

Dual Based DSP Bidding Strategy and its Application

Huahui Liu
Alibaba Group
huahui.lhh@alibaba-inc.com

Mingrui Zhu
Alibaba Group
mingrui.zmr@alibaba-inc.com

Xiaonan Meng
Alibaba Group
xiaonan.mengxn@alibaba-inc.com

Yi Hu
Alibaba Group
erwin.huy@alibaba-inc.com

Hao Wang
Alibaba Group
longran.wh@alibaba-inc.com

ABSTRACT

In recent years, RTB(Real Time Bidding) becomes a popular online advertisement trading method. During the auction, each DSP(Demand Side Platform) is supposed to evaluate current opportunity and respond with an ad and corresponding bid price. It's essential for DSP to find an optimal ad selection and bid price determination strategy which maximizes revenue or performance under budget and ROI(Return On Investment) constraints in P4P(Pay For Performance) or P4U(Pay For Usage) mode. We solve this problem by 1) formalizing the DSP problem as a constrained optimization problem, 2) proposing the augmented MMKP(Multi-choice Multi-dimensional Knapsack Problem) with general solution, 3) and demonstrating the DSP problem is a special case of the augmented MMKP and deriving specialized strategy. Our strategy is verified through simulation and outperforms state-of-the-art strategies in real application. To the best of our knowledge, our solution is the first dual based DSP bidding framework that is derived from strict second price auction assumption and generally applicable to the multiple ads scenario with various objectives and constraints.

KEYWORDS

Computational Advertising, Real Time Bidding, Demand Side Platform, Bidding Strategy

ACM Reference format:

Huahui Liu, Mingrui Zhu, Xiaonan Meng, Yi Hu, and Hao Wang. 2024. Dual Based DSP Bidding Strategy and its Application. In *Proceedings of ACM Conference, Washington, DC, USA, July 2017 (Conference'17)*, 10 pages. https://doi.org/10.475/123_4

1 INTRODUCTION

In recent years, RTB(Real Time Bidding) becomes a popular online advertisement trading method. There are three major roles in the market, namely SSP(Supply Side Platform), DSP(Demand Side Platform), and AdX(Ad Exchange). SSP controls huge amount of websites and earns money by supplying impressions. DSP holds a lot of advertisers and makes profit through fulfilling their demands. AdX, an online advertisement exchange, docks SSPs and DSPs and holds auctions.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).
Conference'17, July 2017, Washington, DC, USA
© 2024 Copyright held by the owner/author(s).
ACM ISBN 123-4567-24-567/08/06.
https://doi.org/10.475/123_4

In a typical scenario, an audience visits one of the SSP's websites, then the AdX is informed and an auction is initiated. The AdX broadcasts bid request to DSPs and waits for a short time(e.g. 100ms). Each DSP is supposed to evaluate current opportunity and respond with an ad and corresponding bid price. The AdX gathers bid responses arriving before deadline and determines the winner and its bidding cost. Finally, the AdX notifies the SSP about the auction result and the SSP serves the winner's ad to the audience.

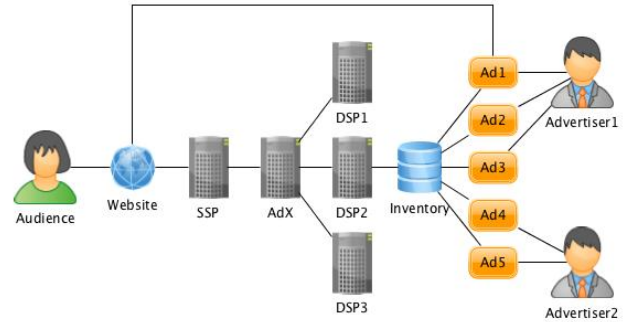


Figure 1: Real Time Bidding

There are two popular payment modes for advertisers

- (1) **P4P(Pay For Performance)**: the advertiser sets a CPP(Cost Per Performance) and pays DSP the CPP times the units of performance delivered by DSP(e.g. 1\$/click*10clicks=10\$).
- (2) **P4U(Pay For Usage)**: the advertiser sets a CR(Commission Rate) and pays DSP the total bidding cost plus the fraction of it as commission(e.g. $(1+10\%)*100\$=110\$$).

DSP is interested in optimizing one of the following objectives

- (1) **Revenue**: the total amount of money(e.g. 50\$) earned from advertisers through either payment mode mentioned above.
- (2) **Performance**: the total units of performance(e.g. 20 clicks) delivered to advertisers.

During the optimization, several constraints must be satisfied

- (1) **Budget Upper Bound**: the maximum amount of money the advertiser is willing to spend in DSP for a certain period of time (e.g. 100\$/day).
- (2) **ROI Lower Bound**: the minimum value of ROI(Return On Investment) which is defined as, for DSP, the revenue earned from advertisers over the bidding cost paid to AdX (e.g. DSP ROI is 1.1 when DSP earns 110\$ and pays 100\$) and, for advertiser, the performance delivered by DSP over

the money spent in DSP (e.g. advertiser ROI is 0.8 when advertiser spends 100\$ for 80 clicks).

It's essential for DSP to find an optimal ad selection and bid price determination strategy which maximizes revenue or performance under budget and ROI constraints in P4P or P4U mode. We solve this problem by

- (1) formalizing the DSP problem as a constrained optimization problem(Section 3),
- (2) proposing the augmented MMKP(Multi-choice Multi-dimensional Knapsack Problem) with general solution(Section 4),
- (3) and demonstrating the DSP problem is a special case of the augmented MMKP and deriving specialized strategy(Section 5).

Our strategy is verified through simulation(Section 6) and outperforms state-of-the-art strategies in real application(Section 7). To the best of our knowledge, our solution is the first dual based DSP bidding framework that is derived from strict second price auction assumption and generally applicable to the multiple ads scenario with various objectives and constraints. These are the main contributions of this document.

Before further discussion, it's worth to mention several points about our problem configuration. First, PPI(Performance Per Impression) is defined as the expected performance of one impression with certain ad and its accurate prediction is of great importance in performance estimation. However, PPI prediction is beyond the scope of this document and we assume that the PPI is always explicitly provided in the rest of our discussion. Second, it is assumed that all advertisers agree to the same payment mode and performance metric and DSP prefers to optimize a pure objective rather than a hybrid one. Third, the CPP in P4P mode or CR in P4U mode are set on the ad level, i.e. the advertiser is able to set different CPP or CR for his ads. And the constraints are set on ad group level, e.g. the budget might be shared by ads of the same advertiser and DSP might be interested in controlling its global ROI. At last, the ROI lower bound for advertiser could also be interpreted as the CPP upper bound which might be more familiar to some readers.

2 RELATED WORKS

[14] suggests a linear bidding strategy which, given base price, bids in proportion to the relative quality of impression. However, their method is a heuristic one and lacks theoretical foundations.

Based on calculus of variations, [21] suggests a non-linear relationship between optimal bid price and KPIs. However, their strategy is derived from first price auction assumption which doesn't hold in RTB. Besides, winning rate is explicitly modeled as a function of bid price in [21]. To find the analytical solution of the optimal bid price, the winning rate function must be of specific forms, which makes their method inflexible.

Both win rate and winning price are estimated in [11], and the corresponding bidding strategy is provided. However, their strategy doesn't consider any constraints(i.e. budget) which are common in real DSP applications.

While all above researches consider only one campaign, [20] extends [21] and proposes bidding strategy for multiple campaigns. However, [20] also shares the drawbacks of [21] as listed above.

[5] studies the joint optimization of multiple objectives with priorities. [18] argues that the bid price should be decided based on the performance lift rather than absolute performance value. Risk management of RTB is discussed and risk-aware bidding strategy is proposed in [19]. By modeling the state transition of auction competition, the optimal bidding policy is derived in [1] based on reinforcement learning theory.

The probability estimation of interested feedbacks plays a central role in performance based advertising. CTR(Click Through Rate) prediction is of great importance and extensively studied by researchers. FTRL-Proximal, an online learning algorithm, is proposed in [12] and sparse model is learned for CTR prediction. In [6], a hybrid model which combines decision trees with logistic regression outperforms either of these methods on their own. In [7], field-aware factorization machines are used to predict CTR. Compared with clicks, the conversions are even more rare and harder to predict. To tackle the data sparseness, a hierarchical method is proposed in [10] for CVR(Conversion Rate) prediction. Feedbacks are usually delayed in practice and [2] tries to distinguish negative training samples without feedbacks eventually from those with delayed ones.

Bidding landscape is studied in [4] and log normal is used to model the distribution of winning price. [16] predicts win price with censored data, which utilizes both winning and losing samples in the sealed auction. Traffic prediction for DSP is discussed in [8]. Budget pacing is achieved through throttling in [17] and bid price adjustment in [9].

Our work is mainly inspired by [3] in which compact allocation strategy, after modeling its problem as linear programming, is derived from complementary slackness. Sealed second price auction is studied in [15]. After all, DSP problem is a sort of online matching problem and [13] is an informative survey of this area.

3 FORMALIZATION

3.1 Primal

The DSP problem could be formalized as follows. Once we bid *Impression* with *Ad*, it results in gain *V* and resource consumptions *W*, both of which are functions of *BidPrice*. Our total gain should be maximized under resource constraints *B* with *x* and *BidPrice* as variables. In addition, each *Impression* should be distributed to no more than one *Ad*. To conquer the computational hardness, indicator variable *x* is relaxed from $\{0, 1\}$ to $[0, 1]$. Although most kinds of resources(e.g. budget) are sort of private and only accessible to very limited number of *Ads* in practice, we assume, without loss of generality, that all resources are public and shared by all *Ads* in this formalization.

$$\max_{x_{ij}, bp_{ij}} \sum_{ij} x_{ij} V_{ij}(bp_{ij}) \quad (1)$$

$$\text{s.t.} \quad \sum_{ij} x_{ij} W_{ij}^{(k)}(bp_{ij}) \leq B^{(k)} \quad \forall k \quad (2)$$

$$\sum_j x_{ij} \leq 1 \quad \forall i \quad (3)$$

$$x_{ij} \geq 0 \quad \forall i, j \quad (4)$$

$i \in \{1, 2, \dots, N\}$ is the index of *Impression*
 $j \in \{1, 2, \dots, M\}$ is the index of *Ad*
 $k \in \{1, 2, \dots, K\}$ is the index of *Constraint*
 x_{ij} is a relaxed variable, indicating whether *Impression_i* should be given to *Ad_j*
 bp_{ij} , short for *BidPrice_{ij}*, is a variable
 $V_{ij}(bp)$ is the gain function of *BidPrice* with support $[0, \infty)$
 $W_{ij}^{(k)}(bp)$ is the k -th resource consumption function of *BidPrice* with support $[0, \infty)$
 $B^{(k)}$ is a resource limit constant

The above formalization might seem too abstract to capture the details of those practical objectives and constraints discussed in Section 1. To make things clearer, we

- (1) derive the expected winning probability and bidding cost under second price auction assumption (Section 3.2),
- (2) define the utility function family \mathcal{F} based on previous derivation (Section 3.3),
- (3) and show how to systematically encode those practical objectives and constraints into above formalization by setting B and choosing $V(bp)$ and $W(bp)$ from \mathcal{F} (Section 3.4).

3.2 Second Price Auction

Most AdXes adopt sealed second price auction mechanism in which the DSP with the highest bid price wins and pays the second highest bid price. For example, three DSPs bid 2\$, 1\$, 3\$ respectively, so the third DSP wins and pays 2\$. Furthermore, only the winner has access to the second highest bid price while the others observe nothing except the fact that they lose.

Due to the dynamic nature of auction, the outcome is random. To model this uncertainty, $p_i(x)$ is defined as the distribution of the highest bid price among all other DSPs' bid prices for *Impression_i* with support $[0, \infty)$. In another word, the most competitive DSP will bid x for *Impression_i* with probability $p_i(x)$ dx.

To win *Impression_i*, our *BidPrice* must be higher than x , but we will only pay x eventually. Then the expected winning probability and bidding cost for our DSP could be defined as follows. As our *BidPrice* goes infinite, we'll win *Impression_i* with probability 1 and our bidding cost must be the mean of $p_i(x)$.

Definition 3.1. $Prob_i(BidPrice) = \int_0^{BidPrice} p_i(x)dx$

Definition 3.2. $Cost_i(BidPrice) = \int_0^{BidPrice} xp_i(x)dx$

It is the non-negativity property of $p_i(x)$ and the integral forms of $Prob_i(BidPrice)$ and $Cost_i(BidPrice)$ which play a central role in our theory (Section 3.3). Except that, we make little, if any, assumption about the distribution family of $p_i(x)$. In addition, in some special cases, even explicit modeling of $p_i(x)$ is unnecessary (Section 5.3 & 5.4), which simplifies the implementation of our strategy.

Whenever it's mandatory, $p_i(x)$ could be modeled with method proposed by [16]. We could pick a distribution family $p(x; \theta)$ (e.g. log normal) with parameter θ and learn a parameter predictor $\hat{\theta}(i)$ from historical bidding data which maximizes the following likelihood.

$$\prod_{i \in Win} p_i(Cost_i; \hat{\theta}(i)) \prod_{i \in Lose} \int_{BidPrice_i}^{\infty} p_i(x; \hat{\theta}(i))dx \quad (5)$$

The likelihood could be separated into two parts, i.e. one for the impressions we won and the other for those we lost. For any *Impression_i* that we won, the bid price of the most competitive DSP must be equal to our $Cost_i$, which suggests the first part. Otherwise, the only thing for sure is that it must be higher than our $BidPrice_i$, which suggests the second part.

3.3 Utility Function Family

The practical $V(bp)$ and $W(bp)$ in DSP problem come from a certain family which is defined here and whose properties are shown without proof.

Definition 3.3. \mathcal{F} is the function family that $\forall f \in \mathcal{F}$ is of the form $f(bp; \phi, \psi, p(x)) = \phi Prob(bp) + \psi Cost(bp) = \int_0^{bp} (\phi + \psi x)p(x)dx$.

THEOREM 3.4. Given $\forall f \in \mathcal{F}$, we have $f' = (\phi + \psi bp)p(bp)$.

THEOREM 3.5. Given $\forall f \in \mathcal{F}$, we have $\arg \max_{bp} f = -\phi/\psi$.

THEOREM 3.6. Given $\forall g, h \in \mathcal{F}$ with shared $p(x)$ and ψ , we have $\max_{bp} g \geq \max_{bp} f$ if and only if $\phi_g \geq \phi_f$.

THEOREM 3.7. Given $\forall g, h \in \mathcal{F}$ with shared $p(x)$, we have $\frac{d^2 h}{dg^2} = \frac{\phi_g \psi_h - \psi_g \phi_h}{(\phi_g + \psi_g bp)^3 p(bp)}$.

All above theorems are listed here for summarization purpose and will be referenced when actually used. It's safe to skip them for now and come back later.

3.4 Objectives and Constraints

There are 4 practical objectives as listed in Table 1, i.e. revenue and performance objectives in P4P and P4U modes. It's straightforward to encode those objectives into standard form by definition.

There are 6 practical constraints as listed in Table 4, i.e. budget, DSP ROI and advertiser ROI constraints in P4P and P4U modes. Constraints like budget could be expressed in standard form naturally. Others, though not so obvious at the first glance, could be rewritten into standard form as well.

Take DSP ROI constraint in P4P mode for example. By definition, we have

$$\frac{\sum_{ij} x_{ij} CPP_j PPI_{ij} Prob_i(bp_{ij})}{\sum_{ij} x_{ij} Cost_i(bp_{ij})} \geq ROI^{(k)} \quad (6)$$

After multiplying both sides with the denominator, subtracting both sides with the nominator, and combining items by x_{ij} , we have

$$\sum_{ij} x_{ij} \{ROI^{(k)} Cost_i(bp_{ij}) - CPP_j PPI_{ij} Prob_i(bp_{ij})\} \leq 0 \quad (7)$$

It's easy to encode this constraint into standard form with $\phi = -CPP_j PPI_{ij}$, $\psi = ROI^{(k)}$ and $B^{(k)} = 0$.

4 AUGMENTED MMKP

4.1 Primal

Now we propose the augmented MMKP which could be formalized as follows and seen as an extension of MMKP with infinitely

Table 1: Practical Objectives

Mode	Type	Definition	$V_{ij}(bp)$	
			ϕ	ψ
P4P	Revenue	$\sum_{ij} x_{ij} CPP_j PPI_{ij} Prob_i(bp_{ij})$	$CPP_j PPI_{ij}$	0
	Performance	$\sum_{ij} x_{ij} PPI_{ij} Prob_i(bp_{ij})$	PPI_{ij}	0
P4U	Revenue	$\sum_{ij} x_{ij} (1 + CR_j) Cost_i(bp_{ij})$	0	$1 + CR_j$
	Performance	$\sum_{ij} x_{ij} PPI_{ij} Prob_i(bp_{ij})$	PPI_{ij}	0

Table 2: Practical Constraints

Mode	Type	Definition	$W_{ij}^{(k)}(bp)$		$B^{(k)}$
			ϕ	ψ	
P4P	Budget	$\sum_{ij} x_{ij} CPP_j PPI_{ij} Prob_i(bp_{ij}) \leq Budget^{(k)}$	$CPP_j PPI_{ij}$	0	$Budget^{(k)}$
	DSP ROI	$\frac{\sum_{ij} x_{ij} CPP_j PPI_{ij} Prob_i(bp_{ij})}{\sum_{ij} x_{ij} Cost_i(bp_{ij})} \geq ROI^{(k)}$	$-CPP_j PPI_{ij}$	$ROI^{(k)}$	0
	Advertiser ROI	$\frac{\sum_{ij} x_{ij} PPI_{ij} Prob_i(bp_{ij})}{\sum_{ij} x_{ij} CPP_j PPI_{ij} Prob_i(bp_{ij})} \geq ROI^{(k)}$	$CPP_j PPI_{ij} ROI^{(k)} - PPI_{ij}$	0	0
P4U	Budget	$\sum_{ij} x_{ij} (1 + CR_j) Cost_i(bp_{ij}) \leq Budget^{(k)}$	0	$(1 + CR_j)$	$Budget^{(k)}$
	DSP ROI	$\frac{\sum_{ij} x_{ij} (1 + CR_j) Cost_i(bp_{ij})}{\sum_{ij} x_{ij} Cost_i(bp_{ij})} \geq ROI^{(k)}$	0	$ROI^{(k)} - (1 + CR_j)$	0
	Advertiser ROI	$\frac{\sum_{ij} x_{ij} PPI_{ij} Prob_i(bp_{ij})}{\sum_{ij} x_{ij} (1 + CR_j) Cost_i(bp_{ij})} \geq ROI^{(k)}$	$-PPI_{ij}$	$ROI^{(k)} (1 + CR_j)$	0

many sub-choices. In the original MMKP, both V and W are constants, while, in the augmented MMKP, V is variable and W becomes function of V . Our main-choice and sub-choice are indicated by x and corresponding V respectively.

$$\max_{x_{ij}, V_{ij}} \sum_{ij} x_{ij} V_{ij} \quad (8)$$

$$\text{s.t.} \quad \sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) \leq B^{(k)} \quad \forall k \quad (9)$$

$$\sum_j x_{ij} \leq 1 \quad \forall i \quad (10)$$

$$x_{ij} \geq 0 \quad \forall i, j \quad (11)$$

$i \in \{1, 2, \dots, N\}$ is the index of *Item*

$j \in \{1, 2, \dots, M\}$ is the index of *User*

$k \in \{1, 2, \dots, K\}$ is the index of *Constraint*

x_{ij} is a relaxed variable, indicating whether *Item_i* should be given to *User_j*

V_{ij} is a gain variable

$W_{ij}^{(k)}(V)$ is the k -th resource consumption function of V with support $[0, \infty)$

$B^{(k)}$ is a resource limit constant

4.2 Dual

We define several basic functions and show the dual of augmented MMKP based on them.

$$\text{Definition 4.1. } F_{ij}(V; \vec{\alpha}) = V - \sum_k \alpha^{(k)} W_{ij}^{(k)}(V)$$

$$\text{Definition 4.2. } V_{ij}(\vec{\alpha}) = \arg \max_V F_{ij}(V; \vec{\alpha})$$

$$\text{Definition 4.3. } S_{ij}(\vec{\alpha}) = \max_V F_{ij}(V; \vec{\alpha})$$

$$\min_{\alpha^{(k)}, \beta_i} \sum_k \alpha^{(k)} B^{(k)} + \sum_i \beta_i \quad (12)$$

$$\text{s.t. } \beta_i \geq S_{ij}(\vec{\alpha}) \quad \forall i, j \quad (13)$$

$$\alpha^{(k)} \geq 0 \quad \forall k \quad (14)$$

$$\beta_i \geq 0 \quad \forall i \quad (15)$$

$F_{ij}(V; \vec{\alpha})$ serves as sort of score function which is used to estimate the utility of distributing *Item_i* to *User_j* with sub-choice V . It could be interpreted as the compromised gain function in which our original gain V is degenerated by resource consumption W with opportunity price α .

Table 3: Auxiliary Problems

Name	Description
P	outer[inner]
D	dualize(P)
DD	dualize(dualize(P))
d	outer[dualize(inner)]
dd	outer[dualize(dualize(inner))]

4.3 Strong Duality

The strong duality of augmented MMKP is provable under mild assumption. A brief proof is provided here and more details are revealed in the appendix.

THEOREM 4.4. *If $W(V)$ is convex function of V , strong duality of augmented MMKP holds.*

PROOF. Several auxiliary problems are defined in Table 3. P is the primal and could be separated into 2 nested steps. The inner step, given x_{ij} , maximizes objective with V_{ij} as variables. The outer step, maximizes objective with x_{ij} as variables.

Since $W(V)$ is convex function of V , inner is a strong duality problem, inner = dualize(inner), P = d. Since dualize(inner) is a strong duality problem, dualize(inner) = dualize(dualize(inner)), d = dd. Since D is a strong duality problem, D = DD. dd and DD happen to have the same form, dd = DD. As a result, P = D, strong duality of augmented MMKP holds. \square

4.4 Dual Based Strategy

With strong duality satisfied, several important properties are claimed about the optimal solution of both primal and dual problems (i.e. x_{ij}^* , V_{ij}^* , $\vec{\alpha}^*$ and β_i^*), based on which we propose the dual based strategy.

THEOREM 4.5. $V_{ij}^* = V_{ij}(\vec{\alpha}^*)$.

THEOREM 4.6. $x_{ij}^*(\beta_i^* - S_{ij}(\vec{\alpha}^*)) = 0$.

COROLLARY 4.7. *If $S_{ij}(\vec{\alpha}^*) < 0$, we have $x_{ij}^* = 0$.*

PROOF. Since $S_{ij}(\vec{\alpha}^*) < 0$ and $\beta_i^* \geq 0$, we have $\beta_i^* > S_{ij}(\vec{\alpha}^*)$. Now that $\beta_i^* - S_{ij}(\vec{\alpha}^*) > 0$ and $x_{ij}^* \geq 0$, taking above theorem into consideration, x_{ij}^* must be 0, that is $Item_i$ should not be distributed to $User_j$. \square

COROLLARY 4.8. *If $S_{i j_1}(\vec{\alpha}^*) < S_{i j_2}(\vec{\alpha}^*)$, we have $x_{i j_1}^* = 0$.*

PROOF. Similarly, since $S_{i j_1}(\vec{\alpha}^*) < S_{i j_2}(\vec{\alpha}^*)$ and $\beta_i^* \geq S_{i j_2}(\vec{\alpha}^*)$, we have $\beta_i^* > S_{i j_1}(\vec{\alpha}^*)$. Now that $\beta_i^* - S_{i j_1}(\vec{\alpha}^*) > 0$ and $x_{i j_1}^* \geq 0$, taking above theorem into consideration, $x_{i j_1}^*$ must be 0, that is $Item_i$ should not be distributed to dominated $User_{j_1}$. \square

THEOREM 4.9. $\beta_i^*(\sum_j x_{ij}^* - 1) = 0$.

COROLLARY 4.10. *If $\exists j$ that $S_{ij}(\vec{\alpha}^*) > 0$, we have $\sum_j x_{ij}^* = 1$.*

PROOF. Since $S_{ij}(\vec{\alpha}^*) > 0$ and $\beta_i^* \geq S_{ij}(\vec{\alpha}^*)$, we have $\beta_i^* > 0$. Now that $\beta_i^* > 0$ and $\sum_j x_{ij}^* - 1 \leq 0$, taking above theorem into consideration, $\sum_j x_{ij}^*$ must be 1, which means $Item_i$ should not be discarded. \square

In summary, for each $Item_i$, every $User_j$ should propose its own best score S_{ij}^* achieved by V_{ij}^* . $Item_i$ should be awarded to the dominating $User_{j^*}$ if its best score $S_{ij^*}^*$ is positive and discarded if that is negative. Theoretically speaking, while most of which are determined by above corollaries, behaviors remain undefined in two special cases. First, there might be multiple dominating users with the same best score. Second, the best score of dominating user might be exactly zero. In practice, however, both cases are probably rare due to the high resolution of items and users, and prone to cause relatively limited damage. Ties could be broken by random or heuristics.

Algorithm 1: Dual Based Strategy for Augmented MMKP

```

1 for  $Item_i \in \mathcal{I}$  do
2   for  $User_j \in \mathcal{U}$  do
3      $F_{ij}(V; \vec{\alpha}^*) = V - \sum_k \alpha^{(k)} W_{ij}^{(k)}(V)$ 
4      $V_{ij}^* = V_{ij}(\vec{\alpha}^*) = \arg \max_V F_{ij}(V; \vec{\alpha}^*)$ 
5      $S_{ij}^* = S_{ij}(\vec{\alpha}^*) = \max_V F_{ij}(V; \vec{\alpha}^*)$ 
6   end
7    $j^* = \arg \max_j S_{ij}^*$ 
8   if  $S_{ij^*}^* \geq 0$  then
9      $\text{bid with } (User_{j^*}, V_{ij^*}^*)$ 
10  end
11 end

```

4.5 Numeric Optimization

Note that, during the execution of the dual base strategy, only the $\vec{\alpha}^*$ is mandatory while the others (i.e. x_{ij}^* , V_{ij}^* and β_i^*) could be recovered with $\vec{\alpha}^*$, which makes our strategy storage efficient. Next, we propose the numeric method to solve $\vec{\alpha}^*$.

Definition 4.11. $\beta_i(\vec{\alpha}) = \max\{0, S_{ij}(\vec{\alpha})\forall j\}$

Definition 4.12. $G_i(\vec{\alpha}) = \sum_k \frac{\alpha^{(k)} B^{(k)}}{N} + \beta_i(\vec{\alpha})$

By fixing $\vec{\alpha}$ in the dual problem, β_i^* could be calculated as $\beta_i^* = \beta_i(\vec{\alpha})$. Then the dual problem could be rewritten as

$$\min_{\vec{\alpha} \geq 0} \sum_i G_i(\vec{\alpha}) \quad (16)$$

and solved by SGD(Stochastic Gradient Descent). Due to the convexity of dual problem, it must converge to the global optimal $\vec{\alpha}^*$.

5 SOLUTION

5.1 Dual

We define corresponding basic functions and show the dual of DSP problem based on them.

$$\text{Definition 5.1. } F_{ij}(bp; \vec{\alpha}) = V_{ij}(bp) - \sum_k \alpha^{(k)} W_{ij}^{(k)}(bp)$$

$$\text{Definition 5.2. } bp_{ij}(\vec{\alpha}) = \arg \max_{bp} F_{ij}(bp; \vec{\alpha})$$

$$\text{Definition 5.3. } S_{ij}(\vec{\alpha}) = \max_{bp} F_{ij}(bp; \vec{\alpha})$$

$$\min_{\alpha^{(k)}, \beta_i} \sum_k \alpha^{(k)} B^{(k)} + \sum_i \beta_i \quad (17)$$

$$\text{s.t. } \beta_i \geq S_{ij}(\vec{\alpha}) \quad \forall i, j \quad (18)$$

$$\alpha^{(k)} \geq 0 \quad \forall k \quad (19)$$

$$\beta_i \geq 0 \quad \forall i \quad (20)$$

Note that, in DSP problem, our sub-choice is indicated by bp rather than V . Since F_{ij} is the linear combination of $V_{ij}(bp)$ and $W_{ij}^{(k)}(bp)$ from \mathcal{F} with shared $p_i(x)$, it must belong to \mathcal{F} too with its $\phi_{F_{ij}}$ and $\psi_{F_{ij}}$ as follows.

$$\phi_{F_{ij}} = \phi_{V_{ij}} - \sum_k \alpha^{(k)} \phi_{W_{ij}^{(k)}} \quad (21)$$

$$\psi_{F_{ij}} = \psi_{V_{ij}} - \sum_k \alpha^{(k)} \psi_{W_{ij}^{(k)}} \quad (22)$$

In practice, each ad is usually subjected to very limited number of constraints, which makes the calculation of $\phi_{F_{ij}}$ and $\psi_{F_{ij}}$ lightweighted.

5.2 Strong Duality

Due to the nice property of \mathcal{F} , it's easy to check that, as to practical objectives and constraints (Section 3.4), $W(bp)$ is indeed convex function of $V(bp)$, which immediately justifies the strong duality of DSP problem.

THEOREM 5.4. *Strong duality of DSP problem holds.*

PROOF. According to Theorem 3.4, $V'(bp) > 0$ and $W(bp)$ must be function of $V(bp)$. According to Theorem 3.7, $\frac{d^2 W}{dV^2} \geq 0$ and $W(bp)$ must be convex function of $V(bp)$. As a result, according to Theorem 4.4, strong duality of DSP problem holds. \square

5.3 Dual Based Strategy

With strong duality satisfied, the dual based strategy developed for augmented MMKP is also applicable to DSP problem. Generally speaking, bp_{ij}^* could be determined without $p_i(x)$ according to Theorem 3.5. In certain applications, $\psi_{F_{ij}}$ is the same for given i and all j , then j^* could also be determined independent of $p_i(x)$ according to Theorem 3.6. By disposing of $p_i(x)$ completely from deciding process, it not only simplifies the computation, but also encourages $p_i(x)$ free training process.

Algorithm 2: Dual Based Strategy for DSP Problem

```

1 for  $Impression_i \in \mathcal{I}$  do
2   for  $Ad_j \in \mathcal{A}$  do
3      $\phi_{F_{ij}} = \phi_{V_{ij}} - \sum_k \alpha^{(k)} \phi_{W_{ij}^{(k)}}$ 
4      $\psi_{F_{ij}} = \psi_{V_{ij}} - \sum_k \alpha^{(k)} \psi_{W_{ij}^{(k)}}$ 
5      $F_{ij}(bp; \vec{\alpha}^*) = \int_0^{bp} (\phi_{F_{ij}} + \psi_{F_{ij}} x) p_i(x) dx$ 
6      $bp_{ij}^* = bp_{ij}(\vec{\alpha}^*) = \arg \max_{bp} F_{ij}(bp; \vec{\alpha}^*) = -\phi_{F_{ij}} / \psi_{F_{ij}}$ 
7      $S_{ij}^* = S_{ij}(\vec{\alpha}^*) = \max_{bp} F_{ij}(bp; \vec{\alpha}^*)$ 
8   end
9    $j^* = \arg \max_j S_{ij}^*$ 
10  if  $S_{ij^*}^* \geq 0$  then
11    bid with  $(Ad_{j^*}, bp_{ij^*}^*)$ 
12  end
13 end

```

5.4 Numeric Optimization

The numeric method developed for augmented MMKP is also applicable to DSP problem. It's easy to prove that $\frac{d\beta_i(\vec{\alpha})}{d\alpha^{(k)}}$ must be either $-W_{ij}^{(k)}(bp_{ij}(\vec{\alpha}))$ if the best score of the dominating Ad_j is positive or 0 otherwise. This optimization method, though generally applicable, requires explicit modeling of $p_i(x)$.

Through executing our strategy in production environment, the randomized version of $W_{ij}^{(k)}(bp_{ij}(\vec{\alpha}))$ is revealed and the gradients could be approximated with these feedbacks. This optimization method is $p_i(x)$ free and much easier to implement.

6 SIMULATION

6.1 Methodology

To eliminate the uncertainty, our strategy is verified in P4P and P4U modes through simulation. Due to the limited space, we focus on the P4P mode in the rest of Section 6.

There are two simulation cases, i.e. one for revenue maximization and the other for performance maximization. Two mocked ads Ad_1 and Ad_2 are created with $CPP_1 = 1$ and $CPP_2 = 2$. Four mocked constraints are listed in Table 4. Budget of Ad_1 and Ad_2 are 20 and 10 respectively. The global DSP ROI lower bound is 2, while the global advertiser ROI lower bound is 0.5. As suggested by [4], $p(x)$ is assumed to be log normal distribution $p(x; \mu, \sigma)$ with mean μ and standard deviation σ as parameters. To mock the impressions, 200 tuples $\langle \mu_i, \sigma_i, PPI_{i1}, PPI_{i2} \rangle$ are drawn randomly.

Once the configurations are ready, $\vec{\alpha}^*$ are solved by SGD (Section 5.4). After that, the dual based strategy is applied on the same cases and the consequent statistics are collected.

6.2 Results and Analysis

The statistics and $\vec{\alpha}^*$ are listed in Table 5. In both cases, all resources have non-negative surplus and no constraint is violated. In addition, the gap between primal and dual objective values is

Table 4: Mocked Constraints

k	Type	Parameter	Scope
1	Budget	$Budget^{(k)} = 20$	$\{Ad_1\}$
2	Budget	$Budget^{(k)} = 10$	$\{Ad_2\}$
3	DSP ROI	$ROI^{(k)} = 2$	$\{Ad_1, Ad_2\}$
4	Advertiser ROI	$ROI^{(k)} = 0.5$	$\{Ad_1, Ad_2\}$

negligible(Theorem 5.4). As mentioned earlier, the α^* serves as so called opportunity price of the resource. Intuitively speaking, waste of resource with positive surplus shouldn't lead to any opportunity cost. As a result, the corresponding α^* tends to be 0.


7 APPLICATION

7.1 Scenario

We also deploy our strategy in the DSP platform of Alibaba. In our application, advertisers set budgets and pay for clicks, while DSP is willing to maximize revenue under daily global DSP ROI constraint. There are so many ads in our inventory that it's impossible to go through each ad before auction deadline. Although these budgets are quite large totally, they are relatively small on average.

With well calibrated CPP and PPI predictors, the problem could be transformed equivalently into one in P4P mode. And to meet the latency requirement, the whole deciding process is decomposed into two stages with so called logical ad.

Logical ad should be seen as proxy of physical ads and binded with specific ad retrieval algorithm. In the first stage, DSP is supposed to make decisions among just a few logical ads and respond in time. In the second stage, once the chosen logical ad wins the auction, physical ad is lazily retrieved with corresponding algorithm.

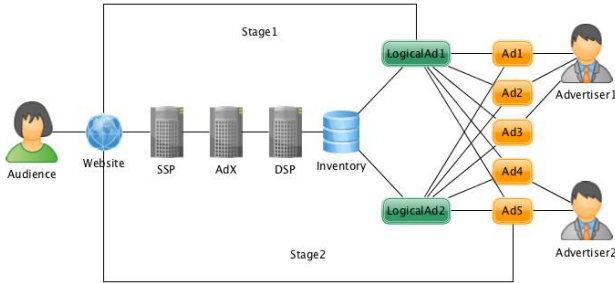**Figure 2: Real Time Bidding with Logical Ad**

Our logical ads are actually based on 4 heterogeneous ad retrieval algorithms whose details are beyond the scope of this document. These algorithms are sorted by their historical performance in descending orders and 4 logical ads are constructed correspondingly.

In summary, our problem could be approximately modeled as, given 4 logical ads with literally unlimited budget, maximizing revenue under daily global DSP ROI constraint in P4P mode. Since there is only one resource constraint, superscript k is omitted and ROI is short for global DSP ROI in the rest of Section 7.

According to our theory, we have $\phi_{F_{ij}} = (1 + \alpha)CPP_jPPI_{ij}$ and $\psi_{F_{ij}} = -\alpha ROI$. Since $\psi_{F_{ij}}$ is always $-\alpha ROI$, no $p_i(x)$ is required in deciding process as discussed in Section 5.3. To take full advantage of that, we adopt a simplified version of the $p_i(x)$ free optimization method suggested in Section 5.4, i.e. $\alpha' = \frac{ROI}{ActualROI(\alpha)}\alpha$.

7.2 Experiment Groups

We compare our strategy with a variation of linear bidding strategy. In [14], it's suggested that $bp_{ij} = \frac{ActualCTR_{ij}}{CTR} Bid$ with Bid set by operation team. However, unlike $ActualCTR_{ij}$ which is independent of bp_{ij} , $ActualROI_{ij}$ indeed varies with it. As a result, we iteratively update bp_{ij} with $bp'_{ij} = \frac{ActualROI_i(bp_{ij})}{ROI} Bid$.

We also apply optimal RTB theory to our application for comparison. According to [21], we model the win probability as $w(bp; c) = \frac{bp}{c+bp}$ and bid with $bp_{ij} = \sqrt{\frac{cCPP_jPPI_{ij}}{ROI}}(1 + \frac{1}{\lambda}) + c^2 - c$, in which c is fitted with method proposed by [16] and λ is iteratively tuned with $\lambda' = \frac{ROI}{ActualROI(\lambda)}\lambda$.

Four experiment groups are shown in Table 6. The first three groups are designed to compare different strategies with single logical ad, while the last group is used to test our strategy with multiple logical ads.

To eliminate potential bias, the experiment lasts for a whole ordinary week. Bidding opportunities are distributed to each group randomly with equal probability. For fairness, the same CPP and PPI predictors are shared by all groups. The lower bound of daily ROI is set to 3.5.

Strategy parameters(i.e. bp_{ij} , λ and α) are randomly initialized and periodically adjusted with actual ROI since last update. The period is set to 24 hours for the LIN group due to the data sparseness and 10 minutes as to the others for robustness and faster convergence. Note that the more frequent update introduces inexplicitly a 10 minutes ROI constraint which is stricter than the daily one and might degenerate the theoretical optimal.

7.3 Results and Analysis

For each group, the daily statistics of four metrics are plotted in Figure 3, namely revenue, actual ROI, number of winning impressions and revenue per winning impression.

The LIN , though with theoretical optimal intact, tends to earn less revenue than the others in practice. In addition, it usually violates the daily ROI constraint seriously, so it's an inferior strategy.

Compared with the DB_s who claims a linear relationship between bid price and expected revenue, the $ORTB$, derived from first price auction assumption, suggests a non-linear one. It is biased towards the impressions with low expected revenue and against those with high expected revenue, which leads to more impressions and lower averaged quality. While the daily ROI constraint is satisfied by both strategies, the DB_s earns more revenue than the $ORTB$. As a result, the DB_s is superior theoretically and practically.

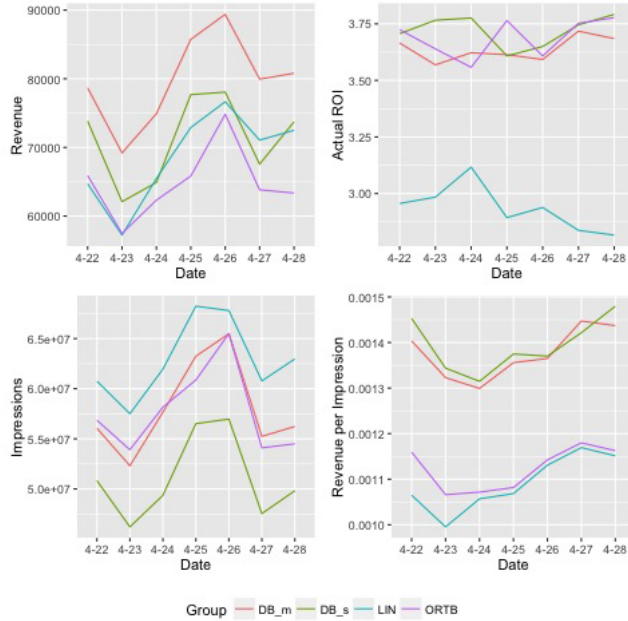
The DB_m , as an ensemble of four ad retrieval algorithms, achieves the most revenue without violation of the daily ROI constraint and becomes the best strategy.

Table 5: Statistics and α^*

Case	Description	Primal	Dual	Resource				α^*
				k	Limit	Consumption	Surplus	
$Case_1$	Revenue Maximization	2.164	2.164	1	20.000	0.865	19.135	0.000
				2	10.000	1.299	8.701	0.000
				3	0.000	0.000	0.000	4.749
				4	0.000	-0.433	0.433	0.000
$Case_2$	Performance Maximization	1.590	1.590	1	20.000	1.100	18.900	0.000
				2	10.000	0.979	9.021	0.000
				3	0.000	2.747	-2.747	3.654
				4	0.000	-0.550	0.550	0.000

Table 6: Experiment Groups

Group	Inventory	Strategy	bp_{ij}	Iteration	Period
LIN	$\{LogicalAd_1\}$	Linear	bp_{ij}	$bp'_{ij} = \frac{ActualROI_i(bp_{ij})}{ROI} Bid$	24 hours
$ORTB$	$\{LogicalAd_1\}$	Optimal RTB	$\sqrt{\frac{cCPP_iPPI_{ij}}{ROI} (1 + \frac{1}{\lambda})} + c^2 - c$	$\lambda' = \frac{ROI}{ActualROI(\lambda)} \lambda$	10 minutes
DB_s	$\{LogicalAd_1\}$	Dual Based	$\frac{CPP_iPPI_{ij}}{ROI} (1 + \frac{1}{\alpha})$	$\alpha' = \frac{ROI}{ActualROI(\alpha)} \alpha$	
DB_m	$\{LogicalAd_j j \in \{1, 2, 3, 4\}\}$				

**Figure 3: Experiment Results**

8 CONCLUSIONS AND FUTURE WORKS

In this document, we propose a dual based DSP bidding strategy derived from second price auction assumption according to convex optimization theory. Our strategy is verified through simulation and outperforms state-of-the-art strategies in real application. It's a theoretically solid and practically effective strategy with simple implementation and various applications.

Three problems remain unsolved and deserve further study. First, is there a better way to solve $\vec{\alpha}^*$ of large scale in dynamic environment? On the one hand, in a typical DSP, there will be millions of constraints shared by similar number of ads. Each of the constraints deserves a α , which makes the vector $\vec{\alpha}$ very large. On the other hand, billions of impressions are broadcast by AdX every day and bid by hundreds of DSPs simultaneously. The bidding strategies are interactively adjusted by DSPs and the inventories are frequently updated by advertisers, which makes the bidding landscape unstable. Both properties make the $\vec{\alpha}^*$ hard to solve.

Second, how to construct and index logical ads automatically in massive ads applications, balancing latency and performance? It's obvious that both deciding and training processes share the same ad evaluation and maximum determination style, which makes their computational complexities linearly related with the number of candidate logical ads. At one extreme, each ad is represented by exactly one logical ad, and the consequent latency is unacceptable. At the other extreme, all ads are represented by the only logical ad, while the performance might be seriously degenerated. A proper compromise combined with efficient indexing tricks will accelerate both processes by orders of magnitude.

Third, how to optimally break ties when they are common and critical? Take an imaginary scenario for example. DSP is willing to maximize its revenue in P4P mode. There are two identical ads with the same CPP and PPI, but they are targeted to overlapped sets of impressions and subjected to different budget constraints. In this circumstance, resolution of impressions and ads is extremely low and ties are very prevalent. To tackle the tie breaking problem, we might try randomized soft-max instead of hard-max during ad selection. However, the theoretical soundness and practical effectiveness of this tie breaking strategy are to be verified.

A STRONG DUALITY PROOF

Here we give the detailed proof of the strong duality. We first prove that $P \leq D$ by dualizing P .

$$\begin{aligned}
P &= - \min_{\substack{x_{ij}, V_{ij} \\ \sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) \leq B^{(k)} \\ \sum_j x_{ij} \leq 1 \\ x_{ij} \geq 0}} \left\{ - \sum_{ij} x_{ij} V_{ij} \right\} \\
&= - \min_{x_{ij}, V_{ij}} \left\{ \max_{\alpha^{(k)}, \beta_i, \gamma_{ij} \geq 0} \left\{ - \sum_{ij} x_{ij} V_{ij} \right. \right. \\
&\quad + \sum_k \alpha^{(k)} \left[\sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) - B^{(k)} \right] \\
&\quad + \sum_i \beta_i \left(\sum_j x_{ij} - 1 \right) + \sum_{ij} \gamma_{ij} (-x_{ij}) \left. \right\} \right\} \\
&= - \min_{x_{ij}, V_{ij}} \left\{ \max_{\alpha^{(k)}, \beta_i, \gamma_{ij} \geq 0} \left\{ - \sum_k \alpha^{(k)} B^{(k)} - \sum_i \beta_i \right. \right. \\
&\quad + \sum_{ij} x_{ij} [-V_{ij} + \sum_k \alpha^{(k)} W_{ij}^{(k)}(V_{ij}) + \beta_i - \gamma_{ij}] \left. \right\} \right\} \\
&\leq - \max_{\alpha^{(k)}, \beta_i, \gamma_{ij} \geq 0} \left\{ \min_{x_{ij}, V_{ij}} \left\{ - \sum_k \alpha^{(k)} B^{(k)} - \sum_i \beta_i \right. \right. \\
&\quad + \sum_{ij} x_{ij} [-V_{ij} + \sum_k \alpha^{(k)} W_{ij}^{(k)}(V_{ij}) + \beta_i - \gamma_{ij}] \left. \right\} \right\} \\
&= - \max_{\substack{\alpha^{(k)}, \beta_i \geq 0 \\ \beta_i \geq S_{ij}(\vec{\alpha})}} \left\{ - \sum_k \alpha^{(k)} B^{(k)} - \sum_i \beta_i \right\} \\
&= \min_{\substack{\alpha^{(k)}, \beta_i \geq 0 \\ \beta_i \geq S_{ij}(\vec{\alpha})}} \left\{ \sum_k \alpha^{(k)} B^{(k)} + \sum_i \beta_i \right\} \\
&= D
\end{aligned}$$

Next, we prove that $D = DD$ by dualizing DD .

$$\begin{aligned}
D &= \min_{\alpha^{(k)}, \beta_i} \left\{ \max_{x_{ij}, \zeta^{(k)}, \eta_i \geq 0} \left\{ \sum_k \alpha^{(k)} B^{(k)} + \sum_i \beta_i \right. \right. \\
&\quad + \sum_{ij} x_{ij} [S_{ij}(\vec{\alpha}) - \beta_i] \\
&\quad + \sum_k \zeta^{(k)} (-\alpha^{(k)}) + \sum_i \eta_i (-\beta_i) \left. \right\} \right\} \\
&= \min_{\alpha^{(k)}, \beta_i} \left\{ \max_{x_{ij}, \zeta^{(k)}, \eta_i \geq 0} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) \right. \right. \\
&\quad + \sum_i \beta_i (1 - \sum_j x_{ij} - \eta_i) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \left. \right\} \right\} \\
&= \max_{x_{ij}, \zeta^{(k)}, \eta_i \geq 0} \left\{ \min_{\alpha^{(k)}, \beta_i} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) \right. \right. \\
&\quad + \sum_i \beta_i (1 - \sum_j x_{ij} - \eta_i) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \left. \right\} \right\} \\
&= \max_{\substack{x_{ij}, \zeta^{(k)} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \min_{\alpha^{(k)}} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \\
&= DD
\end{aligned}$$

After that, we prove that $P = d$ by dualizing the inner step of P with the outer step unchanged.

$$\begin{aligned}
P &= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \max_{V_{ij}} \left\{ \sum_{ij} x_{ij} V_{ij} \right\} \right. \\
&\quad \left. \sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) \leq B^{(k)} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ - \min_{V_{ij}} \left\{ - \sum_{ij} x_{ij} V_{ij} \right\} \right. \\
&\quad \left. \sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) \leq B^{(k)} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ - \min_{V_{ij}} \left\{ \max_{\alpha^{(k)} \geq 0} \left\{ - \sum_{ij} x_{ij} V_{ij} \right. \right. \right. \right. \\
&\quad + \sum_k \alpha^{(k)} \left[\sum_{ij} x_{ij} W_{ij}^{(k)}(V_{ij}) - B^{(k)} \right] \left. \right\} \left. \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ - \min_{V_{ij}} \left\{ \max_{\alpha^{(k)} \geq 0} \left\{ - \sum_k \alpha^{(k)} B^{(k)} \right. \right. \right. \right. \\
&\quad + \sum_{ij} x_{ij} [-V_{ij} + \sum_k \alpha^{(k)} W_{ij}^{(k)}(V_{ij})] \left. \right\} \left. \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ - \max_{\alpha^{(k)} \geq 0} \left\{ \min_{V_{ij}} \left\{ - \sum_k \alpha^{(k)} B^{(k)} \right. \right. \right. \right. \\
&\quad + \sum_{ij} x_{ij} [-V_{ij} + \sum_k \alpha^{(k)} W_{ij}^{(k)}(V_{ij})] \left. \right\} \left. \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ - \max_{\alpha^{(k)} \geq 0} \left\{ - \sum_k \alpha^{(k)} B^{(k)} - \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \min_{\alpha^{(k)} \geq 0} \left\{ \sum_k \alpha^{(k)} B^{(k)} + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \\
&= d
\end{aligned}$$

At last, we prove that $d = dd$ by dualizing the inner step of d with the outer step unchanged.

$$\begin{aligned}
d &= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \min_{\alpha^{(k)}} \left\{ \max_{\zeta^{(k)} \geq 0} \left\{ \sum_k \alpha^{(k)} B^{(k)} + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right. \right. \right. \right. \\
&\quad + \sum_k \zeta^{(k)} (-\alpha^{(k)}) \left. \right\} \left. \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \min_{\alpha^{(k)}} \left\{ \max_{\zeta^{(k)} \geq 0} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \right\} \\
&= \max_{\substack{x_{ij} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \max_{\zeta^{(k)} \geq 0} \left\{ \min_{\alpha^{(k)}} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \right\} \\
&= \max_{\substack{x_{ij}, \zeta^{(k)} \geq 0 \\ \sum_j x_{ij} \leq 1}} \left\{ \min_{\alpha^{(k)}} \left\{ \sum_k \alpha^{(k)} (B^{(k)} - \zeta^{(k)}) + \sum_{ij} x_{ij} S_{ij}(\vec{\alpha}) \right\} \right\} \\
&= dd
\end{aligned}$$

It's obvious that DD and dd are of the same form, so $DD = dd$. As a result, we have $P = D$ and strong duality holds.

REFERENCES

- [1] Han Cai, Kan Ren, Weinan Zhang, Kleanthis Malialis, Jun Wang, Yong Yu, and Defeng Guo. 2017. Real-Time Bidding by Reinforcement Learning in Display Advertising. In *Proceedings of the Tenth ACM International Conference on Web Search and Data Mining (WSDM '17)*. ACM, New York, NY, USA, 661–670. <https://doi.org/10.1145/3018661.3018702>
- [2] Olivier Chapelle. 2014. Modeling delayed feedback in display advertising. In *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 1097–1105.
- [3] Ye Chen, Pavel Berkhin, Bo Anderson, and Nikhil R Devanur. 2011. Real-time bidding algorithms for performance-based display ad allocation. In *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 1307–1315.
- [4] Ying Cui, Ruofei Zhang, Wei Li, and Jianchang Mao. 2011. Bid landscape forecast in online ad exchange marketplace. In *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 265–273.
- [5] Sahin Cem Geyik, Sergey Faleev, Jianqiang Shen, Sean O'ÄZDonnell, and Santanu Kolay. 2016. Joint Optimization of Multiple Performance Metrics in Online Video Advertising. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. ACM, 471–480.
- [6] Xinran He, Junfeng Pan, Ou Jin, Tianbing Xu, Bo Liu, Tao Xu, Yanxin Shi, Antoine Atallah, Ralf Herbrich, Stuart Bowers, et al. 2014. Practical lessons from predicting clicks on ads at facebook. In *Proceedings of the Eighth International Workshop on Data Mining for Online Advertising*. ACM, 1–9.
- [7] Yuchin Juan, Yong Zhuang, Wei-Sheng Chin, and Chih-Jen Lin. 2016. Field-aware factorization machines for CTR prediction. In *Proceedings of the 10th ACM Conference on Recommender Systems*. ACM, 43–50.
- [8] Hsu-Chao Lai, Wen-Yueh Shih, Jiun-Long Huang, and Yi-Cheng Chen. 2016. Predicting traffic of online advertising in real-time bidding systems from perspective of demand-side platforms. In *Big Data (Big Data), 2016 IEEE International Conference on*. IEEE, 3491–3498.
- [9] Kuang-Chih Lee, Ali Jalali, and Ali Dasdan. 2013. Real time bid optimization with smooth budget delivery in online advertising. In *Proceedings of the Seventh International Workshop on Data Mining for Online Advertising*. ACM, 1.
- [10] Kuang-chih Lee, Burkay Orten, Ali Dasdan, and Wentong Li. 2012. Estimating conversion rate in display advertising from past performance data. In *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 768–776.
- [11] Xiang Li and Devin Guan. 2014. Programmatic buying bidding strategies with win rate and winning price estimation in real time mobile advertising. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining*. Springer, 447–460.
- [12] H Brendan McMahan, Gary Holt, David Sculley, Michael Young, Dietmar Ebner, Julian Grady, Lan Nie, Todd Phillips, Eugene Davydov, Daniel Golovin, et al. 2013. Ad click prediction: a view from the trenches. In *Proceedings of the 19th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 1222–1230.
- [13] Aranyak Mehta et al. 2013. Online matching and ad allocation. *Foundations and Trends® in Theoretical Computer Science* 8, 4 (2013), 265–368.
- [14] Claudia Perlich, Brian Dalessandro, Rod Hook, Ori Stitelman, Troy Raeder, and Foster Provost. 2012. Bid optimizing and inventory scoring in targeted online advertising. In *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 804–812.
- [15] William Vickrey. 1961. Counterspeculation, auctions, and competitive sealed tenders. *The Journal of finance* 16, 1 (1961), 8–37.
- [16] Wush Chi-Hsuan Wu, Mi-Yen Yeh, and Ming-Syan Chen. 2015. Predicting winning price in real time bidding with censored data. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. ACM, 1305–1314.
- [17] Jian Xu, Kuang-chih Lee, Wentong Li, Hang Qi, and Quan Lu. 2015. Smart Pacing for Effective Online Ad Campaign Optimization. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '15)*. ACM, New York, NY, USA, 2217–2226. <https://doi.org/10.1145/2783258.2788615>
- [18] Jian Xu, Xuhui Shao, Jianjie Ma, Kuang-chih Lee, Hang Qi, and Quan Lu. 2016. Lift-based bidding in ad selection. In *Thirtieth AAAI Conference on Artificial Intelligence*.
- [19] Haifeng Zhang, Weinan Zhang, Yifei Rong, Kan Ren, Wenxin Li, and Jun Wang. 2017. Managing Risk of Bidding in Display Advertising. In *Proceedings of the Tenth ACM International Conference on Web Search and Data Mining (WSDM '17)*. ACM, New York, NY, USA, 581–590. <https://doi.org/10.1145/3018661.3018701>
- [20] Weinan Zhang and Jun Wang. 2015. Statistical arbitrage mining for display advertising. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. ACM, 1465–1474.
- [21] Weinan Zhang, Shuai Yuan, and Jun Wang. 2014. Optimal real-time bidding for display advertising. In *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*. ACM, 1077–1086.