

Communication complexity of promise problems and their applications to finite automata

Jozef Gruska¹, Daowen Qiu², Shenggen Zheng^{1,*}

¹*Faculty of Informatics, Masaryk University, Brno 60200, Czech Republic*

²*Department of Computer Science, Sun Yat-sen University, Guangzhou 510006, China*

Abstract

Equality and *disjointness* are two of the most studied problems in *communication complexity*. They have been studied for both classical and also quantum communication and for various models and modes of communication. Buhrman et al. [6] proved that the exact *quantum communication complexity* for a promise version of the equality problem is $\mathbf{O}(\log n)$ while the *classical deterministic communication complexity* is $n + 1$ for two-way communication, which was the first impressively large (exponential) gap between quantum and classical (deterministic and probabilistic) communication complexity. If an error is tolerated, both quantum and probabilistic communication complexities for equality are $\mathbf{O}(\log n)$. However, even if an error is tolerated, the gaps between quantum (probabilistic) and deterministic complexity are not larger than quadratic for the disjointness problem [2, 4, 16, 18, 24, 25]. It is therefore interesting to ask whether there are some promise versions of the disjointness problem for which bigger gaps can be shown. We give a positive answer to such a question. Namely, we prove that there exists an exponential gap between quantum (even probabilistic) communication complexity and classical deterministic communication complexity of some specific versions of the disjointness problem.

Klauck [16] proved, for any language, that the state complexity of exact quantum/classical finite automata, which is a general model of one-way quantum finite automata, is not less than the state complexity of an equivalent one-way deterministic finite automata (1DFA). In this paper we show, using a communication complexity result, that situation may be different for some promise problems. Namely, we show for certain promise problem that the gap between the state complexity of exact one-way quantum finite automata and 1DFA can be exponential.

Keywords: Communication complexity, Disjointness, Quantum finite automata, State complexity

1. Introduction

Since the topic of communication complexity was introduced by Yao [26] in 1979, it has been extensively studied [5, 8, 14, 19]. In the setting of two distributed parties, Alice is given as an input $x \in \{0, 1\}^n$ and Bob is given as an input $y \in \{0, 1\}^n$ and their task is to communicate in order to be able to compute the value of some boolean function $f(x, y) \in \{0, 1\}$, while exchanging as small number of bits between Alice and Bob as possible. In the general case, local computation is free, but communication is expensive and

*Corresponding author.

E-mail addresses: zhengshenggen@gmail.com (S. Zheng), gruska@fi.muni.cz (J. Gruska), issqdw@mail.sysu.edu.cn (D. Qiu).

has to be minimized. Alice and Bob each have a Turing machine (probabilistic, quantum) and can use all the computation power of their machines. There are three kinds of communication complexities according to the models (or protocol) used by Alice and Bob: deterministic, probabilistic or quantum.

The communication between Alice and Bob could be one-way, two-way or simultaneous. In *one-way communication*, Alice sends a single message to Bob who then is to determine the output. In two way communication, Alice and Bob take turns in sending messages to each other. In the simultaneous communication mode, both Alice and Bob send their messages to a third party (called the referee) who, upon receiving messages from Alice and Bob, determines the output.

Two of the most studied communication problems are equality and disjointness [19], which are defined, given a string x as an Alice's input and a string y as a Bob's input, as follows:

- **Equality:** $\text{EQ}(x, y) = 1$ if $x = y$ and 0 otherwise.
- **Disjointness:** $\text{DISJ}(x, y) = 1$ if there is no index i such that $x_i = y_i = 1$ and 0 if such an index exists. Equivalently, we can define also this function as $\text{DISJ}(x, y) = 1$ if $\sum_{i=1}^n x_i \wedge y_i = 0$ and 0 if $\sum_{i=1}^n x_i \wedge y_i > 0$. (We can think of x and y as being subsets of $\{1, \dots, n\}$ represented by characteristic vectors and to have $\text{DISJ}(x, y) = 1$ if and only if these two subsets are disjoint, i.e., $x \cap y = \emptyset$.)

The deterministic communication complexities (if we do not point out explicitly in this paper, otherwise communication complexity will refer always to two-way communication complexity) for EQ and DISJ problems are both $n + 1$ [19]. Buhrman et al. [6] proved that the exact quantum communication complexity for the following promise version of the equality problem

$$\text{EQ}'(x, y) = \begin{cases} 1 & \text{if } H(x, y) = 0 \\ 0 & \text{if } H(x, y) = \frac{n}{2} \end{cases}, \quad (1)$$

is $\mathbf{O}(\log n)$, where $H(x, y)$ is the Hamming distance between x and y , which is the number of bit positions on which they differ. This was the first impressively large (exponential) gap between quantum and classical (deterministic and probabilistic) communication complexity. If errors are tolerated, both quantum and probabilistic communication complexity for equality are $\mathbf{O}(\log n)$.

Concerning communication complexity for the disjointness problem, even on the case an error is tolerated, the probabilistic communication complexity for disjointness is $\mathbf{\Omega}(n)$ [4, 18, 24]. In the quantum cases, Buhrman et al. [6] proved that the quantum communication complexity for DISJ is $\mathbf{O}(\sqrt{n} \log n)$. This bound was improved to $\mathbf{O}(\sqrt{n})$ by Aaronson and Ambainis [2]. Finally, Razborov showed that any bounded-error quantum protocol for DISJ needs to communicate about \sqrt{n} qubits [25]. However, Klauck [16] showed that the one-way quantum communication complexity of DISJ is $\mathbf{\Omega}(n)$. It is unlike the problem EQ for which there is an exponential gap between quantum (probabilistic) communication complexity and deterministic communication complexity [6, 8, 19]. All the known gaps of DISJ are not larger than quadratic. It is therefore interesting to find out whether there are some promise versions of the set disjointness problem such that bigger communication complexity gaps can be achieved. In order to prove that, we consider the following promise problems in this paper, for $0 < \lambda \leq \frac{1}{4}$,

$$\text{DISJ}'_{\lambda}(x, y) = \begin{cases} 1 & \text{if } \sum_{i=1}^n x_i \wedge y_i = 0 \\ 0 & \text{if } \lambda n \leq \sum_{i=1}^n x_i \wedge y_i \leq (1 - \lambda)n \end{cases}. \quad (2)$$

We prove that quantum communication complexity for DISJ'_{λ} is not more than $\frac{\log 3}{3\lambda}(3 + 2 \log n)$ while the deterministic communication complexity for DISJ'_{λ} is $\mathbf{\Omega}(n)$. For example, if $\lambda = \frac{1}{4}$, then the quantum

communication complexity for $DISJ_{\frac{1}{4}}$ is not more than $3 + 2\log n$ while the deterministic communication complexity for $DISJ'_{\lambda}$ is more than $0.007n^1$. We prove also that one-way probabilistic communication complexity for $DISJ'_{\lambda}$ is not more than $\frac{\log 3}{\lambda} \log n$.

Number of states is a natural complexity measure for all models of finite automata and state complexity of finite automata is one of the important research fields with many applications [20]. There is a variety of methods how to prove lower bounds on state complexity and methods as well as the results of communication complexity are among the main ones [15, 16, 19]. In this paper we also show how to make use of our new communication complexity results to get new state complexity outcomes.

Klauck [16] has proved that, for any language, the state complexity of exact quantum/classical finite automata, which is a general model of one-way quantum finite automata, is not less than the state complexity of one-way deterministic finite automata (1DFA). Therefore, it is interesting and important to find out whether the result still holds for interesting cases of promise problems or not². Applying the communication complexity result from [7, 8] to finite automata, for any $n \in \mathbb{Z}^+$, we prove that there exists a promise problem $A_{EQ}(n)$ that can be solved exactly by a *measure-once one-way finite automata with quantum and classical state* (MO-1QCFA) with n quantum basis states and $\mathbf{O}(n)$ classical states, whereas the sizes of the corresponding 1DFA are $2^{\Omega(n)}$. We then apply our communication complexity result to finite automata and prove that, for any $n \in \mathbb{Z}^+$, there exists a promise problem $A_D(n)$ that can be solved with one-sided error by an MO-1QCFA with $2n$ quantum basis states and $\mathbf{O}(n)$ classical states, whereas the sizes of the corresponding 1DFA are $2^{\Omega(n)}$.

The paper is structured as follows. In Section 2 needed basic concepts and notations are introduced and models (including communication complexity and finite automata) involved are described in some details. Communication complexities for $DISJ'_{\lambda}$ is discussed in Section 3. Applications to finite automata are studied in Section 4.

2. Preliminaries

In this section, we recall some of the basic definitions about communication complexity and quantum finite automata.

2.1. Communication complexity

We recall only some very basic concepts and notations of *communication complexity*, and we refer the reader to [8, 17, 19, 26] for more details. We will deal with the situation that there are two communicating parties and with very simple tasks of computing two argument functions for the case one argument is known to one party and the other argument is known to the other party. We will completely ignore computational resources needed by parties and we focus solely on the amount of communication that is need to be exchanged between both parties in order to compute the value of a function.

More technically, let X, Y be finite sets $\{0, 1\}^n$. We consider a two-argument function $f : X \times Y \rightarrow \{0, 1\}$ and two communicating parties. Alice is given an input $x \in X$ and Bob is given an input $y \in Y$. They wish to compute $f(x, y)$.

¹The idea of the proof is inspired by [6, 8].

²Ambainis and Yakaryilmaz showed in [3] that there is a very special case in which the superiority of quantum computation to classical one cannot be bounded.

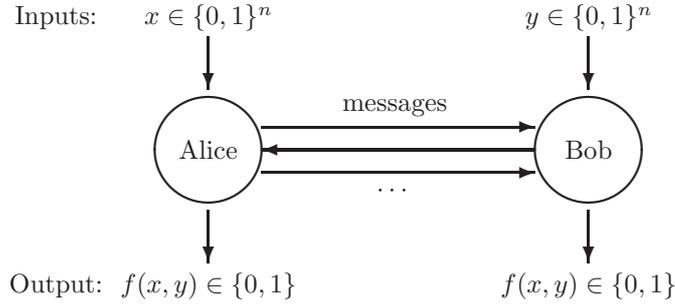


Figure 1: Communication protocol

The computation of $f(x, y)$ will be done using a communication protocol, see Figure 1. During the execution of the protocol, the two parties alternate roles in sending messages. Each of these messages is a bit-string. The protocol, whose steps are based on the communication so far, specifies also for each step whether the communication terminates (in which case it also specifies what is the output). If the communication is not to terminate, the protocol specifies what kind of message the sender (Alice or Bob) should send next, as a function of its input and communication so far.

A deterministic communication protocol \mathcal{P} computes the function f , if for every input pair $(x, y) \in A \times B$ the protocol terminates with the value $f(x, y)$ as its output. In a probabilistic protocol, Alice and Bob may flip coins and the protocol can have an erroneous output with a small probability. In a quantum protocol, Alice and Bob may use quantum resources. Let $\mathcal{P}(x, y)$ denote the output of the protocol \mathcal{P} , we will consider 3 different kinds of protocols for computing f :

- An exact protocol always outputs the right answer, $Pr(\mathcal{P}(x, y) = f(x, y)) = 1$.
- A one-sided error³ protocol that works in such a way that $Pr(\mathcal{P}(x, y) = f(x, y)) = 1$ if $f(x, y) = 0$ and $Pr(\mathcal{P}(x, y) = f(x, y)) \geq \frac{1}{2}$ if $f(x, y) = 1$.
- A two-sided error (a bounded error) protocol \mathcal{P} is such that $Pr(\mathcal{P}(x, y) = f(x, y)) \geq \frac{2}{3}$.

The communication complexity of a protocol \mathcal{P} is the worst case number of (qu)bits exchanged. The communication complexity of f is, with which respect to the communication mode used the complexity of an optimal protocol for f .

In a one-way protocol, shown in Figure 2, Alice sends a single message to Bob who then determines the output.

We use $D(f)$ to denote the deterministic complexity of f . We will use $R_E^1(f), R_1^1(f), R_2^1(f), R_E(f), R_1(f), R_2(f)$ to denote the one-way and two-way probabilistic communication complexity for f in the exact, one-sided error and two-sided error settings, respectively. Similarly we define $Q_E^1(f), Q_1^1(f), Q_2^1(f), Q_E(f), Q_1(f), Q_2(f)$ for the quantum versions of these communication complexities.

We can summarize some of the previous results about EQ, DISJ and promise problem EQ' as follows:

1. $D(\text{EQ}) = n + 1, D(\text{DISJ}) = n + 1$, [19].
2. $D(\text{EQ}') \in \Omega(n), Q(\text{EQ}') \in \mathbf{O}(n)$ [6, 8].
3. $R_2(\text{EQ}) \in \mathbf{O}(\log n)$ [19], $R_2(\text{DISJ}) \in \Omega(n)$ [4, 18, 24].

³If the error is defined in another side, the communication complexity can be very different in some cases.

Definition 1. A measure-once 1QCFA \mathcal{A} is specified by a 10-tuple

$$\mathcal{A} = (Q, S, \Sigma, \Theta, \Delta, \delta, |q_0\rangle, s_0, S_{acc}, S_{rej}) \quad (3)$$

1. Q is a finite set of orthonormal quantum (basis) states.
2. S is a finite set of classical states.
3. Σ is a finite alphabet of input symbols and let $\Sigma' = \Sigma \cup \{\phi, \$\}$, where ϕ will be used as the left end-marker and $\$$ as the right end-marker.
4. $|q_0\rangle \in Q$ is the initial quantum state.
5. s_0 is the initial classical state.
6. $S_{acc} \subset S$ and $S_{rej} \subset S$, where $S_{acc} \cap S_{rej} = \emptyset$ are sets of the classical accepting and rejecting states, respectively.
7. Θ is a quantum transition function

$$\Theta : S \setminus (S_{acc} \cup S_{rej}) \times \Sigma' \rightarrow U(\mathcal{H}(Q)), \quad (4)$$

where $U(\mathcal{H}(Q))$ is set of unitary operations on the Hilbert space generated by quantum states from Q .

8. δ is a classical transition function

$$\delta : S \setminus (S_{acc} \cup S_{rej}) \times \Sigma' \rightarrow S. \quad (5)$$

If $\delta(s, \sigma) = (s')$, then the new classical state of the automaton is s' .

9. Δ is the mapping:

$$\Delta : S \rightarrow O(\mathcal{H}(Q)), \quad (6)$$

where $O(\mathcal{H}(Q))$ is set of projective measurements on the Hilbert space generated by quantum states from Q .

The computation of an MO-1QCFA $\mathcal{A} = (Q, S, \Sigma, \Theta, \Delta, \delta, |q_0\rangle, s_0, S_{acc}, S_{rej})$ on an input $w = \sigma_1 \cdots \sigma_n \in \Sigma^*$ starts with the string $\phi x \$$ on the input tape. At the start, the tape head of the automation is positioned on the left end-marker and the automaton begins the computation in the initial classical state and in the initial quantum state. After that, in each step, if its classical state is s , its tape head reads a symbol σ and its quantum state is $|\psi\rangle$, then the automaton changes its quantum state to $\Theta(s, \sigma)|\psi\rangle$ and its classical state to $\delta(s, \sigma)$. At the end of the computation, a projective measurement, which has two possible classical outcomes a and r , is applied on the current quantum state. If the classical outcome is a (r), then the input is accepted (rejected).

For any string $w \in (\Sigma')^*$ and any $\sigma \in \Sigma$, let $\widehat{\delta}(s, \sigma w) = \widehat{\delta}(\delta(s, \sigma), w)$; if $|w| = 0$, $\widehat{\delta}(s, w) = s$. Let $\sigma_0 = \phi$ and $\sigma_{n+1} = \$$. Assume that $\widehat{\delta}(s_0, \sigma_0 \cdots \sigma_i) = s_{i+1}$. Suppose the measurement is $M = \{P_a, P_r\}$, then the probability that \mathcal{A} accepts the input

$$Pr[\mathcal{A} \text{ accepts } w] = \|P_a U(s_{n+1}, \sigma_{n+1}) \cdots U(s_1, \sigma_1) U(s_0, \sigma_0) |q_0\rangle\|^2. \quad (7)$$

The probability that \mathcal{A} rejects the input is $Pr[\mathcal{A} \text{ rejects } w] = 1 - Pr[\mathcal{A} \text{ accepts } w]$.

Language acceptance is a special case of so called promise problem solving. A *promise problem* is a pair $A = (A_{yes}, A_{no})$, where $A_{yes}, A_{no} \subset \Sigma^*$ are disjoint sets. Languages may be viewed as promise problems that obey the additional constraint $A_{yes} \cup A_{no} = \Sigma^*$.

A 1DFA \mathcal{A} solves a promise problem $A = (A_{yes}, A_{no})$ (exactly) if

1. $\forall w \in A_{yes}, \mathcal{A}$ accepts w , and
2. $\forall w \in A_{no}, \mathcal{A}$ rejects w .

Let $0 < \varepsilon \leq \frac{1}{2}$. An MO-1QCFA \mathcal{A} solves a promise problem $A = (A_{yes}, A_{no})$ with a one-sided error ε if

1. $\forall w \in A_{yes}, Pr[\mathcal{A} \text{ accepts } w] = 1$, and
2. $\forall w \in A_{no}, Pr[\mathcal{A} \text{ rejects } w] \geq 1 - \varepsilon$.

A promise problem $A = (A_{yes}, A_{no})$ is solved by exactly by an MO-1QCFA \mathcal{A} if

1. $\forall w \in A_{yes}, Pr[\mathcal{A} \text{ accepts } w] = 1$, and
2. $\forall w \in A_{no}, Pr[\mathcal{A} \text{ rejects } w] = 1$.

3. Communication complexity for a promise version of the disjointness problem

In this section we give quantum and probabilistic upper bounds and a deterministic low bound for $DISJ'_\lambda$.

3.1. Quantum protocol

We give at first a quantum communication protocol for $DISJ'_{\frac{1}{4}}(x, y)$.

Theorem 1. *The quantum communication complexity $Q_2(DISJ'_{\frac{1}{4}}) \leq 3 + 2 \log n$.*

Proof. Assume that Alice is given an input $x = x_1, \dots, x_n$ and Bob an input $y = y_1, \dots, y_n$. The quantum communication protocol \mathcal{P} works as follows:

1. Alice starts with a quantum state $|\psi_0\rangle = |1, 0\rangle = (1, \overbrace{0, \dots, 0}^{2n-1})^T$ and applies the following unitary transformation U_s :

$$U_s|\psi_0\rangle = \sum_{i=1}^n \frac{1}{\sqrt{n}} |i, 0\rangle = \frac{1}{\sqrt{n}} (\overbrace{1, \dots, 1}^n, \overbrace{0, \dots, 0}^n)^T. \quad (8)$$

Alice then applies unitary transformation U_x according to her input $x = x_1, \dots, x_n$:

$$U_x = U_{x_n} \cdots U_{x_1} \quad (9)$$

where

$$U_{x_i} = \begin{cases} I & \text{if } x_i = 0 \\ |i, 1\rangle\langle i, 0| + |i, 0\rangle\langle i, 1| + \sum_{j \neq i} |j, 0\rangle\langle j, 0| + \sum_{j \neq i} |j, 1\rangle\langle j, 1| & \text{if } x_i = 1 \end{cases}. \quad (10)$$

U_x can be seen as a unitary transformation that exchanges the amplitudes of $|i, 0\rangle$ and $|i, 1\rangle$ if $x_i = 1$. The quantum state after performing U_x is

$$|\psi_1\rangle = \frac{1}{\sqrt{n}} (\overline{x}_1, \dots, \overline{x}_n, x_1, \dots, x_n)^T, \quad (11)$$

where $\overline{x}_i = 1 - x_i$. Alice then sends her quantum state $|\psi_1\rangle$ to Bob.

2. Bob then applies to the state received a unitary mapping V_y , defined for his input y as follows

$$V_y|i, 0\rangle = |i, 0\rangle \quad (12)$$

and

$$V_y|i, 1\rangle = (-1)^{y_i} |i, 1\rangle. \quad (13)$$

The quantum state after applying V_y is

$$|\psi_2\rangle = \frac{1}{\sqrt{n}}(\bar{x}_1, \dots, \bar{x}_n, (-1)^{y_1}x_1, \dots, (-1)^{y_n}x_n)^T. \quad (14)$$

If $x_i = y_i = 1$, then $(-1)^{y_i}x_i = -1 = (-1)^{x_i \wedge y_i}$; if $x_i = 1$ and $y_i = 0$, then $(-1)^{y_i}x_i = 1 = (-1)^{x_i \wedge y_i}$; otherwise $(-1)^{y_i}x_i = 0$.

3. Alice applies the unitary transformation U_x to the quantum state $|\psi_2\rangle$ received from Bob and gets a new quantum state:

$$|\psi_3\rangle = \frac{1}{\sqrt{n}}(z_1, \dots, z_n, \overbrace{0, \dots, 0}^n)^T. \quad (15)$$

If $x_i = 0$, then $z_i = \bar{x}_i = 1 = (-1)^{x_i \wedge y_i}$. If $x_i = 1$, then $z_i = (-1)^{y_i}x_i = (-1)^{x_i \wedge y_i}$. Therefore, $z_i = (-1)^{x_i \wedge y_i}$ for $1 \leq i \leq n$.

Alice then applies the unitary transformation U_f (U_f which will be specified later) to get the follow state:

$$U_f|\psi_3\rangle = \left(\frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i}, \overbrace{*, \dots, *}^{2n-1}\right)^T. \quad (16)$$

and then measures the final quantum state with $\{|i, 0\rangle\langle i, 0|, |i, 1\rangle\langle i, 1|\}_{i=1}^n$. If the measurement outcome is $|1, 0\rangle$, then Alice sends 1 to Bob; otherwise, Alice sends 0 to Bob.

It is clear that this protocol communicates $1 + 2(\log 2n) = 3 + 2 \log n$ qubits. Unitary transformations U_s and U_f do exist. The first column of U_s is $\frac{1}{\sqrt{n}}(\overbrace{1, \dots, 1}^n, \overbrace{0, \dots, 0}^n)^T$ and the first row of U_f is $\frac{1}{\sqrt{n}}(\overbrace{1, \dots, 1}^n, \overbrace{0, \dots, 0}^n)$. It is easy to verify that V_y is a unitary transformation.

If $\sum_{i=1}^n x_i \wedge y_i = 0$, then $\frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i} = 1$. After the measurement, Alice gets the quantum outcome $|1, 0\rangle$ and sends 1 to Bob with certainty. Thus,

$$Pr(\mathcal{P}(x, y) = \text{DISJ}'_{\frac{1}{4}}(x, y)) = 1. \quad (17)$$

If $n/4 \leq \sum_{i=1}^n x_i \wedge y_i \leq 3n/4$, then $|\frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i}| \leq 1/2$. Alice gets the quantum outcome $|1, 0\rangle$ with probability not more than $|\frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i}|^2 = 1/4$. Thus,

$$Pr(\mathcal{P}(x, y) = \text{DISJ}'_{\frac{1}{4}}(x, y)) = 1 - \left|\frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i}\right|^2 \geq \frac{3}{4}. \quad (18)$$

Therefore \mathcal{P} is a two-sided error quantum protocol for $\text{DISJ}'_{\frac{1}{4}}(x, y)$ and $Q_2(\text{DISJ}'_{\frac{1}{4}}) \leq 3 + 2 \log n$. \square

Theorem 2. *The quantum communication complexity $Q_2(\text{DISJ}'_{\lambda}) \leq \frac{\log 3}{3\lambda}(3 + 2 \log n)$.*

Proof. For general cases, the new quantum protocol \mathcal{P}' works as follows: Repeat the protocol \mathcal{P} from the proof of the previous theorem k times (k will be specified later). If all the measurement outcomes in Step 3 are $|1, 0\rangle$, then $\mathcal{P}'(x, y) = 1$; otherwise, $\mathcal{P}'(x, y) = 0$.

If $\sum_{i=1}^n x_i \wedge y_i = 0$, then

$$Pr(\mathcal{P}(x, y) = 1) = 1 \quad (19)$$

and

$$Pr(\mathcal{P}(x, y) = 0) = 0. \quad (20)$$

Therefore,

$$Pr(\mathcal{P}'(x, y) = \text{DISJ}'_\lambda(x, y) = 1) = 1. \quad (21)$$

If $\lambda n \leq \sum_{i=1}^n x_i \wedge y_i \leq (1 - \lambda)n$, then

$$p_0 = Pr(\mathcal{P}(x, y) = \text{DISJ}'_\lambda(x, y) = 0) = 1 - \left| \frac{1}{n} \sum_{i=1}^n (-1)^{x_i \wedge y_i} \right|^2 \geq 1 - |1 - 2\lambda|^2 \quad (22)$$

$$= 4\lambda - \lambda^2 = 4\lambda(1 - \lambda) \geq 4\lambda\left(1 - \frac{1}{4}\right) = 3\lambda. \quad (23)$$

If $k = \frac{\log 1/3}{\log(1-3\lambda)}$, and the protocol is repeated \mathcal{P} k times, then

$$Pr(\mathcal{P}'(x, y) = \text{DISJ}'_\lambda(x, y) = 0) = 1 - (1 - p_0)^k \geq 1 - (1 - 3\lambda)^k \geq 1 - (1 - 3\lambda)^{\frac{\log 1/3}{\log(1-3\lambda)}} \quad (24)$$

$$= 1 - 2^{\log((1-3\lambda)^{\frac{\log 1/3}{\log(1-3\lambda)}})} = 1 - 2^{\frac{\log 1/3}{\log(1-3\lambda)} \times \log((1-3\lambda))} = 1 - 2^{\log 1/3} = \frac{2}{3}. \quad (25)$$

Since for any real number $u > 0$, $1 - u \leq e^{-u} \leq 2^{-u}$. We have,

$$k = \frac{\log 1/3}{\log(1-3\lambda)} \leq \frac{\log 1/3}{\log 2^{(-3\lambda)}} = \frac{\log 3}{3\lambda}. \quad (26)$$

Thus, $Q_2(\text{DISJ}'_\lambda) \leq \frac{\log 3}{3\lambda}(3 + 2 \log n)$.

□

3.2. Deterministic lower bound

Theorem 3. *The deterministic communication complexity $D(\text{DISJ}'_\lambda) \in \Omega(n)$.*

Proof. Let \mathcal{P} be a deterministic protocol for DISJ'_λ . We consider the set $F_\lambda = \{x \in \{0, 1\}^n \mid \lambda n \leq H(x) \leq (1 - \lambda)n\}$, where $H(x)$ is the Hamming weight of x . If $x \in F_\lambda$, then also $\bar{x} \in F_\lambda$, where $\bar{x} = \bar{x}_1 \cdots \bar{x}_n$. If the set $E = \{(x, \bar{x}) \mid x \in F_\lambda\}$, then for every $(x, \bar{x}) \in E$, $\mathcal{P}(x, \bar{x}) = 1$. Suppose there is a 1-monochromatic rectangle $R = A \times B \subseteq \{0, 1\}^n \times \{0, 1\}^n$ such that $\mathcal{P}(x, y) = 1$ for every $(x, y) \in R$. For $S = R \cap E$, we now prove that $|S| < 1.99^n$.

Suppose $|S| \geq 1.99^n$. According to Corollary 1.2 from [9], then there exist $(x, \bar{x}) \in S$ and $(z, \bar{z}) \in S$ such that $x \wedge z = \frac{n}{4}$, where $x \wedge z = \sum_{i=1}^n x_i \wedge z_i$. Since $S \subseteq E$, we have $x, \bar{x}, z, \bar{z} \in F_\lambda$. Without a loss of generality, let

$$x = \underbrace{1 \cdots 1}_{n/4} \underbrace{0 \cdots 0}_{\lambda n} \underbrace{1 \cdots 1}_{\lambda n} \underbrace{* \cdots *}_{3n/4 - 2\lambda n}, \text{ and} \quad (27)$$

$$z = \underbrace{1 \cdots 1}_{n/4} \underbrace{1 \cdots 1}_{\lambda n} \underbrace{0 \cdots 0}_{\lambda n} \underbrace{* \cdots *}_{3n/4 - 2\lambda n}. \quad (28)$$

In such a case

$$\bar{x} = \underbrace{0 \cdots 0}_{n/4} \underbrace{1 \cdots 1}_{\lambda n} \underbrace{0 \cdots 0}_{\lambda n} \underbrace{* \cdots *}_{3n/4 - 2\lambda n} \quad (29)$$

and therefore $\lambda n \leq z \wedge \bar{x} \leq 3n/4 - \lambda n < (1 - \lambda)n$. Thus, $\mathcal{P}(z, \bar{x}) = 0$. Since $S \subset R$ and R is 1-rectangle, we get $(x, \bar{x}) \in R, (z, \bar{z}) \in R$ and therefore also $(z, \bar{x}) \in R$ – a contradiction.

Therefore, the minimum number of 1-monochromatic rectangles that partition the space of inputs is

$$C^1(\text{DISJ}'_\lambda) \geq \frac{|E|}{|S|} = \frac{|F_\lambda|}{|S|} \geq \frac{|F_{1/4}|}{|S|} \geq \frac{2^n/2}{1.99^n}. \quad (30)$$

According to Lemma 1, the deterministic communication complexity is then

$$D(\text{DISJ}'_\lambda) \geq \log C^1(\text{DISJ}'_\lambda) \geq \log\left(\frac{2^n/2}{1.99^n}\right) = n - 1 - n \log 1.99 > n - 1 - 0.9927n = 0.0073n - 1. \quad (31)$$

Thus, $D(\text{DISJ}'_\lambda) \in \Omega(n)$. \square

Remark 2. The lower bound that was proved in the previous theorem is quite a rough bound. We expect that the low bound is relative to λ . When λ is close to 0, then the low bound is expected to be close to n instead of $0.007n$.

3.3. Probabilistic protocol

As already mentioned, the two-sided error probabilistic communication complexity $R_2(\text{DISJ}) \in \Omega(n)$. However, for DISJ' , the communication complexity is dramatically improved as will now be shown

Theorem 4. *The one-way probabilistic communication complexity $R_2^1(\text{DISJ}'_{\frac{1}{4}}) \leq 5 \log n$.*

Proof. Let us consider the one-way probabilistic protocol \mathcal{P}^1 which works as follows:

1. If $H(x) < k$, then Alice just sends 1 to Bob. Otherwise, Alice chooses randomly k bits of '1's of her input, says x_{i_1}, \dots, x_{i_k} , and sends the positions i_1, \dots, i_k to Bob.
2. If Bob just receives a bit of '1', then $\mathcal{P}^1(x, y) = 1$. Otherwise, Bob checks the positions i_1, \dots, i_k of his input. If there exists a j ($1 \leq j \leq k$) such that $y_{i_j} = 1$, then $\mathcal{P}^1(x, y) = 0$; otherwise $\mathcal{P}^1(x, y) = 1$.

If $\sum_{i=1}^n x_i \wedge y_i = 0$, then

$$\Pr(\mathcal{P}^1(x, y) = \text{DISJ}'_{\frac{1}{4}}(x, y) = 1) = 1. \quad (32)$$

If $n/4 \leq \sum_{i=1}^n x_i \wedge y_i \leq 3n/4$, then for any $i \in \{i_1, \dots, i_k\}$

$$\Pr(y_i = x_i) \geq \frac{1}{4}. \quad (33)$$

Therefore,

$$\Pr(\mathcal{P}^1(x, y) = 0) \geq 1 - \left(1 - \frac{1}{4}\right)^k = 1 - \left(\frac{3}{4}\right)^k. \quad (34)$$

If $k = 5$, then $\Pr(\mathcal{P}^1(x, y) = 0) \geq \frac{2}{3}$. Since Alice needs $\log n$ bits to specifies every position, we have $R_2^1(\text{DISJ}'_{\frac{1}{4}}) \leq 5 \log n$. \square

Theorem 5. *The one-way probabilistic communication complexity $R_2^1(\text{DISJ}'_\lambda) \leq \frac{\log 3}{\lambda} \log n$.*

Proof. For this general cases, we use the same protocol as in the proof of the previous theorem, but Alice will send more positions of her '1' bits input.

If $\sum_{i=1}^n x_i \wedge y_i = 0$, then

$$\Pr(\mathcal{P}^1(x, y) = \text{DISJ}'_\lambda(x, y) = 1) = 1. \quad (35)$$

If $\lambda n \leq \sum_{i=1}^n x_i \wedge y_i \leq (1 - \lambda)n$, then for any $i \in \{i_1, \dots, i_k\}$

$$\Pr(y_i = x_i) \geq \lambda. \quad (36)$$

Therefore,

$$\Pr(\mathcal{P}^1(x, y) = 0) \geq 1 - (1 - \lambda)^k. \quad (37)$$

If $k = \frac{\log 1/3}{\log(1-\lambda)}$, then $\Pr(\mathcal{P}^1(x, y) = 0) \geq \frac{2}{3}$. Thus, $R_2^1(\text{DISJ}'_\lambda) \leq \frac{\log 1/3}{\log(1-\lambda)} \log n \leq \frac{\log 3}{\lambda} \log n$. \square

Remark 3. If λ is close to $\frac{1}{n}$, then the quantum and probabilistic communication complexity advantages in Theorem 2 and Theorem 5 disappear. We can define two-sided error mode as tolerating an error probability ε instead of $\frac{1}{3}$. Modifying our proof in Theorem 2 and Theorem 5, we can get $Q_2(\text{DISJ}'_\lambda) \leq \frac{\log \varepsilon}{3\lambda}(3 + 2 \log n)$ and $R_2^1(\text{DISJ}'_\lambda) \leq \frac{\log \varepsilon}{\lambda} \log n$ for any error probability ε . When ε is close to $\frac{1}{2^n}$, the the quantum and probabilistic communication complexity advantages in Theorem 2 and Theorem 5 disappear.

4. Applications to finite automata

For any $n \in \mathbb{Z}^+$, we consider two promise problems $A_{EQ}(n)$ and $A_D(n)$ corresponding to EQ' and $\text{DISJ}'_{\frac{1}{4}}$ that are defined as follows:

$$A_{EQ}(n) : \begin{cases} A_{yes}(n) = \{x\#y \mid x = y, x, y \in \{0, 1\}^n\} \\ A_{no}(n) = \{x\#y \mid x \neq y, x, y \in \{0, 1\}^n, H(x, y) = \frac{n}{2}\} \end{cases}, \quad (38)$$

$$A_D(n) : \begin{cases} A_{yes}(n) = \{x\#y\#x \mid \sum_{i=1}^n x_i \wedge y_i = 0, x, y \in \{0, 1\}^n\} \\ A_{no}(n) = \{x\#y\#x \mid \frac{1}{4}n \leq \sum_{i=1}^n x_i \wedge y_i \leq \frac{3}{4}n, x, y \in \{0, 1\}^n\} \end{cases}. \quad (39)$$

The quantum protocol for EQ' which is described in [8] can be implemented on an MO-1QCFA as shown bellow. Therefore, we get the following result:

Theorem 6. *The promise problem $A_{EQ}(n)$ can be solved exactly by an MO-1QCFA $\mathcal{A}(n)$ with n quantum basis states and $\mathbf{O}(n)$ classical states, whereas the sizes of the corresponding 1DFA are $2^{\Omega(n)}$.*

1. Read the left end-marker ϕ , perform U_s on the initial quantum state $|1\rangle$, change its classical state to $\delta(s_0, \phi) = s_1$, and move the tape head one cell to the right.
2. Until the currently scanned symbol σ is not $\#$, do the following:
 - 2.1 Apply $\Theta(s_i, \sigma) = U_{i, \sigma}$ to the current quantum state.
 - 2.2 Change the classical state s_i to s_{i+1} and move the tape head one cell to the right.
3. Change the classical state s_{n+1} to s_1 and move the tape head one cell to the right.
4. While the currently scanned symbol σ is not the right end-marker $\$$, do the following:
 - 2.1 Apply $\Theta(s_i, \sigma) = U_{i, \sigma}$ to the current quantum state.
 - 2.2 Change the classical state s_i to s_{i+1} and move the tape head one cell to the right.
5. When the right end-marker is reached, perform U_f on the current quantum state, measure the current quantum state with $M = \{P_i = |i\rangle\langle i|\}_{i=1}^n$. If the outcome is $|1\rangle$, accept the input; otherwise reject the input.

Figure 3: Description of the behavior of $\mathcal{A}(n)$ when solving the promise problem $A_{EQ}(n)$.

Proof. Let $x = x_1 \cdots x_n$ and $y = y_1 \cdots y_n$. Let us consider an MO-1QCFA $\mathcal{A}(n)$ with n quantum basis states $\{|i\rangle : i = 1, 2, \dots, n\}$. $\mathcal{A}(n)$ will start in the quantum state $|1\rangle = (1, 0 \cdots, 0)^T$. We use classical states $s_i \in S$ ($1 \leq i \leq n + 1$) to point out the positions of the tape head that will provide some information for

quantum transformations. If the classical state of $\mathcal{A}(n)$ will be s_i ($1 \leq i \leq n$) that will mean that the next scanned symbol of the tape head is the i -th symbol of $x(y)$ and s_{n+1} means that the next scanned symbol of the tape head is $\#(\$)$. The automaton proceeds as shown in Figure 4, where

$$U_s|1\rangle = \frac{1}{\sqrt{n}} \sum_{i=1}^n |i\rangle; \quad (40)$$

$$U_{i,\sigma}|i\rangle = (-1)^\sigma|i\rangle \text{ and } U_{i,\sigma}|j\rangle = |j\rangle \text{ for } j \neq i \quad (41)$$

$$U_f\left(\sum_{i=1}^n \alpha_i|i\rangle\right) = \left(\frac{1}{\sqrt{n}} \sum_{i=1}^n \alpha_i\right)|1\rangle + \dots \quad (42)$$

Transformations U_s and U_f are unitary. The first column of U_s is $\frac{1}{\sqrt{n}}(1, \dots, 1)^T$ and the first row of U_f is $\frac{1}{\sqrt{n}}(1, \dots, 1)$.

The quantum state after scanning the left end-marker is $|\psi_1\rangle = U_s|1\rangle = \sum_{i=1}^n \frac{1}{\sqrt{n}}|i\rangle$, the quantum state after Step 2 is $|\psi_2\rangle = \sum_{i=1}^n \frac{1}{\sqrt{n}}(-1)^{x_i}|i\rangle$, and the quantum state after Step 4 is $|\psi_3\rangle = \sum_{i=1}^n \frac{1}{\sqrt{n}}(-1)^{x_i+y_i}|i\rangle$. The quantum state after scanning the right end-marker is therefore

$$|\psi_4\rangle = U_f\left(\sum_{i=1}^n \frac{1}{\sqrt{n}}(-1)^{x_i+y_i}|i\rangle\right) = U_f \frac{1}{\sqrt{n}} \begin{pmatrix} (-1)^{x_1+y_1} \\ (-1)^{x_2+y_2} \\ \vdots \\ (-1)^{x_n+y_n} \end{pmatrix} = \begin{pmatrix} \frac{1}{n} \sum_{i=1}^n (-1)^{x_i+y_i} \\ \vdots \\ \vdots \end{pmatrix}. \quad (43)$$

If the input string $w \in A_{yes}(n)$, then $x_i = y_i$ for $1 \leq i \leq n$ and $|\frac{1}{n} \sum_{i=1}^n (-1)^{x_i+y_i}|^2 = 1$. The amplitude of $|1\rangle$ is 1, and that means $|\psi_4\rangle = |1\rangle$. Therefore the input will be accepted with probability 1 at the measurement in Step 5.

If the input string $w \in A_{no}(n)$, then $H(x, y) = \frac{n}{2}$. Therefore the probability of getting outcome $|1\rangle$ in the measurement in Step 5 is $|\frac{1}{n} \sum_{i=1}^n (-1)^{x_i+y_i}|^2 = 0$.

The deterministic communication complexity for EQ' is at least $0.007n$ [6, 8]. Therefore, the sizes of the corresponding 1DFA are $2^{\Omega(n)}$. \square

We implement the quantum protocol used in Theorem 1 on an MO-1QCFA and prove the following theorem:

Theorem 7. *The promise problem $A_D(n)$ can be solved with one-sided error $\frac{1}{4}$ by an MO-1QCFA $\mathcal{A}(n)$ with $2n$ quantum basis states and $\mathbf{O}(n)$ classical states, whereas the sizes of the corresponding 1DFA are $2^{\Omega(n)}$.*

Proof. Let $x = x_1 \dots x_n$ and $y = y_1 \dots y_n$. Let us consider an MO-1QCFA $\mathcal{A}(n)$ with $2n$ quantum basis states $\{|i, 0\rangle, |i, 1\rangle\}_{i=1}^n$ that will start in the state $|1, 0\rangle = (1, \overbrace{0, \dots, 0}^{2n-1})^T$. The automaton proceeds as shown

- | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. Read the left end-marker \clubsuit, perform U_s on the initial quantum state $1, 0\rangle$, change its classical state to $\delta(s_0, \clubsuit) = s_1$, and move the tape head one cell to the right. 2. While the currently scanned symbol σ is not $\#$, do the following: <ol style="list-style-type: none"> 2.1 Apply $\Theta(s_i, \sigma) = U_{i, \sigma}$ to the current quantum state. 2.2 Change the classical state s_i to s_{i+1} and move the tape head one cell to the right. 3. Move the tape head one cell to the right. 4. While the currently scanned symbol σ is not $\#$, do the following: <ol style="list-style-type: none"> 4.1 Apply $\Theta(s_{n+i}, \sigma) = V_{i, \sigma}$ to the current quantum state. 4.2 Change the classical state s_{n+i} to s_{n+i+1} and move the tape head one cell to the right. 5. Change the classical state s_{2n+1} to s_1 and move the tape head one cell to the right. 6. While the currently scanned symbol σ is not the right end-marker $\\$, do the following: <ol style="list-style-type: none"> 6.1 Apply $\Theta(s_i, \sigma) = U_{i, \sigma}$ to the current quantum state. 6.2 Change the classical state s_i to s_{i+1} and move the tape head one cell to the right. 7. When the right end-marker $\\$ is reached, perform U_f on the current quantum state, measure the current quantum state with $M = \{ i, 0\rangle\langle i, 0 , i, 1\rangle\langle i, 1 \}_{i=1}^n$. If the outcome is $1, 0\rangle$, accept the input; otherwise reject the input. |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Figure 4: Description of the behavior of $\mathcal{A}(n)$ when solving the promise problem $A_D(n)$.

in Figure 4, where

$$U_s|1, 0\rangle = \frac{1}{\sqrt{n}} \sum_{i=1}^n |i, 0\rangle; \quad (44)$$

$$U_{i, \sigma}|j, 0\rangle = |j, 1\rangle \text{ and } U_{i, \sigma}|j, 1\rangle = |j, 0\rangle \text{ if } \sigma = 1 \text{ and } j = i \text{ otherwise } U_{i, \sigma}|j, k\rangle = |j, k\rangle; \quad (45)$$

$$V_{i, \sigma}|j, 1\rangle = (-1)^\sigma |j, 1\rangle \text{ if } j = i, \text{ otherwise } V_{i, \sigma}|j, k\rangle = |j, k\rangle; \quad (46)$$

$$U_f\left(\sum_{i=1}^n \alpha_i |i, 0\rangle + \beta_i |i, 1\rangle\right) = \left(\frac{1}{\sqrt{n}} \sum_{i=1}^n \alpha_i\right) |1, 0\rangle + \dots \quad (47)$$

For $1 \leq i \leq n$, it is easy to verify that $U_s, U_{i, \sigma}, V_{i, \sigma}$ and U_f are unitary transformations. According to the analysis in the proof of Theorem 1, if the input string $w \in A_{yes}(n)$, the automaton will get the outcome $|1, 0\rangle$ in Step 7 with certainty and therefore

$$Pr[\mathcal{A} \text{ accepts } w] = 1. \quad (48)$$

If the input string $w \in A_{no}(n)$, the automaton gets the outcome $|1, 0\rangle$ with probability not more than $1/4$. Thus,

$$Pr[\mathcal{A} \text{ rejects } w] \geq \frac{3}{4}. \quad (49)$$

Let an N -states 1DFA $\mathcal{A}'(n) = (S, \Sigma, \delta, s_0, S_{acc})$ solves the promise problem $A_D(n)$, then we can get a deterministic protocol for $\text{DISJ}'_{\frac{1}{4}}(x, y)$ as follows:

1. Alice simulates the computation of $\mathcal{A}'(n)$ on input “ $x\#$ ” and then sends her state $\widehat{\delta}(s_0, x\#)$ to Bob.
2. Bob simulates the computation of $\mathcal{A}'(n)$ on input “ $y\#$ ” starting at state $\widehat{\delta}(s_0, x\#)$, and then sends his state $\widehat{\delta}(s_0, x\#y\#)$ to Alice.

3. Alice simulates the computation of $\mathcal{A}'(n)$ on input “ x ” starting at state $\widehat{\delta}(s_0, x\#y\#x) \in S_{acc}$ then Alice sends 1 to Bob, otherwise Alice sends 0 to Bob.

The deterministic complexity of the above protocol is $1 + 2 \log N$ and therefore $D(\text{DISJ}'_{\frac{1}{4}}) \leq 1 + 2 \log N$. According the analysis in 3, we have

$$1 + 2 \log N \geq D(\text{DISJ}'_{\frac{1}{4}}) > 0.0073n - 1 \quad (50)$$

$$\Rightarrow N \in 2^{\Omega(n)}. \quad (51)$$

□

Acknowledgements

Work of the first and third authors supported by the Employment of Newly Graduated Doctors of Science for Scientific Excellence project/grant (CZ.1.07./2.3.00/30.0009) of Czech Republic. Work of second author supported by the National Natural Science Foundation of China (Nos. 61272058, 61073054).

References

- [1] A. Ambainis, J. Watrous, Two-way finite automata with quantum and classical states, *Theoretical Computer Science* **287** (2002) 299–311.
- [2] S. Aaronson, A. Ambainis, Quantum search of spatial regions, In *Proceedings of 44th IEEE FOCS* (2003) 200–209.
- [3] A. Ambainis, A. Yakaryilmaz, Superiority of exact quantum automata for promise problems, *Information Processing Letters* **112** (7) (2012) 289–291.
- [4] Z. Bar-Yossef, T. S. Jayram, R. Kumar, D. Sivakumar, An information statistics approach to data stream and communication complexity, *Journal of Computer and System Sciences* **68** (2004) 702–732.
- [5] G. Brassard, Quantum communication complexity, *Foundations of Physics* **70** (2003) 1593–1616.
- [6] H. Buhrman, R. Cleve and A. Wigderson, Quantum vs. classical communication and computation, *Proceedings of 30th Annual ACM Symposium on Theory of Computing* (1998) 63–68.
- [7] H. Buhrman, R. de Wolf. Communication complexity lower bounds by polynomials. In *Proceedings of 16th IEEE Conference on Computational Complexity* (2001) 120–130.
- [8] H. Buhrman, R. Cleve, S. Massar, R. de Wolf, Nonlocality and Communication Complexity, *Rev. Mod. Phys.* **82** (2010) 665–698. Also arXiv:0907.3584 (2009).
- [9] P. Frankl and V. Rödl, Forbidden intersections, *Trans. Amer. Math. Soc.* **300**, 1, (1987) 259–286.
- [10] J. Gruska, *Quantum Computing*, McGraw-Hill, London (1999).
- [11] J. Gruska, Descriptive complexity issues in quantum computing. *J. Automata, Languages Combin.* **5** (3) (2000) 191–218.
- [12] J. E. Hopcroft, J. D. Ullman, *Introduction to Automata Theory, Languages, and Computation*, Addison-Wesley, New York (1979).
- [13] P. Høyer, R. De Wolf, Improved quantum communication complexity bounds for disjointness and equality, in: H. Alt, A. Ferreira (Eds.), *Proc. 19th STACS, Lecture Notes in Computer Science*, Vol. 2285, Springer, Berlin (2002) 299–310, quant-ph/0109068.
- [14] J. Hromkovič, *Communication Complexity and Parallel Computing*, Springer, Berlin (1997).
- [15] J. Hromkovič, G. Schintger, On the Power of Las Vegas for One-Way Communication Complexity, OBDDs, and Finite Automata, *Information and Computation* **169** (2001) 284–296.
- [16] H. Klauck, On quantum and probabilistic communication: Las Vegas and one-way protocols, *Proceedings of the 32th annual ACM symposium on Theory of computing* (2000) 644–651.
- [17] H. Klauck, *Quantum Communication Complexity*, arXiv:quant-ph/0005032.
- [18] B. Kalyanasundaram, G. Schintger, The probabilistic communication complexity of set intersection, *SIAM Journal on Discrete Mathematics* **5** (1992) 545–557.
- [19] E. Kushilevitz, N. Nisan, *Communication Complexity*, Cambridge University Press (1997).

- [20] S. Yu, State Complexity: Recent Results and Open Problems, *Fundamenta Informaticae* **64** (2005) 471–480.
- [21] M. A. Nielsen, I. L. Chuang, *Quantum Computation and Quantum Information*, Cambridge University Press, Cambridge (2000).
- [22] D. W. Qiu, L. Z. Li, P. Mateus, J. Gruska, Quantum finite automata, J.C. Wang, Editor, *CRC Handbook of Finite State Based Models and Applications*, CRC Press (2012) 113–144.
- [23] D.W. Qiu, L.Z. Li, P. Mateus, A. Sernadas, Exponentially more concise quantum recognition of non-RMM regular languages, arXiv:0909.1428v5 (2013).
- [24] A. Razborov, On the distributional complexity of disjointness, *Theor. Comput. Sci.* **106** (1992) 385–390.
- [25] A. Razborov, Quantum communication complexity of symmetric predicates, *Izvestiya of the Russian Academy of Sciences, mathematics* **67** (2003) 159–176.
- [26] A. C. Yao, Some Complexity Questions Related to Distributed Computing, in: *Proc. of 11th STOC* (1979) 209–213.
- [27] A. Yakaryilmaz, A. C. Cem Say, Succinctness of two-way probabilistic and quantum finite automata, *Discrete Mathematics and Theoretical Computer Science* **12** (4) (2010) 19–40.
- [28] S.G. Zheng, D.W. Qiu, L.Z. Li, J. Gruska, One-way finite automata with quantum and classical states, In: H. Bordihn, M. Kutrib, and B. Truthe (Eds.), *Dassow Festschrift 2012*, LNCS 7300 (2012) 273–290.
- [29] S. G. Zheng, D. W. Qiu, J. Gruska, L. Z. Li, P. Mateus. State succinctness of two-way finite automata with quantum and classical states, *Theoretical Computer Science*, **499** (2013) 98–112.
- [30] S. G. Zheng, D. W. Qiu, L. Z. Li, Some languages recognized by two-way finite automata with quantum and classical states, *International Journal of Foundation of Computer Science*, **23** (5) (2012) 1117–1129.
- [31] S. G. Zheng, J. Gruska, D. W. Qiu, On the state complexity of semi-quantum finite automata, arXiv:1307.2499 (2013).