

Ipanema- β : tools and examples for HEP analysis on GPU

D. Martínez Santos^{a,b}, P. Álvarez Cartelle^c, M. Borsato^b, V. G. Chobanova^b,
J. García Pardiñas^b, M. Lucio Martínez^b, M. Ramos Pernas^b

^a*Axencia Galega de Innovación. Consellería de Industria. Xunta de Galicia, Spain*

^b*Universidade de Santiago de Compostela, Santiago de Compostela, Spain*

^c*Imperial College London, London, United Kingdom*

Abstract

Acknowledgements

We would like to thank Cedric Potterat and the rest of our colleagues at the Federal University of Rio de Janeiro, for introducing us to the world of GPUs and for showing us the large gain in computing speed that such devices can achieve in a likelihood fit. We are very grateful for the funding provided by EPLANET, which made this exchange possible. We would also like to thank Axencia Galega de Innovacion (GAIN), XuntaGAL and the European Research Council (ERC-StG-639068) for their support.

1. Introduction

We present here a set of examples, classes and tools which can be used for statistical analysis in Graphics Processing Units (GPU). This includes binned and unbinned maximum likelihood fits, pseudo-experiment generation, convolutions, Markov Chain Monte Carlo method implementations, and limit setting techniques. Our idea is that these examples can be used either as starting points by anyone interested in the subject, or as a framework to develop given analyses. Hence, we include cases with different levels of complexity, starting by showing how to use and combine existing packages, down to more realistic examples that required of us the development of generic classes. Our code is based on pyCUDA [1], which is then combined with scientific packages for analysis such as iMinuit [2, 3] or pyMultinest [4]. In Sect. 2, we list the packages that we use, as well as other approaches we tried or that could be of interest for the reader. Sections 3-7 describe the provided examples. Section 8 is meant to collect some frequently asked questions.

2. Software

The `Ipanema` package is available on `git`:

```
git clone https://gitlab.cern.ch/bsm-fleet/Ipanema.git .
```

It contains the following folders:

```
urania cuda polibio examples
```

and a simple `setup.csh` script. The software we use depends on the following:

- `Cuda`. Tested with 7.5 and 8.0.
- `Python2` (we used 2.7.11).
- Standard `Python` packages for scientific usage, such as `scipy`, `numpy`, `matplotlib`. We got them all through an installation of `Anaconda` [5]. We tested both against `Anaconda2` and `Anaconda4`.
- `pyCuda` [1] (not in `Anaconda`). In addition, we made a modified version of `curand.py`, (`toyrand.py`) where the generation of an array of poisson numbers uses a separate poisson mean per generated value. We include `toyrand.py` in the repository.
- `reikna` [6] (not in `Anaconda`).
- Default (for likelihood fits): `iminuit` [2] (not in `Anaconda`). In order to use analytical gradients, one needs to get the version from the `git` master branch. If not, then the standard 1.2 is fine.
- Optional, multidimensional parameter sampling: `Multinest` [7], `pymultinest` [4] (not in `Anaconda`).
- Optional, symbolic programming: `sympy` (included in `Anaconda`¹), `Mathematica` (optional, can be called by `urania` modules to substitute some of the utilities of `sympy`).

¹The released examples are for `sympy` 0.7.6.1 as well as `sympy` 1.0, older versions of `sympy` may need some small tweaking of the expression manipulation.

There are several interesting packages on the market that we don't use here, but that the reader may be interested in:

- GooFit. This is the software that was shown to us in Rio. It mimics the structure of RooFit, but for Cuda. We don't use it because we preferred to work mostly from Python, and because at the time we knew about GooFit, there were still functionalities missing that we needed. It can be used with a related software, Hydra.
- numba.accelerate: It contains an alternative to pyCUDA, which can upload Python functions to a GPU using decorators. It was the base of our first attempts to make fitting programs via Python+CUDA. But after some time we moved to pyCUDA instead. We gave it a short try to combine both, but they didn't seem compatible.
- Faddeeva's function from [GitHub](#). It is not used in the current released examples, but we are using it for more realistic versions of the $B_s^0 \rightarrow J/\psi KK$ fit, for instance.

To test the examples we provide, we use three graphics card models: GeForce 980 GTX Ti, GeForce 1080 GTX and Tesla M2090. Their specifications are listed in [Appendix D](#).

3. Example 1: Fit to a signal peak on top of an exponential background

File: `examples/sbfit.py`

In this example, a signal peak is fitted on top of an exponential background, using an unbinned maximum likelihood fit. The signal probability density function (PDF) is implemented in a file called `psIpatia.cu` as a device function, `__device__ double log_apIpatia`. A `__device__` function is only accessible by the GPU. The signal PDF is then processed inside `sbfit.py` by pyCUDA's `SourceModule`. Since `SourceModule` uses strings, we read `psIpatia.cu` as:

```
mod = SourceModule(file("psIpatia.cu","r").read()).
```

An alternative way is to define a string which contains the CUDA code, as done in the standard pyCUDA examples.

The signal PDF is later called by a global function, `__global__ void Ipatia`, over an array of data. Global functions are visible both for the GPU and for the host (e.g. a CPU). They must be of type `void`, meaning that any output has to be passed as an argument. In this case, the output (`int_gpu`) is an array with the signal PDF value of each data point. The function is then called in Python as:

```
sig_pdf(bins_gpu, int_gpu, np.float64(mu), np.float64(sigma),  
np.float64(l), np.float64(beta), np.float64(a), np.float64(n),  
np.float64(a2), np.float64(n2), block = (1000,1,1),  
grid = (len(mydat)/1000,1)).
```

Note that each parameter has to be passed to the GPU using the variable type specified in the CUDA code. In this case, all parameters are of type `double`, which is passed as `np.float64(parameter)`. The last two arguments of the function define the block and grid size in the GPU. The maximum block size depends on the computing capability of the graphics card and is smaller or equal than 1024. The limitations for the grid size are much looser. In this case we are making blocks of 1000 events each, and then the grid as large as needed

so that it covers all the events, i.e, $N_{evts} = block[x] \times grid[x]$. The y and z components of the block/grid are not used.

The minimization is done by `Minuit`, via the `iminuit` package. `Minuit` minimizes a given cost function, FCN. In most of the usages in high-energy physics, the FCN is $-2 \log L$ (or just $-\log L$) and a typical definition for fit errors correspond to a change of one unit in $-2 \log L$. Inside the FCN the signal and background PDF,

```
bkg_gpu = pycuda.cumath.exp(k*data_array_gpu),
```

and afterwards the likelihood for each data point are calculated in parallel by the GPU,

```
LL_gpu = pycuda.cumath.log(fs*invint_s*sig_gpu+fb*invint_b*bkg_gpu).
```

Here, `invint_s` and `invint_b` are the inverses of the signal and background PDF integrals, `integral_ipa` and `integral_exp`, respectively. The calculation of `integral_ipa` is performed numerically by summing up the `int_gpu` entries,

```
integral_ipa = np.sum((int_gpu).get())*DM.
```

The background PDF integral is determined analytically,

```
if k!= 0 :
```

```
    integral_exp = (np.exp(k*Mmax)-np.exp(k*Mmin))*1./k
```

```
else :
```

```
    integral_exp = (Mmax - Mmin).
```

This parallelization significantly reduces the computational time compared to an algorithm which loops over the data and calculates each value in sequence. Note also that some operations, such as the calculation of an exponential or a logarithmic function, can be performed directly on the `gpu_array` from the `Python` function even though it is parallelized and executed in the GPU, as shown above. In the end, the individual likelihoods are summed up to a total

likelihood in the CPU². The sum, including normalization terms, is returned as the output of FCN. The results of the MIGRAD and HESSE methods and the corresponding correlation matrix are shown in Fig. 1.

The example prints in the end the GPU time in seconds. We measured the following timings in different devices (Table 1):

Table 1: Timings of Example 1 in different devices (see text for details).

Device	10k events	10M events
	time [s]	
GeForce 980 GTX Ti	0.9	30.9
GeForce 1080 GTX	1.0	24.1
Tesla M2090	1.1	21.5

4. Example 2: Fit to the time and angular distribution in bins of the KK mass

File: `examples/phis/fitphis.py`

This example bases on the fit used by the LHCb collaboration to determine the CP-violating phase ϕ_s in the $B_s^0 \rightarrow J/\psi KK$ decay channel [8]. In the model we consider contributions from $\phi \rightarrow KK$ (P wave), which has three polarization states, and from $f_0 \rightarrow KK$ (S wave). We fit the time dependent angular distributions of B_s^0 and \bar{B}_s^0 decays in six KK mass bins. The events are produced with EvtGen [9], where equal numbers of B_s^0 and \bar{B}_s^0 are generated according to a theoretical model, which for simplicity does not include any experimental effects.

²Depending on the size of the array, in some cases it is faster to pass the entire array to the host and let it do the sum, while above a given size *which we didn't calculate accurately* it becomes better to do the sum in the GPU.

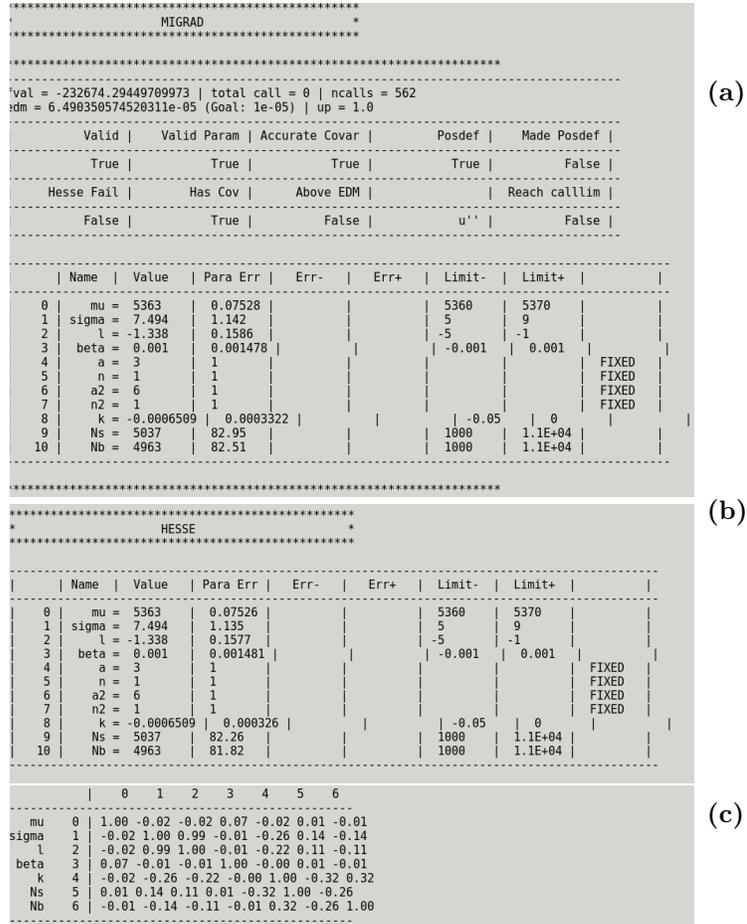


Figure 1: Fit result of Example 1: (a) MIGRAD output, (b) HESSE output, (c) parameter correlation matrix.

We use a simultaneous fit over a total of 12 categories: six KK mass bins times two B flavours. Most of the fit parameters are shared between all of the 12 categories. These are: the polarization fractions, the CP-violating phases for each contributing resonance and polarization, the physics parameters Δm_s , Γ , $\Delta\Gamma$. The S wave parameters are individual for each bin, since a priori they differ between the KK mass bins. The external constant C_{SP} accounts for the KK -mass integral in the interference between the S and the P waves. These factors are imported from a Python list from the file `phisParams.py`.

The parameter handling is performed by the classes `Parameter` or `Free` defined in `ModelBricks.py`. In `Parameter`, a parameter is initialized, from a parameter name, and an initial value. Additional information can be passed at the initialization, such as, limits, step, type and a flag indicating whether it is a constant (default). `Free` inherits from `Parameter`, with the only difference that the default is `constant=False`. For example, to fix the longitudinal fraction, we use

```
fL = Parameter("fL",0.5, limits=(0.3,.6)),
```

while to set it free in the fit:

```
fL = Free("fL",0.5, limits=(0.3,.6)).
```

The latter would be equivalent to:

```
fL = Parameter("fL",0.5, limits=(0.3,.6), constant = False),
```

as well as to

```
fL = Parameter("fL",0.5, limits=(0.3,.6))
fL.constant = False
```

The categories for the simultaneous fit are created with a custom class, `Cat`, defined in `ModelBricks.py`. Instances of `Cat` store information such as the data array, and default values block and grid size to be used for each bin when calculating the likelihood. As Python objects, additional attributes can

be incorporated *ad-hoc* without existing in the definition of the `Cat` class. In this example, we add the bin number, a pointer to the function that calculates the integral for that category (the integral function is different for B_s^0 and \bar{B}_s^0), etc. When initializing an instance of `Cat`, a GPU array with the size of the data is reserved in order to store the likelihood probability values at each point .

A list of parameters and categories is passed when initializing an instance of the model class, `myModel`,

```
manager = myModel(Params, cats)
```

defined in `PhisModel.py`. The class `myModel` inherits from the `ParamBox` class defined in `ModelBricks.py` and is adapted to the particular problem in this example. For details on `ParamBox` see [Appendix A](#).

In `myModel`, the PDF and its normalization are calculated for each data point by the function

```
run_cat(self, cat, CSP, Fs, fL, fpe, dpa, dpe, dS, G, DG, DM, phis)
```

and then combined to a total $-2 \log L$. The corresponding physics distributions are taken from the physics model defined in `cuda_phis.c`. Once an instance of the model is initialized, a `Minuit` fit can be created using the class method `createFit()` of `ParamBox`. The class method `createFit()` instantiates a `Minuit` object from `iminuit` and passes to it central values, ranges and other information of the parameters. The `Minuit` instance is stored as `fit` attribute of `manager`.

A method `plotcat(Cat)` creates a plot (via `matplotlib`) of the result in a given bin including the pulls, as shown in [Fig. 2](#). The fit result for the case when only the P wave contributes to the final state is shown in [Fig. 3](#). The computation times as tested on different devices are summarized in [Tab. 2](#).

`ParamBox` also includes a method that can launch a scan of the parameter space using `MultiNest` ,

```
manager.createMultinest("mnest_party").
```


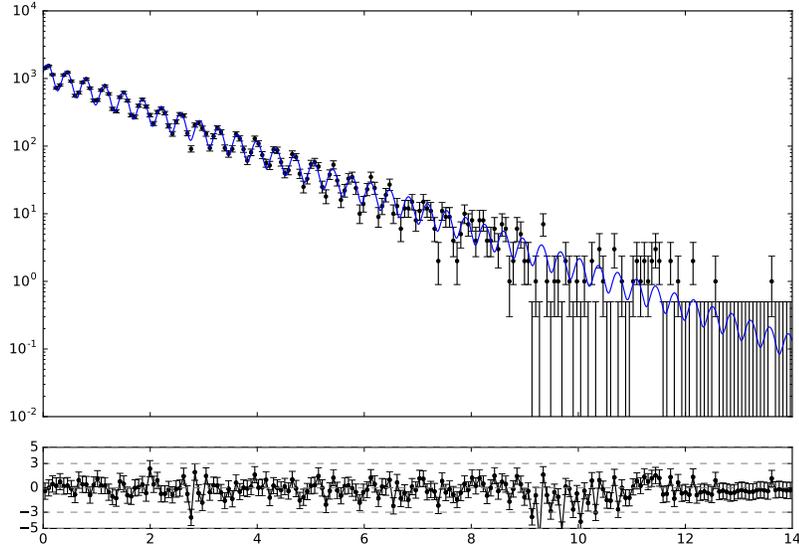


Figure 2: Plot of the fit result of Example 2: Decay time distribution in the fourth KK mass bin, and flavour B_s^0 .

This is done via `pymultinest`. The string passed to `createMultinest` is the folder in which `MultiNest` will store its outputs. Although `pymultinest` has a default value for it (“./chains”), here we force the user to set it manually, to avoid reading from an unrelated chain made on the same folder. Keyword arguments will be sent to `pymultinest`. In addition, a keyword argument `reset = True/False` can be used to restart the sampling if a scan on the same folder was done before. Then, the `ParamBox` class provides methods to read the `MultiNest` output, for example

```
manager.mnest_vals()
```

prints out the most probable value. The default priors in `ParamBox` are flat, thus the printed values should be close to those found by `Minuit`, unless one of the two algorithms has converged to a local minimum or the parameter space was undersampled. Note that convergence in `MultiNest` will be way slower than for `Minuit` (although `MultiNest` can offer other advantages).

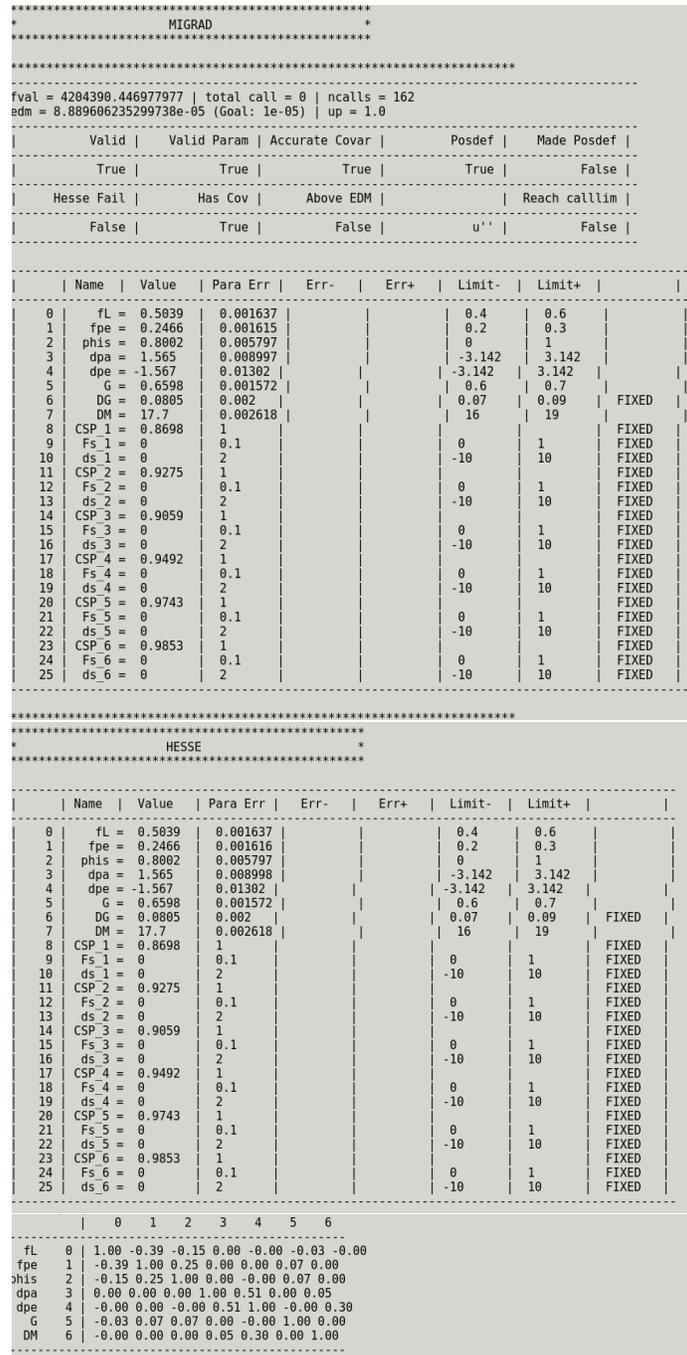

(a)

(b)

(c)

Figure 3: Fit result of Example 2 for the case of a P wave contribution only: (a) MIGRAD output, (b) HESSE output, (c) parameter correlation matrix.

Table 2: Timings of the Example 2 in different devices (see text for details).

Device	10k events	10M events
	time [s]	
GeForce 980 GTX Ti	1.9	60
GeForce 1080 GTX	1.8	50
Tesla M2090	1.9	

5. Example 3: Binned fit to $\Upsilon \rightarrow \mu^+\mu^-$ decays in bins of η and p_T and search for $A^0 \rightarrow \mu^+\mu^-$ decay

File: `ypsilons.py`

In this example, a binned fit is performed to the Υ resonances, on a decay into two muons of opposite sign. The fit is performed simultaneously in bins of pseudorapidity, η , and transverse momentum, p_T . The number of bins for these two variables is left to the user, and specified in two lists:

```
ptbins = range(2)
etabins = range(2).
```

Binning scheme for the data is set using

```
binning = gpuarray.to_gpu(np.float64(np.linspace(5.5e3, 15e3, 512*32)))
```

where `5.5e3` and `15e3` are the bounds on the di-muon mass (in MeV/c^2) and `512*32` defines a number of bins in terms of the grid used later. Data is taken from a toy-MC sample, generated from a PDF as the one used in the fit. The parameters to create the sample are specified in a dictionary corresponding in this case to the initial values of those to do the fit:

```
genPars = {}
for p in Params:
    genPars[p.name] = p.val
manager.generateToy(genPars).
```

For more information on how to generate toy-MC samples see Sect. 7. When the categories (one per bin) are defined:

```
Cat(cat_name, idata[1], getN = True)
```

the input data for each category is set as binned specifying `getN=True`. The Υ fit parameters are fixed to those saved in `params.py`. The free parameter limits are specified during the initialization of the variable `Params`:

```
Params = [
    Free('lm', 0.47, limits = (0., 0.9)),
    Free('lb', -2.0, limits = (-4, -0.1)),
    Free('a1', 1.26, limits = (0.5, 5.)),
    Free('n1', 1.28, limits = (0.5, 5.)),
    Parameter('n2', 1.),
    Parameter('a2', 200.),
    Free('beta', -0.001, limits = (-1.e-02, 0.)),
    Free('scale', 1.e-04, limits = (0, 0.005)),
    Parameter('A1_m', 9460.30),
]
```

The mass model consists on a smeared Ipatia distribution, which includes a gaussian convolution for the multiple scattering [10]. The MS contribution is read from `rampup_params.cpickle`. As an output the mass plots for each p_T and η bin are shown and saved in pdf format (see Fig. 4).

6. Example 4: CL_s

File: `cls_beta_01.py`

Limits setting and combinations of experimental results using the CL_s method (or *modified frequentist approach* [11, 12]) can greatly benefit from the use of GPUs, by parallelizing the computation of the toy experiments, that represent the most time-consuming part of the computation of the confidence levels. In

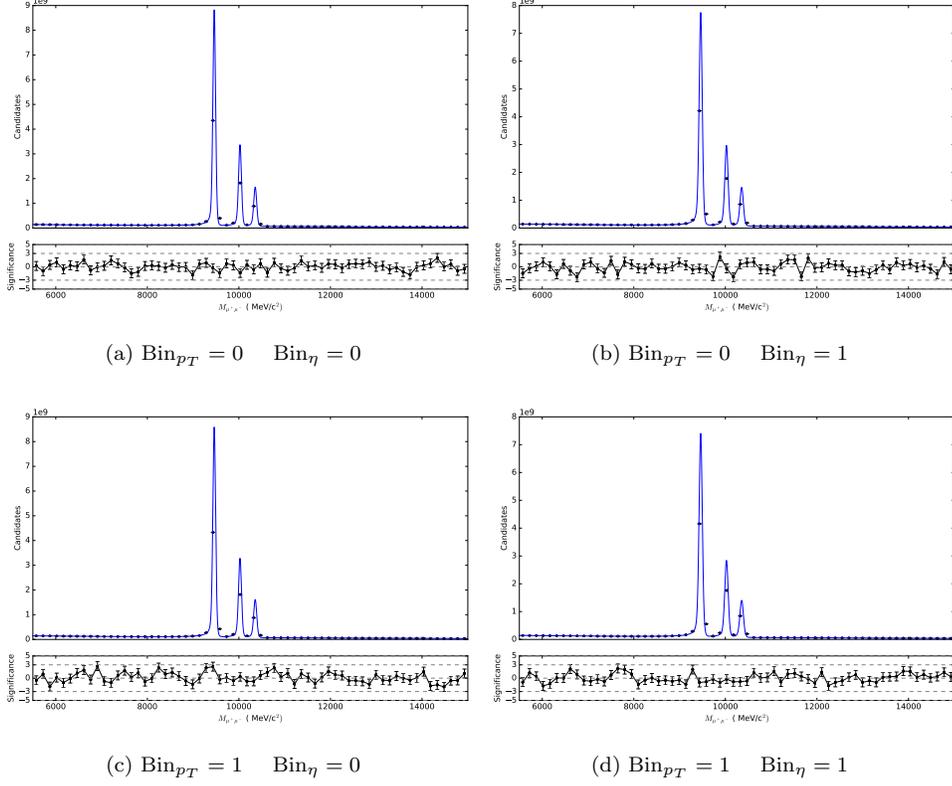


Figure 4: Fits to the binned dataset of two opposite sign muons in the Υ range. The three peaks correspond to the three different states of the Υ resonance which contribute to this spectrum.

Table 3: Timings of the Example 3 in different devices (see text for details).

Device	10^{10} events time [s]
GeForce 980 GTX Ti	≈ 50
GeForce 1080 GTX	≈ 50
Tesla M2090	-

this section a generic example is shown. This example consists on the computation of CL_b, CL_{s+b} and CL_s in a hypothetical search experiment of a signal described by the Ipatia function [10] in the mass spectrum, on top of an exponential background. For this, a definition of the different parameters is done, such as the number of bins for the mass distribution ($NBINS = 10000$), as well as the the array of mass values that define the interval where the search is performed:

```
masslow = np.arange(5179.,5379., 200./NBINS, dtype = dtype)
DM = masslow[1] - masslow[0]
massbins = np.append(masslow, np.array(max(masslow)+DM,dtype = dtype))
mass_center = masslow +0.5*DM,
```

where `masslow` is the array of low-edges, `DM` its step size, `massbins` is defined from `masslow` such that the last value of the array is also incorporated, and `mass_center` is the corresponding array with the bin centers. After this, the Ipatia function is loaded into the GPU, and the values of its parameters are specified:

```
mod = SourceModule(file(os.environ["IPATH"] + "/cuda/psIpatia.cu","r").read())
ipa = mod.get_function("Ipatia").
```

In order to convert unbinned data to histograms, bins for the GPU have to be defined from `mass_center`:

```
bins_gpu = gpuarray.to_gpu(mass_center)
bins_cx = bins_gpu.astype(np.complex128)
```

Note that there are two sets of bins: the ones of type `np.float64` are used for both the Ipatia and exponential PDF that will be used later for the background, while the bins of type `np.complex128` will be necessary when convolving the Ipatia with a Gaussian function.

The array corresponding to the signal distribution is created as an empty array with the size of `mass_center`, filled via the Ipatia function and then convolved with a Gaussian function as follows:

```
ipa(bins_gpu, sigf_i_gpu, np.float64(mu),np.float64(sigma),np.float64(1),
np.float64(beta), np.float64(a), np.float64(n), np.float64(a2),
```

```

np.float64(n2) , block = (1000,1,1), grid = (max(len(tmp0)/1000,1),1))
SM = GaussSmear1(bins_cx,sigma0)
sigf_gpu = SM.Smear(sigf_i_gpu).

```

As for the background distribution, an array of the same length as `sigf_gpu` is filled following an exponential function, $\exp(-kx)$, where k is set to be -0.001 and x is the mass value. Both signal and background distributions are normalized to 1:

```

sigpdf_gpu = sigf_gpu/np.sum((sigf_gpu).get())
bkgpdf_gpu = bkgf_gpu/np.sum((bkgf_gpu).get()).

```

From these PDFs, the data that will be used for the CL_s computation is generated, setting the number of expected events for both signal (`ns`) and background (`nb`).

```

def HistoPdf(ns =5000, nb = Nb):  return np.float64(ns) * sigpdf_gpu
+ np.float64(nb)*bkgpdf_gpu
fake_data = gpuarray.to_gpu(np.uint32(tmp0))
generateBinned(fake_data, HistoPdf(ns = 70)).

```

Finally, the confidence levels and CL_s are calculated as a function of the *signal strength* or number of signal events. The number of toy experiments used can be modified, and for the sake of this example is set to the default value (10000 toys), good enough to get proper precision.

```

CL = CLcalculator()
CL.setData(fake_data)
CL.setExpected(HistoPdf)
CL.CLs(70, toys = 10000)

```

7. Example 5: Generating ToyMC

GPU devices can also be used to generate toyMC. For binned PDFs, it can be done via `generateBinned` as shown in the examples of CL_s and $A^0 \rightarrow \mu\mu$. Generating unbinned datasets require somewhat more gymnastics, but

Table 4: Timings of the example 4 in different devices (See text for details).

Device	time (s) per event
GeForce 980 GTX Ti	10.6
GeForce 1080 GTX	12.8
Tesla M2090	41.7

can also be done without too much effort, as we will discuss now. CUDA random generators are imported via `curand.h` and `curand_kernel.h`. It must be noted that the latter cannot be included inside an `extern "C"`, which is what `SourceModule` automatically wraps the code in. Thus, we have to invoke `SourceModule` (or `cuRead`) with the keyword argument `no_extern_c = True`. Then we should place `extern "C"` manually inside our CUDA file, after the inclusion of the generators and before the function definitions.

Once this is done, one can proceed and use `curand_init`, `curand_uniform` etc to generate random numbers, and create `toyMC`. The generation can be done for instance by using the *accept-reject* method.

An example of this is shown in file:

`examples/toyMC/fitphis.py`

The above is a modified version of the example presented in Sect. 4, where we generate a random dataset for one of the categories of the fit, and plot it on top of the PDF. The example can easily be expanded to generate datasets for all categories, as well as to include Poissonian random fluctuations on the generated number of events. For this we suggest generating `Nevts` in the `Python` class with `scipy.random.poisson` or `scipy.random.normal`, and modifying the grid and block sizes accordingly. The timing of the example measured in different setups is shown in Table 5.

Table 5: Timings of Example 5 in different devices (see text for details).

Device	133 725 events	6 769 840 events
	time [s]	
GeForce 980 GTX Ti	0.11	0.34
GeForce 1080 GTX	0.13	0.30
Tesla M2090	-	-

Combining with Symbolic programing

When dealing with complicated models, symbolic programing can be very useful. In `Python` this can be done through `sympy`. In that case, being able to convert a symbolic expression to a CUDA piece of code greatly simplifies the development of GPU fits. For instance, the angular PDFs and the corresponding integrals in the $B_s^0 \rightarrow J/\psi K^+ K^-$ example were obtained this way. Another example of this is

`examples/urania/faddeeva.py`,

where the limit expression of Faddeva’s functions at large t/σ are obtained, and converted to `__device__` CUDA functions.

A more complicated (*and, sadly, cryptic*) example ³ can be found at:

`examples/urania/JpsiPhiTimeFit_forRooFit.py`.

where the $B_s^0 \rightarrow J/\psi \phi$ time-dependent angular distribution is printed to `LaTeX` and `.pdf` files as well as to a `RooFit` fitting class. By enabling the flag `USE_MATHEMATICA` one can get the integral over time from `Mathematica` instead of `sympy`, as the latter is sometimes worse at simplification. The `Python` list `Spins` lists the spins of the hh resonances one wants to generate, i.e, `[1]` for P-wave, `[0,1]` for S-

³Note: this was adapted to the `sympy` version quoted in Sect. 2, but the outcome for that version is has not yet been tested.

wave and P-wave, [0,1,2] to also include D-wave, etc⁴... One can similarly make an script to create CUDA code. The following examples:

```
examples/urania/JpsiPhiTimeFit_forCuda.py
examples/urania/JpsiPhiTimeFit_forCuda_Bbar.py
```

create CUDA files with the function, the integrals and the derivatives.

8. FAQ

- **Can I add prints/std::outs to my cuda stuff?:** Yes, `#include <stdio.h >` and you could use `printf` at least on the `__global__` functions. You can also pass a `gpuarray` to your program and store on it intermediate numbers that you want to check, it will be visible from `Python`.
-

⁴ A priori the list of waves is unlimited. But of course as the expression becomes more and more complicated, the symbolic manipulation may get stuck

Appendix A. ParamBox class

The class `ParamBox` is defined in `ModelBricks.py`. To initialize an instance, one needs to provide a list of fit parameters and (optionally) a list of categories (class `Cat`). The following methods are contained in `ParamBox`:

- `freeThese(pars)`: Frees each parameter in the provided list
- `lock_to_init(pars)`: Fixes each parameter in the provided list
- `createFit()`: Initializes a `Minuit` fit providing it with a list of parameters
- `createMultinest(savedir, reset = False, **kwargs)`: Runs a `Multinest` scan with the fit result as an input and saves the output in a directory
- `readMultinest(savedir)`: Reads an existing `Multinest` output and prints its result
- `fitSummary()`: Creates an instance of the class `FitSummary` (defined in the same file), which contains the fit result information, such as the parameter values, parameter errors, fit matrix etc.
- `saveFitSummary(name)`: Saves the fit result information into a `cPickle` file with the name provided

Appendix B. Parameter class

The class `Parameter`, defined in `ModelBricks.py`, handles the information of each parameter in the fit. It is initialized with a name and, optionally, an initial value, range limits, a step size, a flag indicating whether it is constant (default), and a type. The following methods are contained in `Parameter`:

- `setVal(var)`: Sets the initial value
- `autoStepSize()`: Sets the step size to one tenth of the parameter range (determined by the limits)
- `setLimits(m,M, constant = False)`: Sets the lower and upper limits and, optionally, changes the constant flag
- `getSettings()`: Returns a dictionary with the available information of the parameter (value, limits, error and whether it is constant)

The class `Free` is completely equivalent to `Parameter` but with the option `constant=False` set by default.

Appendix C. Cat class

The information in each category of a simultaneous fit is handled by the class `Cat`, defined in `ModelBricks.py`. An instance of this class is initialized with a name for the category. Additionally, a dataset (GPU array, numpy ndarray, list, cPickle file or string) can be provided. If `getN=True` is added as extra argument, the class will determine the size of the given sample. Alternatively, the user can specify the size by setting `N` to the desired value in the arguments.

When an instance of the class `Cat` is initialized, the following two methods are called (if possible):

- `setData(ary, getN = False)`: Creates a GPU array to store the provided dataset
- `bookProbs(N)`: Books a GPU array with the size of the data for the likelihood probability values at each point

Appendix D. Hardware

Here, we give some hardware specifications for the graphics cards used to test the examples in this documentation.

Table D.6: Specifications of the graphics cards used for testing the examples.

	GeForce 980 GTX Ti	GeForce 1080 GTX	Tesla M2090
CUDA cores	2816	2560	512
Single precision (GFLOPS)	5632	8228 (8873)	1331.2
Double precision (GFLOPS)	176	257 (277)	665.6
Memory size (GiB)	6.1	8	6.1
Memory Bandwidth (GB/s)	336.5	320	177.6

References

- [1] A. Klöckner, N. Pinto, Y. Lee, B. Catanzaro, P. Ivanov and A. Fasih, *Pycuda and pyopencl: A scripting-based approach to gpu run-time code generation*, *Parallel Comput.* **38** (Mar., 2012) 157–174.
- [2] “Iminuit - interactive ipython friendly minimizer based on seal minuit.” <https://github.com/iminuit/iminuit>, 2017.
- [3] F. James and M. Winkler. <http://www.cern.ch/minuit>, May, 2004.
- [4] Buchner, J., Georgakakis, A., Nandra, K., Hsu, L., Rangel, C., Brightman, M. et al., *X-ray spectral modelling of the agn obscuring region in the cdfs: Bayesian model selection and catalogue*, *A&A* **564** (2014) A125.
- [5] “Anaconda.” <https://docs.continuum.io/anaconda/>, 2017.
- [6] “reikna.” <http://reikna.publicfields.net/en/latest/>, 2017.
- [7] F. Feroz, M. P. Hobson and M. Bridges, *Multinest: an efficient and robust bayesian inference tool for cosmology and particle physics*, *Monthly Notices of the Royal Astronomical Society* **398** (2009) 1601.
- [8] LHCb collaboration, R. et al., Aaij, *Precision measurement of cp violation in $B_S^0 \rightarrow j/\Psi K^+ K^-$ decays*, *Phys. Rev. Lett.* **114** (2015) 041801.
- [9] D. J. Lange, *The EvtGen particle decay simulation package*, *Nucl. Instrum. Meth.* **A462** (2001) 152–155.
- [10] D. Martínez Santos and F. Dupertuis, *Mass distributions marginalized over per-event errors*, *Nucl. Instrum. Meth.* **A764** (2014) 150–155, [[1312.5000](#)].
- [11] T. Junk, *Confidence level computation for combining searches with small statistics*, *Nucl. Instrum. Meth.* **A434** (1999) 435–443, [[hep-ex/9902006](#)].
- [12] A. L. Read, *Presentation of search results: The $CL(s)$ technique*, *J. Phys.* **G28** (2002) 2693–2704.