

Community Detection by L_0 -penalized Graph Laplacian

Chong Chen

School of Mathematical Science , Peking University
and

Ruibin Xi *

School of Mathematical Science , Peking University
and

Nan Lin

Department of Mathematics, Washington University in St. Louis

January 15, 2022

Abstract

Community detection in network analysis aims at partitioning nodes in a network into K disjoint communities. Most currently available algorithms assume that K is known, but choosing a correct K is generally very difficult for real networks. In addition, many real networks contain outlier nodes not belonging to any community, but currently very few algorithm can handle networks with outliers. In this paper, we propose a novel model free tightness criterion and an efficient algorithm to maximize this criterion for community detection. This tightness criterion is closely related with the graph Laplacian with L_0 penalty. Unlike most community detection methods, our method does not require a known K and can properly detect communities in networks with outliers.

*Correspondence should be addressed to. Email: ruibinxi@math.pku.edu.cn. The authors gratefully acknowledge *the National Natural Science Foundation of China (11471022, 71532001) and the Recruitment Program of Global Youth Experts of China*

Both theoretical and numerical properties of the method are analyzed. The theoretical result guarantees that, under the degree corrected stochastic block model, even for networks with outliers, the maximizer of the tightness criterion can extract communities with small misclassification rates even when the number of communities grows to infinity as the network size grows. Simulation study shows that the proposed method can recover true communities more accurately than other methods. Applications to a college football data and a yeast protein-protein interaction data also reveal that the proposed method performs significantly better.

Keywords: consistency; degree corrected stochastic block model; spectral clustering; outlier; social network; gene regulatory network

1 Introduction

Community detection has attracted tremendous research attention, initially in the physics and computer science community (Newman, 2004a; Newman and Girvan, 2004; Newman, 2006) and more recently in the statistics community (Bickel and Chen, 2009; Bickel et al., 2013; Zhao et al., 2012; Jin, 2015). Considering an undirected network $G = (V, E)$, where V is the set of nodes and E is the set of edges between nodes. Community detection is to find an “optimal” partition of the nodes $V = G_1 \cup \dots \cup G_K$ such that nodes within the communities G_k ($k = 1, \dots, K$) are more closely connected than nodes between the communities.

One class of community detection algorithms detects community by optimizing a heuristic global criterion over all possible partitions of the nodes (Wei and Cheng, 1989; Shi and Malik, 2000). For example, the criterion modularity (Newman and Girvan, 2004) has been very popular in community detection and fast algorithms for maximizing modularity (Newman, 2004b) have been developed and widely used. The well-known spectral clustering algorithms (Jin, 2015; Balakrishnan et al., 2011; Chaudhuri et al., 2012; Rohe et al., 2011; Joseph and Yu, 2016) can be traced back as continuous approximation methods of global criterion such as ratio cut (Hagen and Kahng, 1992) or modularity (White and Smyth, 2005). Spectral clustering methods are fast in computation and easy to implement since they usually only require calculation of a few eigenvectors of the Laplacian matrix.

Probabilistic model-based methods are another class of community detection algorithms. They detect communities by fitting a probabilistic model (Bickel et al., 2013; Nowicki and Snijders, 2001; Mariadassou et al., 2010; Decelle et al., 2011) or by optimizing a criterion derived from a probabilistic model (Bickel and Chen, 2009; Karrer and Newman, 2011). One of the most commonly used models is the stochastic block model (SBM)

(Holland et al., 1983). Given the adjacency matrix $A = (A_{ij})_{1 \leq i, j \leq n}$ of a network G with n nodes, the SBM assumes that true node labels c_i are independently sampled from a multinomial distribution with parameters $\pi = (\pi_1, \dots, \pi_K)^T$, i.e. $\pi_k = P(c_i = k)$, $k = 1, \dots, K$. Conditional on the community labels, the edges A_{ij} ($i < j$) are independent Bernoulli random variables with $P(A_{ij} = 1 | c_i, c_j) = p_{c_i c_j}$. The connection probabilities should have $p^- = \min_k \{p_{kk}\} > q^+ = \max_{k \neq m} \{p_{km}\}$. The SBM assumes that the expected degrees are the same for all nodes and does not allow hubs in networks. To remove this constraint, the degree corrected stochastic block model (DCSBM) (Karrer and Newman, 2011) introduces a degree correction variable θ_i to each node such that $P(A_{ij} = 1 | c_i, c_j, \theta_i, \theta_j) = \theta_i \theta_j p_{c_i c_j}$, where $\theta_i > 0$ and $E(\theta_i) = 1$.

Consistency results were developed for a number of community detection algorithms, mostly based on the SBM or DCSBM. Under the assumption that the community number is fixed, Bickel and Chen (Bickel and Chen, 2009) laid out a general theory under the SBM for checking consistency of community detection criteria when the network size grows to infinity, and similar theories were also developed for DCSBM (Zhao et al., 2012; Jin, 2015). With a fixed community number, the community size would linearly grow as the number of nodes grows. However, this is not a realistic assumption, because real networks often have tight communities at small scales, even when networks contain millions of nodes (Leskovec et al., 2008). Recent researches (Rohe et al., 2011; Choi et al., 2012; Cai and Li, 2015) generalized these consistency results by allowing the number of communities grows as the node number grows for the SBM. However, as far as we know, similar results for the DCSBM are not available yet.

Despite all these progresses in community detection, most of the current algorithms assume that the number of communities K is known in priori. This is problematic because the number of communities is usually unknown in real applications. If the network is small,

one may try a few different community numbers K and choose the “best” K as the “true” community number. When the network is large, it would be very difficult to perform such a search. Although there are a few algorithms (Newman and Girvan, 2004; Zhao et al., 2011) not requiring a known K , consistency results for these algorithms were either not developed or only developed in very simple cases (e.g. for SBMs with $K = 2$). In addition, real networks often contain outlier nodes that cannot be grouped into any communities (Kumar et al., 2010; Wang et al., 2015; Khorasgani et al., 2010). Currently, there is not much work for community detection in networks with outliers. A few algorithms were developed (Zhao et al., 2011; Lancichinetti et al., 2011), but their performance is limited and, as far as we know, no consistency result is available for these algorithms yet.

In this paper, we propose a novel model-free tightness criterion for community detection. Community detection based on this criterion iteratively extracts single communities and no prior knowledge about K is needed. A permutation-based test is performed to filter the extracted communities that are likely to be outliers or false communities. Under the DCSBM, we establish asymptotic consistency allowing the community number K increases as the number of nodes grows. We further extend this consistency result for DCSBMs with outliers. We show that maximizing this criterion is equivalent to maximizing a penalized graph Laplacian with constraints. An efficient algorithm is developed based on the alternating direction method of multiplier (ADMM) to maximize this penalized Laplacian. This paper is organized as follows. The model-free criterion and the ADMM algorithm are described in Section 2. Theoretical results are given in Section 3. Section 4 presents simulation comparison with existing methods and Section 5 is the real data analysis. Proofs of the theorems are given in the Appendix.

2 Method and Algorithm

Assume that nodes of a graph $G = (V, E)$ are indexed by $\{1, 2, \dots, n\}$ and each node i belongs to exactly one of K non-overlapping communities denoted by a latent label $c_i \in \{1, \dots, K\}$. If there is no outlier, nodes within communities are more tightly connected than nodes between communities. For networks with outliers, we assume that the K th community is the outlier “community”, in which nodes are randomly connected with other nodes in the network. Exact definition of outliers is given in Section 3. Given a set $S \subset V$, the complementary set of S is denoted by \bar{S} and the number of elements in S is denoted as $|S|$. Define $W(S) = \sum_{i,j \in S} A_{ij}$, $B(S) = \sum_{i \in S, j \in \bar{S}} A_{ij}$ and $V(S) = W(S) + B(S)$. Then, $W(S)$ is twice the number of edges between nodes in S , $B(S)$ is the total number of edges between S and \bar{S} and $V(S)$ is the total degrees in S . Given a vector \mathbf{u} , we denote $\|\mathbf{u}\|_0$ as the number of nonzero elements in \mathbf{u} and $\|\mathbf{u}\|_2$ as the L_2 -norm of the vector \mathbf{u} .

2.1 A tightness criterion

Given a set $S \subset V$, if it is a true community, we expect that most of its connections are within S itself and thus $W(S)/V(S)$ should be large. However, directly maximizing $W(S)/V(S)$ has a trivial solution $S = V$. We instead introduce a penalty to the size of the community and consider the following tightness criterion,

$$\psi(S) = \frac{W(S)}{V(S)} - \eta |S|, \quad (1)$$

where η is a tuning parameter. In Section 3, we will show that with a proper choice of η , maximizing this tightness criterion can render consistency in community detection. This tightness criterion is closely related to a penalized graph Laplacian. More specifically, let $Q = D^{-1/2}AD^{-1/2}$ be the graph Laplacian, where A is the adjacency matrix and $D =$

$\text{diag}\{d_1, \dots, d_n\}$ is the nodal degree matrix with d_i being the degree of the i th node. Then, we have the following proposition.

Proposition 2.1. *Given a set $S \subset V$, define its membership vector by*

$$\mathbf{u}_S(i) = \begin{cases} \frac{\sqrt{d_i}}{\sqrt{W(S)+B(S)}}, & \text{if } i \in S, \\ 0, & \text{if } i \in \bar{S}. \end{cases} \quad (2)$$

Then we have $\psi(S) = \mathbf{u}_S^t Q \mathbf{u}_S - \eta \|\mathbf{u}_S\|_0$ and $\|\mathbf{u}_S\|_2 = 1$.

Therefore, maximizing the tightness criterion (1) is equivalent to the following optimization problem

$$\max_{S \subset V, \mathbf{u} = \mathbf{u}_S} \mathbf{u}^t Q \mathbf{u} - \eta \|\mathbf{u}\|_0. \quad (3)$$

The objective function in (3) is the penalized graph Laplacian and hence maximizing (1) is equivalent to maximizing the penalized graph Laplacian with the constraints $\mathbf{u} = \mathbf{u}_S$, $S \subset V$. Finding global solution to (3) is difficult in general, because we have to search over all possible subsets of V to find the maximum. In the next section, we develop an efficient greedy algorithm based on the ADMM to solve (3).

2.2 Algorithm

Before giving the algorithm, we first introduce a few notations. For any \mathbf{u} with $\|\mathbf{u}\|_2 = 1$, we denote its nonzero element index set $S(\mathbf{u}) = \{i : \mathbf{u}(i) \neq 0\} \subset V$. On the other hand, given $S(\mathbf{u})$, we can define a new vector $\mathbf{u}_d = \mathbf{u}_{S(\mathbf{u})}$ using (2). Thus, we have $\|\mathbf{u}_d\|_2 = 1$. The vector \mathbf{u}_d is obtained by just reassigning values of the nonzero elements of \mathbf{u} according to the degrees of $S(\mathbf{u})$. Given $\lambda_1 \geq 0$, we consider the following optimization problem

$$\max_{\|\mathbf{u}\|_2=1} \mathbf{u}^t Q \mathbf{u} - \eta \|\mathbf{u}\|_0 - 2\lambda_1 \|\mathbf{u} - \mathbf{u}_d\|_2^2. \quad (4)$$

The optimization problem (4) can be viewed as the augmented Lagrangian of (3). If we take λ_1 as ∞ , \mathbf{u} in (4) will be forced to be \mathbf{u}_d . In (3), the constraint is that \mathbf{u} can only take discrete values; but \mathbf{u} in (4) can be any vector with norm 1 and hence solving (4) is much easier than solving (3). By introducing an intermediate variable \mathbf{v} with $\mathbf{v} = \mathbf{u}$, the augmented Lagrangian of (4) is

$$\max_{\|\mathbf{u}\|_2=1, \|\mathbf{v}\|_2=1} \mathbf{u}^t Q \mathbf{v} - \lambda \|\mathbf{u} - \mathbf{v}\|_2^2 - \frac{\eta}{2} (\|\mathbf{u}\|_0 + \|\mathbf{v}\|_0) - \lambda_1 \|\mathbf{u} - \mathbf{u}_d\|_2^2 - \lambda_1 \|\mathbf{v} - \mathbf{v}_d\|_2^2, \quad (5)$$

which is equivalent to

$$\max_{\|\mathbf{u}\|_2=1, \|\mathbf{v}\|_2=1} \mathbf{u}^t (Q + 2\lambda I) \mathbf{v} - \frac{\eta}{2} (\|\mathbf{u}\|_0 + \|\mathbf{v}\|_0) + 2\lambda_1 \mathbf{u}^t \mathbf{u}_d + 2\lambda_1 \mathbf{v}^t \mathbf{v}_d. \quad (6)$$

We can solve (6) by iteratively updating \mathbf{u} and \mathbf{v} . When either \mathbf{u} or \mathbf{v} is given, problem (6) reduces to a simple linear programming problem with an explicit solution given in the following proposition. The proof of this proposition is given in Kim and Shi (2012) and we omit it here.

Proposition 2.2. *For a given vector $\mathbf{z} = (z_1, \dots, z_n)^t \in \mathbb{R}^n$, we denote its r th largest absolute value as $|z|_r$, and let \mathbf{z}_r^h be the vector with the i th element as $\mathbf{z}_r^h(i) = z_i \mathbf{I}(|z_i| > |z|_{r+1})$. Then for a constant $\rho > 0$, the solution to*

$$\max_{\|\mathbf{u}\|_2=1} \mathbf{u}^t \mathbf{z} - \rho \|\mathbf{u}\|_0 \quad (7)$$

is $\mathbf{u} = L(\mathbf{z}, \rho) = \mathbf{z}_r^h / \|\mathbf{z}_r^h\|_2$, where r is the smallest integer that satisfies

$$|z|_{r+1} \leq \sqrt{\rho^2 + 2\rho \|\mathbf{z}_r^h\|_2}. \quad (8)$$

We summarize the algorithm for solving (6) as Algorithm 1 below

Algorithm 1 L_0 -Penalized Laplacian Algorithm

Require: Q , λ , λ_1 , η and ϵ

Initialize \mathbf{v}^0 , \mathbf{u}^0 . For each $k = 1, 2, \dots$,

repeat

$$\mathbf{z}_1^k = (Q + 2\lambda I)\mathbf{v}^{k-1} + 2\lambda_1\mathbf{u}_d^{k-1}, \mathbf{u}^k = L(\mathbf{z}_1^k, \eta/2);$$

$$\mathbf{z}_2^k = (Q + 2\lambda I)^t\mathbf{u}^k + 2\lambda_1\mathbf{v}_d^{k-1}, \mathbf{v}^k = L(\mathbf{z}_2^k, \eta/2);$$

until $\|\mathbf{u}^k - \mathbf{v}^k\| < \epsilon$.

return $S_\eta = \{i, \mathbf{u}^k(i) \neq 0 \text{ and } \mathbf{v}^k(i) \neq 0\}$

In all simulation and real data analysis, we fix λ as $1/\sqrt{n}$ and ϵ as 10^{-4} for Algorithm 1. We find that Algorithm 1 is sensitive to the choice of initial values. In order to get a more robust result, we first run Algorithm 1 with the initial value $\mathbf{v}^0 = (1/\sqrt{n}, \dots, 1/\sqrt{n})$ and $\lambda_1 = 0$ to get $\hat{\mathbf{v}}^0$. Then we run Algorithm 1 with the initial value $\hat{\mathbf{v}}^0$ and $\lambda_1 = 1$ to get the final solution. We call Algorithm 1 L_0 -Penalized Laplacian Algorithm (L0Lap). We discuss how to tune the parameter η in the following subsection. Algorithm 1 extracts one community at a time from the network. After the first community is identified, we iteratively apply Algorithm 1 to the remaining network until there is no edge left in the network. This iterative procedure can detect true communities but also may generate false communities. For example, in a SBM with small connecting probabilities, a few nodes (e.g. 2 nodes) could easily only connect to themselves but not connect to other nodes in the network. The iterative application of Algorithm 1 will capture these nodes as a community. However, such communities are most likely to be spurious, because even Erdős-Rényi (ER) networks can have such small communities. In the next subsection, we present a permutation test that can effectively filter false communities.

2.3 Choice of the tuning parameter η and the permutation test

Given a subset $S \subset V$, define $\bar{p}_W(S) = W(S)/(|S|(|S| - 1))$ and $\bar{p}_B(S) = B(S)/(|S||\bar{S}|)$. Thus, $\bar{p}_W(S)$ is the average connection within S and $\bar{p}_B(S)$ is the average connection between S and \bar{S} . If S is the k th community of a SBM, $\bar{p}_W(S)$ would be approximately the same as the connection probability p_{kk} . If the SBM has a constant between-community connection probability q^+ (i.e. $p_{km} = q^+$ for all $k \neq m$), $\bar{p}_B(S)$ would be approximately the same as q^+ . Therefore, $\bar{p}_W(S)$ would be much larger than $\bar{p}_B(S)$ (assuming p_{kk} much larger than q^+). On the other hand, if S consists of nodes from different communities, then $\bar{p}_W(S)$ would be generally smaller than p^- . Define

$$\phi(S) = \frac{\bar{p}_W(S)}{\bar{p}_W(S) + \bar{p}_B(S)}. \quad (9)$$

True communities should have large $\phi(S)$ compared with random sets of nodes. In this paper, we use $\phi(S)$ to help choosing the tuning parameter η . In comparison, [Zhao et al. \(2011\)](#) used a criterion, the difference between $\bar{p}_W(S)$ and $\bar{p}_B(S)$, that is similar to $\phi(S)$ for community detection. From the theoretical results in the next section, we know that the best η is at the order of $O(1/n)$. Therefore, we run Algorithm 1 for $\eta = 0, B/n, 2B/n, \dots, cB/n$ and choose an η such that the resulted S_η from Algorithm 1 corresponds to the maximum value of $\phi(S_\eta)$. In all simulation and real data analysis, we choose $c = 10$ and $B = 1$.

After iterative application of Algorithm 1 to the network, we further use a permutation test to filter false communities. Suppose that S_1, \dots, S_c are all the identified communities with less than M nodes and G_0 is the sub-network of G composed of nodes in $\bigcup_{i=1}^c S_i$. If M is large enough, G_0 will be the same as G . To save computational time, we choose $M = 20$ and apply a permutation test to G_0 . Let $\bar{p} = \sum_{i,j} A_{ij}/(n^2 - n)$. Given a sub-network S of G_0 , if S is an ER-graph with a connecting probability \bar{p} , given any m nodes, the probability

of observing no more than E edges between these m nodes is

$$p(m, E) = \sum_{i=0}^E \binom{m(m-1)/2}{i} \bar{p}^i (1 - \bar{p})^{m(m-1)/2-i}. \quad (10)$$

Let n_i and E_i be the number of nodes and number of edges in S_i ($i = 1, \dots, c$), respectively. Each detected community S_i has an associated probability $p(n_i, E_i)$ using (10). We permute N times the edges in G_0 to generate N ER-graphs and run Algorithm 1 to each of the N ER-graphs. The first extracted community of the j th ER-graph also has a probability p_j^{ER} using (10). We assign the permutation p-value for S_i as $p_i = |\{j : p_j^{ER} \leq p(n_i, E_i), j = 1, \dots, N\}|/N$. The detected community S_i is filtered out if $p_i \geq \alpha$. In our simulation and real data, we set $N = 100$ and $\alpha = 0.05$.

3 Theoretical Properties

In this section, we discuss theoretical results about the estimator S that maximizes the tightness criterion (1) under the DCSBM. We first give the exact definition of the DCSBM.

Definition 3.1. *A network $G = (V, E)$ is said to follow a DCSBM, if it satisfies the following assumptions.*

- (A1) *Each node is independently assigned a pair of latent variables (c_i, θ_i) , where c_i is the community label taking values in $\{1, 2, \dots, K\}$, and θ_i is a “degree variable” taking discrete values in $\{h_1, \dots, h_M\}$ ($0 < h_1 < \dots < h_M$).*
- (A2) *The marginal distribution of c_i is a multinomial distribution with parameters $\boldsymbol{\pi} = (\pi_1, \dots, \pi_K)^T$, and the random variable θ_i satisfies $E[\theta_i] = 1$ for identifiability.*
- (A3) *Given $\mathbf{c} = (c_1, \dots, c_n)$ and $\boldsymbol{\theta} = (\theta_1, \dots, \theta_n)$, the edges A_{ij} ($i < j$) are independent Bernoulli random variables with $P(A_{ij} = 1 | \mathbf{c}, \boldsymbol{\theta}) = \theta_i \theta_j p_{c_i c_j}$.*

(A4) Denote $\pi^- = \min_{1 \leq k \leq K} \pi_k$, $p^- = \min_{1 \leq k \leq K} \{p_{kk}\}$ and $q^+ = \max_{k \neq m} \{p_{km}\}$. Then, $p^- > q^+$.

Throughout this paper, we assume that $\alpha, \tau, \gamma, \delta$ are fixed constants such that $0 \leq 2\delta < \alpha < 1/2$ and $0 < \tau < \gamma < \alpha - 2\delta$. These constants are for controlling the community number K , the connecting probabilities p^- and q^+ and the smallest community size parameter π^- . Given any two sets S_1 and S_2 , we denote $S_1 \Delta S_2 = S_1 \cup S_2 - S_1 \cap S_2$ as their symmetric difference. For two nonnegative sequences a_n and b_n , we write $a_n \gtrsim b_n$ if there exists a constant $C_0 > 0$ such that $a_n \geq C_0 b_n$. We assume $p^- \gtrsim \log n / n^{1-2\alpha}$ and $\pi^- \gtrsim n^{-\delta/2}$. Define $\Gamma_\delta = \{S \subset V, |S|^2/K \gtrsim n^{2-2\delta}\}$. Similar to [Zhao et al. \(2012\)](#), we assume Π is the $K \times M$ matrix representing the joint distribution of (c_i, θ_i) with $\mathbb{P}(c_i = k, \theta_i = h_l) = \Pi_{kl}$. Denote $\pi_k^d = \sum_l h_l \Pi_{kl}$. Note that since $E[\theta_i] = 1$, we have $\sum_k \pi_k^d = 1$. Let $\rho_k^d = p_{kk} / \sum_{l=1}^K \pi_l^d p_{kl}$.

Given the community label \mathbf{c} and a set of nodes $S \in \Gamma_\delta$, denote $G_k = \{i | c_i = k, i = 1, \dots, n\}$, $S_k = \{i | i \in S, c_i = k\}$, $\hat{\pi}_k = |G_k|/n$ and $r_k(S) = |S_k|/n$ for $1 \leq k \leq K$. We define $\hat{\pi}_k^d = \pi_k^d \hat{\pi}_k / \pi_k$, $r_k^d(S) = \pi_k^d r_k(S) / \pi_k$, $r^d(S) = \sum_{k=1}^K r_k^d(S)$ and $\hat{\rho}_k^d = p_{kk} / \sum_{l=1}^K \hat{\pi}_l^d p_{kl}$. For $S = G_1$, we have $r_1(G_1) = \hat{\pi}_1$, $r_1^d(G_1) = \hat{\pi}_1^d$, $r_k(G_1) = 0$, $r_k^d(G_1) = 0$ ($k = 2, \dots, K$) and $r^d(G_1) = \hat{\pi}_1^d$. Let $x_k = p_{kk}$, $y_k = \sum_{l=1}^K \hat{\pi}_l^d p_{kl}$ for $1 \leq k \leq K$. For any $t_k \geq 0$ ($k = 1, \dots, K$) and $\sum_{k=1}^K t_k = 1$, define

$$f(t_1, \dots, t_K) = \frac{\sum_{k=1}^K t_k (t_k x_k + \sum_{l \neq k} t_l p_{kl})}{\sum_{k=1}^K t_k y_k}.$$

Theorem 3.1. Assume $\rho_1^d - \max_{2 \leq k \leq K} \rho_k^d \gtrsim n^{-\tau}$ and $\pi_1^d / \pi_1 \geq \max_{2 \leq k \leq K} \pi_k^d / \pi_k$. Then, there is a constant C such that, with probability at least $1 - 2Kn^{-2}$, we can choose $\eta > 0$ such that

$$f(1, 0, \dots, 0) \frac{\pi_1^d}{\pi_1} - \frac{C}{n^\gamma} > n\eta > \max_{t_1 \leq 1-1/n^{\gamma-\tau}} f(t_1, t_2, \dots, t_K) \frac{\pi_1^d}{\pi_1} + \frac{C}{n^\gamma}. \quad (11)$$

With such a choice of η , suppose that $S \subset V$ is such that the tightness criterion (1) is maximized in Γ_δ , then with probability at least $1 - (2K)n^{-2} - 2^{n+2}/n^n$,

$$\frac{|S \Delta G_1|}{|S \cup G_1|} \leq 2h_M h_1^{-1} / n^{\gamma-\tau} + \log n / n^{\alpha-2\delta-\gamma}. \quad (12)$$

This theorem says that under a number of regularity conditions, if the tuning parameter is chosen properly, the detected community S is very close to the underlying true community G_1 . The condition $\pi_1^d / \pi_1 \geq \max_{2 \leq k \leq K} \pi_k^d / \pi_k$ is not as restrictive as it looks. For example, if \mathbf{c} and $\boldsymbol{\theta}$ are independent, then $\pi_k^d = \pi_k$ for all $1 \leq k \leq K$ and this condition is naturally satisfied. The SBM clearly also satisfies this condition, since in this case $M = 1$ and $h_1 = 1$. The first extracted community G_1 corresponds to the community with the largest ρ_k^d . For the SBM, when $p_{kl} = p_0$ for all $k \neq l$, we have $\rho_k^d = p_{kk} / (p_{kk}\pi_k + p_0(1 - \pi_k)) = 1 / ((1 - p_0/p_{kk})\pi_k + p_0/p_{kk})$. The ratio $\beta_k = p_0/p_{kk}$ can be viewed as the “out-in-ratio” defined in (Decelle et al., 2011), and we have $\rho_k^d = 1 / ((1 - \beta_k)\pi_k + \beta_k)$. If all π_i ’s are the same, the first extracted community G_1 is the community with the smallest out-in-ratio. If all out-in-ratios β_k are the same, the first extracted community G_1 is the community with the smallest size.

Since $p^- \gtrsim \log n / n^{1-2\alpha}$ and $\pi^- \gtrsim n^{-\delta/2}$, we have $p^- n^{1-2\alpha+\delta/2} \gtrsim K \log n$. Consider a special case when K is finite and the community sizes are all $O(n)$. In this case, the lower bound of the connecting probability within communities should satisfies $p^- \gtrsim \log n / n^{1-2\alpha+\delta/2}$ and thus $np^- / \log n \gtrsim n^{2\alpha-\delta/2}$. This condition is similar to the condition $np^- / \log n \rightarrow \infty$ in Zhao et al. (2012), especially when α is close to 0. If $p^- = O(1)$ and $\delta = 1/4 - 2\epsilon$ for some $\epsilon > 0$ very close to 0, then $n_{min} = O(n^{7/8+\epsilon})$ and $K = O(n^{1/8-\epsilon})$. Thus, the upper bound of K is $O(n^{1/8})$. Consider the simplest case when $K = 2$. Let $\tau = 0$ and $\gamma = \alpha/2 - \delta$, the misclassification rate is about $O_p(\log n / n^{\alpha/2-\delta})$ by the inequality (12). This improves the results in Rohe et al. (2011) and Lei and Rinaldo (2015) where the misclassification rate was $O_p(1/\log n)$.

When there are outliers in networks, we also have a consistency result similar to Theorem 3.1. We first give the definition of the DCSBM with outliers.

Definition 3.2. *A network $G = (V, E)$ is said to follow a DCSBM with outliers, if it satisfies all assumptions (A1)-(A3) and the following assumption.*

(A4') Denote $\pi^- = \min_{1 \leq k \leq K-1} \pi_k$, $p^- = \min_{1 \leq k \leq K-1} \{p_{kk}\}$ and $q^+ = \max_{k \neq m} \{p_{km}\}$. Then, $p^- > q^+ \geq p_{KK}$. The K th community is called the outlier community.

For a DCSBM with outliers, all communities are well-defined communities except the K th outlier community. We also assume $p^- \gtrsim \log n / n^{1-2\alpha}$ and $\pi^- \gtrsim n^{-\delta/2}$ for the DCSBM with outliers. We have the following theorem.

Theorem 3.2. *Suppose that G is a DCSBM with outliers. Assumes that all conditions in Theorem 3.1 hold. In addition, assume that the outlier community G_K satisfies $|G_K|^2 / K = o(n^{2-2\delta})$. Then, the conclusions in Theorem 3.1 hold.*

This theorem says that as long as the outlier community is not too large, the first extracted community will be very close to the community with the largest ρ_k^d .

4 Simulation Study

In this section, we perform simulation study to compare the methods proposed in this paper with currently available methods. For the algorithm developed in this paper, we consider two versions of the algorithm, with or without the permutation test. This helps us to see the effect of the permutation test on removing false communities. We call these algorithms L0Lap (without the permutation test), L0LapT (with the permutation test). The methods that we compare with include Newman's modularity (Newman, 2004b),

SCORE (Jin, 2015), oPCA (Chung, 1997), nPCA (Shi and Malik, 2000) and OSLOM (Lancichinetti et al., 2011). For Newman’s modularity, we use the C++ implementation available at <http://cs.unm.edu/~aaron/research/fastmodularity.htm>. For OSLOM, we use the C++ implementation from <http://www.oslom.org/software.htm>. For the other three methods, we implement the algorithms using Matlab according to their respective descriptions. Since SCORE, oPCA and nPCA requires a known community number, we provide the true community number to these algorithms in the simulation. The simulation study includes both networks without outliers and networks with outliers.

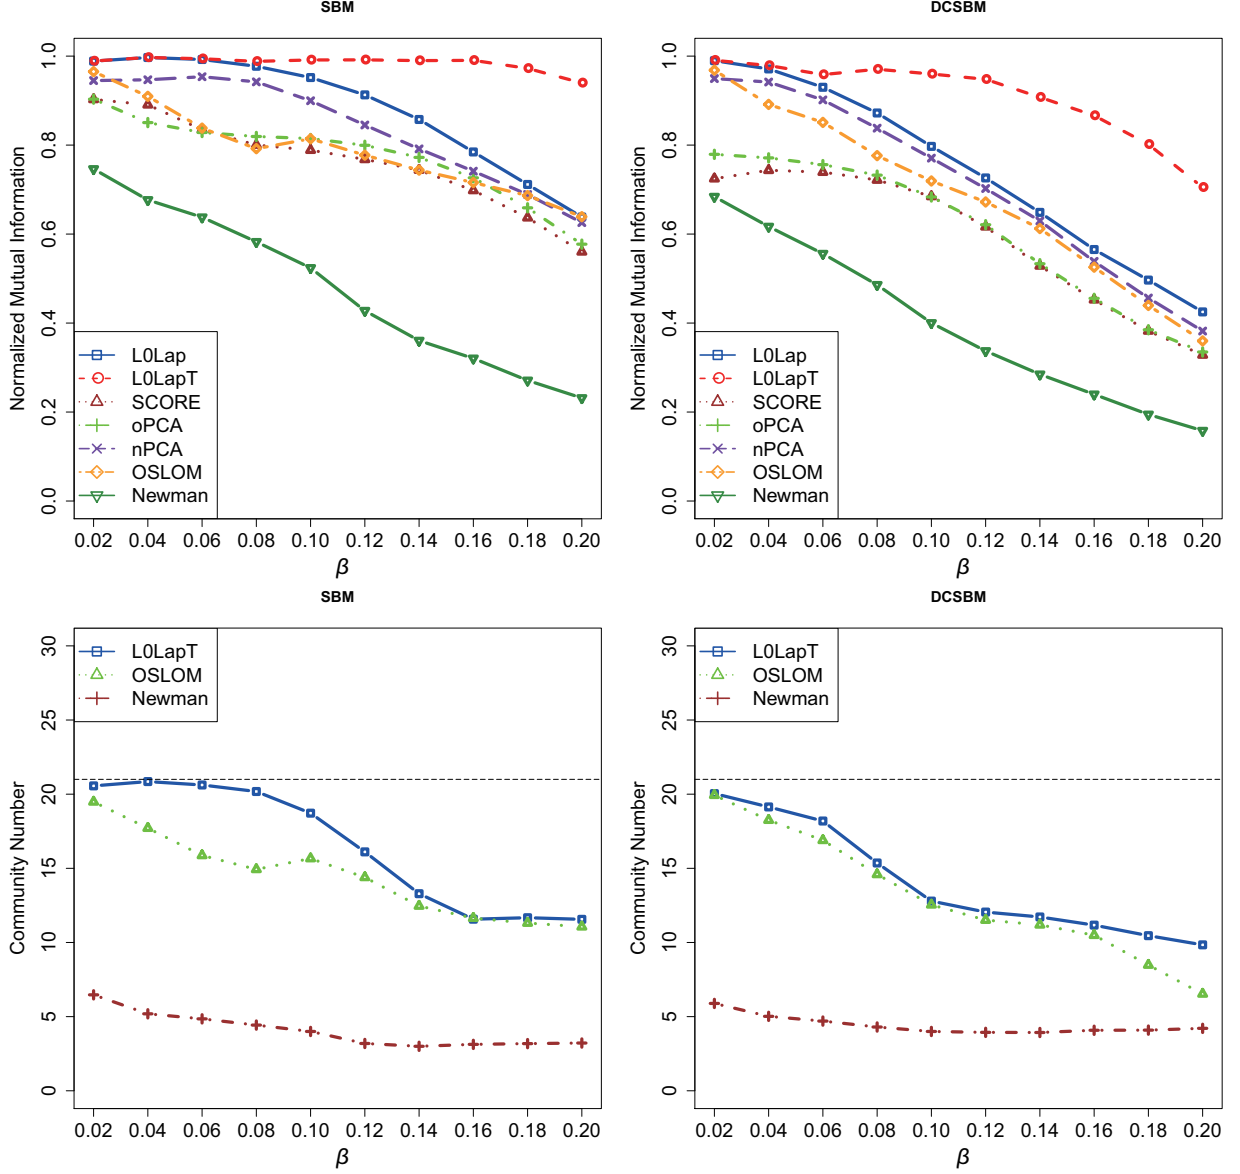


Figure 1: Under the SBM and DCSBM, the mean NMI (top panel) and the mean detected community number (bottom panel) over 100 simulated networks with varying out-in-ratio parameter β . The degree parameter Λ is fixed as 50.

4.1 Simulation under DCSBM

In this subsection, we simulate networks under the SBM and DCSBM. All simulated networks have $n = 1,000$ nodes and $K = 21$ communities of different sizes. Among the 21 communities, 5 of them have 100 nodes, 6 have 50 nodes and 10 have 20 nodes. Let $\pi = (\pi_1, \pi_2, \dots, \pi_{21})$ be the proportion of nodes in each community (e.g. $\pi_1 = \dots = \pi_5 = 100/1000 = 0.1$, $\pi_6 = \dots = \pi_{11} = 50/1000 = 0.05$). Conditional on the labels, the edges between nodes are generated as independent Bernoulli variables with probabilities proportional to $\theta_i \theta_j P_{ij}$. For the SBM, the parameters θ_j are all equal to 1. For the DCSBM, θ_j 's are drawn independently from $U[0.5, 1]$.

Similar to [Amini et al. \(2013\)](#), the connecting matrix P is constructed depending on an “out-in-ratio” parameter β ([Decelle et al., 2011](#)). Given a β , we set the diagonal elements of a 21×21 matrix $P^{(0)}$ as β^{-1} and set all off-diagonal elements as 1. Then, given an overall expected network degree Λ , we rescale $P^{(0)}$ to give the final P :

$$P = \frac{\Lambda}{(n-1)(\pi^T P^{(0)} \pi)(\mathbb{E}\Theta)^2} P^{(0)}.$$

The normalized mutual information (NMI) ([Yao, 2003](#)) is often used to measure the concordance between the detected and true communities. Given two community labels c and e , assume c has K_1 communities and e has K_2 communities. Define the confusion matrix $M_{K_1 \times K_2}$ by $M_{ij} = \sum_k \mathbf{1}\{c_k = i, e_k = j\}$, denote its row and column sums M_{i+} and M_{+j} . The NMI is defined by $\text{NMI}(c, e) = - \left(\sum_{i,j} M_{ij} \log M_{ij} \right)^{-1} \sum_{i,j} M_{ij} \log \frac{M_{ij}}{M_{i+} M_{+j}}$. For L0LapT and OSLOM, since there will be unclassified nodes, we only consider nodes that are assigned with a community label when calculating the NMI.

We first fix $\Lambda = 50$ and vary the out-in-ratio parameter β from 0.02 to 0.2. For each β , we generate 100 networks and compare the mean NMI of each algorithm over these 100 networks (Figure 1). For all algorithms, the NMIs tend to decrease as the out-in-ratio

parameter β increases. We clearly see that our algorithm achieves the highest NMI compared with other methods. As expected, after we apply the permutation test, the NMI can also be significantly improved. This is because the permutation test successfully removes small false communities. Especially, when β is large, the test is more effective in terms of improving the NMI. For example, under the SBM, when $\beta = 0.2$, the NMI of L0Lap is similar to that of nPCA and OLSOM, but after applying the permutation test, the NMI of L0Lap becomes close to 1. Furthermore, since nodes in the DCSBM are heterogeneous, as expected, all methods perform better in the SBM than in the DCSBM. We also compare the detected community numbers given by L0LapT, Newman and OSLOM (Figure 1 bottom panel). Our algorithm usually gives better community number estimation than the other two algorithms, although when β is large all methods underestimate the community number. The community number chosen by Newman is much smaller than the true number. This is probably due to the known resolution limit of modularity (Fortunato and Barthélemy, 2007).

We then fix $\beta = 0.1$ and vary network degree Λ from 2 to 100 to compare different algorithms. The mean NMI of each algorithm is shown in Figure 2. Again, we see that our algorithm generally performs better than other algorithms. When Λ is very small, since OSLOM and Newman often divide networks to many small connected subsets, they tend to have much larger NMIs than other methods, but also detect much more communities than the truth.

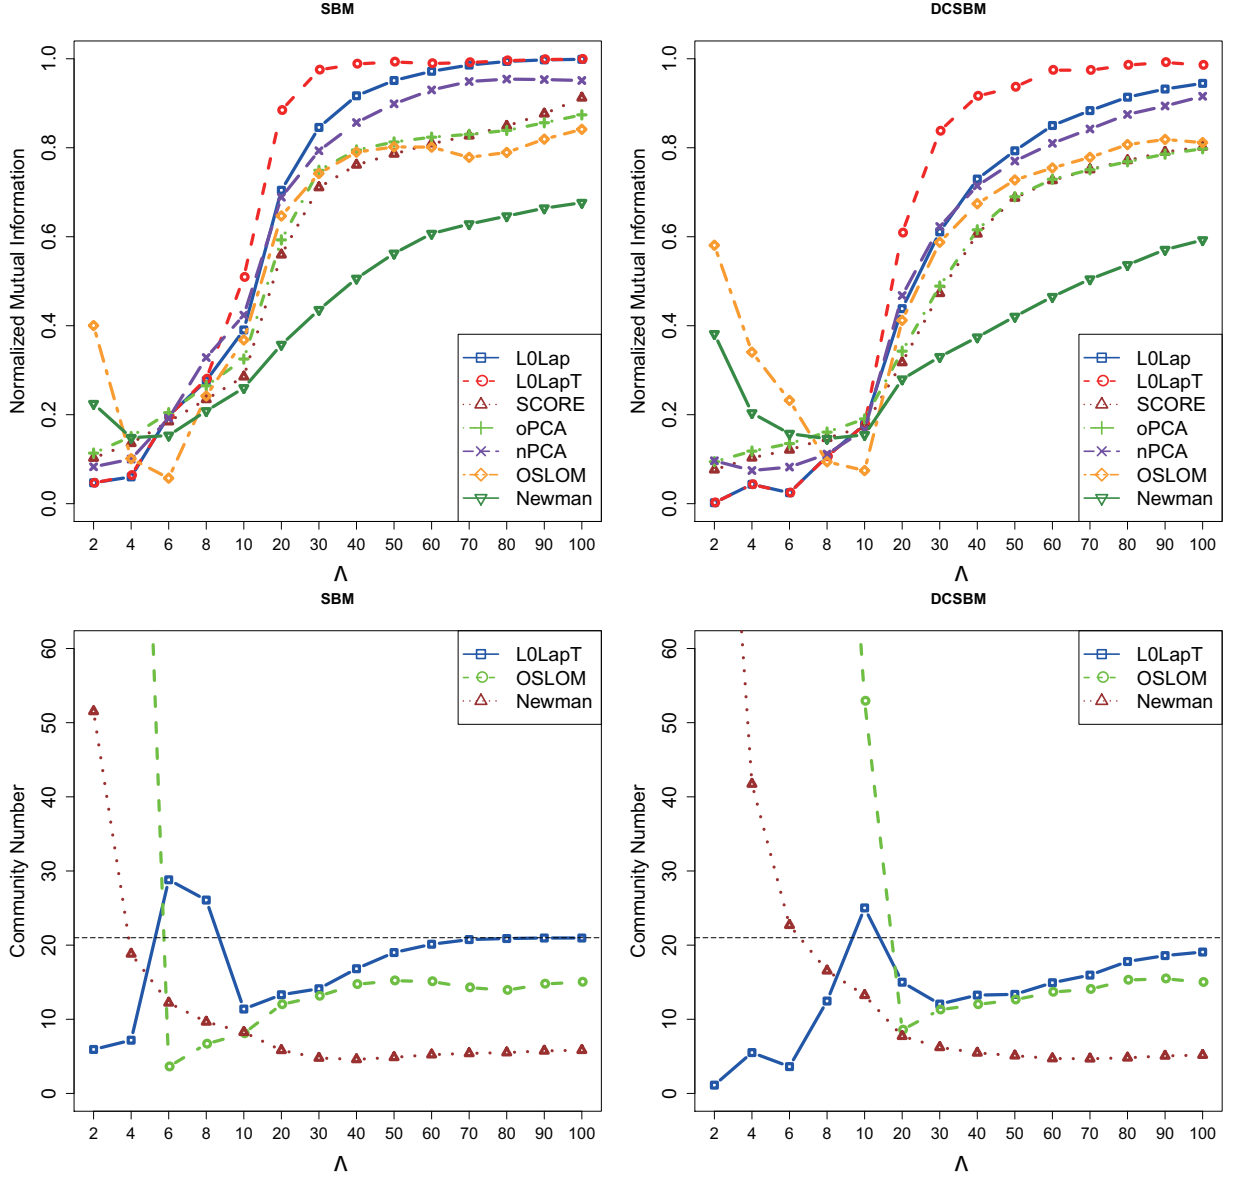


Figure 2: Under the SBM and DCSBM, the mean NMI (top panel) and the mean detected community number (bottom panel) over 100 simulated networks with varying network degree Λ . The out-in-ratio β is fixed as 0.1.

4.2 Simulation under DCSBM with Outliers

In this section, we compare the performance of each algorithm under the DCSBM with outliers. The simulated networks have $n = 1,000$ nodes and $K = 16$ communities of different sizes. The 16 communities are categorized into three groups according to their size, that is, 5 communities have 100 nodes, 6 have 50 nodes, and 5 have 20 nodes. The remaining 100 nodes are viewed as outliers which connect with any other nodes with the probability equal to the connecting probability between communities. The connecting probability matrix is generated similar to Section 4.1. Here, we fix $\Lambda = 50$ and vary β from 0.02 to 0.2. For nPCA, SCORE and oPCA, we set the community number as 17 in this simulation (16 communities and 1 outlier community). To compute the reasonable NMIs, the outlier nodes are viewed as in the 17th community and calculated similarly as before. Figure 3 shows the NMIs and the number of detected communities of these algorithms. Because there are outliers, even when β is very small, there is still a nonignorable gap between the NMIs and its upper bound 1. However, after applying the permutation test, the NMI of L0Lap is significantly improved. Furthermore, the community number found by L0LapT is much closer to the truth compared to OSLOM and Newman.

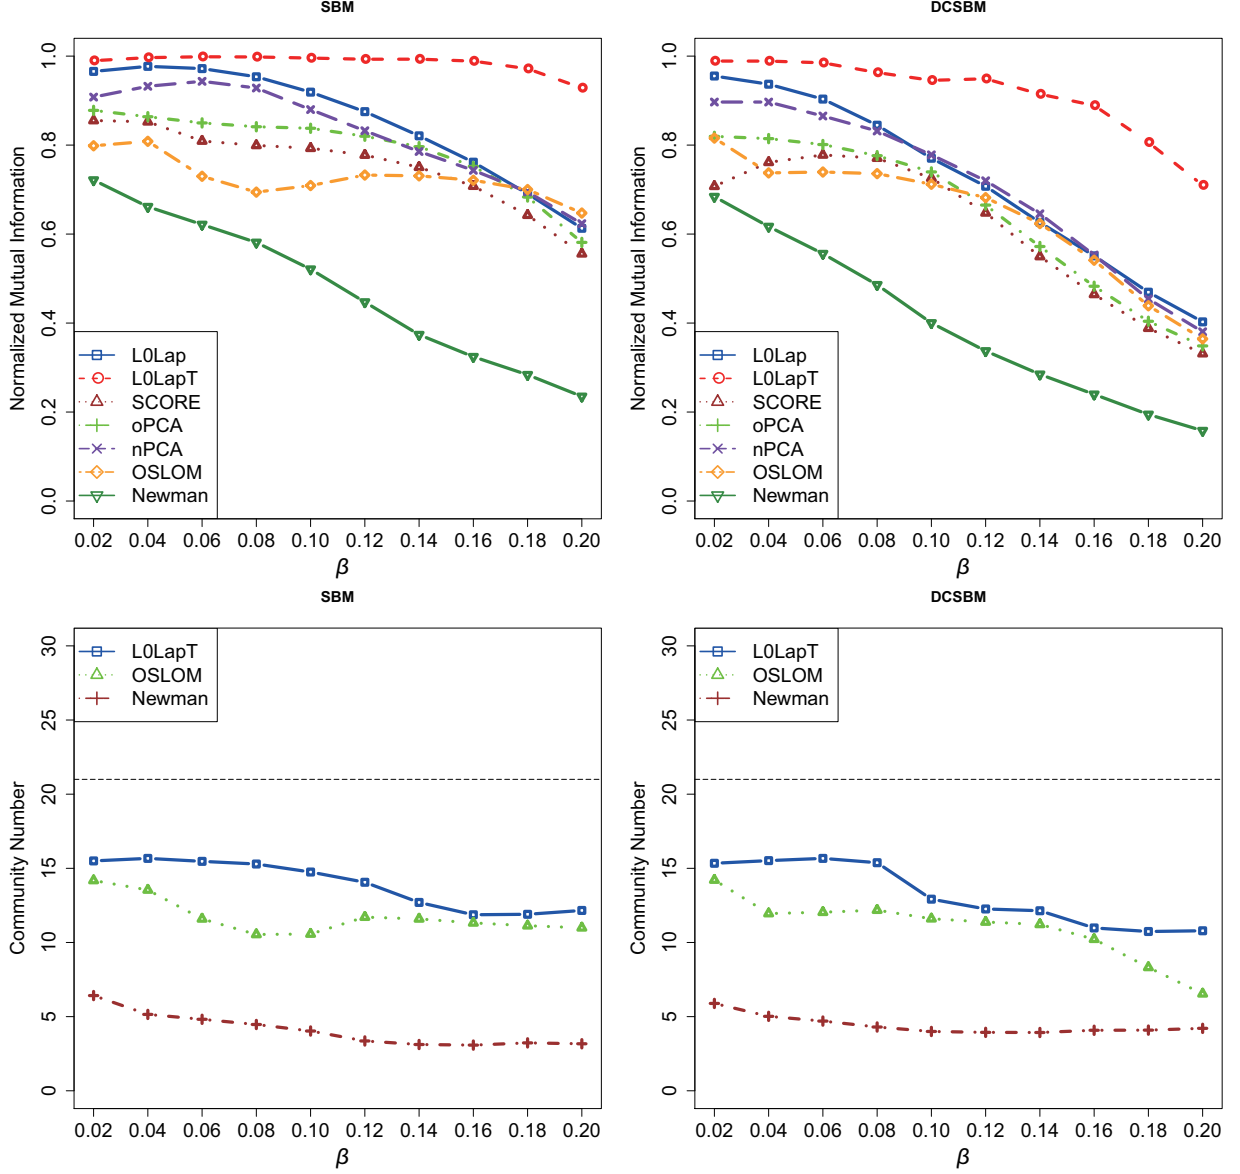


Figure 3: Under the SBM and DCSBM with outliers, the mean NMI (top panel) and the mean detected community number (bottom panel) over 100 simulated networks with varying out-in-ratio parameter β . The degree parameter Λ is fixed as 50.

5 Real Data Analysis

We consider two real data sets in this section, the college football network data (Xu et al., 2007) and the protein-protein network data in yeast (Yu et al., 2008).

5.1 College Football Data

The college football network data is the 2006 National Collegiate Athletic Association (NCAA) Football Bowl Subdivision (FBS) schedule (Xu et al., 2007). The data set consists of 115 schools belonging to 11 conferences in FBS, 4 independent schools and 61 lower division schools. Schools within conferences play more often against each other, so the 11 conferences are 11 communities. The four independent schools are hubs: they play against many schools in different conferences but do not belong to any conferences. The 61 lower division schools connect loosely with other nodes and are outliers of the network. We apply all methods considered in the simulation study to this data set. The algorithms L0Lap, L0LapT, OSLOM and Newman can automatically estimate the community number. For SCORE, oPCA and nPCA, we provide them with the true community number 12, including 11 communities and one outlier community. The outlier community includes both the hub nodes and the outlier nodes. Table 1 shows the NMI and the detected community number (CN) of each algorithm. This clearly show that L0LapT have the largest NMI compared with other methods. oPCA also works well: Its NMI is 0.925 and ranks the second best among all algorithms. In terms of outlier identification, although OSLOM is designed to be able to identify outliers, it fails to report any outlier for this data. In comparison, L0LapT identifies 80 nodes as outliers and 62 of them are true outliers. OSLOM gives the most accurate estimate of the community number.

Table 1: The performance of all methods on the college football network data. CN is the detected or the provided community number. We set the community number as 12 for SCORE, oPCA and nPCA.

	L0Lap	L0LapT	SCORE	oPCA	nPCA	OSLOM	Newman
NMI	0.856	0.985	0.674	0.925	0.640	0.681	0.550
CN	22	10	12	12	12	11	6

To look into more details of the detected communities of each algorithm, we examine the pairwise overlaps between detected communities with true communities. Specifically, given a detected community C_i^D and a true community C_j^T , we calculate an overlapping score between these two communities by $o_{ij} = |C_i^D \cap C_j^T| / |C_i^D \cup C_j^T|$. Thus, we get a matrix $O = (o_{ij})_{CN \times 12}$ for each algorithm. Figure 4 shows heat maps of these matrices for L0LapT, oPCA, Newman and OSLOM. The true community 12 in Figure 4 is the outlier community. All communities identified by L0LapT are highly similar to or exactly the same as the true communities. This demonstrates that L0LapT can give high quality communities. However, L0LapT fails to detect the community 11 and nodes in this community are filtered as outliers. In comparison, although OSLOM gives the best estimate of the community number, the quality of its detected communities are not as high as those given by L0LapT. Most of the “diagonal” overlapping scores for OSLOM are less than 0.71 and the largest overlapping score is only 0.86, showing that many detected communities contain substantial amount of nodes not belonging to these communities. oPCA performs well for most communities, but members in community 2 and community 11 are mixed up. Newman performs poorly in this data. Most of its detected communities are far away from true communities.

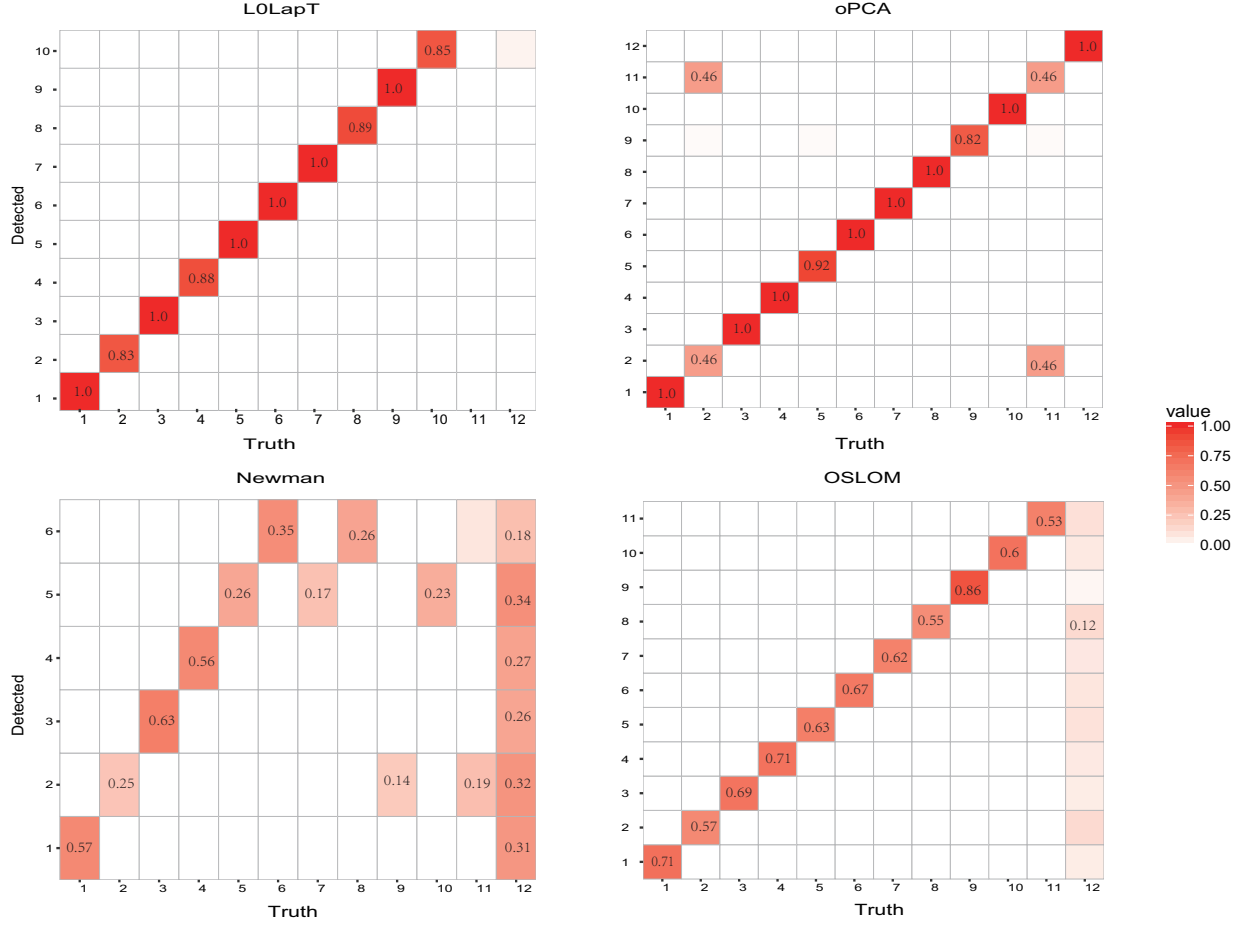


Figure 4: Heatmap of the overlapping scores o_{ij} between the detected communities with the true communities for the college football network data. The figure only shows results for L0LapT, oPCA, Newman and OSLOM. Similar plots for other algorithms are shown in the Supplementary Figure. The numbers in the figure are the overlapping scores o_{ij} with $o_{ij} > 0.1$.

5.2 Protein-protein interaction data in yeast

In this section, we consider a protein-protein interaction network data in yeast (Yu et al., 2008). After removing isolated nodes, we get a network with 1,540 nodes and 7,123 edges. Different proteins often interact with each other to achieve one biological function. The communities of the PPI network should then represent different cellular functions. We apply all methods considered in the simulation study to this network to find communities in this PPI network. L0LapT finds 22 communities with their sizes ranging from 8 to 138. OSLOM finds 114 communities ranging from 3 to 103. Newman finds 202 communities ranging from 2 to 193. For SCORE, oPCA and nPCA, since the number of communities is unknown, we set the community number as 100, which roughly is the average number of communities detected by L0LapT, OSLOM and Newman. Finally, the community sizes given by SCORE, oPCA and nPCA ranges from 1 to 1178, from 1 to 738 and 1 to 1069, respectively. We further filter out communities with ≤ 5 nodes, since these are unlikely to be true communities.

Since we do not know the true community structure, to evaluate the quality of the partition of this yeast network, we instead use gene ontology (GO) enrichment analysis to compare different algorithms. Since communities of the PPI network correspond to different cellular functions, the detected communities should be enriched with known GO terms. We download yeast gene GO annotation database from <http://www.yeastgenome.org/>. For enrichment analysis, we focus only on GO terms with at least 10 annotated genes. For each community, we calculate a list of p-values with every GO term by Fisher’s exact test. If the detected communities are biological meaningful, the communities should be highly significant with a number of GO terms. After \log_{10} transformation of these p-values, define $\text{ratio}_t = |\{-\log_{10} \text{p-value} > t\}| / |\{-\log_{10} \text{p-value} > 0\}|$ for a threshold t . This ratio could be viewed as an indicator of biological relatedness of the detected communities. At the same

cutoff t , larger ratio value should correspond to more biologically meaningful communities. The ratio curves of these methods are shown in Figure 5, left panel. We see that the curve of L0LapT is largely above other curves. However, when t is large, it is hard to see the difference. Therefore, we further consider only p-values less than 0.1 and define $\text{ratio}_t^r = |\{-\log_{10} \text{p-value} > t\}| / |\{-\log_{10} \text{p-value} > 1\}|$ for any threshold $t \geq 1$. The new ratio curves are shown in Figure 5, right panel. We can now clearly see that the curve of L0LapT curves is always above other methods.

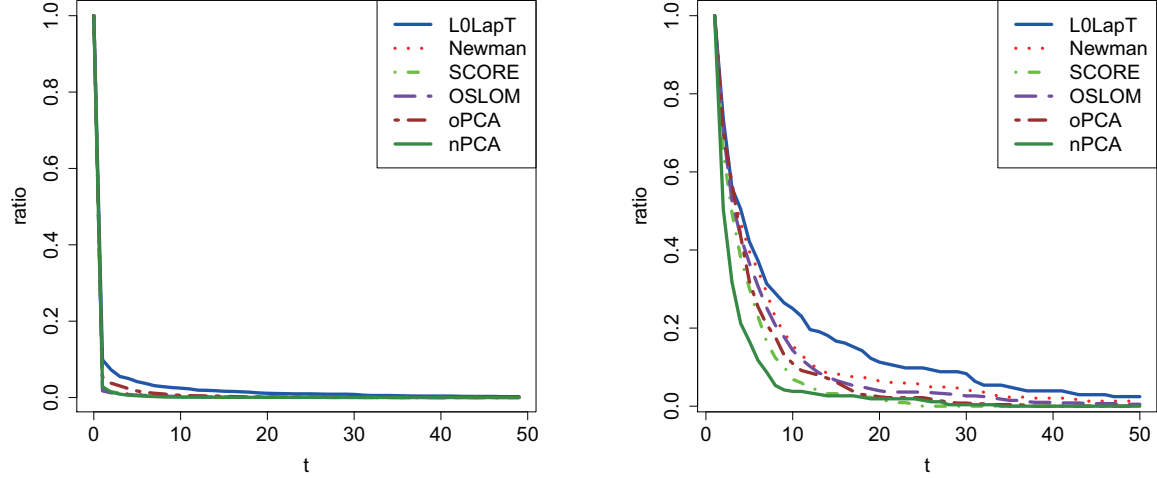


Figure 5: GO enrichment analysis.

6 Conclusion and Discussion

In this paper, we propose a L_0 -penalized Laplacian for community detection. This method does not require information about the community number and it can detect communities in networks with outliers. We prove a consistency result for DCSBM with or without outliers. Simulation studies show that the proposed method generally performs better than other available algorithms. One problem we found is that although the proposed method generally gives more accurate estimation of the community number, when networks contain more noise or when the network is too sparse, the proposed algorithm still cannot give a very accurate estimate of community number. In addition, the statistical test used in this paper is based on permutation. Although simulation shows that this permutation works well in general in terms filtering false communities, we were not able to develop theoretical guarantees for this test. This seems a quite difficult question. As far as we know, there is currently no theory developed for permutation tests in networks.

7 Appendix

In this section, we give proofs of our theoretical results. Before proving the main theorem, we first give some lemmas.

Lemma 7.1. *Under the assumptions of DCSBM, we have*

$$\mathbb{E}(W(S)|\mathbf{c}) = \sum_{k=1}^K nr_k^d(S) \left(\sum_{l=1}^K nr_l^d(S) p_{kl} \right) \text{ and } \mathbb{E}(V(S)|\mathbf{c}) = \sum_{k=1}^K nr_k^d(S) \left(\sum_{l=1}^K n\hat{\pi}_l^d p_{kl} \right)$$

Proof. Under the assumptions of DCSBM, we have

$$\mathbb{E}(A_{ij}|c_i = k, c_j = l) = \mathbb{E}(\theta_i|c_i = k)\mathbb{E}(\theta_j|c_j = l)p_{kl} = \frac{\pi_k^d \pi_l^d}{\pi_k \pi_l} p_{kl}.$$

So we have

$$\begin{aligned}\mathbb{E}(W(S)|\mathbf{c}) &= \sum_{k=1}^K \sum_{l=1}^K \sum_{i \in S_k, j \in S_l} \mathbb{E}(A_{ij}|\mathbf{c}) \\ &= \sum_{k=1}^K \sum_{l=1}^K \sum_{i \in S_k, j \in S_l} \frac{\pi_k^d \pi_l^d}{\pi_k \pi_l} p_{kl} = \sum_{k=1}^K nr_k^d(S) \left(\sum_{l=1}^K nr_l^d(S) p_{kl} \right),\end{aligned}$$

and

$$\begin{aligned}\mathbb{E}(V(S)|\mathbf{c}) &= \sum_{k=1}^K \sum_{l=1}^K \sum_{i \in S_k, j \in G_l} \mathbb{E}(A_{ij}|\mathbf{c}) \\ &= \sum_{k=1}^K \sum_{l=1}^K \sum_{i \in S_k, j \in G_l} \frac{\pi_k^d \pi_l^d}{\pi_k \pi_l} p_{kl} = \sum_{k=1}^K nr_k^d(S) \left(\sum_{l=1}^K n\hat{\pi}_l^d p_{kl} \right).\end{aligned}$$

□

We need Chernoff's inequality ([Füredi and Komlós, 1981](#)) and Hoeffding's inequality ([Hoeffding, 1963](#)) to prove Theorem [3.1](#).

Lemma 7.2. (*Chernoff's inequality*) Let X_1, \dots, X_n be independent random variables with

$$\mathbb{P}(X_i = 1) = p_i, \quad \mathbb{P}(X_i = 0) = 1 - p_i.$$

Then the sum $X = \sum_{i=1}^n X_i$ has expectation $\mathbb{E}(X) = \sum_{i=1}^n p_i$, and we have

$$\mathbb{P}(X < \mathbb{E}(X) - \lambda) < \exp \left\{ -2^{-1} \lambda^2 / \mathbb{E}(X) \right\},$$

$$\mathbb{P}(X > \mathbb{E}(X) + \lambda) < \exp \left\{ -2^{-1} \lambda^2 / (\mathbb{E}(X) + \lambda/3) \right\}.$$

Lemma 7.3. (*Hoeffding's inequality*) Let X_1, \dots, X_n be independent random variables and X_i 's are strictly bounded by the intervals $[a_i, b_i]$. We define the empirical mean of these variables by $\bar{X} = n^{-1} \sum_{i=1}^n X_i$, then we have

$$\mathbb{P}(|\bar{X} - \mathbb{E}(\bar{X})| > t) \leq 2 \exp \left\{ - \frac{2n^2 t^2}{\sum_{i=1}^n (b_i - a_i)^2} \right\}.$$

Lemma 7.4. Define $\hat{\psi}(S) = \mathbb{E}(W(S)|\mathbf{c})/\mathbb{E}(V(S)|\mathbf{c}) - \eta|S|$. Under the assumptions of DCSBM, we have

$$\max_{S \in \Gamma_\delta} \left| \psi(S) - \hat{\psi}(S) \right| \lesssim n^{\delta-\alpha}$$

with probability at least $1 - 2^{n+2}/n^n$ when n is sufficiently large.

Proof. By Lemma 7.1 and the condition $p^- \gtrsim \log n/n^{1-2\alpha}$, we have

$$\begin{aligned} \mathbb{E}(W(S)|\mathbf{c}) &= \sum_{k=1}^K n r_k^d(S) \left(\sum_{l=1}^K n r_l^d(S) p_{kl} \right) \\ &\geq p^- \sum_{k=1}^K n^2 (r_k^d(S))^2 \gtrsim n^{1+2\alpha} \log n \sum_{k=1}^K (r_k^d(S))^2. \end{aligned} \quad (13)$$

Since $\sum_{k=1}^K r_k^d(S) = \sum_{k=1}^K r_k(S) \pi_k^d / \pi_k$ and $0 < h_1 \leq \pi_k^d / \pi_k \leq h_M$, we have $\sum_{k=1}^K (r_k^d(S))^2 \geq (\sum_{k=1}^K r_k^d(S))^2 / K \geq h_1^2 |S|^2 / (K n^2)$ by the Cauchy-Schwarz inequality. Then we have $\mathbb{E}(W(S)|\mathbf{c}) \gtrsim n^{1+2(\alpha-\delta)} \log n$ if $S \in \Gamma_\delta$. Let $\lambda = 2\sqrt{n \log n \mathbb{E}(W(S)|\mathbf{c})}$ and by Chernoff's inequality, we have

$$\mathbb{P}(W(S) - \mathbb{E}(W(S)|\mathbf{c}) < -\lambda) < n^{-n}.$$

Since $\mathbb{E}(W(S)|\mathbf{c}) \gtrsim n^{1+2(\alpha-\delta)} \log n$, we have $\lambda/3 < \mathbb{E}(W(S)|\mathbf{c})$ with sufficiently large n and thus

$$\mathbb{P}(W(S) - \mathbb{E}(W(S)|\mathbf{c}) > \lambda) < n^{-n}.$$

So we have

$$\mathbb{P}(|W(S) - \mathbb{E}(W(S)|\mathbf{c})| > \lambda) < 2n^{-n}.$$

For $V(S)$, we have

$$\mathbb{E}(V(S)|\mathbf{c}) \geq \mathbb{E}(W(S)|\mathbf{c}) \gtrsim n^{1+2(\alpha-\delta)} \log n$$

Similarly, let $\tilde{\lambda} = 2\sqrt{n \log n \mathbb{E}(V(S)|\mathbf{c})}$, and we have

$$\mathbb{P}(|V(S) - \mathbb{E}(V(S)|\mathbf{c})| > \tilde{\lambda}) < 2n^{-n}.$$

In addition, we have

$$\frac{\lambda}{\mathbb{E}(W(S)|\mathbf{c})} \lesssim \frac{1}{n^{\alpha-\delta}} \text{ and } \frac{\tilde{\lambda}}{\mathbb{E}(V(S)|\mathbf{c})} \lesssim \frac{1}{n^{\alpha-\delta}}.$$

Thus, with probability at least $1 - 4/n^n$, we have

$$\begin{aligned} & \left| \frac{W(S)}{V(S)} - \frac{\mathbb{E}(W(S)|\mathbf{c})}{\mathbb{E}(V(S)|\mathbf{c})} \right| \\ & \leq \max \left\{ \left| \frac{\mathbb{E}(W(S)|\mathbf{c}) - \lambda}{\mathbb{E}(V(S)|\mathbf{c}) + \tilde{\lambda}} - \frac{\mathbb{E}(W(S)|\mathbf{c})}{\mathbb{E}(V(S)|\mathbf{c})} \right|, \left| \frac{\mathbb{E}(W(S)|\mathbf{c}) + \lambda}{\mathbb{E}(V(S)|\mathbf{c}) - \tilde{\lambda}} - \frac{\mathbb{E}(W(S)|\mathbf{c})}{\mathbb{E}(V(S)|\mathbf{c})} \right| \right\} \\ & = \max \left\{ \left| \frac{\mathbb{E}(W(S)|\mathbf{c})\tilde{\lambda} + \mathbb{E}(V(S)|\mathbf{c})\lambda}{\mathbb{E}(V(S)|\mathbf{c})(\mathbb{E}(V(S)|\mathbf{c}) + \tilde{\lambda})} \right|, \left| \frac{\mathbb{E}(W(S)|\mathbf{c})\tilde{\lambda} + \mathbb{E}(V(S)|\mathbf{c})\lambda}{\mathbb{E}(V(S)|\mathbf{c})(\mathbb{E}(V(S)|\mathbf{c}) - \tilde{\lambda})} \right| \right\} \\ & \leq \left| \frac{\lambda}{\mathbb{E}(V(S)|\mathbf{c}) - \tilde{\lambda}} \right| + \left| \frac{\tilde{\lambda}}{\mathbb{E}(V(S)|\mathbf{c}) - \tilde{\lambda}} \right| \lesssim \frac{1}{n^{\alpha-\delta}}. \end{aligned}$$

Therefore, with probability at least $1 - 2^{n+2}/n^n$ we have

$$\max_{S \in \Gamma_\delta} |\psi(S) - \hat{\psi}(S)| \lesssim \frac{1}{n^{\alpha-\delta}},$$

when n is sufficiently large. □

Lemma 7.5. *For DCSBM, with probability at least $1 - 2Kn^{-2}$, we have*

$$|\hat{\rho}_k^d - \rho_k^d| \lesssim \frac{1}{n^{\alpha-\delta}},$$

for all $1 \leq k \leq K$.

Proof. By definition, we have

$$\hat{\pi}_k = \frac{1}{n} \sum_{i=1}^n \mathbf{I}\{c_i = k\}.$$

Since $\mathbb{E}(\hat{\pi}_k) = \pi_k$ and $\mathbf{I}\{c_i = k\}$ are strictly bounded by the intervals $[0, 1]$, we have

$$\mathbb{P} \left(|\hat{\pi}_k - \pi_k| > \sqrt{\frac{\log n}{n}} \right) \leq \frac{2}{n^2},$$

by Hoeffding's inequality.

Since $\hat{\pi}_k^d = \pi_k^d \hat{\pi}_k / \pi_k$ and $\pi_k^d / \pi_k \leq h_M$, we have

$$\mathbb{P} \left(\left| \hat{\pi}_k^d - \pi_k^d \right| > h_M \sqrt{\frac{\log n}{n}} \right) \leq \frac{2}{n^2},$$

by the inequality above. Therefore, with probability at least $1 - 2Kn^{-2}$ we have

$$\begin{aligned} |\hat{\rho}_k^d - \rho_k^d| &= \left| \frac{p_{kk}}{\sum_{l=1}^K \pi_l^d p_{kl}} - \frac{p_{kk}}{\sum_{l=1}^K \hat{\pi}_l^d p_{kl}} \right| = p_{kk} \left| \frac{\sum_{l=1}^K (\hat{\pi}_l^d - \pi_l^d) p_{kl}}{(\sum_{l=1}^K \pi_l^d p_{kl})(\sum_{l=1}^K \hat{\pi}_l^d p_{kl})} \right| \\ &\lesssim \sqrt{\frac{\log n}{n}} \frac{1}{(\pi^-)^2} \lesssim \frac{\sqrt{\log n}}{n^{1/2-\delta}} \lesssim \frac{1}{n^{\alpha-\delta}}. \end{aligned}$$

□

Lemma 7.6. Assume real numbers $0 < x_k, y_k, z_{kl} \leq 1$ satisfy $0 < C_1 \leq x_k/y_k \leq C_2$ for all $1 \leq k \neq l \leq K$. Define

$$f(t_1, \dots, t_K) = \frac{\sum_{k=1}^K t_k (t_k x_k + \sum_{l \neq k} t_l z_{kl})}{\sum_{k=1}^K t_k y_k}, \quad (14)$$

where $t_k \geq 0$ and $\sum_{k=1}^K t_k = 1$. If $x_1/y_1 > \max_{2 \leq k \leq K} x_k/y_k$ and $\min_{1 \leq k \leq K} x_k > \max_{k \neq l} z_{kl}$, we have

$$(1) \quad f(t_1, \dots, t_K) \leq f(1, 0, \dots, 0) = \frac{x_1}{y_1},$$

$$(2) \quad \text{For any } 0 < t < 1,$$

$$f(1, 0, \dots, 0) - \max_{t_1 \leq 1-t} f(t_1, \dots, t_K) \geq \frac{1}{2} \left(\frac{x_1}{y_1} - \max_{2 \leq k \leq K} \frac{x_k}{y_k} \right) t.$$

Proof. (1) Since $x_1/y_1 > \max_{2 \leq k \leq K} x_k/y_k$ and $\min_{1 \leq k \leq K} x_k > \max_{k \neq l} z_{kl}$,

$$f(t_1, \dots, t_K) \leq \frac{\sum_{k=1}^K t_k x_k}{\sum_{k=1}^K t_k y_k} \leq \frac{x_1}{y_1} = f(1, 0, \dots, 0).$$

(2) Since $f(t_1, \dots, t_K)$ is continuous and $\{(t_1, \dots, t_K) | t_1 \leq 1-t\}$ is a close set, $f(t_1, \dots, t_K)$ can achieve its upper bound on $\{(t_1, \dots, t_K) | t_1 \leq 1-t\}$. Suppose that $f(t_1, \dots, t_K)$ achieves its upper bound at (t_1^*, \dots, t_K^*) and define \bar{x}, \bar{y} such that $(1-t_1^*)\bar{x} = \sum_{k=2}^K t_k^*(t_k^*x_k + \sum_{l \neq k} t_l^*z_{kl})$, $(1-t_1^*)\bar{y} = \sum_{k=2}^K t_k^*y_k$. We have $\bar{x}/\bar{y} \leq \max_{2 \leq k \leq K} x_k/y_k$ since $\min_{1 \leq k \leq K} x_k > \max_{k \neq l} z_{kl}$. Let $z^+ = \max_{k \neq l} z_{kl}$, then we have

$$\begin{aligned} f(1, 0, \dots, 0) - \max_{t_1 \leq 1-t} f(t_1, \dots, t_K) &\geq \frac{x_1}{y_1} - \frac{t_1^*(t_1^*x_1 + (1-t_1^*)z^+) + (1-t_1^*)\bar{x}}{t_1^*y_1 + (1-t_1^*)\bar{y}} \\ &= \frac{(1-t_1^*)t_1^*y_1(x_1 - z^+)}{y_1(t_1^*y_1 + (1-t_1^*)\bar{y})} + \frac{(1-t_1^*)(x_1\bar{y} - \bar{x}y_1)}{y_1(t_1^*y_1 + (1-t_1^*)\bar{y})}. \end{aligned}$$

Case I: $y_1 = \min_{1 \leq k \leq K} y_k$.

We have $\bar{y}/[t_1^*y_1 + (1-t_1^*)\bar{y}] \geq 1$, and thus

$$\begin{aligned} \frac{(1-t_1^*)(x_1\bar{y} - \bar{x}y_1)}{y_1(t_1^*y_1 + (1-t_1^*)\bar{y})} &= (1-t_1^*)\left(\frac{x_1}{y_1} - \frac{\bar{x}}{\bar{y}}\right) \frac{\bar{y}}{t_1^*y_1 + (1-t_1^*)\bar{y}} \\ &\geq t\left(\frac{x_1}{y_1} - \max_{2 \leq k \leq K} \frac{x_k}{y_k}\right). \end{aligned}$$

Case II: $y_1 > \min_{1 \leq k \leq K} y_k$.

There exists $i \neq 1$ such that $y_i < y_1$, then we have $z^+/y_1 < x_i/y_i$.

If $\bar{y}(1-t_1^*) \geq y_1t_1^*$, we have

$$\frac{\bar{y}}{t_1^*y_1 + (1-t_1^*)\bar{y}} \geq \frac{1}{2(1-t_1^*)},$$

and

$$\begin{aligned} \frac{(1-t_1^*)(x_1\bar{y} - \bar{x}y_1)}{y_1(t_1^*y_1 + (1-t_1^*)\bar{y})} &= (1-t_1^*)\left(\frac{x_1}{y_1} - \frac{\bar{x}}{\bar{y}}\right) \frac{\bar{y}}{t_1^*y_1 + (1-t_1^*)\bar{y}} \\ &\geq \frac{1}{2}\left(\frac{x_1}{y_1} - \max_{2 \leq k \leq K} \frac{x_k}{y_k}\right). \end{aligned}$$

If $\bar{y}(1-t_1^*) \leq y_1t_1^*$, we have

$$\frac{t_1^*y_1}{t_1^*y_1 + (1-t_1^*)\bar{y}} \geq \frac{1}{2}$$

and $z^+/y_1 \leq \max_{2 \leq k \leq K} x_k/y_k$, then we have

$$\begin{aligned} \frac{(1-t_1^*)t_1^*y_1(x_1-z^+)}{y_1(t_1^*y_1+(1-t_1^*)\bar{y})} &= (1-t_1^*)\left(\frac{x_1}{y_1}-\frac{z^+}{y_1}\right)\frac{t_1^*y_1}{t_1^*y_1+(1-t_1^*)\bar{y}} \\ &\geq \frac{1}{2}t\left(\frac{x_1}{y_1}-\max_{2 \leq k \leq K} \frac{x_k}{y_k}\right). \end{aligned}$$

So we have

$$f(1, 0, \dots, 0) - \max_{t_1 \leq 1-t} f(t_1, \dots, t_K) \geq \frac{1}{2}t \left(\frac{x_1}{y_1} - \max_{2 \leq k \leq K} \frac{x_k}{y_k} \right).$$

□

Based on the lemmas given previously, we give the proof of Theorem 3.1.

Proof of Theorem 3.1. Based on Lemma 7.4, with probability at least $1 - 2^{n+2}/n^n$, we have

$$\max_{S \in \Gamma_\delta} \left| \psi(S) - \hat{\psi}(S) \right| \lesssim \frac{1}{n^{\alpha-\delta}}.$$

Let $t_k(S) = r_k^d(S)/r^d(S)$ for $1 \leq k \leq K$,

$$\begin{aligned} \hat{\psi}(S) &= \frac{\sum_{k=1}^K nr_k^d(S)(\sum_{l=1}^K nr_l^d(S)p_{kl})}{\sum_{k=1}^K nr_k^d(S)(\sum_{l=1}^K n\hat{\pi}_l^d p_{kl})} - n\eta \sum_{k=1}^K \frac{\pi_k}{\pi_k^d} r_k^d(S) \\ &= r^d(S) \left(\frac{\sum_{k=1}^K t_k(S)(t_k(S)p_{kk} + \sum_{l \neq k} t_l(S)p_{kl})}{\sum_{k=1}^K t_k(S)(\sum_{l=1}^K \hat{\pi}_l^d p_{kl})} - n\eta \sum_{k=1}^K \frac{\pi_k}{\pi_k^d} t_k(S) \right) \\ &= r^d(S) \left(f(t_1(S), \dots, t_K(S)) - n\eta \sum_{k=1}^K \frac{\pi_k}{\pi_k^d} t_k(S) \right). \end{aligned}$$

Note that if $S = G_1$, $t_1(G_1) = 1$, $t_k(G_1) = 0$ ($k = 2, \dots, K$) and

$$\hat{\psi}(G_1) = \hat{\pi}_1^d \left(f(1, 0, \dots, 0) - n\eta \frac{\pi_1}{\pi_1^d} \right).$$

Based on Lemma 7.5, with probability at least $1 - 2Kn^{-2}$ we have

$$\hat{\rho}_1^d - \max_{2 \leq k \leq K} \hat{\rho}_k^d \gtrsim \frac{1}{n^\tau}.$$

Then, with probability at least $1 - 2Kn^{-2}$ we have

$$\begin{aligned} & f(1, 0, \dots, 0) - \max_{t_1 \leq 1 - 1/n^{\gamma-\tau}} f(t_1, t_2, \dots, t_K) \\ & \gtrsim \frac{1}{n^{\gamma-\tau}} (\hat{\rho}_1^d - \max_{2 \leq k \leq K} \hat{\rho}_k^d) \gtrsim \frac{1}{n^{\gamma-\tau}} \frac{1}{n^\tau} \gtrsim \frac{1}{n^\gamma}, \end{aligned} \quad (15)$$

and $f(t_1, \dots, t_K) \leq f(1, 0, \dots, 0) = \hat{\rho}_1^d$ by Lemma 7.6. From (15), it is easy to see that for a constant C , we can choose η satisfying the inequality (11) with probability at least $1 - 2Kn^{-2}$.

Since $\max_{2 \leq k \leq K} \pi_k^d / \pi_k \leq \pi_1^d / \pi_1 \leq h_M$, Using the inequality in the condition, we have with sufficiently large n ,

$$f(t_1(S), \dots, t_K(S)) - n\eta \sum_{k=1}^K \frac{\pi_k}{\pi_k^d} t_k(S) \begin{cases} > C/(h_M n^\gamma), & \text{if } t_1(S) = 1; \\ < -C/(h_M n^\gamma), & \text{if } t_1(S) \leq 1 - 1/n^{\gamma-\tau}. \end{cases}$$

So we have

$$\hat{\psi}(S) \begin{cases} > r^d(S)C/(h_M n^\gamma), & \text{if } t_1 = 1; \\ < -r^d(S)C/(h_M n^\gamma), & \text{if } t_1 \leq 1 - 1/n^{\gamma-\tau}. \end{cases}$$

with sufficiently large n . To maximize $\hat{\psi}(S)$, t_1 must be bigger than $1 - 1/n^{\gamma-\tau}$. If $r^d(S) > \hat{\pi}_1^d + \hat{\pi}_1^d/(n^{\gamma-\tau} - 1)$, then $t_1 \leq \hat{\pi}_1^d / r^d(S) < 1 - 1/n^{\gamma-\tau}$. So we must have $r^d(S) \leq \hat{\pi}_1^d + \hat{\pi}_1^d/(n^{\gamma-\tau} - 1)$. If $r^d(S) \leq \hat{\pi}_1^d - \hat{\pi}_1^d \log n / n^{\alpha-2\delta-\gamma}$ and $\hat{\pi}_1^d \gtrsim n^{-\delta}$, by Lemma 7.6 we have

$$\begin{aligned} \hat{\psi}(G_1) - \hat{\psi}(S) & \geq (\hat{\pi}_1^d - r^d(S)) \left(f(1, 0, \dots, 0) - n\eta \frac{\pi_1}{\pi_1^d} \right) \\ & \geq \hat{\pi}_1^d \frac{\log n}{n^{\alpha-2\delta-\gamma}} \left(f(1, 0, \dots, 0) - n\eta \frac{\pi_1}{\pi_1^d} \right) \gtrsim \frac{\log n}{n^{\alpha-\delta}}. \end{aligned}$$

Since $r^d(S) = \sum_{k=1}^K r_k(S) \pi_k^d / \pi_k \gtrsim 1/n^\delta$ and $\pi_1^d \gtrsim 1/n^\delta$, then with probability at least $1 - 2Kn^{-2}$ we have

$$\hat{\psi}(G_1) - \hat{\psi}(S) \begin{cases} \gtrsim \frac{\log n}{n^{\alpha-\delta}}, & \text{if } r^d(S) \leq \hat{\pi}_1^d - \frac{\hat{\pi}_1^d \log n}{n^{\alpha-2\delta-\gamma}} \\ \gtrsim \frac{C}{n^{\gamma+\delta}}, & \text{if } t_1(S) \leq 1 - 1/n^{\gamma-\tau} \end{cases}$$

So with probability at least $1 - 2Kn^{-2} - 2^{n+2}/n^n$, $\psi(S) < \psi(G_1)$ for all S satisfying $r^d(S) \leq \hat{\pi}_1^d - \hat{\pi}_1^d \log n / n^{\alpha-2\delta-\gamma}$ or $t_1(S) \leq 1 - 1/n^{\gamma-\tau}$, which implies that $\psi(S)$ maximizes when $t_1(S) \geq 1 - 1/n^{\gamma-\tau}$ and $\hat{\pi}_1^d - \hat{\pi}_1^d \log n / n^{\alpha-2\delta-\gamma} \leq r^d(S) \leq \hat{\pi}_1^d + \hat{\pi}_1^d / (n^{\gamma-\tau} - 1)$ with probability at least $1 - 2Kn^{-2} - 2^{n+2}/n^n$. Since $t_1(S) = r_1^d(S)/r^d(S)$, we therefore have $\hat{\pi}_1^d - \hat{\pi}_1^d \log n / n^{\alpha-2\delta-\gamma} \leq r_1^d(S)/t_1(S) \leq \hat{\pi}_1^d + \hat{\pi}_1^d / (n^{\gamma-\tau} - 1)$, and hence $(1 - 1/n^{\gamma-\tau})\hat{\pi}_1 (1 - \log n / n^{\alpha-2\delta-\gamma}) \leq r_1(S) \leq \hat{\pi}_1 t_1(S) n^{\gamma-\tau} / (n^{\gamma-\tau} - 1)$. From $t_1(S) \leq 1 - 1/n^{\gamma-\tau}$, we get $h_1 h_M^{-1} (r(S) - r_1(S)) / r(S) \leq (r^d(S) - r_1^d(S)) / r^d(S) \leq 1/n^{\gamma-\tau}$ and $r_1(S)/r(S) \geq 1 - h_M h_1^{-1} / n^{\gamma-\tau}$. Note that $r_1(S)/\hat{\pi}_1 = |S \cap G_1|/|G_1|$ and $r_1(S)/r(S) = |S \cap G_1|/|S|$. Therefore, with probability at least $1 - 2Kn^{-2} - 2^{n+2}/n^n$, we have

$$\frac{|S \Delta G_1|}{|S \cup G_1|} \leq 2h_M h_1^{-1} / n^{\gamma-\tau} + \log n / n^{\alpha-2\delta-\gamma}. \quad (16)$$

□

The proof of Theorem 3.2 is very similar to the proof of Theorem 3.1 and we omit it. The only difference is that we have to pay attention to the outlier community. For example, in the proof of Lemma 7.4, the inequality (13) becomes $\mathbb{E}(W(S)|\mathbf{c}) \gtrsim n^{1+2\alpha} \log n \sum_{k=1}^{K-1} (r_k^d(S))^2$. Then, using the condition $|G_K|^2/K = o(n^{2-2\delta})$, we can also get $\mathbb{E}(W(S)|\mathbf{c}) \gtrsim n^{1+2(\alpha-\delta)} \log n$ and hence the conclusion of Lemma 7.4 also holds for DCSBM with outliers.

References

- Amini, A. A., A. Chen, P. J. Bickel, and E. Levina (2013). Pseudo-likelihood methods for community detection in large sparse networks. *The Annals of Statistics* 41(4), 2097–2122.
- Balakrishnan, S., M. Xu, A. Krishnamurthy, and A. Singh (2011). Noise thresholds for spectral clustering. *In Advances in Neural Information Processing Systems*, 954–962.

- Bickel, P. J. and A. Chen (2009). A nonparametric view of network models and Newman–Girvan and other modularities. *Proceedings of the National Academy of Sciences* 106(50), 21068–21073.
- Bickel, P. J., D. Choi, X. Chang, and H. Zhang (2013). Asymptotic normality of maximum likelihood and its variational approximation for stochastic blockmodels. *The Annals of Statistics* 41(4), 1922–1943.
- Cai, T. and X. Li (2015). Robust and computationally feasible community detection in the presence of arbitrary outlier nodes. *The Annals of Statistics* 43(3), 1027–1059.
- Chaudhuri, K., F. C. Graham, and A. Tsiatas (2012). Spectral clustering of graphs with general degrees in the extended planted partition model. *Journal of Machine Learning Research* 35, 1–23.
- Choi, D., P. Wolfe, and E. Airoldi (2012). Stochastic blockmodels with a growing number of classes. *Biometrika* 99(2), 273–284.
- Chung, F. R. (1997). *Spectral Graph Theory*, Volume 92. American Mathematical Soc.
- Decelle, A., F. Krzakala, C. Moore, and L. Zdeborová (2011). Asymptotic analysis of the stochastic block model for modular networks and its algorithmic applications. *Physical Review E* 84(6), 66–106.
- Fortunato, S. and M. Barthélemy (2007). Resolution limit in community detection. *Proceedings of the National Academy of Sciences* 104(1), 36–41.
- Füredi, Z. and J. Komlós (1981). The eigenvalues of random symmetric matrices. *Combinatorica* 1(3), 233–241.

- Hagen, L. and A. B. Kahng (1992). New spectral methods for ratio cut partitioning and clustering. *IEEE Transactions on Computer-aided Design of Integrated Circuits and Systems* 11(9), 1074–1085.
- Hoeffding, W. (1963). Probability inequalities for sums of bounded random variables. *Journal of the American Statistical Association* 58(301), 13–30.
- Holland, P., K. Laskey, and S. Leinhardt (1983). Stochastic blockmodels: First steps. *Social Networks* 5(2), 109–137.
- Jin, J. (2015). Fast community detection by SCORE. *The Annals of Statistics* 43(1), 57–89.
- Joseph, A. and B. Yu (2016). Impact of regularization on spectral clustering. *The Annals of Statistics* 44(4), 1765–1791.
- Karrer, B. and M. E. J. Newman (2011). Stochastic blockmodels and community structure in networks. *Physical Review E* 83(1), 16–107.
- Khorasgani, R., J. Chen, and O. Zaiane (2010). Top leaders community detection approach in information networks. In *4th SNA-KDD workshop on social network mining and analysis*.
- Kim, S. and T. Shi (2012). Scalable spectral algorithms for community detection in directed networks. *arXiv preprint arXiv:1211.6807*.
- Kumar, R., J. Novak, and A. Tomkins (2010). Structure and evolution of online social networks. In *Link Mining: Models, Algorithms, and Applications*, 337–357.

- Lancichinetti, A., F. Radicchi, J. J. Ramasco, and S. Fortunato (2011). Finding statistically significant communities in networks. *PLOS ONE* 6(4), e18961.
- Lei, J. and A. Rinaldo (2015). Consistency of spectral clustering in stochastic block models. *The Annals of Statistics* 43(1), 215–237.
- Leskovec, J., K. J. Lang, A. Dasgupta, and M. W. Mahoney (2008). Statistical properties of community structure in large social and information networks. *In Proceedings of the 17th international conference on World Wide Web*, 695–704.
- Mariadassou, M., S. Robin, and C. Vacher (2010). Uncovering latent structure in valued graphs: a variational approach. *The Annals of Applied Statistics* 4(2), 715–742.
- Newman, M. E. J. (2004a). Coauthorship networks and patterns of scientific collaboration. *Proceedings of the National Academy of Sciences* 101(suppl 1), 5200–5205.
- Newman, M. E. J. (2004b). Fast algorithm for detecting community structure in networks. *Physical Review E* 69(6), 66–133.
- Newman, M. E. J. (2006). Modularity and community structure in networks. *Proceedings of the National Academy of Sciences* 103(23), 8577–8582.
- Newman, M. E. J. and M. Girvan (2004). Finding and evaluating community structure in networks. *Physical Review E* 69(2), 26–113.
- Nowicki, K. and T. Snijders (2001). Estimation and prediction for stochastic blockstructures. *Journal of the American Statistical Association* 96(455), 1077–1087.
- Rohe, K., S. Chatterjee, and B. Yu (2011). Spectral clustering and the high-dimensional stochastic blockmodel. *The Annals of Statistics* 39(4), 1878–1915.

- Shi, J. and J. Malik (2000). Normalized cuts and image segmentation. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 22(8), 888–905.
- Wang, M., C. Wang, J. X. Yu, and J. Zhang (2015). Community detection in social networks: an in-depth benchmarking study with a procedure-oriented framework. *Proceedings of the VLDB Endowment* 8(10), 998–1009.
- Wei, Y. C. and C. K. Cheng (1989). Towards efficient hierarchical designs by ratio cut partitioning. In *1989 IEEE International Conference on Computer-Aided Design. Digest of Technical Papers*, 298–301.
- White, S. and P. Smyth (2005). A spectral clustering approach to finding communities in graph. In *SDM*, 76–84.
- Xu, X., N. Yuruk, Z. Feng, and T. A. Schweiger (2007). Scan: a structural clustering algorithm for networks. In *Proceedings of the 13th ACM SIGKDD international conference on Knowledge discovery and data mining*, 824–833.
- Yao, Y. Y. (2003). Information-theoretic measures for knowledge discovery and data mining. In *Entropy Measures, Maximum Entropy Principle and Emerging Applications*, 115–136.
- Yu, H. et al. (2008). High-quality binary protein interaction map of the yeast interactome network. *Science* 322(5898), 104–110.
- Zhao, Y., E. Levina, and J. Zhu (2011). Community extraction for social networks. *Proceedings of the National Academy of Sciences* 108(18), 7321–7326.
- Zhao, Y., E. Levina, and J. Zhu (2012). Consistency of community detection in networks

under degree-corrected stochastic block models. *The Annals of Statistics* 40(4), 2266–2292.