

A slightly smaller surface code S gate

Craig Gidney and Austin Fowler

Google, Santa Barbara, CA 93117, USA

February 26, 2022

We cut the volume of surface code S gates by 25% by omitting a Hadamard gate. See [Figure 1](#).

A wide range of qubit technologies have the potential to implement a 2D array of nearest-neighbor coupled qubits [2, 6, 7, 10, 11]. Given such a 2D array, the surface code [3, 4, 8, 9, 5] has the highest known threshold error rate of approximately 1%. Experiments have yet to yield scalable devices with a set of sufficiently low error quantum gates to implement the surface code, and other codes that work in 2D typically have a threshold error rate an order of magnitude lower [12]. It is unclear whether gates with sufficiently low error rates to use any code other than the surface code will ever exist. Therefore, any techniques that make implementing a surface code quantum computer even a little easier deserve to be made public. It is in this spirit that we make this little note available. See [Figure 1](#), [Figure 2](#), [Figure 3](#).

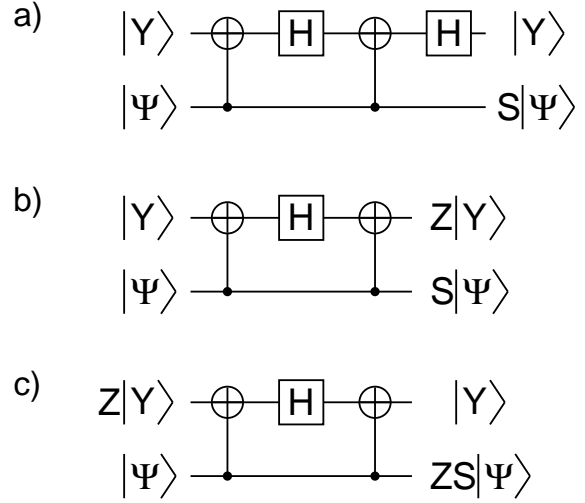


Figure 1: Using the ancilla state $|Y\rangle = \frac{1}{\sqrt{2}}(|0\rangle + i|1\rangle)$ to apply an S gate. a) Previous S gate circuit [1], which used a Hadamard gate to correct a phase-flip of the $|Y\rangle$ state. b–c) New circuit, which simply allows the phase-flip to happen. Unwanted Pauli operators are tracked and corrected in software.

References

- [1] P. Aliferis, D. Gottesman, and J. Preskill. Quantum accuracy threshold for concatenated distance-3 codes. *Quant. Info. Comp.*, 6:97–165, 2006. quant-ph/0504218.
- [2] R. Barends, J. Kelly, A. Megrant, A. Veitia, D. Sank, E. Jeffrey, T. C. White, J. Mutus, A. G. Fowler, B. Campbell, Y. Chen, Z. Chen, B. Chiaro, A. Dunsworth, C. Neill, P. O’Malley, P. Roushan, A. Vainsencher, J. Wenner, A. N. Korotkov, A. N. Cleland, and John M. Martinis. Superconducting quantum circuits at the surface code threshold for fault tolerance. *Nature*, 508:500–503, 2014. arXiv:1402.4848.
- [3] S. B. Bravyi and A. Yu. Kitaev. Quantum codes on a lattice with boundary. *quant-ph/9811052*, 1998.

Craig Gidney: craiggidney@google.com

Austin Fowler: agfowler@google.com

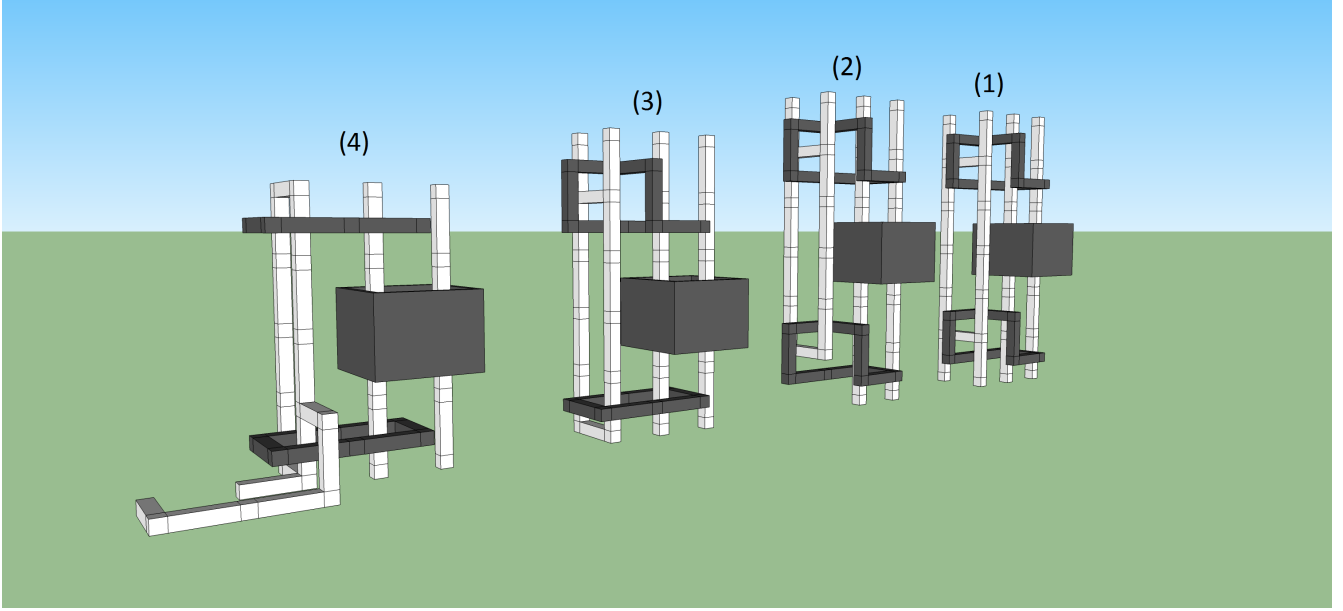


Figure 2: Topological quantum error correction protected version of copying a $|Y\rangle$ state. 1) The structure labelled (1) most closely resembles Figure 1, with inputs at the bottom and outputs at the top. The rightmost two vertical white columns represent the $|Y\rangle$ state, the leftmost two a $|+\rangle$ state. The two dark rings are CNOTs, the dark box a Hadamard gate. 2) Since this is topological quantum error correction, the legs corresponding to $|+\rangle$ state initialization actually achieve nothing and can be removed. 3) Bottom CNOT has been untwisted and flattened 4) Outputs have been dragged down to the bottom of the structure to enable repeated copying.

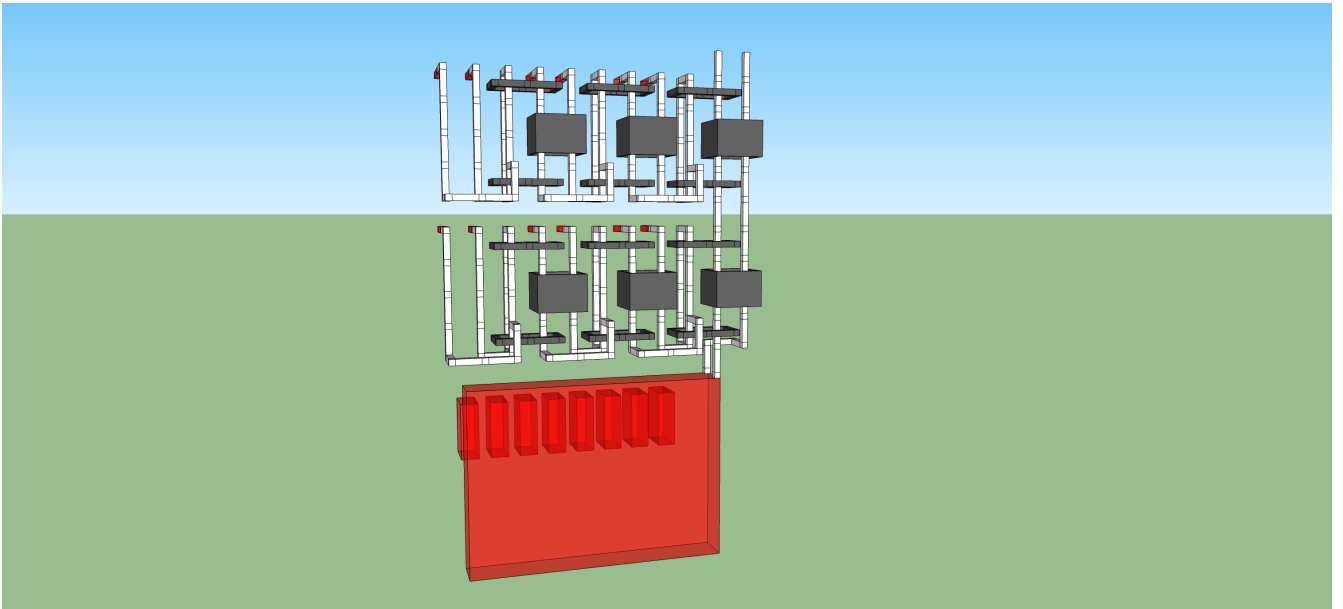


Figure 3: The red translucent structure represents two levels of state distillation producing a single $|Y\rangle$ state. This state is then copied 6 times, permitting these copies to be consumed during computation, each consumption enabling an S gate. This involves nothing more than connecting the rails of a $|Y\rangle$ state to the rails of a data logical qubit.

- [4] E. Dennis, A. Kitaev, A. Landahl, and J. Preskill. Topological quantum memory. *J. Math. Phys.*, 43:4452–4505, 2002. quant-ph/0110143.
- [5] A. G. Fowler, M. Mariantoni, J. M. Martinis, and A. N. Cleland. Surface codes: Towards practical large-scale quantum computation. *Phys. Rev. A*, 86:032324, 2012. arXiv:1208.0928.
- [6] M. Steffen J. M. Gambetta, J. M. Chow. Building logical qubits in a superconducting quantum computing system. *npj Quantum Information*, 3(2), 2017. arXiv:1510.04375.
- [7] B. Lekitsch, S. Weidt, A. G. Fowler, K. Mølmer, S. J. Devitt, C. Wunderlich, and W. K. Hensinger. Blueprint for a microwave trapped-ion quantum computer. *Science Advances*, 3(2):e1601540, 2017. arXiv:1508.00420.
- [8] R. Raussendorf and J. Harrington. Fault-tolerant quantum computation with high threshold in two dimensions. *Phys. Rev. Lett.*, 98:190504, 2007. quant-ph/0610082.
- [9] R. Raussendorf, J. Harrington, and K. Goyal. Topological fault-tolerance in cluster state quantum computation. *New J. Phys.*, 9:199, 2007. quant-ph/0703143.
- [10] Malte Schlosser, Sascha Tichelmann, Jens Kruse, and Gerhard Birkel. Scalable architecture for quantum information processing with atoms in optical micro-structures. *Quantum Information Processing*, 10(6):907, 2011. 1108.5136.
- [11] J. K. Pachos V. Lahtinen. Introduction to topological quantum computation. *arXiv:1705.04103*, 2017.
- [12] D. S. Wang, A. G. Fowler, C. D. Hill, and L. C. L. Hollenberg. Graphical algorithms and threshold error rates for the 2d colour code. *Quant. Info. Comp.*, 10:780, 2010. arXiv:0907.1708.