

Eccentricity effects on blur and depth perception

QI SUN,¹ FU-CHUNG HUANG,² LI-YI WEI,¹ DAVID LUEBKE,² ARIE KAUFMAN,³ AND JOOHWAN KIM^{2,*}

¹Adobe Research, Adobe Inc., San Jose, CA 95110, USA

²NVIDIA Research, NVIDIA Corporation, Santa Clara, CA 95051, USA

³Department of Computer Science, Stony Brook University, Stony Brook, NY 11794, USA

*sckim@nvidia.com

Abstract: Foveation and focus cue are the two most discussed topics on vision in designing near eye displays. Foveation reduces rendering load by omitting spatial details in the content that the peripheral vision cannot appreciate; Providing richer focal cue can resolve vergence-accommodation conflict thereby lessening visual discomfort in using near eye displays. We performed two psychophysical experiments to investigate the relationship between foveation and focus cue. The first study measured blur discrimination sensitivity as a function of visual eccentricity, where we found discrimination thresholds significantly lower than previously reported. The second study measured depth discrimination threshold where we found a clear dependency on visual eccentricity. We discuss the results from the two studies and suggest further investigation.

© 2022 Optical Society of America under the terms of the [OSA Open Access Publishing Agreement](#)

1. Introduction

The density of retinal ganglion cells is highest in the fovea and monotonically decreases towards the periphery, causing high spatial-resolution only in the center of the visual field [1]. This visual effect has been harnessed by gaze-contingent (foveated) computer rendering [2, 3] and imaging [4] techniques. These foveation methods are designed for displays with fixed focal distances, such as desktop monitors, or stereo displays which offer binocular depth cues. In the natural world, however, objects appear at different depths. Even without stereo, the monocular eye can discriminate depths by re-focusing (accommodation). During this process, we perceive depth by comparing blur differences [5]. Lack of accommodation depth cue may cause vergence-accommodation conflicts for binocular viewing, such as VR/AR head-mounted displays. The conflict can be reduced by a variety of optical, display, and computation systems [6, 7], such as single movable focal plane, multiple fixed focal planes, or light fields [8]. These systems may require mechanical movements (e.g., movable focal plane(s) [9]), optical components (e.g., multiple focal planes [10]), or extra computation (e.g., light field rendering that causes latency).

Since defocus blur provided by these displays is a key cue for monocular depth perception [11] and influence vergence-accommodation conflict in binocular vision, in this paper, we ask: *when viewed monocularly, do optical blur and depth perception show similar eccentricity effect as spatial resolution across the visual field?* To help answer this question, we conducted psychophysical experiments under two display systems. First, we measured the sensitivity of human viewers to the change in optical blur. We found that the discrimination threshold varied significantly across individuals. The measured thresholds were significantly lower than previously reported. Second, we used a light field display (that can generate accurate and natural retinal blur without extra lens) [8] to measure depth discrimination threshold, which increased as a function of visual eccentricity. Interestingly, depth discrimination threshold changed more systematically with eccentricity than blur discrimination threshold did. We discuss the discrepancy between blur and depth discrimination and suggest future research.

2. Blur discrimination and visual eccentricity

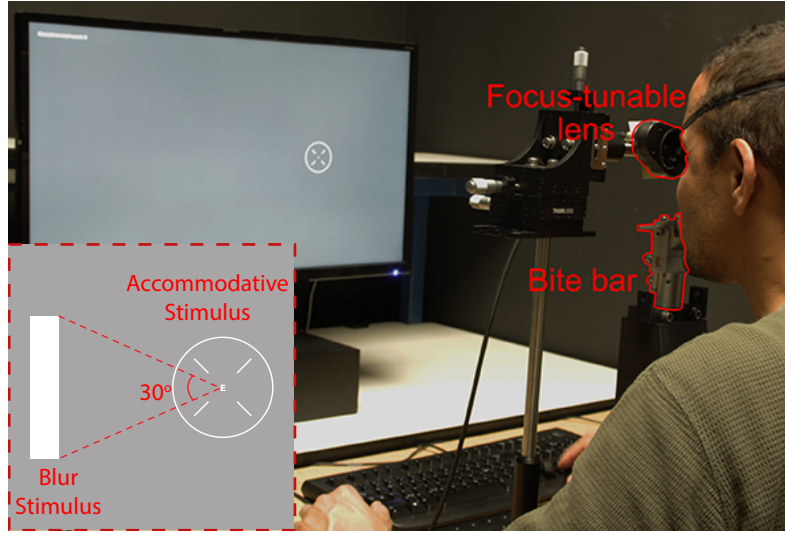


Fig. 1. Blur perception study setup and a sampled stimulus (see [Visualization 1](#)).

Wang and Ciuffreda [12] measured the thresholds of blur detection (noticing blur) and discrimination (differentiating between blur sizes) at various visual eccentricities from fovea to 8 deg. The thresholds increased monotonically along with eccentricity for both detection ($0.53D \rightarrow 1.25D$) and discrimination ($0.29D \rightarrow 0.72D$). Ronchi and Molesini [13] also measured blur detection threshold at farther eccentricities, where it increased from 2 to 5 D at 7 deg of eccentricity to 7 to 12 D at 60 deg of eccentricity. The monotonic increases suggests that we may only weakly perceive blur and depth at far periphery.

We note the wide disagreement in measured thresholds at 7 - 8 deg of eccentricity between the two studies and measure the blur detection and discrimination thresholds from fovea to periphery (at 0, 5, 10, and 15 deg of visual eccentricities).

Setup The setup is photographed in Fig. 1. Blur pedestals (the baseline for discrimination tasks) of -2 , -1 , 0 , 1 , and $2D$ were tested across eccentricities. The stimulus was presented on an LCD display (Acer XB270HU, 2560×1440 resolution, $144Hz$ refresh rate) located at 80 cm away from the viewer, where the central pixel subtended 1 arcmin from the eye. A focus-tunable lens (Optotune, EL-16-40-TC, response time $30ms$), placed before one eye of the subject (the other covered by mask), controlled the focal distance of the stimulus. The field of view (FoV) provided by the lens subtended 25 deg in diameter. A bite bar was used to precisely position the viewer at the desired location.

Calibration Every subject went through a calibration procedure before starting the experiment. We first measured the far point of accommodation by using a tumbling E test [14] and a staircase procedure [15]. Second, we quantified scaling and translation caused by the change in lens focal power using alignment tasks. These two calibration steps let us present stimuli accurately in terms of focal power, visual size, and location in the visual field.

Stimuli As shown in the bottom left inset of Fig. 1, the visual stimulus for blur detection/discrimination was a bright rectangle ($100cd/m^2$) drawn on a dark background ($20cd/m^2$).

The size of the foveal rectangle was $0.16 (W) \times 0.8 (H)$ deg. The peripheral rectangles scaled linearly with visual eccentricity: $0.04E (W) \times 0.2E (H)$ deg, where E is the visual eccentricity in deg. The focus-tunable lens operated with the display to introduce defocus blur to the rectangles. The presentation time for the rectangle was 0.3 sec, short enough to prevent human refocus (0.3 – 0.4 sec according to [16]).

The rectangle appeared twice in a random sequential order with different amounts of blur; one with pedestal blur serving as a reference (or no blur for detection) and the other with blur greater or less than pedestal serving as a test signal. We define the difference between pedestal and test blurs as the differential blur. The magnitude of differential blur was adapted based on the 1-up 2-down staircase method with the minimum step size of $0.1D$. The two stimuli were separated by 0.5 sec in time. A fixation target (the letter “E” in the circle as marked in Fig. 1) was presented before, between, and after the two blur discrimination stimuli to keep subjects’ accommodative state constant. inserted for 0.5 sec between the two intervals to discourage subjects from accommodating to the stimulus. The task was a 2-alternative-forced-choice: subjects had to choose the one that appeared blurrier even if they were not sure.

More than 100 trials were executed per each combination of blur pedestal and visual eccentricity. The total duration, including calibration, training, and breaks, was about 6 hours. A capture of the study can be seen from [Visualization 1](#).

Subjects Four subjects, aged 31 to 48, participated. All subjects had normal or corrected-to-normal visual acuity. One was an author. The other three were unaware of the experimental hypothesis. All subjects provided written consent, and the experiment was conducted in accordance with the Declaration of Helsinki.

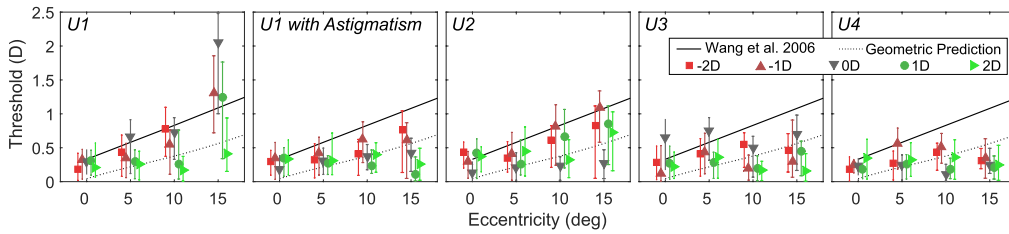


Fig. 2. Blur study results. The Figs. plot the blur detection/discrimination thresholds as a function of eccentricity and pedestal/baseline blur ($-2, -1, 0, 1, 2D$) for four subjects. X-axis represents retinal eccentricity in degree. Y-axis represents measured thresholds in diopter. Each vertical bar indicates the 75% performance level centered at a 95% confidence interval. See [Data File 1](#) for underlying values.

Results As in Fig. 2, the Y-axis represents blur discrimination thresholds. Each symbol indicates the 75% performance level centered at a 95% confidence interval. We define 75% performance level as the threshold, which is halfway between random guess (there were two choices) and being perfect. We estimated the threshold by fitting a cumulative Gaussian function to the performance curve drawn as a function of differential blur sizes [17]. Specifically, we estimate participants’ performance levels as a function of the added blur magnitude.

The experimental results are plotted in Fig. 2, where pedestal blur is color coded. Note that 0D pedestal means detection. The dashed black line shows geometrically estimated detection thresholds by considering a cylindrical blur kernel, a 5mm pupil and anatomical ganglion cell densities from [18]. The solid black line shows the prediction curve suggested by [12]. Both lines are for theoretical comparison with our data. The results show three observations. First, the thresholds increased along with eccentricity for some subjects but not all; the values from two

subjects (U3 and U4) remained nearly constant and below the theoretical predictions at farther eccentricities. Second, correction for astigmatism of one subject (U1, astigmatism = $-1.25D$ at 8 deg) did not significantly improve, if not reduced, sensitivity to blur. Third, varying pedestals sometimes yielded large threshold differences at the same eccentricity, although the hypothesis is a negative correlation [12]. This may be attributable to individual differences such as peripheral refractive state [19].

3. Depth perception and visual eccentricity

We perceive depth using various visual cues where blur is [20] one of them. Here we measured depth discrimination thresholds. We presented the stimulus on a 4D light field display, which can vary the intensity of light not only spatially but also angularly [21, 22].

Setup Figure 3 shows the study setup. We used a parallax-barrier-based [21] ($300\mu m$ pitch size and $120\mu m$ pinhole aperture) light field display prototype built with off-the-shelf components ([8]). The display panels were built by horizontally tiling three 5.98-inch 2K panels (Topfison TF60006A) and a 3D printed housing. It supports 3.2 views/deg angular and 579×333 spatial resolutions. Comparing with the designs suggested by previous literature [23, 24], the display maintains high angular resolution to provide precise accommodation to validate our study result.


During the study, subjects remained seated at 30cm (15 deg FoV) from the display with their non-dominant eye occluded. A chinrest was used to precisely control the viewing distance. In this configuration, each pixel in the light field display provides two views both horizontally and vertically for the smallest pupil (2mm in diameter).

Stimuli The bottom inset in Fig. 3(b) shows a sampled stimulus. The subjects were instructed to fixate on the fixation target. The fixation target at $3.2D$ was a small green square, which remained at the screen center to fix subjects' gaze and focal distance. On the side were two depth discrimination targets with broadband binary Voronoi diagrams textures on them. The test targets were two vertically elongated rectangles rendered side-by-side with a small 2.5mm gap to avoid cues from occlusion while keeping their eccentricities close to the tested condition. To avoid size cue, we dynamically rescaled the sizes of the test targets based on their depths so that they always appear the same size in visual angle. Subjects were instructed to keep watching the fixation target during the entire study.


The two targets appeared at one of 8 eccentricities from the fovea to 15 deg. We used the method of adjustment to measure the depth detection thresholds. At the beginning of each trial, the two test targets were positioned at the same depth as the fixation ($3.2D$). Then, subjects pressed up/down arrow buttons to increase/decrease the two targets' depth separations until reaching the thresholds where they perceive the relative depths. A warning appeared when the depth disparity reached 0 or the hardware limit. We ran 4 trials for each eccentricity. All conditions were randomized. A capture of the study can be seen from [Visualization 2](#).

Subjects Four subjects, aged 23 to 46, participated. One was an author. The other three were unaware of the experimental hypothesis.

Results Figure 4 plots the mean thresholds with standard deviation. All subjects showed consistent trend of increasing depth detection thresholds as eccentricity grows. We observed less degree of individual differences than we did in the first experiment on blur discrimination.

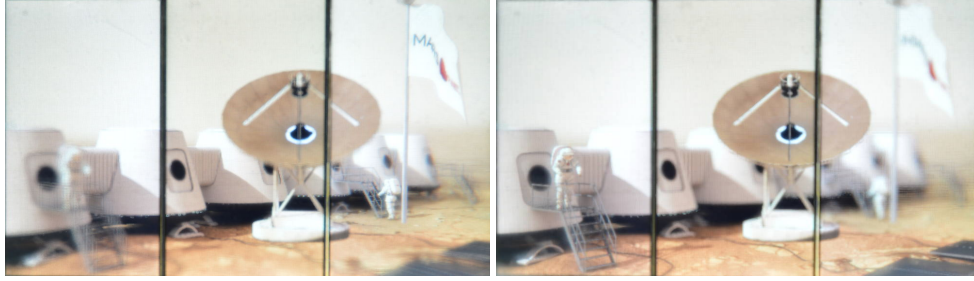

(a) defocus

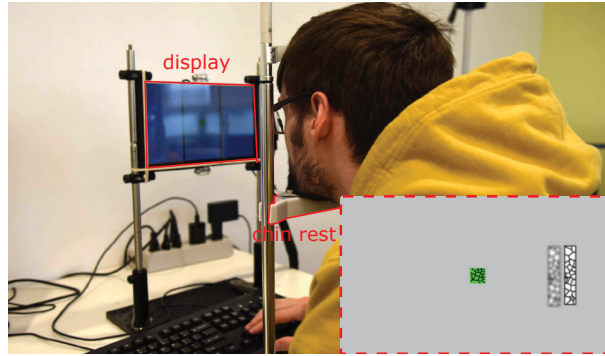

(b) setup and stimuli

Fig. 3. Depth perception study design. (a) shows simulated retinal images via DLSR camera capturing the display [8]. The camera lens focus changed from far (left) to near (right) depth. (b) shows the study setup. The bottom inset shows a simulated retinal image from the stimuli. The green object is the fixation; the other two are the test targets (see [Visualization 2](#)).

4. Discussion

We found that blur discrimination threshold is significantly lower than previously reported. There two notable differences between our methods and those used previously. First, we used two alternative forced choice task, which might have helped subjects with performing at their best, where previous studies used method of adjustment. Second, our subjects used their habitual optical correction where previous studies had paralyzed subjects' accommodation with treatment [12]. We may discern the difference in blur better when harnessed with natural accommodative mechanisms.

Nonetheless, the blur discrimination threshold reported in this study was surprisingly small. The geometrical calculation suggests that we can even discern the differences smaller than the spacing between retinal ganglion cells. Further investigation to clarify the mechanism for blur detection and discrimination will be beneficial.

Computational displays with depth cues and fast response time can benefit a variety of applications, such as in VR/AR and automotive assistance. To save computation like in resolutional foveation, we could leverage the consistently reduced monocular depth perception at larger eccentricity (Fig. 4). However, we could yet do so for the commonly considered root cause, defocus blur. The blur perception thresholds from optical stimulus (Fig. 2) show that some individuals retain high blur sensitivity as far as 15 deg, with the minimum threshold down to 0.2D. The different trends discovered from our two studies suggest that future research should analyze the whole retina-lens-display system: not only the optical/anatomical low-level vision

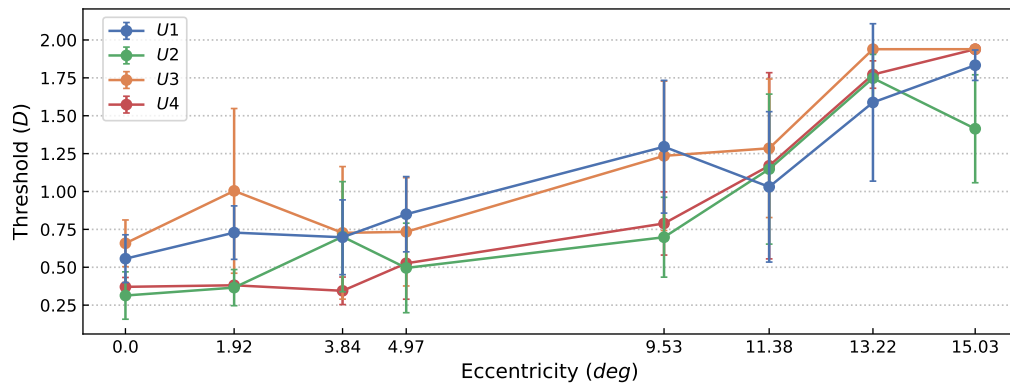


Fig. 4. The result of depth detection thresholds (Y) against eccentricity (X). See [Data File 2](#) for underlying values.

but also the visual cortex processing.

Funding

This work has been partially supported by National Science Foundation grants IIP1069147, CNS1302246, NRT1633299, CNS1650499, and Hong Kong RGC general research fund 17202415.

Disclosures

The authors declare no conflicts of interest.

References

1. M. Kwon and R. Liu, "Linkage between retinal ganglion cell density and the nonuniform spatial integration across the visual field," *Proc. Natl. Acad. Sci.* **116**, 3827–3836 (2019).
2. B. Guenter, M. Finch, S. Drucker, D. Tan, and J. Snyder, "Foveated 3d graphics," *ACM Trans. Graph.* **31**, 164:1–164:10 (2012).
3. A. Patney, M. Salvi, J. Kim, A. Kaplanyan, C. Wyman, N. Bentley, D. Luebke, and A. Lefohn, "Towards foveated rendering for gaze-tracked virtual reality," *ACM Trans. Graph.* **35**, 179:1–179:12 (2016).
4. G. Tan, Y.-H. Lee, T. Zhan, J. Yang, S. Liu, D. Zhao, and S.-T. Wu, "Foveated imaging for near-eye displays," *Opt. Express* **26**, 25076–25085 (2018).
5. S. A. Cholewiak, G. D. Love, and M. S. Banks, "Creating correct blur and its effect on accommodation," *J. vision* **18**, 1–1 (2018).
6. G. Tan, T. Zhan, Y.-H. Lee, J. Xiong, and S.-T. Wu, "Polarization-multiplexed multiplane display," *Opt. Lett.* **43**, 5651–5654 (2018).
7. T. Zhan, Y.-H. Lee, and S.-T. Wu, "High-resolution additive light field near-eye display by switchable pancharatnam-berry phase lenses," *Opt. Express* **26**, 4863–4872 (2018).
8. Q. Sun, F.-C. Huang, J. Kim, L.-Y. Wei, D. Luebke, and A. Kaufman, "Perceptually-guided foveation for light field displays," *ACM Trans. Graph.* **36**, 192:1–192:13 (2017).
9. N. Padmanaban, R. Konrad, T. Stramer, E. A. Cooper, and G. Wetzstein, "Optimizing virtual reality for all users through gaze-contingent and adaptive focus displays," *Proc. Natl. Acad. Sci.* **114**, 2183–2188 (2017).
10. T. Zhan, J. Zou, M. Lu, E. Chen, and S.-T. Wu, "Wavelength-multiplexed multi-focal-plane seethrough near-eye displays," *Opt. Express* **27**, 27507–27513 (2019).
11. J. Read, "Visual perception: Understanding visual cues to depth," *Curr. Biol.* **22**, R163 – R165 (2012).
12. B. Wang, K. J. Ciuffreda, and T. Irish, "Equiblur zones at the fovea and near retinal periphery," *Vis. Res.* **46**, 3690 – 3698 (2006).
13. L. Ronchi and G. Molesini, "Depth of focus in peripheral vision," *Ophthalmic Res.* **7**, 152–157 (1975).
14. H. R. Taylor, "Applying new design principles to the construction of an illiterate e chart," *Optom. & Vis. Sci.* **55**, 348–351 (1978).
15. H. Levitt, "Transformed up-down methods in psychoacoustics," *The J. Acoust. society Am.* **49**, 467–477 (1971).

16. F. Campbell and G. Westheimer, "Dynamics of accommodation responses of the human eye," *The J. physiology* **151**, 285–295 (1960).
17. H. H. Schütt, S. Harmeling, J. H. Macke, and F. A. Wichmann, "Painfree and accurate bayesian estimation of psychometric functions for (potentially) overdispersed data," *Vis. Res.* **122**, 105–123 (2016).
18. A. B. Watson, "A formula for human retinal ganglion cell receptive field density as a function of visual field location," *J. Vis.* **14**, 15 (2014).
19. A. Seidemann, F. Schaeffel, A. Guirao, N. Lopez-Gil, and P. Artal, "Peripheral refractive errors in myopic, emmetropic, and hyperopic young subjects," *J. Opt. Soc. Am. A* **19**, 2363–2373 (2002).
20. R. T. Held, E. A. Cooper, and M. S. Banks, "Blur and disparity are complementary cues to depth," *Curr. Biol.* **22**, 426–431 (2012).
21. F. E. Ives, "A novel stereogram," *J. Frankl. Inst.* **153**, 51 – 52 (1902).
22. D. Lanman and D. Luebke, "Near-eye light field displays," *ACM Trans. Graph.* **32**, 220:1–220:10 (2013).
23. Y. Takaki, "High-density directional display for generating natural three-dimensional images," *Proc. IEEE* **94**, 654–663 (2006).
24. F.-C. Huang, K. Chen, and G. Wetzstein, "The light field stereoscope: Immersive computer graphics via factored near-eye light field displays with focus cues," *ACM Trans. Graph.* **34**, 60:1–60:12 (2015).