

DAGGER: a sequential algorithm for FDR control on DAGs

Aaditya Ramdas⁺, Jianbo Chen^{*}, Martin J. Wainwright^{*†}, Michael I. Jordan^{*†}

Department of Statistics and Data Science⁺, Carnegie Mellon

Departments of Statistics^{*} and EECS[†], University of California, Berkeley

aramdas@stat.cmu.edu, jianbochen@berkeley.edu

wainwrig, jordan@stat.berkeley.edu

August 31, 2021

Abstract

We propose a linear-time, single-pass, top-down algorithm for multiple testing on directed acyclic graphs (DAGs), where nodes represent hypotheses and edges specify a partial ordering in which hypotheses must be tested. The procedure is guaranteed to reject a sub-DAG with bounded false discovery rate (FDR) while satisfying the logical constraint that a rejected node’s parents must also be rejected. It is designed for sequential testing settings, when the DAG structure is known a priori, but the p -values are obtained selectively (such as in a sequence of experiments), but the algorithm is also applicable in non-sequential settings when all p -values can be calculated in advance (such as variable/model selection). Our **DAGGER** algorithm, shorthand for Greedily Evolving Rejections on DAGs, provably controls the false discovery rate under independence, positive dependence or arbitrary dependence of the p -values. The **DAGGER** procedure specializes to known algorithms in the special cases of trees and line graphs, and simplifies to the classical Benjamini-Hochberg procedure when the DAG has no edges. We explore the empirical performance of **DAGGER** using simulations, as well as a real dataset corresponding to a gene ontology, showing favorable performance in terms of time and power.

1 Introduction

Considerable effort in the field of multiple testing is devoted to incorporating prior knowledge and structural constraints into the testing procedure, in the form of covariates, weights, groupings of hypotheses, knowledge of dependence structures, and so on. In this paper, we consider a general setting in which nodes representing hypotheses are organized in a directed acyclic graph (DAG), where the directed edges encode a partial order in which the hypotheses must be tested. We present a sequential top-down algorithm called **DAGGER** that is designed to efficiently test hypotheses on such a DAG while providing false discovery rate (FDR) control.

Research on multiple testing on trees and DAGs is relatively recent. Meinshausen (2008) derived a method for familywise error rate (FWER) control on trees for hierarchical testing of variable importance, and Yekutieli (2008) presented a method for FDR control on trees (under independence) for multiresolution testing of quantitative trait loci. Goeman & Mansmann (2008) proposed an algorithm for FWER control on a DAG, applied to the gene ontology graph. This earlier work left open a fourth natural combination, which is FDR control on DAGs. Progress was

made by Lynch (2014), but the resulting algorithms had several limitations: they were quadratic-time, multi-pass algorithms that cannot handle arbitrary dependence between p -values. In the current paper we move beyond those limitations—we present a linear-time, single-pass algorithm that can handle any form of dependence. Moreover, based on experimental results, we find that our algorithm is more powerful than Lynch’s method.

The aforementioned gene ontology graph is an intersection DAG, where every node corresponds to an intersection of elementary hypotheses, and the intersection set of a parent node is a superset of the union of its children. Hence, the set of non-null hypotheses must satisfy the

Strong Heredity Principle: all parents of a non-null node are also non-null.

Logical constraints that hold in reality need not necessarily hold for the outputs of procedures such as the Benjamini-Hochberg or Bonferroni methods that control FDR or FWER. In order to impose such a logical structure on the output of a multiple-testing procedure, we must explicitly insist that the rejected hypotheses obey the constraints:

(C1). The rejected nodes must form a DAG (a subgraph of the original DAG).

(C2). All parents of a rejected node must themselves be rejected.

Of course condition (C2) implies condition (C1), but not vice versa, and we make the difference explicit to provide intuition.

While some multiple-testing problems are non-sequential in nature, meaning that all the p -values are available at once, we wish to consider the more general problem of sequential multiple testing on arbitrary DAGs (that need not be of the intersection type), where the p -values are not available all at once, but must be obtained in sequence, possibly at some cost. To summarize, let us isolate two distinct motivations for algorithms on DAGs :

(M1). A DAG can represent a partial ordering over a collection of hypotheses to be tested, where we first conduct tests at all the roots, and then proceed to test hypotheses selectively down the DAG depending on their outcomes. We can save resources by exploiting constraints (C1) and (C2), by not testing descendants of a node that is not rejected, while further exploring the subgraph of nodes that are rejected. At the end of the adaptive exploration process, we would like a guarantee that not too many rejected nodes are false discoveries.

(M2). A DAG can represent a structural constraint that one might desire for interpretability of the rejected set, even when the p -values at all nodes can be calculated offline from existing data and there is no sequential component to the problem. We encounter this setting when dealing with a gene ontology DAG later in this paper, which is an intersection DAG. Here, logical coherence would require that the underlying truth must satisfy both (C1) and (C2).

Under motivation (M1), the algorithm must be a single-pass and top-down algorithm, due to the nature of the investigative process. However, under motivation (M2), any top-down or bottom-up or combined algorithm would suffice, as long as the set of rejected nodes satisfies requirements (C1) and (C2). We remark that the Strong Hierarchy Principle represents a set of one-way constraints: a two-way constraint would further require that every rejected parent has at least one rejected child. Note that two-way constraints need not necessarily make sense

under motivation (M1); moreover, scientists having motivation (M2) may be interested in group-level findings even without individual-level identification. Accordingly, our analysis here focuses exclusively on one-way constraints.

In this paper, we design a top-down sequentially rejective algorithm called **DAGGER** for FDR control on DAGs. It was designed based on motivation (M1), but may naturally also be applied in situation (M2). Specifically, **DAGGER** can be run in a truly sequential fashion since it does not access child p -values when deciding whether to reject a parent or not. To the best of our knowledge, **DAGGER** is the first algorithm that, in either setting (M1) or setting (M2) is able to explicitly take into account the structure of the DAG, and can provably control FDR on general or intersection DAGs under a variety of dependence assumptions.

There are several special structures that are of relevance: a tree (with one root, L leaves, and each non-root node having at exactly one parent), a forest (a disjoint collection of trees), a line (with one root, one leaf, and each internal node having one parent and one child), and the empty graph (which corresponds to the standard unconstrained multiple testing problem). When applied to trees/forests, **DAGGER** specializes to the algorithm for FDR control on trees/forests introduced by Lynch et al. (2016); this algorithm in turn specializes to the algorithm for FDR control on a line by Lynch & Guo (2016), which in turn simplifies to the procedure by Benjamini & Hochberg (1995) on a graph without edges.

Lynch (2014) focuses on DAGs, and designs two new algorithms for DAGs, called BH-DAG and SCR-DAG. Although these provide FDR control on DAGs, they do not resolve the problems that we have captured in motivations (M1) and (M2). To elaborate, both methods are multi-pass and non-sequential, and hence cannot be used for adaptive experimentation under (M1). Further, they cannot deal with the arbitrary dependence between hypotheses under (M2) that arises, for example, in multiple testing on the gene ontology DAG.

There has been some work on online multiple testing for a fully ordered set of hypotheses. Rosenbaum (2008) proposed a sequential algorithm for FWER control. In parallel, Foster & Stine (2008) proposed online FDR algorithms called alpha-investing, which have been further studied and generalized by other researchers (Aharoni & Rosset, 2014; Javanmard & Montanari, 2018; Ramdas et al., 2017, 2018b). One may, somewhat arbitrarily, convert a partial ordering into a full ordering and then apply one of the above algorithms. Doing so ignores the structure of the partial ordering, however, leading to suboptimal performance in practice, as confirmed by our experiments. Further, none of these online FDR algorithms, with the exception of LORD, work under arbitrary dependence.

Fully-ordered testing algorithms have been derived for model selection by G'Sell et al. (2016), Barber et al. (2015) and Li & Barber (2017). The STAR algorithm of Lei et al. (2017), and its reversed counterpart in Katsevich & Ramdas (2018), extend these to the setting of partial orderings by utilizing user interaction. However, all these algorithms are inherently non-sequential (requiring all p -values up front) and also need independence of p -values, rendering them inapplicable under both motivations (M1) and (M2).

2 Problem setup and semantics

A directed acyclic graph (DAG) is a graph with directed edges and no directed cycles. We consider a DAG with N nodes, each representing one hypothesis associated with a single p -value. The hypothesis at a node may either correspond to (a) the intersection hypothesis of its

children; or (b) a separate, possibly unrelated hypothesis. A DAG where every node corresponds to the first type is called an intersection DAG. Our algorithms will apply to intersection DAGs as well as more general DAGs.

Let us call the N hypotheses H_1, \dots, H_N , and the set of all hypotheses as \mathcal{H} , and these are associated with corresponding p -values P_1, \dots, P_N . Naturally, when any of the hypotheses is a true null, we assume that its p -value is super-uniform, meaning that it satisfies the inequality

$$\Pr(P \leq t) \leq t \text{ for all } t \in [0, 1]. \quad (1)$$

We use the terms parent and child in the natural way: if $A \rightarrow B$ is an edge, then A is one of the parents of B , and B is one of the children of A . Nodes without parents are called roots, while nodes without children are called leaves, while internal nodes have both parents and children. Analogously, the ancestors of B refer to all nodes, including its parents, that may follow a directed path that leads to B , while the descendants of A refer to all nodes, including its children, that it may reach using a directed path. For the purposes of visualization, we imagine roots at the top, leaves at the bottom and all edges pointing downwards; we then use the term top-down to refer to calculations performed from roots to leaves, and bottom-up to mean the opposite.

We define the depth of a node a , denoted $\text{Depth}(a)$, in a top-down manner as the length of the longest path from any root to the node, plus one. All roots are initialized to have depth one. Any node that has all parents being roots has depth two, and so on recursively. Then, the depth of a node is always one larger than the maximum depth of any of its parents. More formally, using $\text{Par}(a)$ to refer to the parents of node a , we have

$$\text{Depth}(a) = 1 + \max_{b \in \text{Par}(a)} \text{Depth}(b).$$

In other words, a node's depth is the length of the longest possible path one could take from a root to the node. Let D denote the maximum depth of any node in the DAG and let \mathcal{L} denote the set of all leaves. Note that all roots have depth one, but not all leaves have depth D —there might be leaves at depths smaller than d , and in fact a node that is isolated from the graph is both a root and a leaf at depth one. Let \mathcal{H}_d denote the set of all hypotheses at depth d , and let us arbitrarily name these as $H_{d,1}, \dots, H_{d,|\mathcal{H}_d|}$ with associated p -values $P_{d,1}, \dots, P_{d,|\mathcal{H}_d|}$. Let $\mathcal{H}_{1:d}$ denote the set of all nodes with depth $\leq d$. Then $\{\mathcal{H}_d\}_{d=1}^D$ is a partition of the hypotheses that naturally satisfy $\mathcal{H}_d \cup \mathcal{H}_{1:d-1} = \mathcal{H}_{1:d}$ and also $\mathcal{H}_{1:D} = \mathcal{H}$.

Note that we sometimes refer to nodes in the graph with the subscripts $a \equiv (d, i)$. Consequently, if we explicitly refer to an arbitrary hypothesis while making its depth explicit, we may use the label $H_{d,i}$, but if its depth is implicit then we may simply refer to the node as H_a . See Figure 1 for an illustrative example.

2.1 Testing protocol and goal

Recall that we assume the scientist creates, or knows, the structure of the DAG in advance to performing any tests. The goal of the scientist is to design testing levels $\alpha_{d,i}$ at which to test each $P_{d,i}$, so that the false discovery rate (FDR) over the entire DAG is controlled at a predefined level α . The process is inherently constrained by the DAG to be sequential in nature—before testing a node, the scientist must have already tested and rejected all of its parents. In other words, the testing proceeds in D steps:

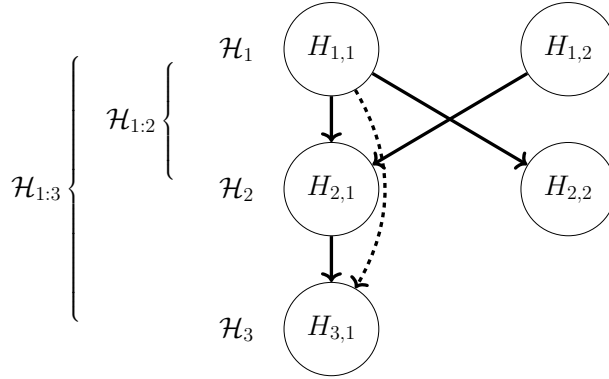


Figure 1: An example of a DAG with $D = 3$. The roots $H_{1,1}, H_{1,2}$ are necessarily at depth one, while the leaves $H_{2,2}, H_{3,1}$ may occur at different depths. We do not allow any edge such as the one from $H_{1,1}$ to $H_{3,1}$ (dotted for clarity), since it does not encode any new constraints.

1. Test all root hypotheses at some predefined constant levels $\{\alpha_{1,i}\}_{i \in \mathcal{H}_1}$, and let \mathcal{R}_1 denote the corresponding set of rejections.
2. For each depth $d = 2, \dots, D$, repeat the following: test all hypotheses at depth d at levels $\{\alpha_{d,i}\}_{i \in \mathcal{H}_d}$, and let \mathcal{R}_d denote the corresponding set of rejections.

Let $\mathcal{R}_{1:d} = \bigcup_{k=1}^d \mathcal{R}_k$ be the total set of rejections up to depth d . Then, we formally require that the level $\alpha_{d,i}$ at which $P_{d,i}$ is tested must be solely a function of $\mathcal{R}_{1:d-1}$ and the p -values in \mathcal{H}_d .

Denote the set of discoveries as the rejected set $\mathcal{R} = \bigcup_{d=1}^D \mathcal{R}_d$, of size $R = |\mathcal{R}|$. If \mathcal{H}^0 is the unknown set of true null hypotheses, then let the set of false discoveries be $\mathcal{V} = \mathcal{H}^0 \cap \mathcal{R}$, of size $V = |\mathcal{V}|$. Clearly, both \mathcal{R} and \mathcal{V} are random variables, and we define the false discovery rate as their expected ratio, that is $\text{FDR} = \mathbb{E}[V/R]$. The ratio $0/0$ is always interpreted as 0.

Since we only test nodes whose parents have been rejected, so the set of nodes that is tested is itself random and unknown a priori. Intuitively this model mimics the adaptive process of science, allowing for the subset of hypotheses to be tested in the future to depend hypotheses are currently being tested, which in turn is a function of which hypotheses have been tested and rejected in the past. We wish to design algorithms to set the testing levels α_i in an adaptive manner, so that no matter which nodes are null and non-null, and no matter the randomness in the corresponding p -values, the false discovery rate over the whole DAG is controlled. It turns out the algorithm design, as well as power, depend on what assumptions one is willing to impose on the dependence structure between the various p -values, an issue which we now discuss.

2.2 Positive dependence

In this paper, we analyze four possible settings of dependence between the p -values, which are defined in terms of sets and functions that are nonincreasing with respect to a partial ordering. For a pair of vectors $x, y \in [0, 1]^K$, we use the notation $x \preceq y$ to denote the partial ordering defined by the orthant cone: i.e., we have $x \preceq y$ if and only if $x_i \leq y_i$ for all $i \in \{1, \dots, K\}$.

A function $f : [0, 1]^K \mapsto \mathbb{R}_+$ is nonincreasing with respect to the orthant ordering if $x \preceq y$ implies $f(x) \geq f(y)$. Similarly, a subset \mathcal{D} of $[0, 1]^K$ is nondecreasing with respect to the orthant

ordering if $x \in \mathcal{D}$ implies $y \in \mathcal{D}$ for all $y \succeq x$. We now define a notion called positive regression dependence on a subset, or positive dependence for short, for a vector of p -values P .

Definition 1 (positive regression dependence on a subset). We say that the vector P is positively dependent if for any $i \in \mathcal{H}^0$ and nondecreasing set $\mathcal{D} \subseteq [0, 1]^n$, the function $t \mapsto \Pr(P \in \mathcal{D} \mid P_i \leq t)$ is nondecreasing on the interval $(0, 1]$.

When the condition is met for a particular null P_i , we say that P is positively dependent on P_i . Note that the original positive regression dependence assumption (Lehmann, 1966) and that of positive regression dependence on a subset (Benjamini & Yekutieli, 2001), both had $P_i = t$ instead of $P_i \leq t$ in the definition, but one can prove that both conditions are essentially equivalent. Positive dependence holds trivially if the p -values are independent, but also allows for some amount of positive dependence. For example, let $Z = (Z_1, \dots, Z_n)$ be a multivariate Gaussian vector with covariance matrix Σ ; the null components correspond to Gaussian variables with zero mean. Letting Φ be the cumulative distribution function of a standard Gaussian, the vector $P = (\Phi(Z_1), \dots, \Phi(Z_n))$ is positive regression dependent on P_i for every null index i if and only if all entries of the covariance matrix Σ are non-negative. See Benjamini & Yekutieli (2001) for additional examples of this type. We note that Definition 1 is closely related to the assumption of log-supermodularity, or equivalently multivariate total positivity of order two, as studied by Karlin & Rinott (1980). Since log-supermodularity is known to imply positive regression dependence, our results also hold immediately under the former condition.

2.3 Arbitrary dependence and reshaping

In order to deal with arbitrarily dependent p -values, we first need to define reshaping functions β , as introduced by Blanchard & Roquain (2008).

Definition 2 (Reshaping). Let \mathcal{T} denote the set of all probability measures τ with domain \mathbb{R}^+ . Given any $\tau \in \mathcal{T}$, the reshaping function $\beta = \beta_\tau$ is given by

$$\beta_\tau(r) = \int_0^r x d\tau(x).$$

We let $\beta(\mathcal{T}) := \{\beta_\tau \mid \tau \in \mathcal{T}\}$ refer to the set of all such reshaping functions.

Note that one may always choose $\beta(r) = r$ if one wishes to avoid reshaping, as is done when dealing with independent or positively dependent p -values. We often drop the subscript τ for ease of notation.

When no assumptions are made about the joint distribution of p -values, FDR-controlling procedures must generally be guarded while proclaiming a discovery. Noting that $\beta(r) \leq r$ for any $\tau \in \mathcal{T}$ by construction, the function β is guaranteed to reshape thresholds by lowering them, rendering the associated procedure more conservative. Indeed, the argument r has been used suggestively, since β conservatively undercounts the number of rejections. Effectively, Benjamini & Yekutieli (2001) use the normalized discrete measure assigning mass $\propto 1/k$ to each positive integer $k \in \{1, \dots, K\}$ as a specific choice of τ , leading to the reshaping function $\beta_{BY}(r) = \frac{r}{\sum_{k=1}^K \frac{1}{k}}$ that underlies the Benjamini-Yekutieli procedure. See Ramdas et al. (2018a) for further discussion on the uses and interpretation of reshaping, and associated references.

2.4 The Simes' p -value

Given a subset \mathcal{S} of hypotheses H_1, \dots, H_S and associated p -values P_1, \dots, P_S , let $P_{(1)}, \dots, P_{(S)}$ denotes the sequence of ordered p -values. Then, the generalized Simes' p -value is given by $\text{Simes}(\mathcal{S}) := \min_{(k)} \frac{P_{(k)} \cdot S}{k}$ under independence or positive dependence of the underlying p -values, and $\text{Simes}(\mathcal{S}) := \min_{(k)} \frac{P_{(k)} \cdot S}{\beta(k)}$ under arbitrary dependence. It is well known that if \mathcal{S} is null, meaning that it consists only of true null hypotheses, then $\text{Simes}(\mathcal{S})$ is a bonafide p -value for the intersection hypothesis $H_1 \cap \dots \cap H_S$. More precisely, this statement means that under the global null hypothesis for subset \mathcal{S} , we have $\Pr(\text{Simes}(\mathcal{S}) \leq t) \leq t$ for all $t \in [0, 1]$. For proofs of the above claims, see the papers by Simes (1986), Benjamini & Yekutieli (2001), Blanchard & Roquain (2008) and Ramdas et al. (2018a).

The Simes' p -value will be of special interest for intersection DAGs, because they yield bonafide p -values under positive dependence, even without reshaping. We remark that we may use other methods for combining p -values within a group to test the intersection null for that group, such as Fisher's or Rosenthal's, as long as the appropriate independence assumptions within the group are satisfied, and as long as we use reshaping to guard against arbitrary dependence among the resulting group p -values.

3 An algorithm for general DAGs

The settings of dependence that can be handled by our algorithm are as follows:

- (D1). For arbitrary and intersection DAGs: all p -values are independent.
- (D2). For arbitrary and intersection DAGs: all p -values are positively dependent.
- (D3). For arbitrary and intersection DAGs: all p -values are arbitrarily dependent.
- (D4). For intersection DAGs: the leaf p -values are positively dependent, and other p -values are formed using Simes' procedure.
- (D5). For intersection DAGs: the leaf p -values are independent, and other p -values are formed using Fisher's procedure, or the procedure presented by Stouffer et al. (1949), commonly called Rosenthal's method.
- (D6). For intersection DAGs: the leaf p -values are arbitrarily dependent, and other p -values are formed using the procedures by Rüschendorf (1982), Vovk (2012) or Rüger (1978).

In order to describe our algorithm, we need some further DAG-related notation. The descendants of a node a is the set of nodes that can be reached from a along a path of directed edges. We use $\text{Sub}(a)$ to denote the subgraph formed by taking a as the root, along with all descendants of node a . The effective number of nodes and effective number of leaves in $\text{Sub}(a)$, denoted by m_a and ℓ_a respectively, are defined as follows. We calculate ℓ_a, m_a for each node a in a bottom-up fashion: we first instantiate each leaf node $a \in \mathcal{L}$ with the value $m_a = \ell_a = 1$, and then proceed up the tree, from leaves to roots, recursively calculating

$$\ell_a \stackrel{(i)}{=} \sum_{b \in \text{Child}(a)} \frac{\ell_b}{|\text{Par}(b)|}, \quad \text{and} \quad m_a \stackrel{(ii)}{=} 1 + \sum_{b \in \text{Child}(a)} \frac{m_b}{|\text{Par}(b)|}. \quad (2)$$

In other words, the counts at each node are split evenly between its parents, and so on. By construction, these counts satisfy the following identities at the roots:

$$\sum_{a \in \mathcal{H}_1} \ell_a \stackrel{(i)}{=} L, \quad \text{and} \quad \sum_{a \in \mathcal{H}_1} m_a \stackrel{(ii)}{=} N. \quad (3)$$

The above calculation is analogous to a water-filling procedure (Lynch, 2014; Meijer & Goeman, 2015a): imagine pouring a unit of water into all the leaf nodes, and then turning the graph upside down so that the leaves are at the top and roots at the bottom. Then, water will flow due to gravity from leaves to roots according to the dynamics (2)(i), whereas equation (3)(i) corresponds to the conservation of water at the roots.

3.1 Generalized step-up procedures

For the moment, suppose that we are only testing a batch of K hypotheses. A threshold function for P_i is mapping of the form $\alpha_i : \{1, \dots, K\} \mapsto [0, 1]$. Each function α_i is also implicitly a function of the constant target FDR level α , but we leave this dependence implicit. A generalized step-up procedure associated with a sequence of threshold functions $\{\alpha_i(r)\}_{i=1}^K$ works as follows. It first calculates the number of rejections as

$$R := \arg \max_{r=1, \dots, K} \left[\sum_{i=1}^K \mathbf{1}(P_i \leq \alpha_i(r)) \geq r \right], \quad (4)$$

and then rejects all hypotheses i such that $P_i \leq \alpha_i(R)$. For example, the Benjamini-Hochberg procedure is recovered by using $\alpha_i(r) = \alpha r / K$ for all i . **DAGGER** uses a generalized step-up procedure to test the hypotheses within \mathcal{H}_d for each $d = 1, \dots, D$, as described below.

3.2 The DAGGER algorithm

Under independence or positive dependence, **DAGGER** uses the generalized step-up procedure (4) with the functions

$$\alpha_{d,i}(r) = \mathbf{1} \left(\bigcap_{j \in \text{Par}(i)} H_{d,j} \in \mathcal{R}_{1:d-1} \right) \alpha \frac{\ell_i}{L} \frac{m_i + r + R_{1:d-1} - 1}{m_i}. \quad (5a)$$

If we wish to protect against arbitrary dependence, then we choose reshaping functions $\beta_1, \dots, \beta_D \in \beta(\mathcal{T})$, and the reshaped **DAGGER** algorithm uses procedure (4) with

$$\alpha_{d,i}(r) = \mathbf{1} \left(\bigcap_{j \in \text{Par}(i)} H_{d,j} \in \mathcal{R}_{1:d-1} \right) \alpha \frac{\ell_i}{L} \frac{\beta_d(m_i + r + R_{1:d-1} - 1)}{m_i}. \quad (5b)$$

Specifically, we run the generalized step-up procedure (4) on \mathcal{H}_d for each $d \in \{1, \dots, D\}$ with threshold functions $\{\alpha_{d,i}(r)\}_{i=1}^{|\mathcal{H}_d|}$, meaning that we initialize $\mathcal{R}_{1:0} := \emptyset, R_{1:0} := 0$ and update $\mathcal{R}_{1:d} = \mathcal{R}_d \cup \mathcal{R}_{1:d-1}$ and $R_{1:d} = R_d + R_{1:d-1}$, where

$$R_d = \max \left[1 \leq r \leq |\mathcal{H}_d| : \sum_{i=1}^{|\mathcal{H}_d|} \mathbf{1}(P_i \leq \alpha_{d,i}(r)) \geq r \right], \quad (6a)$$

$$\mathcal{R}_d = \{i \in \mathcal{H}_d : P_i \leq \alpha_{d,i}(R_d)\}. \quad (6b)$$

We refer to this top-down procedure as greedily evolving rejections on DAGs, or **DAGGER** for short. An illustrative example of how **DAGGER** works on a simple DAG is provided in the supplement. The exact choice of reshaping function β_d does not affect FDR control, but does affect the power. In proposing reshaping functions β_d , it is reasonable to restrict to measures τ that put mass only on the values that its argument could possibly take. For example, in order to mimic the Benjamini-Yekutieli procedure, the reshaping function β_d would assign mass proportional to $1/k$ to each of the real numbers $k \in \{m_i + d - 1, m_i + d, \dots, m_i + |\mathcal{H}_{1:d}| - 1\}$. This assignment occurs because whenever there are any rejections at level d , we must have $d \leq r + R_{1:d-1} \leq |\mathcal{H}_{1:d}|$. Special cases of **DAGGER** include:

- First, suppose that the DAG is trivial, with N nodes and no edges. Then all hypotheses are leaves, and **DAGGER** reduces to the Benjamini-Hochberg procedure under independence or positive dependence, and to the Benjamini-Yekutieli procedure under arbitrary dependence.
- Second, suppose that the DAG is a line graph. On this DAG, the hypotheses are fully ordered, and our procedure reduces to the fixed sequential testing procedure of Lynch et al. (2016).
- Third, consider a DAG in which each node has at most one parent, such as a tree (or a forest). In such a DAG, our procedure reduces to the hierarchical testing procedure of Lynch & Guo (2016).

The following theorem lists some sufficient conditions under which **DAGGER** controls FDR. Below, we use $\text{FDR}(\mathcal{H}_{1:d})$ to denote the FDR achieved after the first d rounds, so that $\text{FDR} = \text{FDR}(\mathcal{H}_{1:D})$.

Theorem 1. *The **DAGGER** algorithm (Eq. 4, 5a, 6) and the reshaped **DAGGER** procedure (Eq. 4, 5b, 6) have the following guarantees:*

- (a) *(All DAGs) If all the p -values are either independent or positively dependent, then **DAGGER** guarantees that $\text{FDR}(\mathcal{H}_{1:d}) \leq \alpha$ for all d .*
- (b) *(All DAGs) If the p -values are arbitrarily dependent, then reshaped **DAGGER** guarantees that $\text{FDR}(\mathcal{H}_{1:d}) \leq \alpha$ for all d .*
- (c) *(Intersection DAGs) If the p -values at the leaves are positively dependent, and other p -values are formed using Simes' procedure (either on the leaves of the node's sub-DAG, or directly on the node's children), then **DAGGER** ensures that $\text{FDR}(\mathcal{H}_{1:d}) \leq \alpha$ for all d .*
- (d) *(Intersection DAGs) If the p -values at the leaves are independent or arbitrarily dependent, and all other p -values are formed using any valid global null test on the leaves (such as Fisher's, Rosenthal's, Rüger's or Rüschendorf's methods), then reshaped **DAGGER** guarantees that $\text{FDR}(\mathcal{H}_{1:d}) \leq \alpha$ for all d .*

The proof of this theorem, which is based on a bottom-up inductive argument, is provided in the supplementary material. The proof strategy is similar to that of the tree-FDR algorithm of Lynch & Guo (2016) that our work generalizes, but our proof exploits recent work on super-uniformity lemmas developed both in the offline context by Blanchard & Roquain (2008) and Ramdas et al. (2018a), and in the online context by Javanmard & Montanari (2018) and Ramdas et al. (2017).

The **DAGGER** algorithm and proof combine the structure of the DAG with ideas from batch FDR procedures as well as online FDR procedures. Naturally, the use of generalized step-up procedures is reminiscent of batch FDR procedures such as the BH method. Further, if we make more rejections early on, then we are allowed to test later hypotheses at more lenient thresholds, because $\alpha_{d,i}(r)$ increases with $R_{1:d-1}$, reminiscent of online FDR procedures that earn alpha-wealth upon making rejections, to spend on later tests. Note that for trees, the FWER procedure by Meinshausen (2008) tests each node whose parents were rejected at a level $\alpha \frac{\ell_i}{L}$, and hence the last term in the expression for $\alpha_{d,i}(r)$ intuitively captures the more lenient thresholds that **DAGGER** enjoys since it is always larger than one.

4 Simulations

Here, we compare **DAGGER** with a variety of existing algorithms, including

- the **Focus-level** method of Goeman & Mansmann (2008);
- two generalizations of the procedure of Meinshausen (2008) to DAGs due to Meijer & Goeman (2015a), called **MG-b1** and **MG-b2**;
- a **structured-Holm** procedure by Meijer & Goeman (2015b);
- the two top-down procedures called **SCR-DAG** and **BH-DAG** by Lynch (2014);
- the **LORD** algorithm of Javanmard & Montanari (2018); Ramdas et al. (2017).

Note that the first four algorithms control FWER, while the last three algorithms control FDR in the case of independent p -values. The power and FDR are calculated by averaging the true discovery proportion $|\mathcal{R} \cap \mathcal{H}_1|/|\mathcal{H}_1|$ and the false discovery proportion $|\mathcal{R} \cap \mathcal{H}_0|/|\mathcal{R}|$ over 100 independent runs. Code for reproducing key empirical results is available online at <https://github.com/Jianbo-Lab/DAGGER/>.

We remind the reader that **DAGGER** is the only algorithm that works under motivations (M1) and (M2), being both sequential and handling arbitrary dependence. Hence, in order to have at least a few algorithms to compare to, we only consider independent p -values and only motivation (M2), meaning that all p -values are made available offline so that algorithms taking multiple passes over the p -values are allowed. Furthermore, it should be noted that online FDR algorithms like **LORD**, an instance of a monotone generalized alpha-investing rule for which FDR control has been proved in past work (Javanmard & Montanari, 2018; Ramdas et al., 2017; Aharoni & Rosset, 2014; Foster & Stine, 2008), were originally designed for testing fully ordered hypotheses in an online manner, and none of the existing online FDR papers consider applications to DAGs. Indeed, we apply **LORD** here by converting the DAG into a full ordering in a somewhat ad-hoc manner, first testing the roots (in some arbitrary order), then testing nodes whose parents were rejected (in some arbitrary order), and so on.

4.1 Results and discussion of experiments

Before providing the details of all the simulations and the real data problem, we first summarize some high-level takeaway messages from the various experiments.

Results under motivation (M2): **DAGGER** is very computationally efficient, requiring only one simple sort operation per depth. **LORD** is slightly faster, since it does not even sort p -values. However, the other FDR algorithms, in particular **SCR-DAG** and **BH-DAG**, are slower by several orders of magnitude, running several hundred times slower than **DAGGER**. This is because each iteration of these algorithms makes a pass over the entire DAG, and the number of such iterations equals the number of ultimately unrejected hypotheses. For the FWER algorithms, the **Focus-level** algorithm is prohibitively slow to repeat hundreds of times for each parameter setting, so we compare to it only in the real-data example in Section 5. The other FWER algorithms are as fast as **DAGGER**. The fastest algorithms are **structured-Holm** which typically has the lowest power, and the BH procedure which has the highest power since it ignores structural constraints and rejects hypotheses anywhere on the DAG including nodes whose parents are not rejected.

Across simulations, the FDR methods usually have greater power than the FWER methods. While it might be expected that Benjamini-Hochberg would have more power than **DAGGER** because it is unconstrained, it turns out that this is not necessarily the case, and we provide a counterexample in this section. In the supplementary material, we provide intuition about how the power of **DAGGER** changes with the DAG shape.

In summary, we find that **DAGGER** performs well in simulations both in terms of time and in terms of power. It has the advantage of being applicable under motivation (M1) and being able to handle the kinds of dependence listed as (D1)-(D6) in Section 3.

LORD versus **DAGGER** under motivation (M1): Even though **LORD** was adapted to the setting of partially ordered hypotheses in a somewhat ad-hoc manner (arbitrarily converting a partial ordering into a full ordering), our simulations show that it performs reasonably well in practice. Since **LORD** and **DAGGER** are the only two algorithms (of which we are aware) that provide FDR control under motivation (M1), it is instructive to compare their strengths and weaknesses.

Both algorithms have the property that past rejections allow future hypotheses to be tested at larger levels. The main advantage of **LORD** is that it does not waste any alpha-wealth on testing hypotheses whose parents were not rejected, but it faces three significant disadvantages compared to **DAGGER**. Firstly, **DAGGER** tests each node at a different threshold that depends on the number of its descendants. As an example, if there are two nodes at the same depth, one being a leaf, and the other having thousands of descendants, then **DAGGER** will assign a larger test threshold to the latter node because of the number of future tests that depend on it, while **LORD** cannot adjust threshold levels for each test to take advantage of the DAG structure.

Secondly, **DAGGER** can test all the levels at a particular depth as a single batch, possibly gaining power by treating the p -values together using the generalized step-up procedure, as opposed to **LORD**, which cannot take other p -values into account when making each of its decisions. Lastly, unlike **LORD**, **DAGGER** does not need to conservatively reshape thresholds when dealing with positive dependence among p -values on general DAGs, and for intersection DAGs, it can handle positive dependence between base p -values when Simes' p -values are used at other nodes.

Unfortunately, not much can be said in general to compare the power of the two algorithms, since it is affected by the choice of graph structure, positions of the non-nulls and the density of the non-null p -values. In all our experiments, **DAGGER** was more powerful than **LORD**.

4.2 Comparing various methods for FWER and FDR control

Graph structure: We follow the simulation protocol of Meijer & Goeman (2015a) and choose the Gene Ontology and one of its subgraphs as the underlying graph structure. The Gene Ontology is a DAG where each node represents a gene ontology term and the relationships between the terms are represented by edges between the nodes. The child nodes represent more specialized terms than parent nodes. The gene ontology graph has 4952 nodes in total. We also used the subgraph of the gene ontology with cell proliferation as its top node with 494 nodes.

Distribution of null and alternative hypotheses: For each replication of our experiments, we distributed the null hypotheses and the alternative hypotheses randomly. The leaves are randomly chosen with probability π_0^L to be true null hypotheses. The rest of the hypotheses are assigned to be true nulls if and only if all of their children are true nulls. We generate p -values in the following two different manners:

- (Independent p -values.) In the first setting, each p -value is independently generated as

$$X \sim \mu + \mathcal{N}(0, 1); \text{ } p\text{-value} = 1 - \Phi(X), \quad (7)$$

where Φ is the standard Gaussian CDF, with $\mu = 0$ for nulls and $\mu > 0$ for alternatives. Larger values of μ indicate stronger signals. We decrease the signal of alternatives linearly with increasing depth. Concretely, we set $\mu = 1$ at the nodes of the largest depth and increase the signal by 0.3 as depth decreases.

- (Simes' p -values.) In the second setting, p -values in leaves are independently generated from the previous model, with $\mu = 2$ at alternatives. Every other node's p -value is calculated recursively as the Simes' p -value of the node's children.

Parameters: For each setting, we increase the proportion of nulls on leaves π_0^L over the entire DAG from 0.15 to 0.95 by 0.05 and plot the power for each algorithm. We repeat each experiment 100 times. We set $\alpha = 0.2$, which refers to the target FWER for **MG-b1**, **MG-b2** and **structured-Holm** and the target FDR for **BH**, **SCR-DAG**, **BH-DAG** and **DAGGER**. As **SCR-DAG** and **BH-DAG** do not work in the case of arbitrary dependence, we run these algorithms only in the independent setting. **LORD** requires specification of an infinite sequence of constants, which we choose to be the same as those used in prior work for mixtures of Gaussians (Javanmard & Montanari, 2018; Ramdas et al., 2017), since the first paper justifies the heuristic optimality of this choice by deriving a lower bound on power in unstructured settings.

Results: From Figure 2, the Benjamini-Hochberg method, which controls FDR and does not take logical constraints into consideration, has the largest power as expected. Our algorithm is more powerful than **SCR-DAG** and **BH-DAG** in the case where there are a large number of nulls, which is a relatively more common and practical setting, and the latter algorithms are also non-sequential, do not work with arbitrary dependence and have a much bigger time complexity, as discussed below. **LORD** is less powerful than **SCR-DAG**, **BH-DAG** and **DAGGER** on the subgraph, but achieves larger power on the full gene ontology graph. Finally, all the algorithms controlling FDR have larger power than the algorithms that control FWER when there are relatively large number of nulls. We refer the reader to Figure 4 for the achieved FDR of various algorithms.

Time complexity: Figure 3 shows the clock-time of various algorithms on a log scale. As the two top-down procedures of Lynch are too time-consuming to run over the whole gene ontology graph, we only report their results on subgraphs of the gene ontology. In summary,

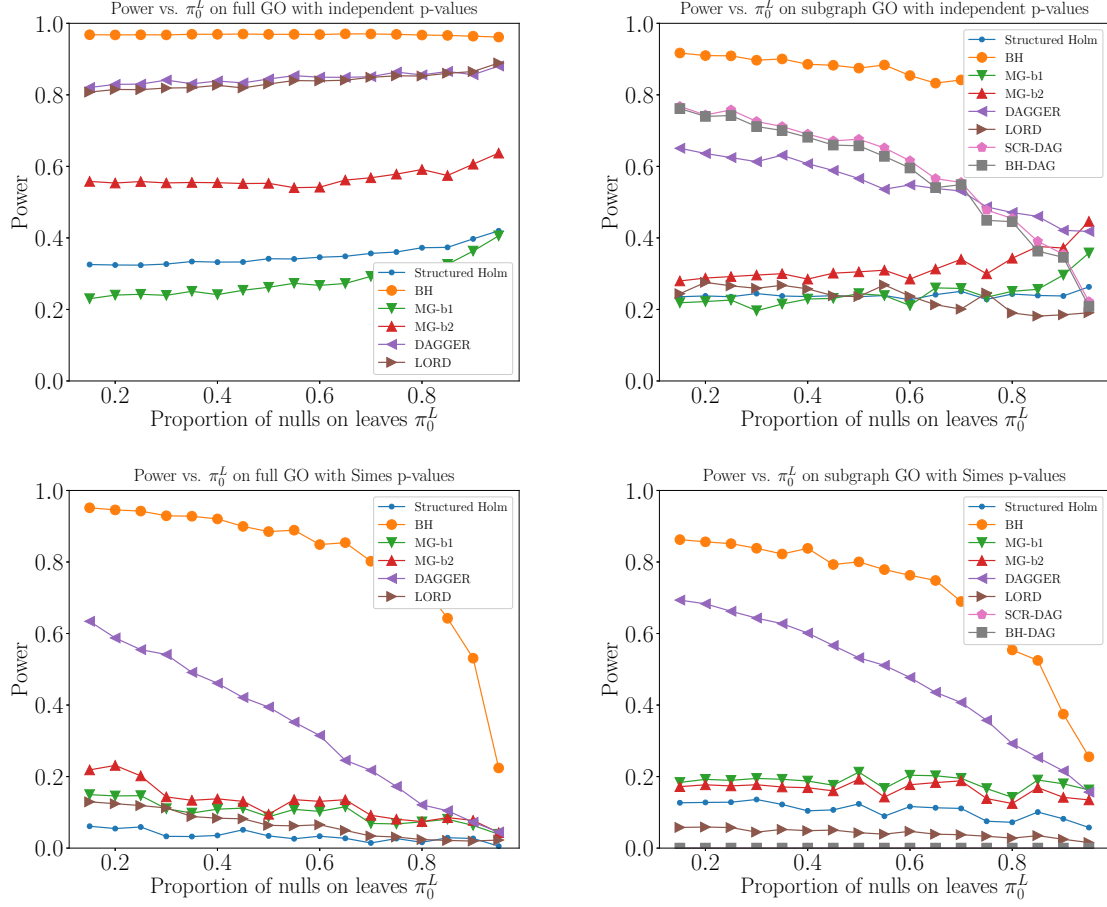


Figure 2: Power of various algorithms on the entire gene ontology graph (left column) and the subgraph rooted at cell proliferation (right column), under the setting of independent p -values (top row) and Simes' p -values (bottom row).

structured-Holm and Benjamini-Hochberg are the fastest, followed by LORD, DAGGER, MG-b1 and MG-b2. Lynch's SCR-DAG and BH-DAG are the slowest, as is the Focus-level algorithm tested in the real data subsection, making these impractical for large DAGs.

4.3 A case where DAGGER is more powerful than BH

In the remaining simulations in the paper and supplement, each p -value P is independently generated from the model

$$X \sim \mu + \mathcal{N}(0, 1) \quad \text{and} \quad P = 1 - \Phi(X), \quad (8)$$

where Φ is the standard Gaussian CDF, with $\mu = 0$ for nulls and $\mu > 0$ for alternatives. Larger values of μ indicate stronger signals. We fix the target FDR to be $\alpha = 0.2$ for all experiments.

Unlike the Benjamini-Hochberg algorithm, the rejections made by DAGGER respect the graph structure, and so we might expect Benjamini-Hochberg to always have higher power. Here we describe a setting where DAGGER actually achieves higher power than Benjamini-Hochberg. It is

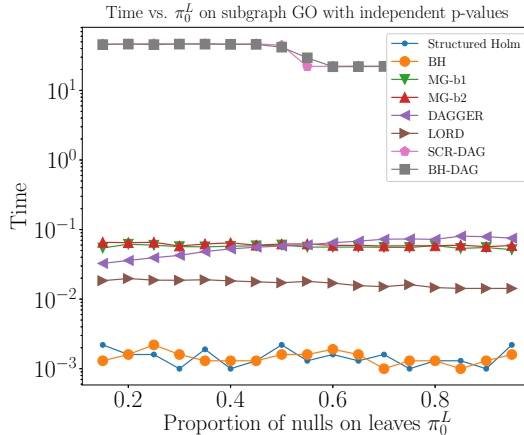


Figure 3: Clock time of algorithms on the subgraph of the gene ontology DAG for independent p -values. The simplicity of **DAGGER** makes it readily scalable to large graphs.

when the non-nulls in the layers of smaller depth have stronger signal strength than the non-nulls in the deeper layers. Concretely, we generate a DAG of depth 2 with each node in the bottom layer randomly assigned to 2 nodes in the top layer. The signal strengths of non-nulls are $\mu = 5$ and $\mu = 1$ in the top and the bottom layer respectively. We control the target FDR to be $\alpha = 0.2$, and assign 100 nodes to the bottom layer and 100 nodes to the top layer. Each experiment is repeated 100 times.

Figure 5 shows how the achieved FDR and the power vary with the proportion of nulls in the entire DAG. The error bars indicate in-sample standard deviations. The achieved power of **DAGGER** is larger than the achieved power of the Benjamini-Hochberg procedure. We observe that both Benjamini-Hochberg and **DAGGER** achieve a much lower FDR than the targeted FDR, opening up the possibility of adaptive algorithms using null-proportion estimates (Storey et al., 2004; Ramdas et al., 2018a) if independence is assumed.

5 An application to the Gene Ontology DAG

In this section, we present the results of an experiment comparing the **DAGGER** method with **Focus-level** methods (Goeman & Mansmann, 2008), the reshaped Benjamini-Hochberg method by Benjamini & Yekutieli (2001) that handles arbitrary dependence in unstructured settings, and all the other algorithms used in the simulation section.

As done in past work, we use a subset of the Golub dataset (Golub et al., 1999; Golub, 2016) that contains 72 tumor mRNA samples in which the expression of 7129 genes is recorded. Specifically, the Golub data set is from the leukemia microarray study, recording the gene expression of 47 patients with acute lymphoblastic leukemia and 25 patients with acute myeloid leukemia. We focus on the biological process “cell cycle” (GO:0007049) and its descendants in the Gene Ontology graph, a DAG of 307 nodes in total.

The gene ontology graph represents a partial order of the gene ontology terms, and the set of genes annotated to a certain term (node) is a subset of those annotated to its parent node (Ashburner et al., 2000). We test for differential biological process activity between the two kinds

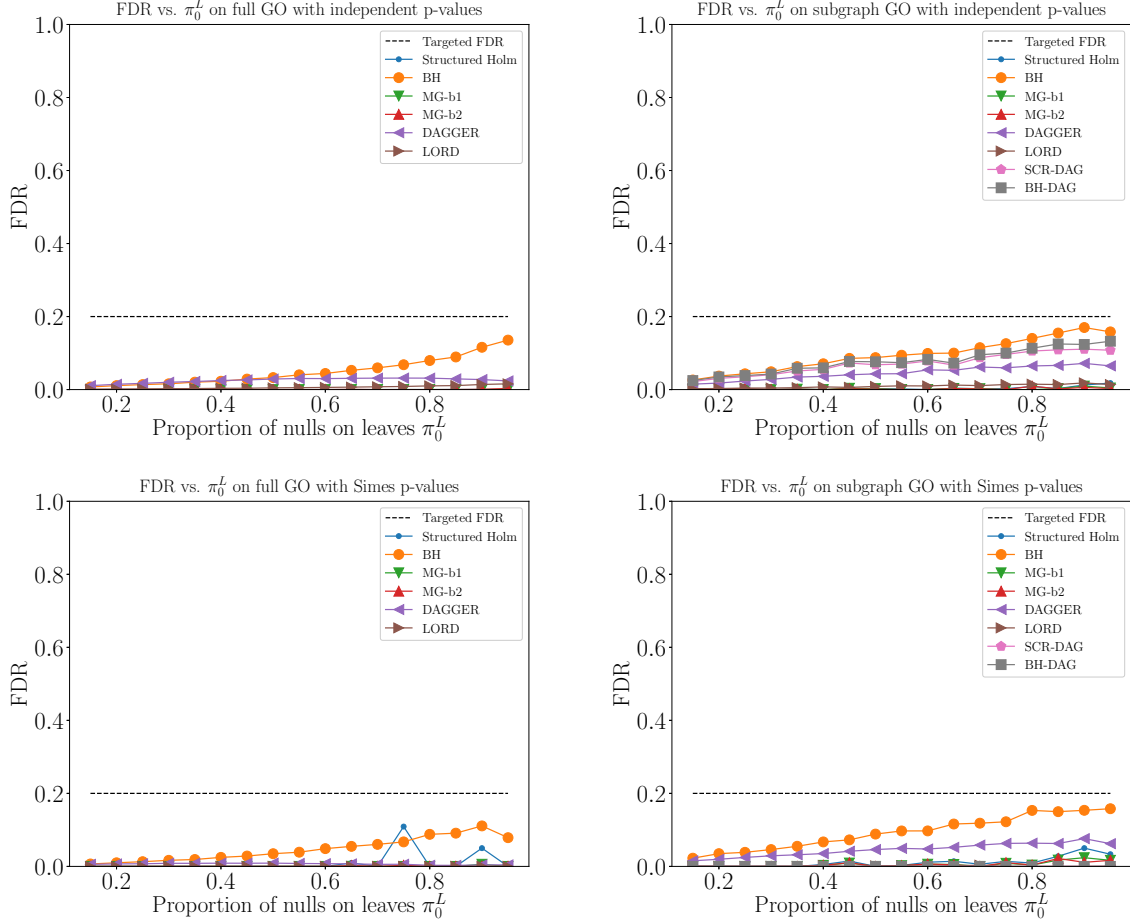


Figure 4: Plots of the achieved FDR versus proportion of nulls on leaves for various algorithms for simulations on the entire gene ontology graph (left column) and the subgraph rooted at cell proliferation (right column), under the setting of independent p -values (top row) and Simes' p -values (bottom row).

of patients. Concretely, the null hypothesis at each node is

$$H_0 : \text{No gene in the node's gene set is associated with the type of diseases.} \quad (9)$$

Multiple testing procedures on the gene ontology graph are expected to preserve the graph structure of Gene Ontology (Goeman & Mansmann, 2008), meaning that a child node is rejected only if all of its parents are rejected, which holds true for DAGGER.

Construction of p -values: Individual (raw) p -values on each node are obtained by Global An-cova (Hummel et al., 2008), which are calculated using the GlobalAncova package in R (Hummel et al., 2016). The test is carried out by comparison between the linear model containing all covariates and the reduced model containing the covariates of interest, which are the genes in the corresponding node here, via the extra sum of squares principle. The test statistic involves

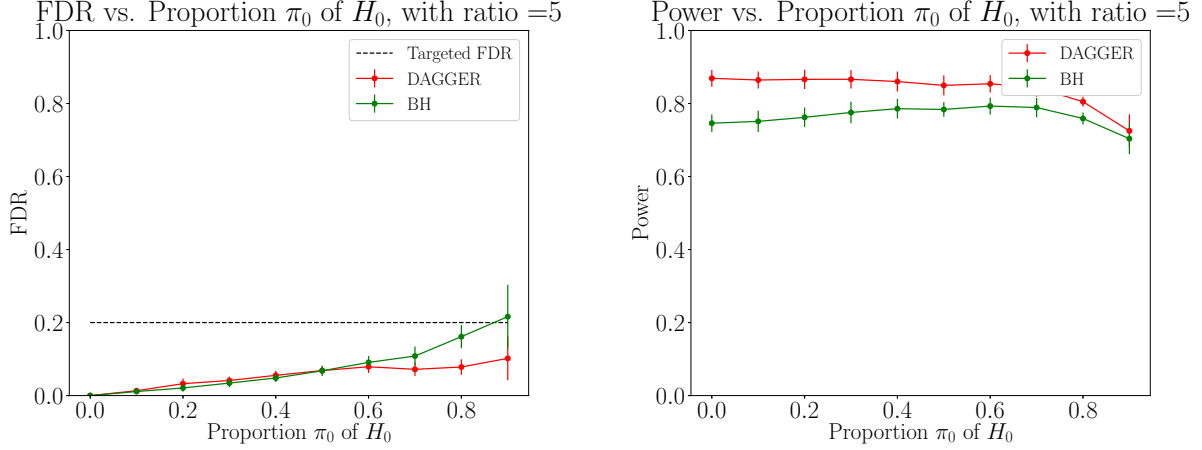


Figure 5: Plots of the achieved FDR and power versus the proportion of nulls in the case where signals are stronger at the top layer, controlling the target FDR at $\alpha = 0.2$, the number of nodes $n = 200$ and with 100 repetitions.

residual sums of squares from both the full model (FM) and the reduced model (RM):

$$F_{GA} = \text{Const.} \cdot \frac{\text{RSS}_{\text{RM}} - \text{RSS}_{\text{FM}}}{\text{RSS}_{\text{FM}}}, \quad (10)$$

and the p -values are computed with a permutation-based approximation (Hummel et al., 2008). Note that the p -values obtained by are arbitrarily dependent, and we consequently adopt the Benjamini-Yekutieli reshaping function in DAGGER and LORD, which we call reshaped DAGGER and reshaped LORD.

Compared algorithms: Figure 6 shows the number of rejections at various critical levels α , where α refers to the target FDR levels for DAGGER, LORD, reshaped DAGGER, reshaped LORD, SCR-DAG, BH-DAG, the Benjamini-Hochberg and Benjamini-Yekutieli procedures, whereas α refers to the target FWERs for **structured-Holm**, **MG-b1**, **MG-b2** and **Focus-level1**. These p -values do not have the assumption of independence or positive dependence, but we include algorithms with these assumptions for comparison. Algorithms that only control FDR under an independence assumption are shown with a dotted line and are annotated by (*) in the legend; these are LORD and SCR-DAG. Algorithms that control FDR under an assumption of positive dependence are annotated by a (+) symbol in the legend; these are DAGGER, BH-DAG and BH. All other methods control FDR/FWER without dependence assumptions.

Time: We apply the **Focus-level1** method with the default focus level in the GlobalAncova package (Hummel et al., 2016), which takes about four minutes to run. We note that the **Short-Focus-Level1** procedure, recently proposed as a more computationally efficient algorithm to control FWER on the gene ontology graph by Saunders et al. (2014), takes about one second. The rest of the algorithms are much faster in terms of clock time and in particular, DAGGER takes about 0.02 seconds, indicating scalability to much larger graphs.

Power: Among the algorithms that control FDR under no dependence assumptions while respecting the strong hierarchical principle, namely reshaped DAGGER, reshaped LORD and all the FWER algorithms, we see that reshaped DAGGER is the most powerful. Similarly, among

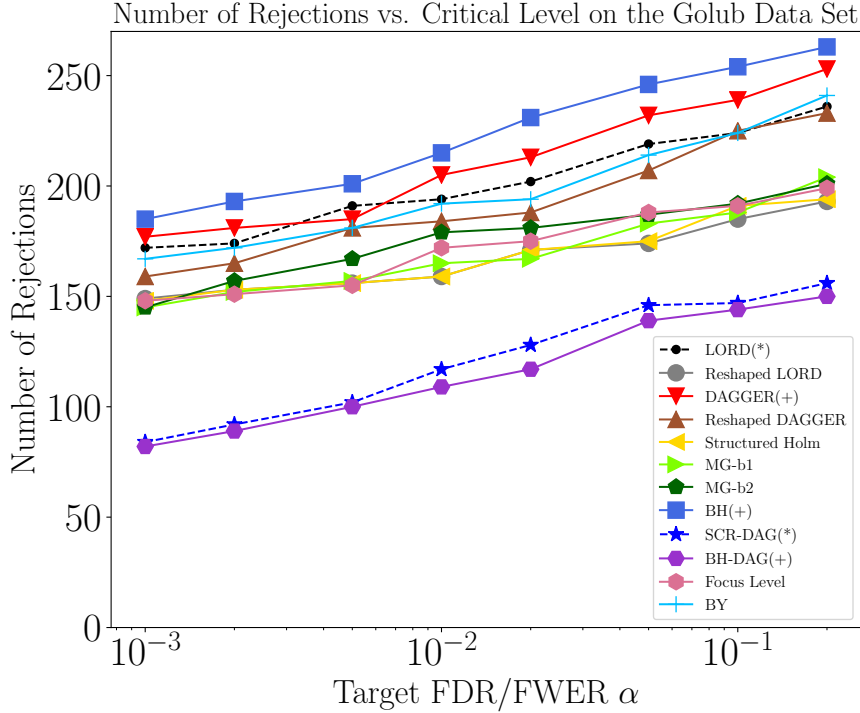


Figure 6: Plots of the number of rejections with various levels of α : $\{0.001, 0.002, 0.005, 0.01, 0.02, 0.05, 0.1, 0.2\}$, where α refers to the target FDR or FWER. The algorithms that work under an independence assumption (unrealistic for this dataset) are shown with a dotted line and followed by (*) in the legend. The algorithms that work with the assumption of positive dependence (plausible, but not provable) are followed by (+) in the legend. Other algorithms make no dependence assumptions. Among those methods that maintain the DAG structural constraints under arbitrary dependence, or even assuming positive dependence, **DAGGER** is the most powerful algorithm.

algorithms that control FDR under the assumption of positive dependence and also respect the structural constraints, we find that **DAGGER** again consistently yields the highest power.

It is worth noting that **DAGGER** performs only slightly worse than Benjamini-Hochberg, while the reshaped **DAGGER** performs almost as well as Benjamini-Yekutieli.

Figure 7 shows the rejections made by **DAGGER** and by reshaped **DAGGER** at $\alpha = 0.001$ respectively. By construction, the set of rejections by **DAGGER** always contains all of the rejections made by reshaped **DAGGER**, but interestingly, in this example, one does not lose much power by removing the assumption of positive dependence.

6 Summary

We have presented a sequential algorithm that exploits prior structural knowledge in the form of a general DAG on hypotheses to selectively carries out tests as needed, ultimately rejecting a sub-DAG that satisfies the strong hierarchy principle. We have shown that for this algorithm

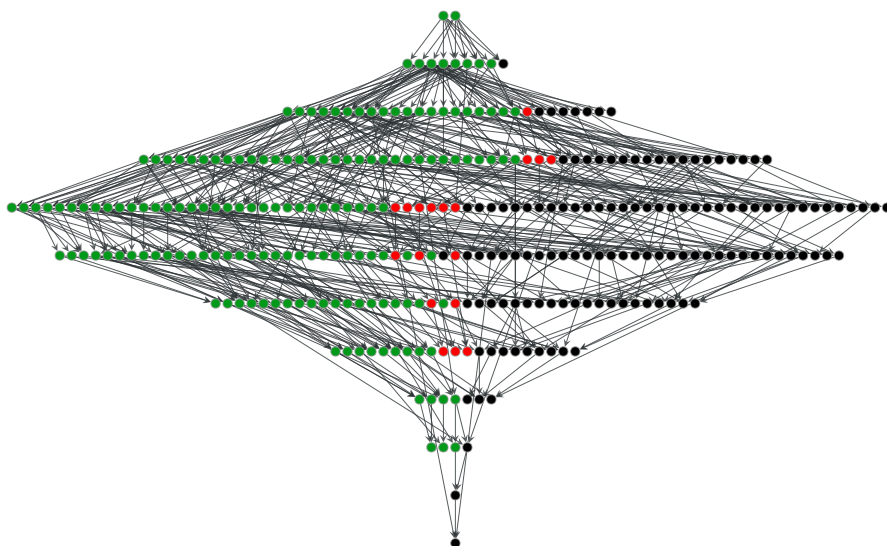


Figure 7: Green nodes (size 177) are rejections made by reshaped DAGGER, while red nodes (size 18) are the additional rejections made by DAGGER if positive dependence is assumed, both at a target FDR of $\alpha = 0.001$.

FDR is controlled at a prespecified level under settings of independence, positive dependence or arbitrary dependence among the p -values. We have demonstrated the utility of our procedure in simulations and on real data.

There are many promising theoretical as well as practical directions for future work, including designing procedures for other error metrics as well as other types of logical constraints. For example, it may also be of importance to consider logical constraints beyond the strong hierarchical principle, by changing (C2) to other natural options, for example by changing the “all” to “any,” or to other pre-defined Boolean operators. Also note that we have assumed that the DAG is finite and known in advance to the scientist. An important direction for future work under motivation (M1) is to design sequentially rejective algorithms, that work on DAGs whose size and structure is not known in advance, but are revealed as the algorithm proceeds down the DAG.

There are other plausible applications that fall under the umbrella of motivation (M2) beyond the gene ontology example that we considered. For example, in factorial experiments, the variable selection problem can be posed in terms of testing on a DAG: here one would consider testing for joint effects with only pairs or triplets of variables in which at least one of the marginal effects was already deemed significant being involved.

Acknowledgments

We thank Jelle Goeman for helping reproduce results in his papers, and for constructive comments on an initial draft. We thank Lihua Lei for sharing code for SCR-DAG and BH-DAG. This work was improved by comments from audiences of the MCP 2017 conference and Biostatistics seminars at Berkeley and Stanford. We also thank the reviewers for their comments that helped

improve the paper.

Supplementary material

Supplementary material includes an illustrative example of **DAGGER**, the proof of Theorem 1 (FDR control for **DAGGER**), and additional experiments.

References

- AHARONI, E. & ROSSET, S. (2014). Generalized α -investing: definitions, optimality results and application to public databases. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* **76**, 771–794.
- ASHBURNER, M., BALL, C. A., BLAKE, J. A., BOTSTEIN, D., BUTLER, H., CHERRY, J. M., DAVIS, A. P., DOLINSKI, K., DWIGHT, S. S., EPPIG, J. T. et al. (2000). Gene ontology: tool for the unification of biology. *Nature Genetics* **25**, 25–29.
- BARBER, R. F., CANDÈS, E. J. et al. (2015). Controlling the false discovery rate via knockoffs. *The Annals of Statistics* **43**, 2055–2085.
- BENJAMINI, Y. & HOCHBERG, Y. (1995). Controlling the false discovery rate: a practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* **57**, 289–300.
- BENJAMINI, Y. & YEKUTIELI, D. (2001). The control of the false discovery rate in multiple testing under dependency. *The Annals of Statistics* **29**, 1165–1188.
- BLANCHARD, G. & ROQUAIN, E. (2008). Two simple sufficient conditions for FDR control. *Electronic Journal of Statistics* **2**, 963–992.
- FOSTER, D. P. & STINE, R. A. (2008). α -investing: a procedure for sequential control of expected false discoveries. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* **70**, 429–444.
- GOEMAN, J. J. & MANSMANN, U. (2008). Multiple testing on the directed acyclic graph of gene ontology. *Bioinformatics* **24**, 537–544.
- GOLUB, T. (2016). *golubEsets: exprSets for golub leukemia data*. R package version 1.16.0.
- GOLUB, T. R., SLONIM, D. K., TAMAYO, P., HUARD, C., GAASENBEEK, M., MESIROV, J. P., COLLIER, H., LOH, M. L., DOWNING, J. R., CALIGIURI, M. A. et al. (1999). Molecular classification of cancer: class discovery and class prediction by gene expression monitoring. *Science* **286**, 531–537.
- G’SELL, M. G., WAGER, S., CHOULDECHOVA, A. & TIBSHIRANI, R. (2016). Sequential selection procedures and false discovery rate control. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* **78**, 423–444.
- HUMMEL, M., MEISTER, R. & MANSMANN, U. (2008). Globalancova: exploration and assessment of gene group effects. *Bioinformatics* **24**, 78.

- HUMMEL, M., MEISTER, R. & MANSMANN, U. (2016). Global testing of differential gene expression. *Changes* **1**, 2.
- JAVANMARD, A. & MONTANARI, A. (2018). Online rules for control of false discovery rate and false discovery exceedance. *The Annals of Statistics* **46**, 526–554.
- KARLIN, S. & RINOTT, Y. (1980). Classes of orderings of measures and related correlation inequalities. I. multivariate totally positive distributions. *Journal of Multivariate Analysis* **10**, 467–498.
- KATSEVICH, E. & RAMDAS, A. (2018). Towards" simultaneous selective inference": post-hoc bounds on the false discovery proportion. *arXiv preprint arXiv:1803.06790* .
- LEHMANN, E. L. (1966). Some concepts of dependence. *The Annals of Mathematical Statistics* **37**, 1137–1153.
- LEI, L., RAMDAS, A. & FITHIAN, W. (2017). STAR: a general interactive framework for FDR control under structural constraints. *arXiv preprint arXiv:1710.02776* .
- LI, A. & BARBER, R. F. (2017). Accumulation tests for FDR control in ordered hypothesis testing. *Journal of the American Statistical Association* **112**, 837–849.
- LYNCH, G. (2014). *The Control of the False Discovery Rate Under Structured Hypotheses*. Ph.D. thesis, New Jersey Institute of Technology, Department of Mathematical Sciences.
- LYNCH, G. & GUO, W. (2016). On procedures controlling the FDR for testing hierarchically ordered hypotheses. *arXiv preprint arXiv:1612.04467* .
- LYNCH, G., GUO, W., SARKAR, S. K. & FINNER, H. (2016). The control of the false discovery rate in fixed sequence multiple testing. *arXiv preprint arXiv:1611.03146* .
- MEIJER, R. J. & GOEMAN, J. J. (2015a). A multiple testing method for hypotheses structured in a directed acyclic graph. *Biometrical Journal* **57**, 123–143.
- MEIJER, R. J. & GOEMAN, J. J. (2015b). Multiple testing of gene sets from gene ontology: possibilities and pitfalls. *Briefings in bioinformatics* **17**, 808–818.
- MEINSHAUSEN, N. (2008). Hierarchical testing of variable importance. *Biometrika* **95**, 265–278.
- RAMDAS, A., BARBER, R. F., WAINWRIGHT, M. J. & JORDAN, M. I. (2018a). A unified treatment of multiple testing with prior knowledge using the p-filter. *The Annals of Statistics* (*accepted*) .
- RAMDAS, A., YANG, F., WAINWRIGHT, M. J. & JORDAN, M. I. (2017). Online control of the false discovery rate with decaying memory. In *Advances In Neural Information Processing Systems*.
- RAMDAS, A., ZRNIC, T., WAINWRIGHT, M. J. & JORDAN, M. I. (2018b). SAFFRON: an adaptive algorithm for online control of the false discovery rate. In *35th International Conference on Machine Learning*.
- ROSENBAUM, P. R. (2008). Testing hypotheses in order. *Biometrika* **95**, 248–252.

- RÜGER, B. (1978). Das maximale signifikanzniveau des tests: “Lehne H_0 ab, wenn k unter n gegebenen tests zur ablehnung führen”. *Metrika* **25**, 171–178.
- RÜSCHENDORF, L. (1982). Random variables with maximum sums. *Advances in Applied Probability* , 623–632.
- SAUNDERS, G., STEVENS, J. R. & ISOM, S. C. (2014). A shortcut for multiple testing on the directed acyclic graph of gene ontology. *BMC Bioinformatics* **15**, 349.
- SIMES, J. (1986). An improved Bonferroni procedure for multiple tests of significance. *Biometrika* **73**, 751–754.
- STOREY, J., TAYLOR, J. & SIEGMUND, D. (2004). Strong control, conservative point estimation and simultaneous conservative consistency of false discovery rates: a unified approach. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* **66**, 187–205.
- STOUFFER, S. A., SUCHMAN, E. A., DEVINNEY, L. C., STAR, S. A. & WILLIAMS JR, R. M. (1949). The American soldier: Adjustment during army life, vol. 1 .
- VOVK, V. (2012). Combining p-values via averaging. *arXiv preprint arXiv:1212.4966* .
- YEKUTIELI, D. (2008). Hierarchical false discovery rate–controlling methodology. *Journal of the American Statistical Association* **103**, 309–316.

A An illustrative example of DAGGER

Graph	m and l	Steps of DAGGER
	$m_{1,1} = 1 + 0.5m_{2,1} + m_{2,2} = 3.75,$ $m_{1,2} = 1 + 0.5m_{2,1} = 2.25,$ $l_{1,1} = 0.5l_{2,1} + l_{2,2} = 1.25,$ $l_{1,2} = 0.5l_{2,1} = 0.75.$	$\alpha_{1,1}(r) = \frac{1.25}{2} \frac{3.75+r-1}{3.75} \alpha,$ $\alpha_{1,2}(r) = \frac{0.75}{2} \frac{2.25+r-1}{2.25} \alpha,$ $P_{1,1} \leq \alpha_{1,1}(2)$ and $P_{1,2} \leq \alpha_{1,2}(2).$ Plugging into equation (7), we find that both nodes are rejected.
	$m_{2,1} = 1 + m_{3,1} + 0.5m_{3,2} = 2.5,$ $m_{2,2} = 1 + 0.5m_{3,2} = 1.5,$ $l_{2,1} = l_{3,1} + 0.5l_{3,2} = 1.5,$ $l_{2,2} = 0.5l_{3,2} = 0.5.$	$\alpha_{2,1}(r) = \frac{1.5}{2} \frac{2.5+r+2-1}{2.5} \alpha,$ $\alpha_{2,2}(r) = \frac{0.5}{2} \frac{1.5+r+2-1}{1.5} \alpha,$ $P_{2,1} \leq \alpha_{2,1}(2)$ but $P_{2,2} > \alpha_{2,2}(2),$ $P_{2,1} \leq \alpha_{2,1}(1)$ and $P_{2,2} > \alpha_{2,2}(1).$ Plugging into equation (7), we find that $R_2 = 1,$ and only $H_{2,1}$ is rejected.
	$m_{3,1} = 1,$ $m_{3,2} = 1,$ $l_{3,1} = 1,$ $l_{3,2} = 1,$ $L = 2.$	$H_{3,2}$ is not tested, as one of its parents is not rejected. $\alpha_{3,1}(r) = \frac{1}{2}(1+r+3-1)\alpha,$ $P_{3,1} \leq \alpha_{3,1}(1),$ so only $H_{3,1}$ is rejected.

Table 1: An illustrative example of how DAGGER works on a toy DAG with independent p -values. The target FDR level is $\alpha = 0.05$. The first row is the DAG with p -values to be considered. The following three rows show progressive steps of DAGGER layer by layer, with the focused level in a dashed box. The nodes rejected, not rejected, and not yet tested are in red, blue, and black respectively. The second column shows the calculation of effective numbers of nodes and leaves in a bottom-up fashion, and the third column explicitly spells out calculations done by DAGGER.

B The proof of Theorem 1 (FDR control for DAGGER)

Below, we will prove that $\text{FDR}(\mathcal{H}_{1:D}) = \text{FDR} \leq \alpha$, from which it must necessarily follow that $\text{FDR}(\mathcal{H}_{1:d}) \leq \alpha$ for all d . The latter implication is true because **DAGGER** must control FDR regardless of null p -values, and when it has completed d rounds (for any d), it must automatically guard against the hypothetical possibility that all remaining hypotheses are nulls whose p -values equal 1, in which case **DAGGER** will make no more rejections, resulting in $\text{FDR}(\mathcal{H}_{1:d})$ equaling $\text{FDR}(\mathcal{H}_{1:D})$ and hence being at most α .

To proceed, we first define random variables that we need in the proofs, namely the effective number of discoveries and false discoveries in the subgraph below a node. Recalling that \mathcal{R} and \mathcal{V} are the set of discoveries and false discoveries, we define $R(\text{Sub}(a))$ and $V(\text{Sub}(a))$ in a bottom-up fashion. They are set for leaves $a \in \mathcal{L}$ as

$$\begin{aligned} V(\text{Sub}(a)) &:= \mathbf{1}(a \in \mathcal{V}), \\ R(\text{Sub}(a)) &:= \mathbf{1}(a \in \mathcal{R}). \end{aligned}$$

We then calculate their effective values for non-leaf nodes a recursively up the DAG as

$$\begin{aligned} V(\text{Sub}(a)) &:= \mathbf{1}(a \in \mathcal{V}) + \sum_{b \in \text{Child}(a)} \frac{V(\text{Sub}(b))}{|\text{Par}(b)|}, \\ R(\text{Sub}(a)) &:= \mathbf{1}(a \in \mathcal{R}) + \sum_{b \in \text{Child}(a)} \frac{R(\text{Sub}(b))}{|\text{Par}(b)|}. \end{aligned} \tag{11}$$

They satisfy the following identities at the roots:

$$V = \sum_{a \in \mathcal{H}_1} V(\text{Sub}(a)) \quad \text{and} \quad R = \sum_{a \in \mathcal{H}_1} R(\text{Sub}(a)). \tag{12}$$

Before proceeding, we summarize the notation used in the proof.

Notation	Meaning
N	the number of nodes in the DAG, each one representing a null
D	the maximum depth of any node in the DAG
$\mathcal{H}_d, d \in \{1, \dots, D\}$	the set of hypotheses at depth d
$\mathcal{H}_{1:d}$	the set of hypotheses with depth less than or equal to d
$H_{d,i}, d \in \{1, \dots, D\}, i \in \{1, \dots, \mathcal{H}_d \}$	the N null hypotheses, one at each node
\mathcal{H}^0	the set of all null hypotheses
$P_{d,i}$	the N p -values, one at each node
\mathcal{L}	the set of all leaves in the DAG
$L = \mathcal{L} $	the total number of leaves in the DAG
$\alpha_{d,i}$	the level at which $H_{d,i}$ is tested
$R_{d,i}$	the indicator of whether the i -th hypothesis was rejected
\mathcal{R}	the set of all rejected hypotheses
$R = \sum_{d,i} R_{d,i}$	the total number of rejections
$\mathcal{R}(\mathcal{H}_{1:d})$	the set of all rejections up until, and including depth d
$R(\mathcal{H}_{1:d})$	the total number of rejections up until, and including depth d
$\mathcal{V} = \mathcal{H}^0 \cap \mathcal{R}$	the set of all false discoveries
V	the total number of false discoveries
$\text{Depth}(a)$	the depth of node a
$\text{Par}(a)$	the set of all parents of node a
$\text{Child}(a)$	the set of all children of node a
$\text{Sub}(a)$	the set of all descendants of node a , including node a
$m_a \leq \text{Sub}(a) $	the <i>effective</i> number of nodes in $\text{Sub}(a)$
ℓ_a	the <i>effective</i> number of leaves in $\text{Sub}(a)$
$R(\text{Sub}(a)) \leq m_a$	the <i>effective</i> number of discoveries made in $\text{Sub}(a)$
$V(\text{Sub}(a))$	the <i>effective</i> number of false discoveries made in $\text{Sub}(a)$

The key enabler of the proof of Theorem 1 is the following lemma.

Lemma 1. Under the assumptions of Theorem 1, **DAGGER** guarantees that

$$\mathbb{E} \left[\frac{V(\text{Sub}(a))}{R} \right] \leq \alpha \frac{\ell_a}{L} \quad \text{for all nodes } a \text{ in the DAG.} \quad (13)$$

Note that this lemma implies the statement of the theorem. Indeed, we have

$$\begin{aligned} \text{FDR} &= \mathbb{E} \left[\frac{V}{R} \right] = \sum_{a \in \mathcal{H}_1} \mathbb{E} \left[\frac{V(\text{Sub}(a))}{R} \right] \\ &\leq \sum_{a \in \mathcal{H}_1} \alpha \frac{\ell_a}{L} \\ &= \alpha, \end{aligned}$$

where the first equality follows by identity (12), the inequality by Lemma 1 and the last equality follows from the definition of effective number of leaves.

Hence, to conclude the proof of Theorem 1, we only need to prove Lemma 1 under the different dependence assumptions. With this aim in mind, we utilize variants of the super-uniformity lemmas proved by Ramdas et al. (2018a). In particular, first note that our super-uniformity assumption on null p -values can be reformulated as follows:

$$\text{For any } i \in \mathcal{H}^0, \quad \mathbb{E} \left[\frac{\mathbf{1}(P_i \leq t)}{t} \right] \leq 1 \text{ for any non-random } t \in [0, 1]. \quad (14)$$

Of course, if P_i is uniform then the above inequality holds with equality. The following lemma, which combines parts of Lemmas 1 and 3 from Ramdas et al. (2018a), guarantees that property (14) continues to hold for certain random thresholds $f(P)$. Recall that the term “nonincreasing” is interpreted coordinatewise, with respect to the orthant ordering.

Lemma 2 (Super-uniformity lemmas (Ramdas et al., 2018a)). Let $f : [0, 1]^n \mapsto [0, \infty)$ be an arbitrary function, let index $i \in \mathcal{H}^0$ refer to some null hypothesis, and let $g \subseteq \mathcal{H}^0$ refer to some null group with Simes’ p -value P_g .

(a) If f is nonincreasing, then under independence or positive dependence, we have

$$\mathbb{E} \left[\frac{\mathbf{1}(P_i \leq f(P))}{f(P)} \right] \leq 1.$$

(b) For any constant $c > 0$ and $\beta \in \beta(\mathcal{T})$, under arbitrary dependence we have

$$\mathbb{E} \left[\frac{\mathbf{1}(P_i \leq c\beta(f(P)))}{cf(P)} \right] \leq 1.$$

(c) If f is nonincreasing, and the base p -values are positively dependent, we have

$$\mathbb{E} \left[\frac{\mathbf{1}(P_g \leq f(P))}{f(P)} \right] \leq 1.$$

We will apply the above super-uniformity lemma to prove Lemma 1, where cases (a,b,c) above will correspond exactly to cases (a,b,c) in the statement of Theorem 1. Theorem statement (d) actually follows directly from theorem statement (b)—independence at leaf p -values is only required so that p -value combination methods like Fisher’s and Rosenthal’s can produce valid p -values; however, since different Fisher combinations can be arbitrarily dependent, we may utilize reshaping to protect against this scenario.

We now have the tools in place to prove Lemma 1, concluding the proof of Theorem 1. At a high level, Lemma 1 is proved using a bottom-up induction.

Proof. We divide the proof into two cases, depending on whether or not $H_a \equiv H_{d,i}$.

Case 1: Suppose $H_{d,i}$ is true. Note that $V(\text{Sub}(a))$ is nonzero only if $H_{d,i}$ was rejected. Since $V(\text{Sub}(a)) \leq R(\text{Sub}(a)) \leq m_a$, we have

$$\begin{aligned} \mathbb{E} \left[\frac{V(\text{Sub}(a))}{R} \right] &\leq \mathbb{E} \left[\frac{V(\text{Sub}(a))}{V(\text{Sub}(a)) + R - R(\text{Sub}(a))} \right] \\ &\leq \mathbb{E} \left[\frac{m_a}{m_a + R - R(\text{Sub}(a))} \mathbf{1}(H_{d,i} \text{ is rejected}) \right] \\ &\leq \mathbb{E} \left[\frac{m_a}{m_a + R(\mathcal{H}_{1:d}) - 1} \mathbf{1}(H_{d,i} \text{ is rejected}) \right], \end{aligned}$$

where the last inequality follows because $R = R(\mathcal{H}_{1:D}) \geq R(\mathcal{H}_{1:d}) + R(\text{Sub}(a)) - 1$. By definition of our procedure, we may then infer that

$$\begin{aligned} \mathbb{E} \left[\frac{V(\text{Sub}(a))}{R} \right] &\leq \alpha \frac{\ell_a}{L} \mathbb{E} \left[\frac{1}{\alpha \ell_a} \frac{L}{m_a + R(\mathcal{H}_{1:d}) - 1} m_a \mathbf{1} \left(P_{d,i} \leq \alpha \frac{\ell_a}{L} \frac{\beta_d(m_a + R(\mathcal{H}_{1:d}) - 1)}{m_a} \right) \right] \\ &\leq \alpha \frac{\ell_a}{L}, \end{aligned}$$

where the last inequality follows by applying Lemma 2 (a, b, c) to the function $f : P \mapsto \alpha \frac{\ell_a}{L} \frac{m_a + R(\mathcal{H}_{1:d}) - 1}{m_a}$, which can be seen to be nonincreasing in P ; indeed, decreasing any of the p -values can only possibly increase the total number of rejections.

Case 2: We handle the case when H_a is false by induction, leaves upwards. If H_a is a leaf, the lemma is trivially true. Now assume for the purpose of induction that the lemma is true for every false child of H_a , which along with case 1 means that the lemma would then be true for every child of H_a . Hence,

$$\begin{aligned} \mathbb{E} \left[\frac{V(\text{Sub}(a))}{R} \right] &= \sum_{b \in \text{Child}(a)} \frac{1}{|\text{Par}(b)|} \mathbb{E} \left[\frac{V(\text{Sub}(b))}{R} \right] \\ &\leq \sum_{b \in \text{Child}(a)} \frac{1}{|\text{Par}(b)|} \alpha \frac{\ell_b}{L} \\ &= \alpha \frac{\ell_a}{L}, \end{aligned}$$

where the first equality follows by the identity (11), the inequality follows by the induction hypothesis, and the last equality follows by the definition of the effective number of leaves. \square

This concludes the proof of Theorem 1.

C Additional experiments to study the effects of graph structure

In this appendix, we report the results of studies on how the structure of DAGs affect the achieved FDR and power of **DAGGER**. We focus on three scenarios: In the first scenario, we make a comparison between shallow and deep networks. In the second scenario, we compare DAGs of two shapes: the diamond and the hourglass DAGs. In the third scenario, we compare DAGs in the shape of a mountain with DAGs in the shape of a valley. In all cases, we generate random DAGs by first determining the number of nodes at each layer, then starting from the bottom layer, we randomly assign k distinct parents at depth $d - 1$ for each node at depth d . Given a DAG, the leaves are randomly chosen with probability π_0 to be true nulls. The rest of the hypotheses are assigned true if and only if all of its children are true.

C.1 Shallow versus deep.

We define shallow DAGs to be DAGS composed of two layers with the same number of nodes in each layer. Deep DAGs are composed of four layers with the same number of nodes on each layer. For both cases, each node in a lower layer is randomly assigned to two parents in its upper layer. The target FDR is fixed to be $\alpha = 0.2$, the number of nodes are fixed to be 500 and the signal strength of non-nulls is $\mu = 2$.

Figure 8 shows the plots of the achieved FDR and power of **DAGGER** versus the proportion of nulls on shallow and deep graphs. **DAGGER** achieves larger power with a higher false discovery proportion on shallow DAGs. In fact, an incorrect acceptance of a non-null in the first layer has a worse effect when the DAG is deeper, because non-nulls in its descendants have no chance to be discovered at all.

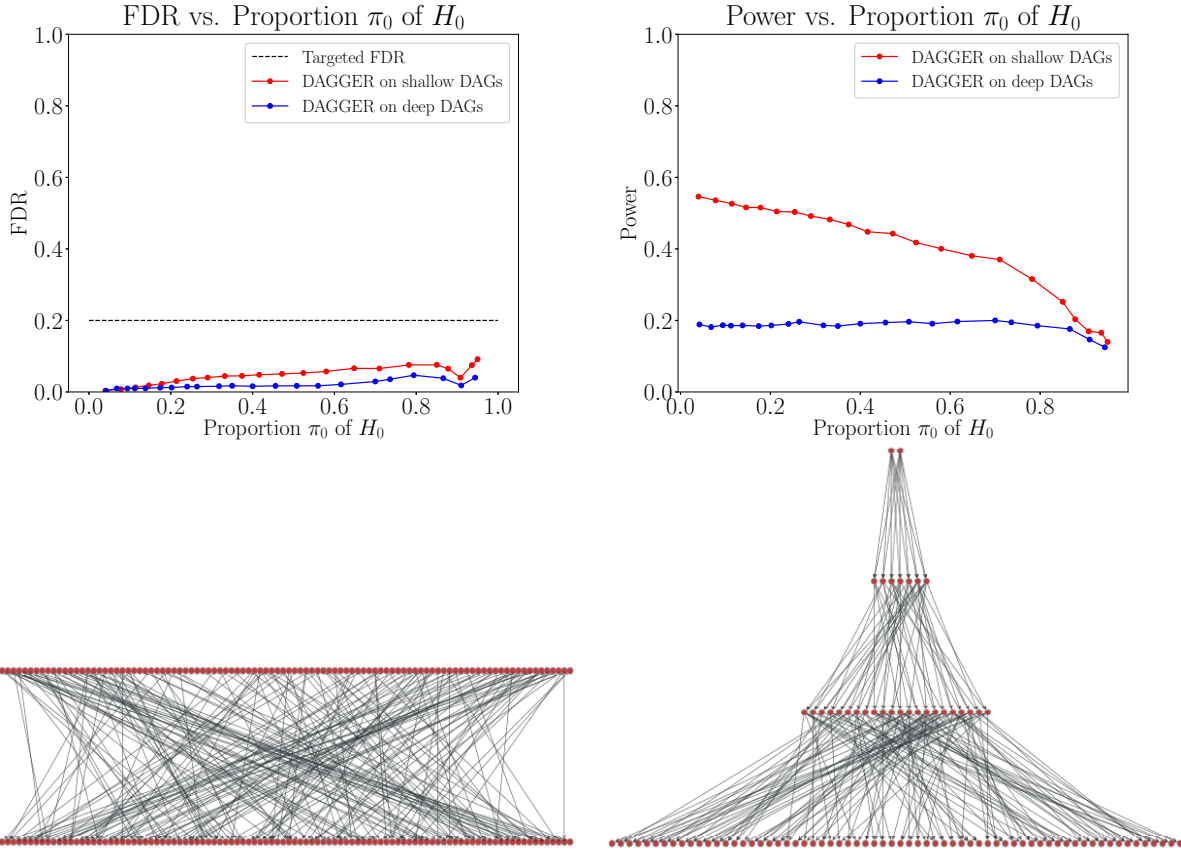


Figure 8: Plots of the FDR and power of **DAGGER** versus the proportion of nulls on shallow and deep graphs, controlling the target FDR $\alpha = 0.2$, number of nodes $n = 500$, signal strength $\mu = 2$ and with 100 repetitions.

C.2 Diamond versus hourglass.

We define diamond DAGs to have the largest number of nodes in middle layers and fewer nodes at the top and the bottom layers, while hourglass DAGs have the smallest number of nodes in middle layers with more nodes at the top and bottom. In this experiment, we consider diamond and hourglass DAGs with three layers and 500 nodes in total. For diamond DAGs, there are 125, 250, 125 nodes on the three subsequent layers. Each node in the last layer is randomly assigned to two parents in its middle layer. Each node in the middle layer is randomly assigned to one parent in the top layer. For hourglass DAGs, there are 200, 100 and 200 nodes on the three subsequent layers. Each node in the last layer is randomly assigned to one parent in its middle layer. Each node in the middle layer is randomly assigned to two parents in the top layer.

Figure 9 shows plots of the achieved FDR and power of **DAGGER** versus the proportion of nulls on diamond and hourglass graphs. We set the target FDR $\alpha = 0.2$ and the signal strength of non-nulls to be $\mu = 2$. **DAGGER** achieves a higher power on hourglass DAGs. Intuitively, for each non-null in the top layer incorrectly accepted, there are a larger number of non-nulls ignored by **DAGGER** among its descendants when the DAG is of diamond shape. For each non-null in the second layer incorrectly accepted, there are a larger number of non-nulls ignored by

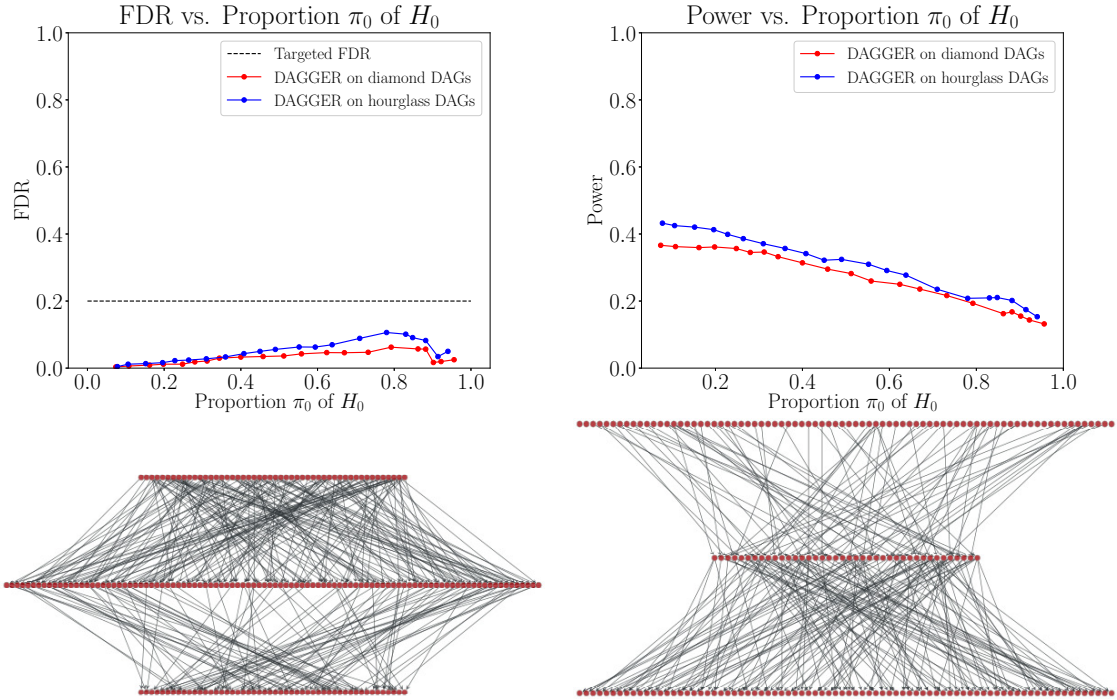


Figure 9: Plots of the achieved FDR and power of **DAGGER** versus the proportion of nulls on diamond and hourglass graphs, controlling the target FDR $\alpha = 0.2$, number of nodes $n = 500$, signal strength $\mu = 2$ and with 100 repetitions.

DAGGER among its descendants when the DAG is of hourglass shape. Due to the structure of DAGs, the first case has a stronger negative effect on the power of DAGs, resulting in less power in diamond DAGs.

C.3 Mountain versus valley.

Mountain DAGs have the smallest number of nodes in the top layers and increasing numbers of nodes in subsequent layers, while valley DAGs have the largest number of nodes in the first layers with increasing numbers of nodes in subsequent layers.

In this experiment, we consider mountain and valley DAGs with three layers and 498 nodes in total. For mountain DAGs, there are 83, 166, 249 nodes on the three subsequent layers. Each node in a layer is randomly assigned to one parent in its higher neighborhood layer. For valley DAGs, there are 249, 166, 83 nodes on the three subsequent layers. Each node in a layer is randomly assigned to two parents in its higher neighborhood layer.

Figure 10 shows plots of the achieved FDR and power of **DAGGER** versus the proportion of nulls on mountain and valley graphs. We set the target FDR $\alpha = 0.2$ and the signal strength of non-nulls to be $\mu = 2$. **DAGGER** achieves a higher power on valley DAGs. Intuitively, there are smaller number of descendants for each incorrectly accepted non-nulls in valley DAGs, among which all non-nulls are ignored.

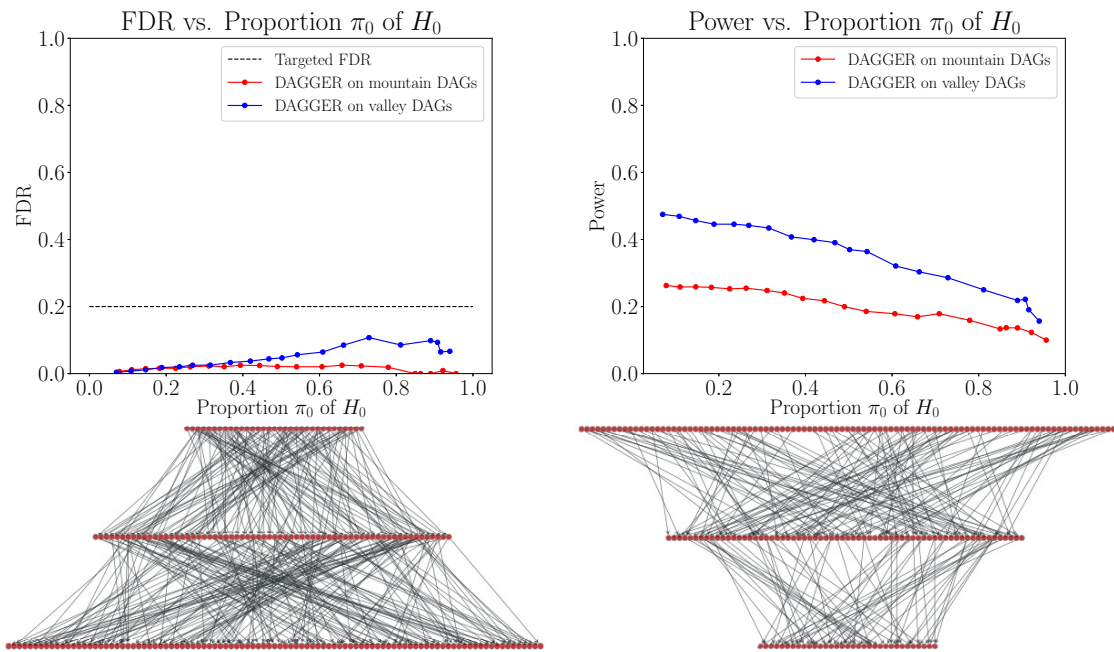


Figure 10: Plots of the achieved FDR and power of **DAGGER** versus the proportion of nulls on mountain and valley graphs respectively over 100 repetitions, with target FDR $\alpha = 0.2$, number of nodes $n = 498$, signal strength $\mu = 2$.