

# On the Runtime-Efficacy Trade-off of Anomaly Detection Techniques for Real-Time Streaming Data

Dhruv Choudhary   Arun Kejariwal   Francois Orsini  
MZ Inc.

## ABSTRACT

Ever growing volume and velocity of data coupled with decreasing attention span of end users underscore the critical need for real-time analytics. In this regard, anomaly detection plays a key role as an application as well as a means to verify data fidelity. Although the subject of anomaly detection has been researched for over 100 years in a multitude of disciplines such as, but not limited to, astronomy, statistics, manufacturing, econometrics, marketing, most of the existing techniques cannot be used as is on real-time data streams. Further, the lack of characterization of performance – both with respect to real-timeliness and accuracy – on production data sets makes model selection very challenging.

To this end, we present an in-depth analysis, geared towards real-time streaming data, of anomaly detection techniques. Given the requirements with respect to real-timeliness and accuracy, the analysis presented in this paper should serve as a guide for selection of the “best” anomaly detection technique. To the best of our knowledge, this is the first characterization of anomaly detection techniques proposed in very diverse set of fields, using production data sets corresponding to a wide set of application domains.

## CCS CONCEPTS

- Computing methodologies → Machine learning algorithms;
- Computer systems organization → Real-time systems;

## KEYWORDS

Stream Mining, Anomaly Detection, Time Series, Machine Learning, Pattern Mining, Clustering

## 1 INTRODUCTION

Advances in technology – such as, but not limited to, decreasing form factor, network improvements and the growth of applications, such as location-based services, virtual reality (VR) and augmented reality (AR) – combined with fashion to match personal styles has fueled the growth of Internet of Things (IoT). Example IoT devices include smart watches, smart glasses, heads-up displays (HUDs), health and fitness trackers, health monitors, wearable scanners and navigation devices, connected vehicles, drones et cetera. In a recent report [27], Cisco projected that, by 2021, there will be 929 M wearable devices globally, growing nearly 3× from 325 M in 2016 at a CAGR of 23%.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

© 2021 Copyright held by the owner/author(s).

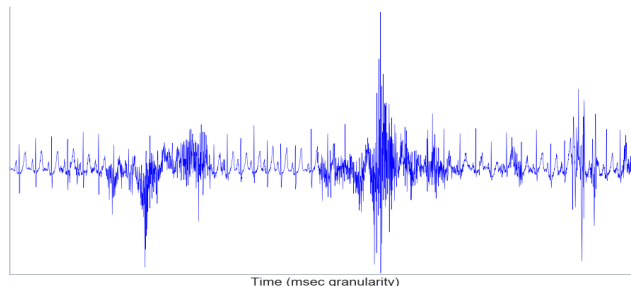


Figure 1: Example ECG time series (10 msec granularity)

The continuous and exponential increase of volume and velocity of the data streaming from such devices limit the use of existing Big Data platforms. To this end, recently, platforms such as Satori [5] have been launched to facilitate low-latency reactions on continuously evolving data. The other challenge in this regard pertains to analysis of real-time streaming data. The notion of *real-time*, though not new, is not well defined and is highly contextual [62]. The following lists the various classes of latency requirements [2] and example applications.

- *Nano seconds*: High Frequency Trading (HFT).
- *Micro seconds*: Data center applications, cloud networks.
- *Milli seconds*: Text messaging, Publish Subscribe systems, cloud gaming.
- *1-3 seconds*: Ad targeting.

In the realm of analytics on real-time streaming data, anomaly detection plays a key role as an application as well as a means to verify data fidelity. For example, finding anomalies in one’s vitals (see Figure 1 as an illustration) can potentially help doctors to take appropriate action in a timely fashion, thereby potentially obviating complications. Likewise, finding anomalies in physiological signals such as electrocardiogram, electromyogram, skin conductance and respiration of a driver can help gauge the stress level and thereby manage non-critical in-vehicle information systems [49].

Although the subject of anomaly detection has been researched for over 100 years [3], most of the existing techniques cannot be used as is on real-time data streams. This stems from a multitude of reasons – a small set of these are mentioned below.

- Non-conformity between the assumptions behind a given technique and the underlying distribution and/or structure of data streams
- The need for labels; in other words, many existing techniques are supervised in nature. Note that obtaining labels in a production environment is not feasible
- Being multi-pass and non-incremental
- Lack of support for recency
- Lack of robustness
- Lack of low latency computation

Domain	Technique	Summary	P/N-P	<Pt,Pa>	Inc.	Robust	Recency	TG	CFAR
Statistics	Mu-Sigma [58, 73, 85, 92, 93, 106, 107]	Thresholds based on mean and standard deviation	P	<✓, X>	✓		✓	1μsec	
	Med-Mad [70]	Thresholds based on median and median absolute deviation	P	<✓, X>		✓		1msec	
	GeneralisedESD [42, 43, 86, 98, 102]	Uses Student t-distribution to calculate a max number of outliers	P	<✓, X>		✓		100msec	✓
	r-Estimator [75, 80, 87, 111]	Measure of Spread with better Gaussian efficiency than MAD	P	<✓, X>		✓		1msec	
	Huber M-Estimator [54, 105]	Huber's M-estimator	P	<✓, ✓>		✓		10msec	
	t-digest [30, 32, 83]	Streaming percentile based detection	N-P	<✓, X>	✓		✓	10μsec	✓
	AdjBox Plots [55, 104]	Adjusted whiskers for box plots	N-P	<✓, X>		✓		10msec	
Time Series Analysis	STL [28, 46, 84, 102]	Seasonality Decomposition	N-P	<✓, X>		✓		100msec	
	SARMA [9, 10, 18, 33, 56]	Seasonal Auto Regressive Moving Average (ARMA)	P	<✓, X>				1sec	
	STL-ARMA-KF [16, 25, 61, 94, 95]	STL, ARMA on residuals	P	<✓, X>				100msec	
	STL-RobustKF [6, 99]	ARMA with Robust Kalman	P	<✓, X>	✓	✓		100msec	
	SDAR [101, 108, 109]	Sequential Discounting AR	P	<✓, X>	✓		✓	100msec	
	RobustOutliers [31, 37, 60, 78]	Intervention Analysis with ARMA	P	<✓, X>		✓		10min	
	TBATS [39, 51, 57, 72, 74]	Exponential Smoothing with Fourier Terms for Seasonality	P	<✓, X>				10sec	
Pattern Mining	HOTSAX [63, 77]	Pattern Distance based on SAX	N-P	<X, ✓>	✓			1sec	
	RRA [90, 91]	Rare Rule Anomaly based on Grammar Induction	N-P	<X, ✓>	✓			1sec	
	DenStream [22]	Online Density Micro-Clustering	N-P	<✓, ✓>	✓	✓	✓	20msec	
	CluStree [64]	Hierarchical Micro-Clustering	N-P	<✓, ✓>	✓			100msec	
	DBStream [34, 47, 97, 110]	Incremental Shared Density Based clustering	N-P	<✓, ✓>	✓	✓	✓	10msec	
Machine Learning	MBk-means [13, 113]	Mini-batch clustering with k-means	N-P	<✓, ✓>				10msec	
	PCA [52, 53, 59, 81]	Principal Components Analysis	P	<✓, X>				1msec	
	RobustPCA [21, 100]	Low Rank Approximation	P	<✓, X>		✓		1sec	
	IForest [44, 71, 96]	Isolation Forests	N-P	<✓, ✓>				100msec	
	OneSVM [12, 89]	One Label SVM	P	<X, ✓>				1sec	

**Table 1: Classification of anomaly detection techniques. P: Parametric technique, N-P: Non-parametric technique, Pt: Point anomalies, Pa: Pattern anomalies, Inc.: Incremental technique, Robust: Robustness to noise, Recency: Ability to weigh observations by age, TG: Time Granularity of a data stream that can use the method, CFAR: Constant False Alarm Rate.**

- Lack of support for constant false alarm rate
- Lack of scalability

Further, other characteristics of IoT devices such as, but not limited to, small storage, small power budgets consumption et cetera limit the use of off-the-shelf anomaly detection techniques. Last but not least, constantly evolving nature of data streams in the wild call for support for continuous learning.

As overviewed in [3], anomaly detection has been researched in a wide variety of disciplines, for example, but not limited to, operations, computer vision, networking, marketing, and social media. Unfortunately, there does not exist a characterization of the performance of anomaly detection techniques – both with respect to real-timeliness and accuracy – on production data sets. This in turn makes model selection very challenging. To this end, in this paper, we present an in-depth analysis, geared towards real-time streaming data, of a large suite of anomaly detection techniques. In particular, the main contributions of the paper are as follows:

- We present a classification of *over 20 (!)* anomaly detection techniques across seven dimensions (refer to Table 1).
- As a first, using *over 25 (!)* real-world data sets and real hardware, we present a detailed evaluation of the real-timeliness of the anomaly detection techniques listed in Table 1. It is important to note that the evaluation was carried out in an unsupervised setting. In other words, irrespective of the availability of labels, a model was not trained a priori.
- We present detailed insights into the performance – as measured by *precision*, *recall* and  $F_1$  score – of the anomaly detection techniques listed in Table 1. Specifically, we also present a deep dive view into the behavior subject to the following:
  - Trend and level shifts
  - Change in variance
  - Change in seasonal level
  - Change in seasonality period

- We present a map of the accuracy-runtime trade-off for the anomaly detection techniques.
- Given an application domain and latency requirement, based on empirical evaluation, we make recommendations for the “best” technique for anomaly detection.

Given the requirements with respect to real-timeliness and accuracy, we believe that the analysis presented in this paper should serve as a guide for selection of the “best” anomaly detection technique. To the best of our knowledge, this is the first characterization of anomaly detection techniques proposed in a very diverse set of fields (refer to Table 1) using production data sets corresponding to a wide set of applications.

The rest of the paper is organized as follows: In Section 2, we define the terms in the subsequent sections. Section 3 present a brief overview of the techniques listed in Table 1. Section 4 details the experimental set up and Section 5 walks the reader through a deep dive of the analysis and insights learned from the experiments. Finally, in Section 6 we conclude with directions for future work.

## 2 PRELIMINARIES

In this section we define the terms used in the rest of paper.

*Definition 2.1. Point Anomalies:* are data points which deviate so much from other data points so as to arouse suspicions that it was generated by a different mechanism [48].

*Definition 2.2. Pattern Anomalies:* Continuous set of data points that are collectively anomalous even though the individual points may or may not be point anomalies.

*Definition 2.3. Change Detection:* This corresponds to a permanent change in the structure of a time series, e.g., change in the mean level (*Level Shift*), change in the amplitude of seasonality (*Seasonal Level Shift*) or change in the noise amplitude (*Variance Change*).

*Definition 2.4. Concept Drift:* This corresponds to the change in statistical properties, for example, the underlying distribution, of a time series over time.

Next, we define the desirable properties for anomaly detection techniques geared towards real-time data streams.

**PROPERTY 2.1.** Incremental: *A property via which a technique can analyze a new data point without re-training a model.*

**PROPERTY 2.2.** Recency: *Under this, a technique assigns weights to data points which decays with their age. In other words, recent data points play a dominant role during model training.*

**PROPERTY 2.3.** Constant False Alarm Rate (CFAR): *A property under which the upper limit on the false alarm rate (FAR) – defined as the ratio of falsely tagged anomalies and the total number of non-anomalous points – is constant.*

### 3 BACKGROUND

As mentioned earlier in Section 1, the subject of anomaly detection has been researched for over 100 years [3]. A detailed walkthrough of prior work is beyond the scope of this paper (the reader is referred to the books [7, 14, 48, 88] or surveys [17, 24, 26, 40, 45, 79, 114] written on the subject). In the section, we present a brief overview of the techniques listed in Table 1.

#### 3.1 Statistics

In this subsection we briefly overview the common statistical techniques used for anomaly detection.

**3.1.1 Parametric Approaches.** One of the most commonly used rule to detect anomalies – popularly referred to as the  $\mu \pm 3 \cdot \sigma$  rule – whereby, observations that lie 3 or more deviations ( $\sigma$ ) away from the mean ( $\mu$ ) are classified as anomalies. The rule is based on the following two assumptions: (a) the underlying data distribution is normal and (b) the time series is stationary. In practice, production time series often do not satisfy the above, which results in false positives. Further, both  $\mu$  and  $\sigma$  are not robust against the presence of anomalies. To this end, several robust estimators have been proposed. Specifically, Huber M-estimator [54] is commonly used as a robust estimate of location, whereas median,  $\tau$  estimator [111] and Median Absolute Deviation (MAD) are commonly used as robust estimates of scatter.

In the presence of heavy tails in the data,  $t$ -distribution [112] is often used as an alternative to the normal distribution. The Generalized Extreme Studentized Deviate (ESD) test [86] uses the  $t$ -distribution to detect outliers in a sample, by carrying out hypothesis tests iteratively. GESD requires an upper bound on the number of anomalies, which helps to contain the false alarm rate (FAR).

**3.1.2 Non-parametric Approaches.** It is routine to observe production data to exhibit, for example but not limited to, skewed and multi-modal distribution. For finding anomalies in such cases, several non-parametric approaches have been proposed over the years. For instance,  $t$ -digest [32] builds an empirical cumulative density function (CDF), using adaptive bin sizes, in a streaming fashion. Maximum bin size is determined based on the quantile of the value  $\max(1, \lfloor 4N\delta q(1-q) \rfloor)$ , where  $q$  is the quantile and  $\delta$  is a compression factor that controls the space requirements. In a similar vein, adjusted Boxplots [104] have been proposed to identify

anomalies in skewed distributions. For this, it uses a robust measure of the skew called medcouple[19].

#### 3.2 Time Series Analysis

Observations in a data streams exhibit autocorrelation. Thus, prior to applying any anomaly detection technique, it is critical to weed out the autocorrelation. Auto Regressive Moving Average (ARMA) [18] models have been commonly used for analysis of stationary time series. ARMA models are formulated as State Space Models (SSM) [33], where one can employ Kalman Filters for model estimation and inference. Kalman filters (KF) [61] are first order Gaussian Markov Processes that provide fast and optimal inference for SSMs. KFs assume that the hidden and observed states are Gaussian processes. When that assumption fails, the estimates obtained via KFs can potentially be biased. Robust Kalman Filters (*RobustKF*) [99] treat the residual error as a statistical property of the process and down weight the impact of anomalies on the observed and hidden states.

Sequential Discounting AutoRegressive (SDAR) filters assign more weight to recent observations in order to adapt to non-stationary time series or change in dynamics of a system [108]. Further, a key feature of SDAR filters is that they update incrementally. A discount rate is specified to guide the rate of adaptation to changing dynamics.

#### 3.3 Pattern Mining

Time series with irregular but self-similar patterns are difficult to model with parametric methods. Non-parametric data mining approaches that find anomalous patterns and/or subsequences have been proposed for such time series. SAX is a discretization technique that transforms a series from real valued domain to a string defined over a finite alphabet  $\mathcal{F}$  of size  $a$  [63]. It divides the real number scale into equal probabilistic bins based on the normal model and assigns a unique letter from  $\mathcal{F}$  to every bin. Before discretization, SAX  $z$ -normalizes the time series to map it to a probabilistic scale. It then forms words from consecutive observations that fall into a sliding window. The time series can now be represented as a document of words. SAX employs a dimensionality reduction technique called Piecewise Aggregate Approximation (PAA) which chunks the time series into equal parts and computes the average for each part. The reduced series is then discretized for further processing.

The key advantage of SAX over other discretization heuristics [20, 38] is that the distance between two subsequences in SAX lower bounds the distance measure on the original series. This allows SAX to be used in distance based anomaly detection techniques. For example, HOTSAX [63] uses SAX to find the top- $k$  discords.

Another method that leverages SAX is the Rare Rule Anomaly (RRA) technique [90]. RRA induces a context free grammar from the data. The grammar induction process compresses the input sequence by learning hierarchical grammar rules. The inability of compressing a subsequence is indicative of the Kolmogorov randomness of the sequence and hence, can be treated as being an anomaly. RRA uses the distance to the closest non-self match subsequence as the anomaly score.

#### 3.4 Machine Learning

Machine Learning approaches such as clustering, random forests, and deep learning are very effective in modeling complex time

series patterns. Having said that, the training time is usually very high and many of these techniques are not incremental in nature. Thus, most of these techniques work in batch mode where training is performed periodically.

Isolation forests [71] is a tree based technique that randomly splits the data recursively in an attempt to isolate all observations into separate leaves. The number of splits needed to reach a data point from the root node is called the path length. Many such random split forests are constructed and the average path length to reach a point is used to compute the anomaly score. Anomalous observations are closer to the root node and hence have lower average path lengths.

One Label Support Vector Machines (SVMs) [89] are often used to construct a non-linear decision boundary around the normal instances, thereby isolating anomalous observation that lie away from the dense regions of the support vectors. A key advantage of this technique is that it can be used even with small number of data points, but are potentially slow to train.

### Clustering

There are two main approaches to handle the stream clustering problem: Micro-Clustering (MC) and Mini-Batching (MB).

#### Micro-Clustering

A large number of techniques follow a 2-phase Micro-clustering approach [8] which has both an online as well as an offline component. The online component is a dimensionality reduction step that computes the summary statistics for observations very close to each other (called micro-clusters). The offline phase is a traditional clustering technique that ingests a set of MCs to output the final clustering, which can be used to identify anomalous MCs.

*DenStream* is a density-based streaming technique which uses the MC paradigm [22]. In the online phase, it creates two kinds of MCs: potential micro-clusters ( $p_{MC}$ ) and anomalous micro-clusters ( $o_{MC}$ ). Each cluster maintains a weight  $w$  which is an exponential function of the age of the observations in the cluster.  $w$  is updated periodically for all clusters to reflect the aging of the observations. If  $w$  is above a threshold ( $t_\alpha$ ), it is deemed as a core micro-cluster. If  $w$  is more than  $\beta t_\alpha$  (where  $0 < \beta < 1$ ), the cluster is deemed as a  $p_{MC}$ , otherwise it is deemed as a  $o_{MC}$ . When a new observation arrives, the technique looks for a  $p_{MC}$  that can absorb it. If no  $p_{MC}$  is found, it looks for a  $o_{MC}$  that can absorb the observation. If no  $o_{MC}$  is found, a new  $o_{MC}$  is instantiated. Older clusters are periodically removed as their  $w$  become smaller.

*DBStream* is an incremental clustering technique that decays MCs, akin to *DenStream*. It also keeps track of the shared density between MCs. During the offline phase, it leverages this shared density for a DBSCAN-style clustering to identify anomalous MCs.

Hierarchical clustering techniques such as *Clustree* use the MC paradigm to construct a hierarchical height balanced tree of MCs [64]. MC corresponding to an inner node is an aggregation of the clusters of all its children. A key advantage of these techniques is their being incremental; having said that, the data structures can grow balloon in size. For anomaly detection, the distance of a new observation from the closest leaf MC is used as the anomaly score.

#### Mini-Batching

The second approach for a data stream clustering entails batch clustering of a sample generated from the data stream. These samples are significantly larger than the micro-clusters and hence the name

mini-batch. An example technique of this kind is the mini-batch  $k$ -means which uses cluster centroids from the previous clustering step to reduce the convergence time significantly [35].

### 3.5 Potpourri

Seasonality in time series is commonly observed in production data. Filtering of the seasonal component is critical for effective anomaly detection. In this regard, a key challenge is how to determine the seasonal period. For this, a widely used approach is to detect strong peaks in the auto-correlation function coupled with statistical tests for the strength of the seasonality.

Seasonal-Trend-Loess (STL) [28] is one the most commonly used techniques for removing the seasonal and trend components. STL uses LOESS [29] to smooth the seasonal and trend components. Presence of anomalies can potentially induce distortions in trend which in turn can result in false positives. To alleviate this, *Robust STL* iteratively estimates the weights of the residual – the number of robustness iterations is an input manual parameter. The downside of this is that the robustness iterations slow down the run time performance. Vallis et al. [103] proposed the use of piecewise medians of the trend or quantile regression – this is significantly faster than using the robustness iterations. Although STL is effective when seasonality is fixed over time, moderate changes to seasonality can be handled by choosing a lower value for the “s.window” parameter in the STL implementation of R.

Seasonal ARMA (SARMA) models handle seasonality via the use of seasonal lag terms [33]. A key advantage with the use of SARMA models is the support for change in seasonality parameters over time. However, SARMA is not robust to anomalies. This can be addressed via the use of robust filters [23]. Note that the estimation of extra parameters increases the relative model estimation time considerably. SARMA models can also handle multiple seasonalities at the expense of complexity and runtime. Akin to SARMA, *TBATS* is an exponential smoothing model which handles seasonality using Fourier impulse terms [72].

Principal Components Analysis (PCA) is another common method used to extract seasonality. However, the use of PCA requires the data to be represented as a matrix. One way to achieve this is to fold a time series along its seasonal boundaries so as to build a rectangular matrix ( $M$ ) where each row is a complete season. Note that PCA is not robust to anomalies as it uses the covariance matrix which is non-robust measure of scatter. To alleviate this, Candes et al. proposed Robust PCA (RPCA) [21], by decomposing the matrix  $M$  into a low rank component ( $L$ ) and a sparse component ( $S$ ) by minimizing the nuclear-norm of  $M$ .

## 4 EXPERIMENTAL SETUP

In this section, we detail the data sets used for evaluation, the underlying methodology and walk through any transformation and/or tuning needed to ensure a fair comparative analysis.

### 4.1 Data Sets


Table 2 details the data sets used for evaluation. Note that the data sets belong to a diverse set of domains. The diversity of the data sets is reflected based on the following attributes:

- **Seasonality Period (SP):** Most of these time series exhibit seasonal behavior and the SP increases with TG. For instance, the minutely time series of operations data experience daily



Domain	Description	Acronym	Len	WinSize	PL	Cnt	TG	Labels	SP	SJ	LS	VC	SLD	SLS
<b>NAB [67]</b>	NAB Advertising Click Rates	nab-ctr	1600	240	20	4	1 hr	✓	24			✓	✓	✓
	NAB Tweet Volumes	nab-twt	15800	2880	20	4	1 hr	✓	288			✓	✓	✓
	NAB Ambient Temperature	nab-iot	7268, 22696	5000	20	1	1 hr	✓	24		✓	✓	✓	✓
<b>YAD [66]</b>	Real operations series	yahoo-a1	1440	720	10	67	1hr	✓	24,168		✓	✓		✓
	Synthetic operations series	yahoo-a2	1440	720	10	100	1hr	✓	100-300		✓	✓		✓
	Synthetic operations series	yahoo-a3	1680	720	10	100	1hr	✓	24,168		✓	✓		✓
<b>HFT [4]</b>	Facebook Trades Dec. 2016	fin-fb	334783	10000	60	1	1 sec	Manual			✓	✓		
	Google Trades Dec. 2016	fin-goog	127848	10000	60	1	1 sec	Manual			✓	✓		
	Netflix Trades Dec. 2016	fin-nflx	177018	10000	60	1	1 sec	Manual			✓	✓		
	SPY Trades Dec. 2016	fin-spy	392974	10000	60	1	1 sec	Manual			✓	✓		
<b>Ops.</b>	Minutely Operations Data	ops-*	120000	14400	60	44	1 min		1440,60		✓	✓	✓	✓
<b>IoT [15]</b>	Power Usage of Freezer	iot-freezer01	432000	23820	1800	1	1 sec		2382	2370-2390			✓	✓
	Power Usage of Fridge	iot-fridge01	432000	81900	1800	1	1 sec		8190	7900-8200			✓	✓
	Power Usage of Dishwasher	iot-dishwasher01	432000	20000	1800	1	1 sec						✓	✓
	Power Usage of Freezer	iot-freezer02	432000	20000	1800	1	1 sec						✓	✓
	Power Usage of Fridge	iot-fridge02	432000	30360	1800	1	1 sec		3036	3030-3080			✓	✓
	Power Usage of Lamp	iot-lamp02	432001	20000	1800	1	1 sec			2370-2390			✓	✓
	Power Usage of Freezer	iot-freezer04	432000	41500	1800	1	1 sec		4150	4100-4200			✓	✓
	Power Usage of Fountain	iot-fountain05	432000	432000	1800	1	1 sec		86400				✓	✓
	Power Usage of Fridge	iot-fridge05	432000	47500	1800	1	1 sec		4750	4720-5000			✓	✓
	ECG Sleep Apnea [82]	health-apnea-ecg/a02	15000	2000	40	1	10 msec	✓	100	90-110	✓			
<b>Health [41]</b>	ECG Seizure Epilepsy [11]	health-szdb/sz04	10000	2000	40	1	5 msec	✓	200	190-230	✓			
	ECG Smart Health Monitoring [76]	health-sharedb/02019	15000	2000	40	1	8 msec	✓	110	95-105	✓			
	Skin Resistance Under Driving Stress [50]	health-drivenb/driver02	22000	2000	40	1	60 msec	✓			✓			
	Skin Resistance Under Driving Stress [50]	health-drivenb/driver09/foot	20000	2000	40	1	60 msec	✓			✓			
	Respiration Under Driving Stress [50]	health-drivenb/driver09/resp	20000	2000	40	1	60 msec	✓			✓			
	ECG Premature Ventricular Contraction [65]	health-qtdb/0606	10000	2000	40	1	4 msec	✓	176	170-180	✓			
	Power Usage of Water Fountain													

**Table 2: Anomaly detection datasets.** Len: Average length of the time series, WinSize: Window Size, PL: Pattern Length, Cnt: Number of Series, TG: Time Granularity, SP: Seasonal Period, SJ: Seasonal period Jitter, LS: Level Shift, VC: Variance Change, SLD: Seasonal Level Drift, SLS: Seasonal Level Shift

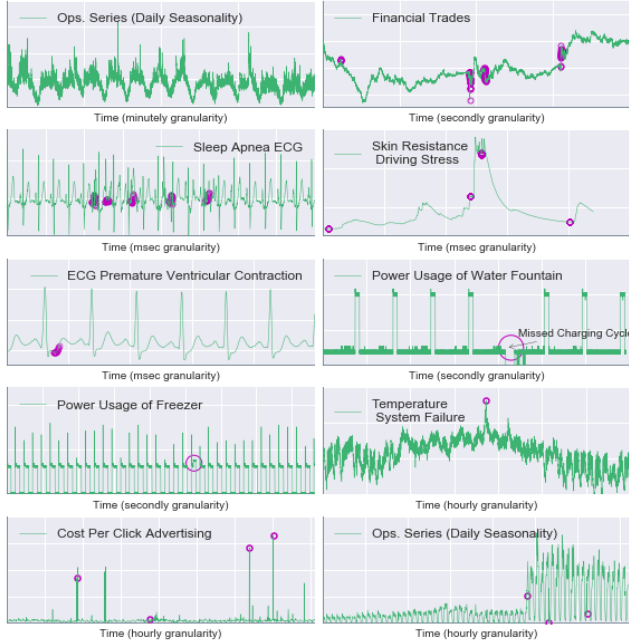

**Figure 2: Illustration of the characteristics of data sets from different domains**

seasonality (period=1440). In contrast, secondly time series of *IoT* workloads experience very long seasonalities (period=2k - 90k) depending on the operation cycles of the appliances.

*Health* series have coarse TG but the seasonal periodicity are usually small (period=100 - 200).

■ **Seasonal Jitter:** It refers to the presence of jitter in seasonal periods, and is an artifact of coarse TG. *IoT* and *Health* time series exhibit this property.

■ **Non-stationarity:** Time series exhibit one or more types of nonstationarities with respect to their level (amplitude) and variance.

Figure 2 illustrates characteristics of these time series. From the figure we note that most of the series are non-stationary and exhibit one of these types of nonstationarities:

The *Numenta Anomaly Benchmark* (NAB) [67] and the *Yahoo Anomaly Dataset* (YAD) [66] – which are considered industry standard – provide labels. NAB itself is a collection of time series from multiple domains like Advertising Click Through Rates (*nab-ctr*), volume of tweets per hour (*nab-twt*), sensor data for temperature (*nab-iot*). The NAB series used herein have hourly granularity. YAD is composed of three distinct data sets: *yahoo-a1* comprises of a set of operations time series with hourly granularity, whereas *yahoo-a2* and *yahoo-a3* are synthetic time series.

Anomalies detection in the context of high frequency trading (HFT) surfaces arbitrage opportunities and hence can have potentially large impact to the bottom line. In light of this, we included a month long time series of trades for the tickers FB, GOOG, NFLX and SPY. The time series, purchased from QuantQuote [4], are of secondly granularity.

We collected 44 minutely time series of operations data from our production environment. The ECO dataset [15] comprises of secondly time series of power usage. Given the increasing emphasis

on healthcare apps owing to the use IoT devices in Healthcare domain, we included seven data sets from Physiobank [41].

## 4.2 Methodology

To emulate unbounded evolutionary data streams, we chose long time series and applied anomaly detection techniques for every new data point in a streaming fashion. Further, we limit the number of data points a technique can use to determine whether the most recent observation is anomalous. A common way of doing this is to define a maximum **Window Size** that can be used for training or modeling.

Window size is an important hyper-parameter which has a direct correlation with runtime and accuracy. Longer windows require more processing time, while shorter windows result in drop in accuracy. For a fair comparative analysis, we set an upper limit on the values of window size for different data sets, as listed in Table 2. The values were set based on the data set, e.g., for the minutely operations time series (seasonal period=1440), one would need at least 10 periods [68] to capture the variance in the seasonal patterns, giving a seasonal period of 14400. This is the maximum allowed value; techniques may choose a shorter seasonal period depending on their requirements. For instance, *TBATS* needs fewer number of periods to learn and hence, we used only 5 periods (WinSize=7200) in the experiments. Data sets such as *YAD* have fixed seasonal periods due to hourly *TG*, and hence, require much smaller window sizes to achieve maximum accuracy. *IoT* data sets have the longest window sizes due to the long seasonal periods.

**Pattern Length (PL)** is a hyper-parameter of all pattern mining techniques. The value of *PL* is dependent on the application and the type of anomalies. For example, *IoT* workloads require a *PL* of  $\approx 30$  minutes, whereas *Health* time series usually require a *PL* of only 40. A moving window equal to the *PL* is used to extract subsequences from the time series. Although pattern anomalies are typically not of fixed length in production data, most techniques require a fixed length to transform the series into subsequences. To alleviate this, post-processing can be used to string together multiple length anomalies [90].

In order to characterize the runtime performance of the technique listed in Table 1, we measured the runtime needed to process every new point in a time series. For every new data point in a time series, each technique was run 10 times and the median runtime was recorded. Across a single time series, the run-times for all the data points in the time series were averaged. Across multiple time series in a group, geometric mean of the run-times<sup>1</sup> of the individual series is used to represent the runtime for the group. Given that some of the data sets listed in Table 2 have short time series (e.g., *NAB* and *YAD*), we replicate these series 10 times to increase their length. All run-times are reported in milliseconds (msec).

**4.2.1 Metrics.** Accuracy for labeled data sets is calculated in terms of the correctly identified anomalies called True Positives (TP), falsely detected anomalies called False Positives (FP) and missed anomalies called False Negatives (FN). To measure accuracy of a single time series, we use the following three metrics:

- **Precision:** defined as the ratio of true positives (TP) to the total detected anomalies:  $Pr = \frac{TP}{TP+FP}$
- **Recall:** defined as the ratio of true positives (TP) to the total labeled anomalies:  $Re = \frac{TP}{TP+FN}$
- **$F_1$ -score:** defined as the weighted harmonic mean of Precision and Recall:  $F_1 = (1 + \beta^2) \frac{Pr * Re}{\beta^2 * Pr + Re}$ , where  $\beta$  is a constant that weights precision vs recall based on the application

In most applications, it is common to set  $\beta=1$ , giving equal weightage to precision and recall. But for healthcare, recall is sometimes more important than precision and hence  $\beta=2$  is often used [69]. This is because false negatives can be catastrophic. To calculate accuracy across a group of time series, we report the micro-average *F<sub>1</sub>*-score [36], which calculates precision and recall across the whole group. The use of this is subject to time series in a group being similar to each other.

Most of our data sets are labeled with point anomalies. In light of this, we propose the following methodology to compute accuracy for detected patterns against labeled point anomalies. Let  $(Y_1, Y_2, Y_3, \dots, Y_p, Y_{p+1})$  denote a time series and the pattern  $Y_2-Y_p$  be detected as a pattern anomaly. Let  $Y_{p-1}$  be a true anomaly. A naive way to compute a *TP* is to have a pattern anomaly end at the true anomaly. In this case,  $Y_2-Y_p$  would be considered a *FP*. In contrast, *TP* can correspond to an instance where a true anomaly occurs anywhere inside the boundary of an anomalous pattern. Pattern anomalies are very often closely spaced due to the property of neighborhood similarity as described by Handschin and Mayne [63]. Given this, it is important to count each true anomaly only once even if multiple overlapping pattern anomalies are detected. A post-processing pass can help weed out such overlapping subsequences.

Given that the methodology of calculating accuracy is so different for pattern techniques, we advise the reader to only compare accuracies of pattern techniques with other pattern techniques.

**4.2.2 System Configuration.** Table 3 details the hardware and software system configuration. Table 4 details the *R* and *Python* packages used. For *HOTSAX* and *RRA*, we modified the implementation so as to make them amenable to a streaming data context.

Architecture	Intel(R) Xeon(R)	Frequency	2.40GHz
Num Cores	24	Memory	128GB
L1d cache	32K	L1i cache	32K
L2 cache	256K	L3 cache	15360K
OS Version	CentOS Linux release 7.1.1503	R, Python	3.2.4, 2.7

**Table 3: System Configuration**

R			
stream, streamMOA	MASS	rrcov	jmotif
robustbase	forecast	tsoutliers	rpca
Python			
pykalman	scikit-learn	tdigest	statsmodels

**Table 4: Packages and Libraries**

<sup>1</sup>This approach is an industry standard as evidenced by its use by SPEC [1] for over 20 years.

### 4.3 Hyper-parameters

In the interest of reproducibility, we detail the hyper-parameters used for the techniques listed in Table 1. In addition, we detail any transformation and/or tuning needed to ensure a fair comparative analysis.

**4.3.1 Statistical techniques.** For parametric statistical techniques such as *mu-sigma*, *med-mad* et cetera, we set the threshold to  $3 \cdot \sigma$  or its equivalent robust estimate of scale.

A constant false alarm rate can be set for techniques such as *t-digest* and *GESD*. In case of the former, we set the threshold at 99.73<sup>th</sup> percentile which is equivalent to  $3 \cdot \sigma$ . In case of the latter, one can set an upper limit on the number of anomalies. Based on our experiments, we set this parameter to 0.02 for all, but the *Health* data sets. The parameter was set to 0.04 for the the *Health* data sets to improve recall at the expense of precision.

Model parameter estimates are computed at each new time step over the moving window. As these techniques do not handle seasonality or trend, we removed seasonality and trend using *STL* and evaluate these techniques on the residual of the *STL*. In light of this, i.e., statistical techniques are not applicable to the raw time series in the presence of seasonality or trend, the accuracy of these techniques should not be compared with ML and Pattern Mining based techniques.

**4.3.2 Time series analysis techniques.** Parametric time series analysis techniques such as *TBATS*, *SARMA*, *STL-ARMA* estimate model parameters and evaluate incoming data against the model. Retraining at every time step is often unnecessary as the temporal dynamics do not change at every point. In practice, it is common to retrain the model periodically and this retraining period is another hyper-parameter. This period depends on the application, but it should not be greater than the window size. We set the retraining period to be the same as the window size. We include the training runtime as part of the total runtime of a techniques so as to assess the total detection time for anomalies.

*STL* with default parameters assumes periodic series. To allow gradual seasonal level drift, we set the *stl-periodic* parameter equal to 21. For *RobustSTL*, we use 4 robust iterations. *SDAR* is an incremental technique that requires a learning rate parameter ( $r$ ). Based on our experiments, we set  $r = 0.0001$ . *RobustKF* is the robust kalman filter by Ting et al.[99] which requires parameters  $\alpha$  and  $\beta$  for the *Gamma* prior on the robustness weights. We set  $\alpha = \beta = 1$ .

We also evaluate techniques based on *Intervention Analysis* of time series implemented in the *tsoutliers* package of *R*. These techniques are significantly slower than most other techniques we evaluate in this work, e.g., for a series with  $2k$  data points, it took over 5 minutes (!) for parameter estimation. Clearly, these techniques are non-viable for real-time streaming data.

**4.3.3 Pattern mining and machine learning techniques.** Most pattern techniques require *pattern length (PL)* as an input parameter. Table 5 lists the specific parameters and their respective values for each technique. *HOTSAX* and *RRA* are robust to presence of trend in a time series as they use symbolic approximation, but they do require the series to be studentized. All the other pattern techniques are not robust to presence of trend as they use the underlying real valued series directly. Thus, all the subsequences need to be mean

adjusted (i.e., subtract the mean from all the data points) to avoid spurious anomalies due to changing trend. Scale normalization is not carried as change in scale is an anomaly itself.

Keogh et al. proposed a noise reduction technique wherein a subsequence is rejected if its variance lies below a threshold,  $\epsilon$  [63]. Our experiments show that this preprocessing step is critical, from an accuracy standpoint, for all pattern mining techniques considerably. Therefore, we use it by default, with  $\epsilon=0.01$ . *DenStream* is the only

Technique	Parameters	Description
HOTSAX	paa-size=4, a-size=5	PAA Size, Alphabet Size
RRA	paa-size=4, a-size=5	PAA Size, Alphabet Size
DenStream	epsilon=0.9 lambda=0.01	MC radius, Decay Constant
DBStream	r=0.5, Cm=5, shared-density=True	MC radius, minimum weight for MC
ClusTree	max-height=5, lambda=0.02	Tree Height, Decay Constant
DBScan	eps=.05	Threshold used to re-cluster ClusTree
IForest	n-estimators=50, contamin.=.05	Number of Trees, Number of Outliers
OneSVM	nu=0.5, gamma=0.1	support vectors, kernel coeff.
MBk-means	n-clusters=10, batch-size=200	Number of Clusters, Batch Size

**Table 5: Parameters for Pattern Mining and Machine Learning Techniques**

*MC* technique that works without an explicit re-clustering step. The technique can classify outlier micro-clusters (*oMC*) as anomalous, but this leads to a higher false positive rate. Alternatively, one can take the distance of the points to the nearest *pMC* as the strength of the anomaly. This makes *DenStream* less sensitive to the *MC* radius  $\epsilon$  as well. *DenStream* and *DBStream* are incremental techniques. Hence, they do not need an explicit window size parameter; having said that, they use a decay constant  $\lambda$  to discount older samples. *IForest* and *OneSVM* are not incremental techniques and hence, need to be retrained for each time step. *MBKmeans* is also not incremental, however, it uses cluster centroids from previous run to calculate the new clusters, which allows the clustering to converge faster.


## 5 ANALYSIS

In this section we present a deep dive analysis of the techniques listed in Table 1, using the data sets detailed in Table 2.

### 5.1 Handling Non-stationarity

In this subsection we walk the reader through how the different techniques handle the different sources of non-stationarity exhibited by the data. Most techniques assume that the underlying process is stationary or evolving gradually. However, in practice, this assumption does not hold true thereby resulting in a larger number of false positives immediately after a process change. Though detecting the change is itself important, the false positives adversely impact the efficacy in a material fashion.

- ❑ **Trend and Level Shifts (LS):** Statistical techniques are not robust to trend or level shifts. Consequently, their performance is dependent on the window size, which decides how fast these techniques adapt to a new level. Time series analysis techniques based on state space models (e.g., *SARMA*, *TBATS*) can identify level shifts and adapt to the new level without adding false positives. Figure 3a illustrates a financial time series, where *SARMA* and *SDAR* detect the level shift as an anomaly. *med-mad* can also detect the level shift but it surfaces many false positives right after the level shift. Pattern techniques mean-adjust the patterns. Hence, in the

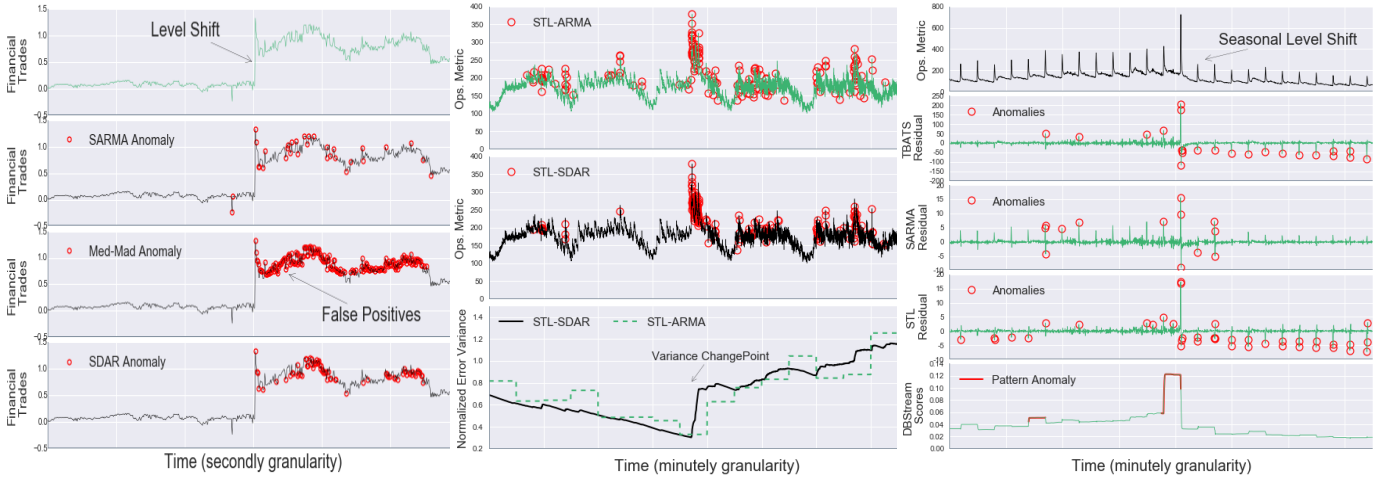

(a) An illustration of a Level Shift

(b) An example illustrating adaptation of SDAR to change in variance

(c) Illustration of Seasonal Level Shift

Figure 3: Impact of Non-Stationarities

presence of level shifts, they do not surface false positives as long as the pattern shapes do not change rapidly.

- **Variance Change (VC):** Figure 3b shows an operations series with a variance change. Iterative techniques such as *STL-SDAR* adapt faster to changing variance which allows them to limit the number of false positives. On the other hand, *STL-ARMA* and *SARMA* are periodically re-trained and oscillate around the true error variance.
- **Seasonal Drift (SD):** Gradually changing seasonal pattern is often observed in *iot* and *ops* time series. *SARMA* adapts to such a drift with default parameters. *STL* adapts as well if the *periodic* parameter is set to false – this ensures that seasonality is not averaged out across seasons.
- **Seasonal Level Shift (SLS):** SLS is again exhibited predominantly in *iot* and *ops* series as illustrated in Figure 3c. *TBATS* does not adapt to SLS or SD as it handles seasonality using Fourier terms and assumes that the amplitudes of seasonality do not change with time. *SARMA* handles SLS smoothly as it runs a Kalman-Filter on the seasonal lags and hence only detects anomalies when the shift happens. On the other hand, *STL* is not robust to SLS and may result in false positives as exemplified by Figure 3c. Pattern Techniques such as *DBStream* are very robust to SLS and can detect the pattern around the shift without any false positives.
- **Seasonal Jitter (SJ):** SJ is an artifact of fine-grain TG and is predominantly exhibited in *iot* (sec) and *health* (msec) time series. Statistical and time series analysis techniques do not model this non-stationary behavior. As a consequence, in such cases, only pattern anomaly techniques can be used.

## 5.2 Runtime Analysis

In this section we present a characterization of the techniques listed in Table 1 with respect to their runtimes. In the figures referenced later in the section, the benchmarks are organized in an increasing order of seasonal period from left to right.

- **Statistical techniques:** From Figure 4a we note that *mu-sigma* and *t-digest* – recall that these are incremental too – are the fastest (<10  $\mu$ sec) in this category. Robust techniques are at least an order of magnitude slower! This stems from the fact that these techniques solve an optimization problem. Although *GESD* is the slowest technique in this category, it let's one set an upper bound on the number of anomalies, which in turn helps control the false alarm rate (CFAR).

- **Time series analysis techniques:** From Figure 4b we note that *STL* is the fastest technique (1-5 msec) in this category. Having said that, the runtime increases considerably as the seasonal period increases (left to right). *Robust STL* is an order of magnitude slower than *STL* even when the number of robust iterations is limited to 4. This can be ascribed to the fact that iterations with the robust weights in *STL* are significantly slower than the first one.

*SARMA* and *TBATS* are significantly slower than most other techniques in this category. This is an artifact of the window length needed to fit these models being proportional to the seasonal period and thus, model parameters need to be estimated on a much larger window. On the other hand, a technique such as *STL-ARMA* applies *ARMA* on the residual of *STL* and therefore does not need to deal with seasonality, which allows for a much smaller training window. Runtimes for *TBATS*, *SARMA* and *RPCA* increase exponentially with an increase in seasonal period. Hence, for secondly time series, these methods become nonviable.

*SDAR* and *RobustKF* are fast incremental techniques that can execute in  $\mu$ secs. However, these techniques cannot be applied to seasonal series as is. This limitation can be alleviated by applying *STL* as a preprocessing step. From Figure 4b, we note that *STL-SDAR* and *STL-RobustKF* are almost as fast as *STL*. Even though *STL-ARMA* trains on small training windows, note that it adds significant additional runtime to *STL*. This impact is not as prominent in the case of the *ops* and *fin* data sets – this is due to the fact that *STL* itself has



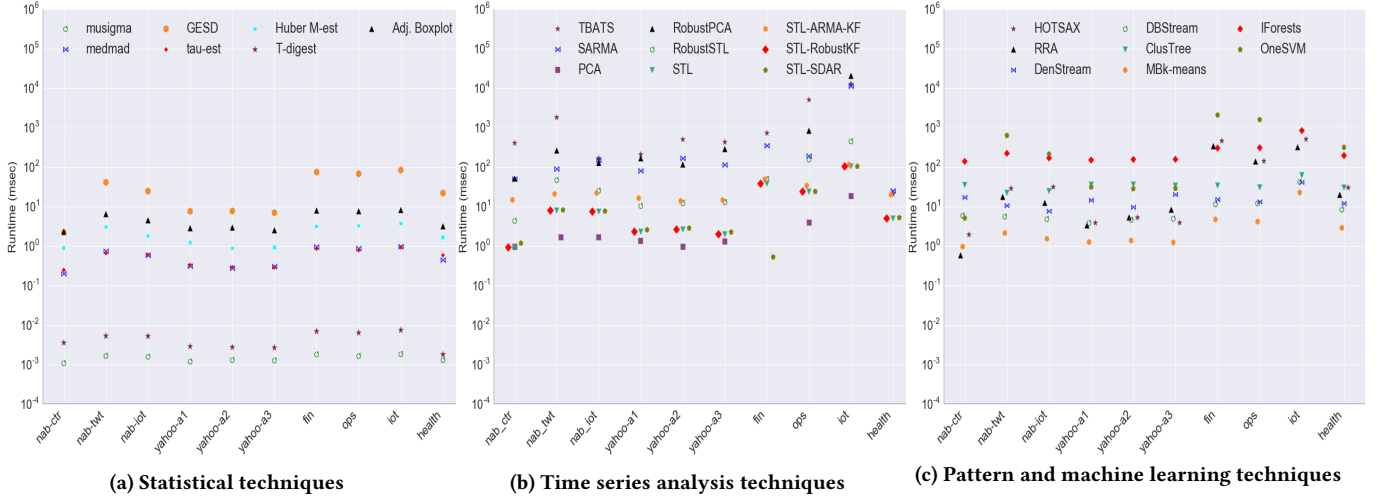


Figure 4: Runtime characterization of anomaly detection techniques

long runtimes for these data sets. Although we note that PCA is a very fast technique, its accuracy is very low (this is discussed further in the next subsection). This is owing to the PCs being not robust to anomalies themselves.

**Pattern and machine learning techniques:** From Figure 4c we note that *IForest* and *OneSVM* have the worst runtime performance as they are not incremental and they need to be trained for every new data point. *MB-Kmeans* is relatively faster even though it performs clustering for every new point. This is because the clustering has fast convergence if the underlying model drift is gradual.

Although the internal data structures *HOTSAX* and *RRA* can be generated incrementally, finding the farthest point using these structures accounts for majority of the runtime. Thus, the runtime for *HOTSAX*, *RRA* is not dependent on the window size; instead, it is a function of the variance in the data. Data sets such as *fin*, *ops* and *ldt* exhibit high variance due to fine grain TG – this impacts the runtime of *HOTSAX*, *RRA*. *med* data set on the other hand has coarse TG and therefore have a low variance in terms of the shapes of patterns and hence, *HOTSAX* and *RRA* are significantly faster for them.

*DBStream* is the fastest micro-clustering technique across all data sets even though it does have an offline clustering component which is executed for every new point. This is because it maintains the shared density between *MCs* on-the-fly and then uses *DBScan* over these *MCs* to produce the final clustering. *DenStream* is slower than *DBStream* because the distance of a data point to all *pMCs* needs to be computed to calculate the strength of the anomaly. Alternatively, one can tag all *oMCs* as anomalous which helps to reduce runtime but adversely impacts the FAR. From Figure 4c we note that *ClusTree* is the slowest of all the micro-clustering techniques.

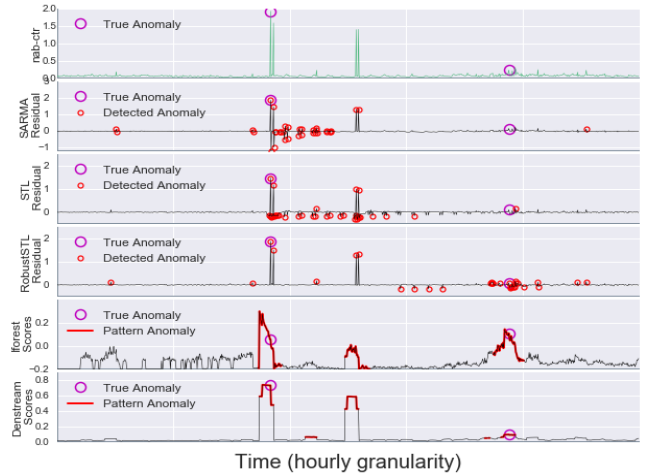



Figure 5: Illustration of the impact of lack of robustness

### 5.3 Accuracy-Speed Tradeoff

Figure 6 charts the landscape of accuracy-speed tradeoff for the techniques listed in Table 1 across all data sets tabulated in Table 2. Table 6 details the *Precision*, *Recall* along with the *F<sub>1</sub>-score*. In this rest of this subsection, we present an in-depth analysis of the trade-off from multiple standpoints.

**Robustness and False Positives:** Techniques such as *medmad* surface a higher number of anomalies, which improves recall at the expense of precision as evident from Table 6. For best accuracy, we recommend to use robust techniques with CFAR such as *GESD*. From Table 6 we note that *GESD* outperforms most other statistical techniques. On the other hand, from Figure 6 we note that *GESD* has the highest runtime amongst the statistical techniques.

**Model Building:** Estimating model parameters in the presence of anomalies can potentially impact accuracy adversely if the technique is not robust. This is observed from Figure 5 wherein an extreme anomaly biases the model obtained

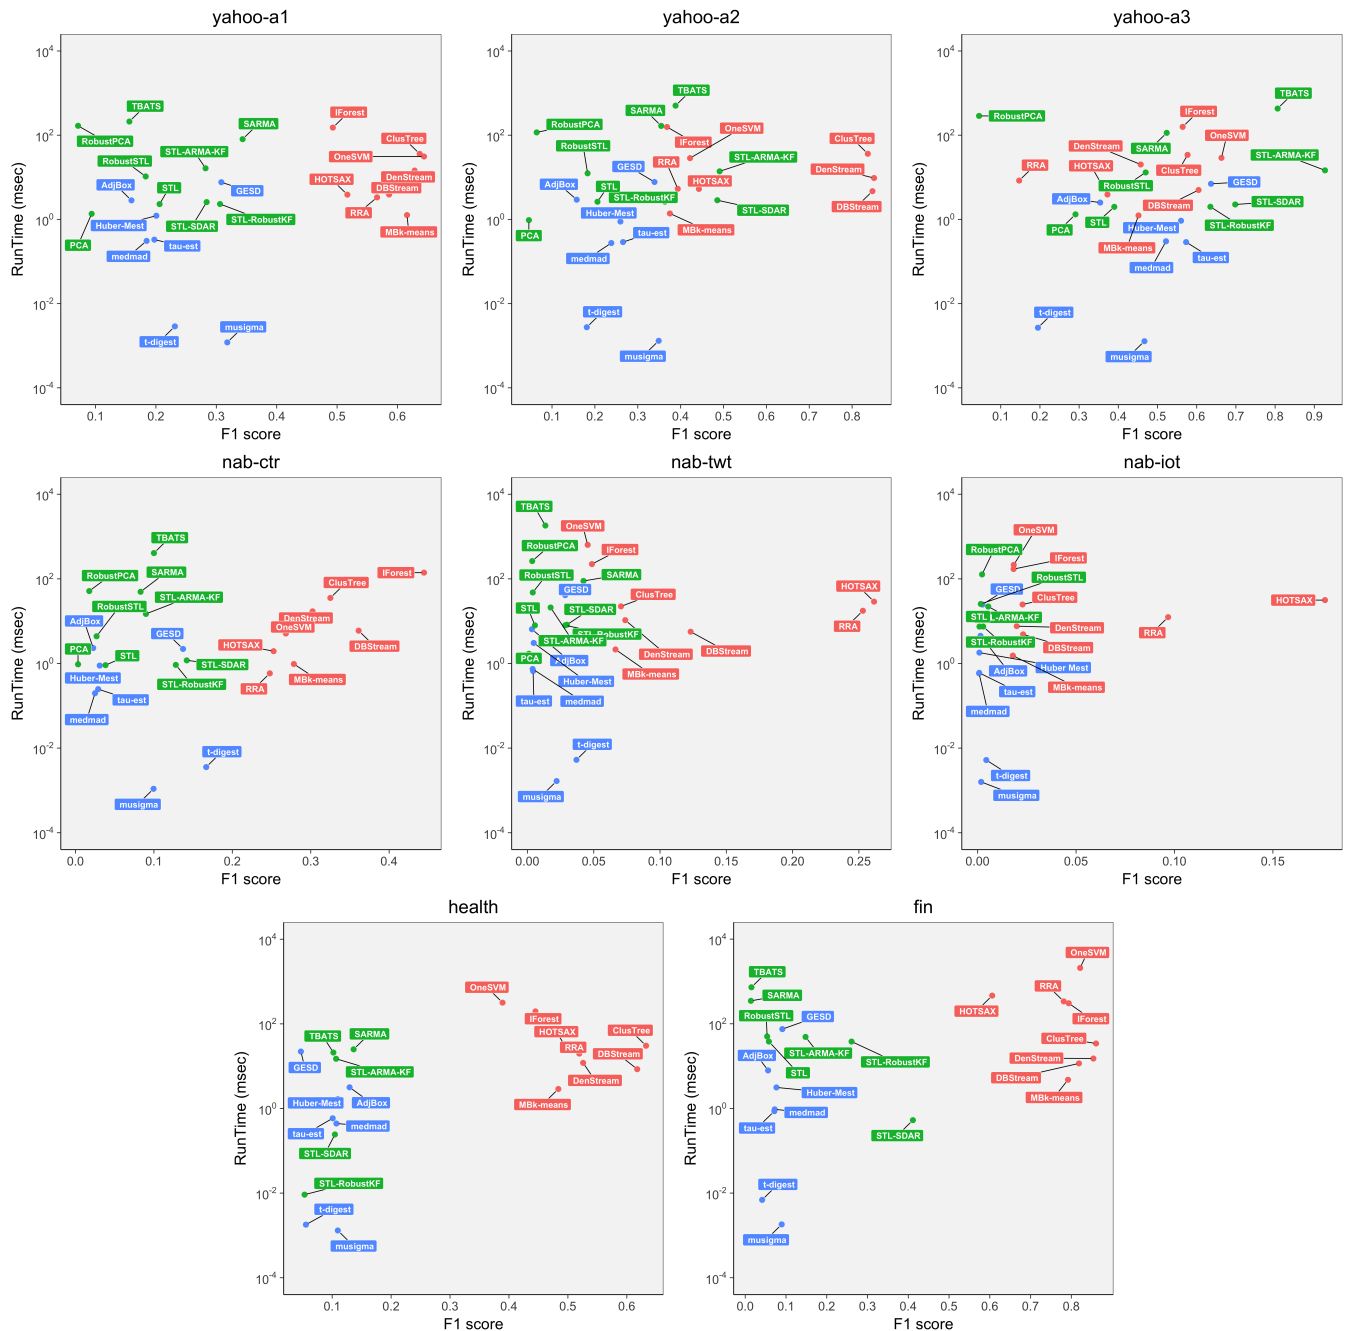


**Figure 6: Landscape of accuracy-speed tradeoff. Note that Y-axis is on log scale. For ease of visual analysis, the range for X-axis is custom for each dataset. Techniques are grouped according to scale - Blue: Statistical, Green: Time Series, Red: Pattern**

via *SARMA* thereby inducing false positives in the *nab-ctr* dataset. *STL* is susceptible to this as well. In contrast, *Robust STL* effectively down-weights the anomalies during model parameter estimation. From Figure 5 we also note that pattern mining techniques such as *DenStream* are more robust to anomalies, as they do not fit a parametric model.

- ❑ **Anomaly Bursts:** It is not uncommon to observe bursts of anomalies in production data. In such a scenario, the

accuracy of a technique is driven by how soon the technique adapts to the new “normal”. If a burst is long enough, then most techniques do adapt but with different lag. CFAR techniques such as *t-digest* and *GESD* fair quite poorly against anomaly bursts. For instance, in the *health* data set, the anomalies happen in bursts and a CFAR system puts an upper bound on the number of anomalies, thereby missing many of them. Having said that, this can also be

Datasets	MuSigma			Med-MAD			tau-est			Huber Mest			AdjBox			GESD			t-digest			SARMA		
	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>
yahoo-a1	0.268	0.392	0.318	0.108	0.623	0.185	0.118	0.61	0.197	0.121	0.592	0.201	0.092	0.579	0.159	0.303	0.314	0.308	0.221	0.242	0.231	0.284	0.434	0.344
yahoo-a2	0.234	0.687	0.349	0.139	0.83	0.238	0.158	0.83	0.266	0.154	0.83	0.26	0.087	0.83	0.158	0.215	0.803	0.339	0.107	0.588	0.181	0.232	0.749	0.355
yahoo-a3	0.467	0.745	0.467	0.353	0.999	0.522	0.402	0.999	0.573	0.389	0.999	0.56	0.215	0.999	0.354	0.47	0.986	0.636	0.111	0.787	0.195	0.355	0.993	0.523
nab-ctr	0.053	0.786	0.1	0.013	1	0.025	0.015	1	0.029	0.016	1	0.031	0.011	1	0.023	0.075	0.857	0.137	0.093	0.786	0.167	0.044	0.786	0.083
nab-twt	0.011	0.743	0.022	0.002	0.914	0.004	0.002	0.914	0.004	0.002	0.914	0.005	0.002	0.886	0.003	0.015	0.714	0.028	0.019	0.743	0.037	0.022	0.75	0.042
nab-iot	0.001	0.167	0.002	0	0.167	0.001	0	0.167	0.001	0	0.167	0.001	0.001	0.333	0.001	0.001	0.167	0.002	0.002	0.333	0.004	0	0	-
fin	0.073	0.114	0.089	0.044	0.203	0.072	0.045	0.17	0.071	0.049	0.177	0.076	0.033	0.196	0.056	0.073	0.12	0.091	0.037	0.047	0.041	0.007	0.144	0.014
health	0.109	0.11	0.11	0.067	0.272	0.107	0.065	0.231	0.101	0.075	0.202	0.11	0.084	0.283	0.13	0.037	0.066	0.047	0.042	0.08	0.055	0.129	0.145	0.136
	TBATS			STL-ARMA-KF			STL			RobustSTL			STL-SDAR			STL-RobustKF			RobustPCA			PCA		
	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>
yahoo-a1	0.106	0.295	0.156	0.225	0.378	0.282	0.133	0.454	0.206	0.111	0.525	0.183	0.372	0.23	0.284	0.299	0.313	0.306	0.038	0.585	0.071	0.062	0.191	0.094
yahoo-a2	0.253	0.83	0.388	0.379	0.697	0.491	0.133	0.454	0.206	0.111	0.525	0.183	0.346	0.811	0.486	0.234	0.809	0.363	0.033	1	0.064	0.024	0.469	0.046
yahoo-a3	0.678	0.995	0.806	0.865	0.999	<b>0.927</b>	0.242	1	0.39	0.307	0.999	0.47	0.537	0.999	0.698	0.468	0.986	0.635	0.023	0.996	0.045	0.184	0.686	0.291
nab-ctr	0.053	0.857	0.1	0.048	0.786	0.09	0.02	0.929	0.038	0.014	1	0.027	0.079	0.714	0.142	0.07	0.786	0.128	0.009	1	0.018	0.002	0.071	0.003
nab-twt	0.007	0.8	0.013	0.009	0.8	0.017	0.003	0.943	0.006	0.002	0.857	0.004	0.015	0.686	0.03	0.015	0.714	0.028	0.002	0.935	0.004	0.001	0.226	0.001
nab-iot	0	0	-	0.003	0.167	0.005	0	0.167	0.001	0.001	0.333	0.002	0	0	-	0.001	0.167	0.003	0.001	1	0.002	0	0	-
fin	0.008	0.151	0.015	0.109	0.231	0.148	0.034	0.191	0.058	0.032	0.182	0.054	0.443	0.383	0.411	0.221	0.319	0.261	-	-	-	-	-	-
health	0.109	0.096	0.102	0.103	0.11	0.107	-	-	-	-	-	-	0.104	0.105	0.105	0.057	0.05	0.053	-	-	-	-	-	-
	HOTSAX			RRA			DenStream			ClusTree			DBStream			IForest			MBk-means			OneSVM		
	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>	Pr	Re	F <sub>1</sub>
yahoo-a1	0.783	0.386	0.517	0.675	0.488	0.566	0.569	0.702	0.628	0.594	0.686	0.637	0.646	0.537	0.586	0.46	0.531	0.493	0.563	0.68	0.616	0.58	0.724	<b>0.644</b>
yahoo-a2	0.471	0.417	0.443	0.312	0.532	0.393	0.741	1	<b>0.851</b>	0.719	1	0.837	0.759	0.959	0.847	0.226	0.989	0.368	0.231	1	0.375	0.267	1	0.422
yahoo-a3	0.431	0.328	0.372	0.105	0.244	0.147	0.411	0.514	0.457	0.466	0.755	0.577	0.784	0.492	0.605	0.486	0.672	0.564	0.471	0.433	0.451	0.603	0.737	0.663
nab-ctr	0.148	0.857	0.253	0.141	1	0.248	0.181	0.929	0.302	0.197	0.929	0.325	0.224	0.929	0.361	0.3	0.857	<b>0.444</b>	0.169	0.786	0.278	0.162	0.786	0.268
nab-twt	0.169	0.571	<b>0.261</b>	0.16	0.6	0.253	0.038	0.971	0.074	0.037	0.971	0.071	0.066	0.914	0.123	0.025	0.971	0.049	0.034	0.943	0.066	0.023	0.714	0.045
nab-iot	0.107	0.5	<b>0.176</b>	0.054	0.5	0.097	0.01	0.5	0.02	0.012	0.5	0.023	0.012	0.333	0.023	0.009	0.667	0.018	0.009	0.667	0.018	0.009	0.667	0.018
fin	0.932	0.449	0.606	0.952	0.663	0.781	0.806	0.908	0.854	0.816	0.91	<b>0.861</b>	0.888	0.759	0.819	0.808	0.78	0.794	0.686	0.936	0.792	0.749	0.91	0.822
health	0.949	0.335	0.495	0.788	0.387	0.519	0.775	0.398	0.526	0.827	0.512	<b>0.633</b>	0.9	0.47	0.618	0.858	0.3	0.445	0.79	0.349	0.484	0.679	0.273	0.389

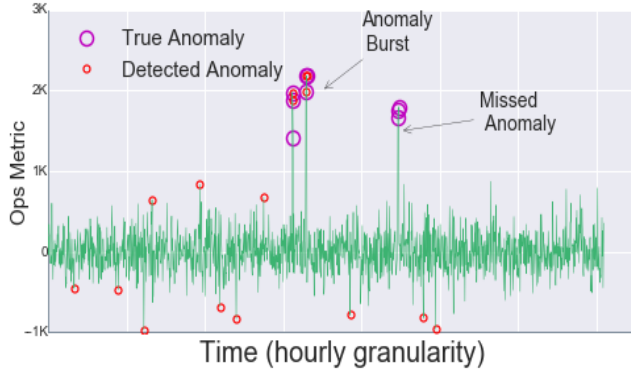Table 6: Precision, Recall and  $F_1$ -scores for all the techniques. For each dataset, the most accurate technique is highlighted.Figure 7: Performance of  $t$ -digest anomaly bursts

advantageous as exemplified by the *nab-ctr* data set wherein there are a few spaced out anomalies. Table 6 shows that  $t$ -digest improves both precision and recall. Figure 7 illustrates an operations time series that highlights why  $t$ -digest does not surface anomaly bursts.

- Unique Pattern Anomalies:** The performance of *HOTSAX* and *RRA* is abysmal on the *yahoo-a2* and *yahoo-a3* data sets. This is because these synthetic data sets comprise of many similar anomalies. Both *HOTSAX* and *RRA* are not robust to the presence of such similar anomalies as the anomaly score is based on the nearest neighbor distance. Figure 8 highlights how similar anomalies may be missed. In contrast, *DenStream* and *DBStream* are able to detect self-similar anomalies as they create micro-clusters of similar anomalies.

- Scale of distance measure:** Accuracy of an anomaly detection technique is a function of the distance measure used to

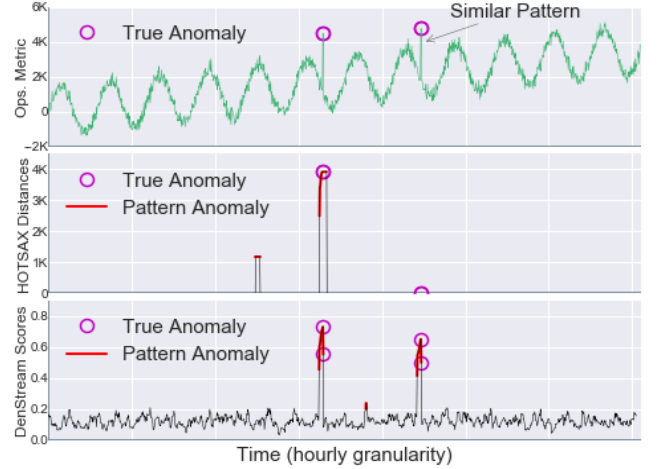


Figure 8: HOTSAX similar anomalies

differentiate normal vs. anomalous data points. For instance, let us consider *IForest* and *DBStream* (refer to Figure 9). The latter creates much better separation between normal and anomalous data points. This can be ascribed to anomaly score in *IForest* being the depth of the leaf in which the point resides, which is analogous to the  $\log$  of the distance.

## 5.4 Model Selection

As mentioned earlier, the analysis presented in this paper should serve as a guide for selection of the “best” anomaly detection technique. In general, model selection is a function of the application domain and latency requirement. Table 7 enlists the various application domains, the attributes exhibited by the datasets in these domains and the “best” algorithms for a given latency requirement

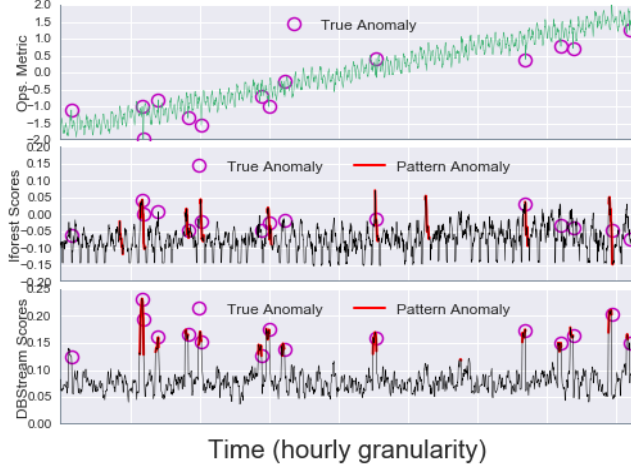


Figure 9: Anomaly Score Separation

(according to the accuracy-speed trade-offs discussed in the previous section).

Application Domain	DataSets	Attributes	<1 msec	1-10 msec	>10 msec
Hourly Operations	yahoo-a1, yahoo-a2, yahoo-a3	LS, VC, SLC, Noisy	STL-SDAR/ STL-RobustKF	DenStream	DenStream
Advertising	nab-ctr	No Anomaly Bursts	t-digest	DBStream	IForest
Hourly IoT	nab-twt, nab-iot	Unique Anomalies	med-mad	DBStream	HOTSAX
Financial	fin	LS, VC	SDAR	DenStream	ClusTree
Healthcare	health	SJ, LS	-	DBStream	DBStream/ HOTSAX
Minutely Operations	ops	LS, VC, SLS, SLD, Large SP	med-mad	DBStream	DBStream

Table 7: Best Techniques For Different Latency Requirements. SP: Seasonal Period, SJ: Seasonal period Jitter, LS: Level Shift, VC: Variance Change, SLD: Seasonal Level Drift, SLS: Seasonal Level Shift

For applications with latency requirement <1 msec, the use of pattern and machine learning based anomaly detection techniques is impractical owing to their high computation requirements. Although techniques geared towards detecting point anomalies can be employed, the “best” technique is highly dependent on the attributes. For instance, *STL-SDAR* accurately detects anomalies for operations time series that exhibit non-stationarities such as *LS*, *VC*. On the other hand, in the case of minutely operations time series which typically tend to exhibit long Seasonal Periods (SP), *STL* becomes expensive, and hence a simpler technique such as *med-mad* can potentially be used to meet the latency requirement. One can use *SDAR* for financial time series even if the latency requirements are strict. This stems from the fact that these series (mostly) do not exhibit seasonality, and hence *STL* is not a bottleneck.

When latency requirement is in the range of 1-10 msec, micro-clustering techniques like *DBStream* and *DenStream* outperform all others. Although *DBStream* marginally outperforms *DenStream*, in the presence of noisy time series *DenStream* is more effective. It has been shown in prior work [63, 90] that techniques such as *HOTSAX* are effective in finding anomalies in ECG data in an offline setting. From Figure 6 we note that the detection runtime is over 100 msec, which is significantly larger than the *TG* for ECG series. *DBStream* on the other hand is much faster (5-10msec) and can detect the same set of anomalies as *HOTSAX*, refer to Figure 10. Having said

that, *DBStream* does surface more false positives than *HOTSAX*. A post processing step can help reduce the false positive rate. It should be noted that none of the aforementioned techniques satisfy the <1 msec latency requirement for the health time series.

Finally, when the latency requirements are >10msec, a wide range of anomaly techniques can be leveraged. In many cases, *DBStream* is still the most accurate technique. When an application has very few unique anomalies, *HOTSAX* usually is the most effective, as is the case with the datasets *nab-twt* and *nab-iot*.



Figure 10: HOTSAX and DBStream for health-qtdb/0606

## 6 CONCLUSION

In this paper, we first presented a classification of over 20 anomaly detection techniques across seven dimensions (refer to Table 1). Next, as a first, using over 25 real-world data sets and real hardware, we presented a detailed evaluation of these techniques with respect to their real-timeliness and performance – as measured by *precision*, *recall* and *F<sub>1</sub>* score. We also presented a map of their accuracy-runtime trade-off. Our experiments demonstrate that the state-of-the-art anomaly detection techniques are applicable for data streams with 1 msec or higher granularity, highlighting the need for faster algorithms to support the use cases mentioned earlier in Section 1. Last but not least, given an application domain and latency requirement, based on empirical evaluation, we made recommendations for the “best” technique for anomaly detection.

As future work, we plan to extend our evaluation to other data sets such as live data streams as exemplified by Facebook Live, Twitter Periscope video applications and other live data streams on platforms such as Satori.

## REFERENCES

- [1] 2006. SPEC: Standard Performance Evaluation Corporation. (2006). <http://www.spec.org/>.
- [2] 2010. Low Latency 101. (2010). <http://www.informatix-sol.com/docs/LowLatency101.pdf>.
- [3] 2017. Anomaly detection in real-time data streams using Heron. (2017). <https://www.slideshare.net/arankejarawal/anomaly-detection-in-realtime-data-streams-using-heron>.
- [4] 2017. QuantQuote. (2017). <https://quantquote.com/>.
- [5] 2017. Satori: Transforming the world with live data. (2017). <https://www.satori.com>.
- [6] G. Agamennoni, J. I. Nieto, and E. M. Nebot. 2011. An outlier-robust Kalman filter. In *2011 IEEE International Conference on Robotics and Automation*. 1551–1558.
- [7] Charu C. Aggarwal. 2013. *Outlier analysis*. Springer.



- [8] C. C. Aggarwal, T. J. Watson, R. Ctr, J. Han, J. Wang, and P. S. Yu. 2003. A framework for clustering evolving data streams. (2003).
- [9] H. Akaike. 1969. Fitting autoregressive models for prediction. *Annals of the Inst. of Stat. Math.* 21 (1969), 243–247.
- [10] H. Akaike. 1986. Use of Statistical Models for Time Series Analysis. In *Proceedings of the International Conference on Acoustics, Speech, and Signal Processing*. 3147–3155.
- [11] Krishnamurthy KB Al-Aweel IC. 1999. Post-Ictal Heart Rate Oscillations in Partial Epilepsy. *Neurology* 53, 7 (October 1999), 1590–1592.
- [12] Mennatallah Amer, Markus Goldstein, and Slim Abdennadher. 2013. Enhancing One-class Support Vector Machines for Unsupervised Anomaly Detection. In *Proceedings of the ACM SIGKDD Workshop on Outlier Detection and Description*. ACM, New York, NY, USA, 8–15.
- [13] Hesam Amoualian, Marianne Clausel, Eric Gaussier, and Massih-Reza Amini. 2016. Streaming-LDA: A Copula-based Approach to Modeling Topic Dependencies in Document Streams. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '16)*. ACM, New York, NY, USA, 695–704. <https://doi.org/10.1145/2939672.2939781>
- [14] Vic Barnett and Toby Lewis. 1994. *Outliers in statistical data*. Vol. 3. Wiley New York.
- [15] Christian Beckel, Wilhelm Kleiminger, Romano Cicchetti, Thorsten Staake, and Silvia Santini. 2014. The ECO Data Set and the Performance of Non-intrusive Load Monitoring Algorithms. In *Proceedings of the 1st ACM Conference on Embedded Systems for Energy-Efficient Buildings*. 80–89.
- [16] A. Bera, S. Kim, and D. Manocha. 2016. Realtime Anomaly Detection Using Trajectory-Level Crowd Behavior Learning. In *2016 IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*. 1289–1296.
- [17] Monowar Hussain Bhuyan, D. K. Bhattacharyya, and Jugal K. Kalita. 2012. Survey on incremental approaches for network anomaly detection. *arXiv preprint arXiv:1211.4493* (2012).
- [18] George Edward Pelham Box and Gwilym Jenkins. 1990. *Time Series Analysis, Forecasting and Control*. HoldenDay, Incorporated.
- [19] G. Brys, M. Hubert, and A. Struyf. 2003. *A Comparison of Some New Measures of Skewness*. Physica-Verlag HD, Heidelberg, 98–113.
- [20] Yingyi Bu, Tat-Wing Leung, Ada Wai-Chee Fu, Eamonn Keogh, Jian Pei, and Sam Meshkin. [n. d.]. *WAT: Finding Top-K Discords in Time Series Database*. 449–454. arXiv:<http://eprints.siam.org/doi/pdf/10.1137/1.9781611972771.43> <http://eprints.siam.org/doi/abs/10.1137/1.9781611972771.43>
- [21] Emmanuel J. Candès, Xiaodong Li, Yi Ma, and John Wright. 2011. Robust Principal Component Analysis? *J. ACM* 58, 3, Article 11 (June 2011), 11:1–11:37 pages.
- [22] Feng Cao, Martin Ester, Weiming Qian, and Aoying Zhou. [n. d.]. *Density-Based Clustering over an Evolving Data Stream with Noise*. 328–339. <https://doi.org/10.1137/1.9781611972764.29> arXiv:<http://eprints.siam.org/doi/pdf/10.1137/1.9781611972764.29>
- [23] Y. Chakhchoukh, P. Panchiati, and P. Bondon. 2009. Robust estimation of SARIMA models: Application to short-term load forecasting. In *2009 IEEE/SP 15th Workshop on Statistical Signal Processing*. 77–80.
- [24] Varun Chandola, Arindam Banerjee, and Vipin Kumar. 2009. Anomaly detection: A survey. *ACM Computing Surveys (CSUR)* 41, 3 (2009), 15.
- [25] S. Y. Chen. 2012. Kalman Filter for Robot Vision: A Survey. *IEEE Transactions on Industrial Electronics* 59, 11 (Nov 2012), 4409–4420.
- [26] Shin C. Chin, Asok Ray, and Venkatesh Rajagopalan. 2005. Symbolic time series analysis for anomaly detection: a comparative evaluation. *Signal Processing* 85, 9 (2005), 1859–1868.
- [27] Cisco. 2016. Cisco Visual Networking Index: Global Mobile Data Traffic Forecast Update, 2016–2021. (Feb. 2016). <http://www.cisco.com/c/en/us/solutions/collateral/service-provider/visual-networking-index-vni/mobile-white-paper-c11-520862.html#MeasuringMobileIoT>.
- [28] Robert B. Cleveland, William S. Cleveland, Jean E. McRae, and Irma Terpenning. 1990. STL: A Seasonal-Trend Decomposition Procedure Based on Loess (with Discussion). *Journal of Official Statistics* 6 (1990), 3–73.
- [29] William S. Cleveland. 1979. Robust Locally Weighted Regression and Smoothing Scatterplots. *J. Amer. Statist. Assoc.* 74, 368 (1979), 829–836.
- [30] Edith Cohen and Martin J. Strauss. 2006. Maintaining Time-decaying Stream Aggregates. *J. Algorithms* 59, 1 (April 2006), 19–36.
- [31] Javier Lopez de Lacalle. 2016. *tsoutliers: Detection of Outliers in Time Series*. R package version 0.6-5.
- [32] T. Dunning and O. Ertl. 2015. Computing Extremely Accurate Quantiles using t-Digests. (2015). <https://github.com/tdunning/t-digest/>.
- [33] J. Durbin and S.J. Koopman. 2001. *Time Series Analysis by State Space Methods*. Clarendon Press.
- [34] Martin Ester, Hans-Peter Kriegel, Jörg Sander, Michael Wimmer, and Xiaowei Xu. 1998. Incremental Clustering for Mining in a Data Warehousing Environment. In *Proceedings of the 24th International Conference on Very Large Data Bases (VLDB '98)*. Morgan Kaufmann Publishers Inc., San Francisco, CA, USA, 323–333. <http://dl.acm.org/citation.cfm?id=645924.671201>
- [35] A. Feizollah, N. B. Anuar, R. Salleh, and F. Amalina. 2014. Comparative study of k-means and mini batch k-means clustering algorithms in android malware detection using network traffic analysis. In *2014 International Symposium on Biometrics and Security Technologies (ISBAST)*. 193–197. <https://doi.org/10.1109/ISBAST.2014.7013120>
- [36] George Forman and Martin Scholz. 2010. Apples-to-apples in Cross-validation Studies: Pitfalls in Classifier Performance Measurement. *SIGKDD Explor. News.* 12, 1 (Nov. 2010), 49–57.
- [37] Anthony J. Fox. 1972. Outliers in time series. *Journal of the Royal Statistical Society. Series B (Methodological)* (1972), 350–363.
- [38] Ada Wai-chee Fu, Oscar Tat-Wing Leung, Eamonn Keogh, and Jessica Lin. 2006. Finding Time Series Discords Based on Haar Transform. In *Proceedings of the Second International Conference on Advanced Data Mining and Applications*. Springer-Verlag, Berlin, Heidelberg, 31–41.
- [39] P. Laurinec G. Grmanova. 2016. Incremental Ensemble Learning for Electricity Load Forecasting. *Acta Polytechnica Hungarica* 13, 2 (2016).
- [40] Prasanta Gogoi, D. K. Bhattacharyya, Bhogeshwar Borah, and Jugal K. Kalita. 2011. A survey of outlier detection methods in network anomaly identification. *Comput. J.* 54, 4 (2011), 570–588.
- [41] A. L. Goldberger, L. A. N. Amaral, L. Glass, J. M. Hausdorff, P. Ch. Ivanov, R. G. Mark, J. E. Mietus, G. B. Moody, C.-K. Peng, and H. E. Stanley. 2000 (June 13). PhysioBank, PhysioToolkit, and PhysioNet: Components of a New Research Resource for Complex Physiologic Signals. *Circulation* 101, 23 (2000 (June 13)), e215–e220.
- [42] Frank E. Grubbs. 1950. Sample Criteria for Testing Outlying Observations. *The Annals of Mathematical Statistics* 21, 1 (1950), 27–58.
- [43] Frank E. Grubbs. 1969. Procedures for detecting outlying observations in samples. *Technometrics* 11, 1 (1969), 1–21.
- [44] Sudipto Guha, Nina Mishra, Gourav Roy, and Okke Schrijvers. 2016. Robust Random Cut Forest Based Anomaly Detection on Streams. In *Proceedings of the 33rd International Conference on International Conference on Machine Learning - Volume 48*. JMLR.org, 2712–2721.
- [45] M. Gupta, J. Gao, C. C. Aggarwal, and J. Han. 2014. Outlier Detection for Temporal Data: A Survey. *IEEE Transactions on Knowledge and Data Engineering* 26, 9 (Sept 2014), 2250–2267.
- [46] Ryan Hafen. 2016. *stlplus: Enhanced Seasonal Decomposition of Time Series by Loess*. <https://CRAN.R-project.org/package=stlplus> R package version 0.5.1.
- [47] M. Hahsler and M. Bolanos. 2016. Clustering Data Streams Based on Shared Density between Micro-Clusters. *IEEE Transactions on Knowledge and Data Engineering* 28, 6 (June 2016), 1449–1461. <https://doi.org/10.1109/TKDE.2016.2522412>
- [48] Douglas M. Hawkins. 1980. *Identification of outliers*. Vol. 11. Chapman and Hall London.
- [49] J. A. Healey and R. W. Picard. 2005. Detecting stress during real-world driving tasks using physiological sensors. *IEEE Transactions on Intelligent Transportation Systems* 6, 2 (June 2005), 156–166.
- [50] J. A. Healey and R. W. Picard. 2005. Detecting stress during real-world driving tasks using physiological sensors. *IEEE Transactions on Intelligent Transportation Systems* 6, 2 (June 2005), 156–166.
- [51] Charles C. Holt. 2004. Forecasting seasonals and trends by exponentially weighted moving averages. *International Journal of Forecasting* 20, 1 (2004), 5–10.
- [52] H. Hotelling. 1933. Analysis of a Complex of Statistical Variables Into Principal Components. *Journal of Educational Psychology* 24, 6 (1933), 417–441.
- [53] H. Hotelling. 1933. Analysis of a Complex of Statistical Variables Into Principal Components. *Journal of Educational Psychology* 24, 7 (Oct. 1933), 498–520.
- [54] Peter J. Huber. 1964. Robust Estimation of a Location Parameter. *The Annals of Mathematical Statistics* 35, 1 (1964), 73–101.
- [55] M. Hubert and E. Vandervieren. 2008. An adjusted boxplot for skewed distributions. *Computational Statistics and Data Analysis* 52, 12 (2008), 5186 – 5201.
- [56] R.J. Hyndman and G. Athanasopoulos. 2014. *Forecasting: principles and practice*. OTexts.
- [57] Rob J Hyndman. 2016. *forecast: Forecasting functions for time series and linear models*. <http://github.com/robjhyndman/forecast> R package version 7.3.
- [58] Willis A. Jensen, L. Allison Jones-Farmer, Charles W. Champ, and William H. Woodall. 2006. Effects of parameter estimation on control chart properties: a literature review. *Journal of Quality Technology* 38, 4 (2006), 349–364.
- [59] I. T. Jolliffe. 1986. *Principal Component Analysis*. Springer-Verlag.
- [60] Regina Kaiser and Agustn Maravall. 2001. Seasonal outliers in time series. *Estadística* 53, 160-161 (2001), 97–142.
- [61] Rudolph Emil Kalman. 1960. A New Approach to Linear Filtering and Prediction Problems. *Transactions of the ASME-Journal of Basic Engineering* 82, Series D (1960), 35–45.
- [62] A. Kejariwal and F. Orsini. 2016. On the Definition of Real-Time: Applications and Systems. In *2016 IEEE Trustcom/BigDataSE/ISPA*. 2213–2220.
- [63] Eamonn Keogh, Jessica Lin, and Ada Fu. 2005. HOTSAX: Efficiently Finding the Most Unusual Time Series Subsequence. In *Proceedings of the Fifth IEEE International Conference on Data Mining*. 226–233.

- [64] P. Kranen, I. Assent, C. Baldauf, and T. Seidl. 2011. The ClusTree: indexing micro-clusters for anytime stream mining. *Knowl Inf Syst* 29 (2011).
- [65] P. Laguna, R. G. Mark, A. Goldberg, and G. B. Moody. 1997. A database for evaluation of algorithms for measurement of QT and other waveform intervals in the ECG. In *Computers in Cardiology 1997*. 673–676.
- [66] Nikolay Laptev, Saeed Amizadeh, and Ian Flint. 2015. Generic and Scalable Framework for Automated Time-series Anomaly Detection. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. Sydney, NSW, Australia, 1939–1947.
- [67] A. Lavin and S. Ahmad. 2015. Evaluating Real-Time Anomaly Detection Algorithms – The Numenta Anomaly Benchmark. In *2015 IEEE 14th International Conference on Machine Learning and Applications (ICMLA)*. 38–44.
- [68] Vernon Lawhern, Scott Kerick, and Kay A. Robbins. 2007. Minimum Sample Size Requirements For Seasonal Forecasting Models. *Foresight: the International Journal of Applied Forecasting* (2007).
- [69] Vernon Lawhern, Scott Kerick, and Kay A. Robbins. 2013. Detecting alpha spindle events in EEG time series using adaptive autoregressive models. *BMC Neuroscience* 14, 1 (2013), 101.
- [70] Christophe Leys, Christophe Ley, Olivier Klein, Philippe Bernard, and Laurent Licata. 2013. Detecting outliers: Do not use standard deviation around the mean, use absolute deviation around the median. *Journal of Experimental Social Psychology* (2013).
- [71] Fei Tony Liu, Kai Ming Ting, and Zhi-Hua Zhou. 2012. Isolation-Based Anomaly Detection. *ACM Trans. Knowl. Discov. Data* 6, 1, Article 3 (March 2012), 3:1–3:39 pages.
- [72] Alysha M. De Livera, Rob J. Hyndman, and Ralph D. Snyder. 2011. Forecasting Time Series With Complex Seasonal Patterns Using Exponential Smoothing. *J. Amer. Statist. Assoc.* 106, 496 (2011), 1513–1527.
- [73] Cynthia A. Lowry and Douglas C. Montgomery. 1995. A review of multivariate control charts. *IIE transactions* 27, 6 (1995), 800–810.
- [74] James M. Lucas and Michael S. Saccucci. 1990. Exponentially weighted moving average control schemes: properties and enhancements. *Technometrics* 32, 1 (1990), 1–12.
- [75] Martin Maechler, Peter Rousseeuw, Christophe Croux, Valentin Todorov, Andreas Ruckstuhl, Matias Salibian-Barrera, Tobias Verbeke, Manuel Koller, Eduardo L. T. Conceicao, and Maria Anna di Palma. 2016. *robustbase: Basic Robust Statistics*. R package version 0.92-7.
- [76] Paolo Melillo, Raffaele Izzo, Ada Orrico, Paolo Scala, Marcella Attanasio, Marco Mirra, Nicola De Luca, and Leandro Pecchia. 2015. Automatic Prediction of Cardiovascular and Cerebrovascular Events Using Heart Rate Variability Analysis. *PLOS ONE* 10, 3 (03 2015), 1–14.
- [77] Abdullah Mueen, Eamonn J. Keogh, Qiang Zhu, Sydney Cash, and M. Brandon Westover. 2009. Exact Discovery of Time Series Motifs. In *SDM*. SIAM, 473–484.
- [78] Colin R. Muirhead. 1986. Distinguishing outlier types in time series. *Journal of the Royal Statistical Society. Series B (Methodological)* (1986), 39A–547.
- [79] Joseph Ndong and Kav  t Salamatian. 2011. Signal Processing-based Anomaly Detection Techniques: A Comparative Analysis. In *INTERNET 2011, The Third International Conference on Evolving Internet*. 32A–39.
- [80] Robin Nunkesser, Karen Schettlinger, and Roland Fried. 2008. *Applying the Qn Estimator Online*. Springer Berlin Heidelberg, 277–284.
- [81] K. Pearson. 1901. On lines and planes of closest fit to systems of points in space. *Philosophical Magazine, Series 6* 2, 11 (1901), 559–572.
- [82] T. Penzel, G. B. Moody, R. G. Mark, A. L. Goldberger, and J. H. Peter. 2000. The apnea-ECG database. In *Computers in Cardiology 2000*. Vol. 27 (Cat. 00CH37163). 255–258.
- [83] Q. Plessis, M. Suzuki, and T. Kitahara. 2016. Unsupervised multi scale anomaly detection in streams of events. In *2016 10th International Conference on Signal Processing and Communication Systems (ICSPCS)*. 1–9.
- [84] R Core Team. 2016. *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. <https://www.R-project.org/>
- [85] S. W. Roberts. 1959. Control Chart Tests Based on Geometric Moving Averages. *Technometrics* 1, 3 (1959), 239–250.
- [86] Bernard Rosner. 1983. Percentage points for a generalized ESD many-outlier procedure. *Technometrics* 25, 2 (1983), 165–172.
- [87] Peter J. Rousseeuw and Christophe Croux. 1993. Alternatives to the median absolute deviation. *J. Amer. Statist. Assoc.* 88, 424 (1993), 1273A–1283.
- [88] P. J. Rousseeuw and A. M. Leroy. 2003. *Robust Regression and Outlier Detection*. John Wiley and Sons, New York, NY.
- [89] Bernhard Sch  lkopf, John C. Platt, John C. Shawe-Taylor, Alex J. Smola, and Robert C. Williamson. 2001. Estimating the Support of a High-Dimensional Distribution. *Neural Comput.* 13, 7 (July 2001), 1443–1471.
- [90] Pavel Senin, Jessica Lin, Xing Wang, Tim Oates, Sunil Gandhi, Arnold P. Boedihardjo, Crystal Chen, and Susan Frankenstein. 2015. Time series anomaly discovery with grammar-based compression. In *Proceedings of the 18th International Conference on Extending Database Technology, Brussels, Belgium, March 23-27, 2015*. 481–492.
- [91] Pavel Senin, Jessica Lin, Xing Wang, Tim Oates, Sunil Gandhi, Arnold P. Boedihardjo, Crystal Chen, Susan Frankenstein, and Manfred Lerner. 2014. Grammar-Viz 2.0: A Tool for Grammar-Based Pattern Discovery in Time Series. In *Machine Learning and Knowledge Discovery in Databases - European Conference, ECML PKDD 2014, Nancy, France, September 15-19, 2014. Proceedings, Part III*. 468–472. [https://doi.org/10.1007/978-3-662-44845-8\\_37](https://doi.org/10.1007/978-3-662-44845-8_37)
- [92] Walter A. Shewhart. 1926. Quality control charts. *Bell System Technical Journal* 5, 4 (1926), 593A–603.
- [93] W. A. Shewhart. 1926. Quality Control Charts1. *Bell System Technical Journal* 5, 4 (1926), 593–603.
- [94] D. Simon. 2010. Kalman filtering with state constraints: a survey of linear and nonlinear algorithms. *IET Control Theory Applications* 4, 8 (August 2010), 1303–1318.
- [95] Augustin Soule, Kav  t Salamatian, and Nina Taft. 2005. Combining Filtering and Statistical Methods for Anomaly Detection. In *Proceedings of the 5th ACM SIGCOMM Conference on Internet Measurement*. 31–31.
- [96] Swee Chuan Tan, Kai Ming Ting, and Tony Fei Liu. 2011. Fast Anomaly Detection for Streaming Data. In *Proceedings of the Twenty-Second International Joint Conference on Artificial Intelligence - Volume Volume Two*. AAAI Press, 1511–1516.
- [97] D. K. Tasoulis, G. J. Ross, and N. M. Adams. 2007. Visualising the cluster structure of data. In *Proceedings of the 7th International Symposium on Intelligent Data Analysis*. Ljubljana, Slovenia, 81–92.
- [98] Gary L. Tietjen and Roger H. Moore. 1972. Some Grubbs-type statistics for the detection of several outliers. *Technometrics* 14, 3 (1972), 583A–597.
- [99] J. A. Ting, E. Theodorou, and S. Schaal. 2007. A Kalman filter for robust outlier detection. In *2007 IEEE/RSJ International Conference on Intelligent Robots and Systems*. 1514–1519.
- [100] Madeleine Udell, Corinne Horn, Reza Zadeh, and Stephen P. Boyd. 2014. Generalized Low Rank Models. *CoRR* abs/1410.0342 (2014). <http://arxiv.org/abs/1410.0342>
- [101] Yasuhiro Urabe, Kenji Yamanishi, Ryota Tomioka, and Hiroki Iwai. 2011. *Real-Time Change-Point Detection Using Sequentially Discounting Normalized Maximum Likelihood Coding*. 185–197.
- [102] Owen Vallis, Jordan Hochenbaum, and Arun Kejariwal. 2014. A Novel Technique for Long-term Anomaly Detection in the Cloud. In *Proceedings of the 6th USENIX Conference on Hot Topics in Cloud Computing*. USENIX Association, Berkeley, CA, USA, 15–15.
- [103] Owen Vallis, Jordan Hochenbaum, and Arun Kejariwal. 2014. A Novel Technique for Long-Term Anomaly Detection in the Cloud. In *6th USENIX Workshop on Hot Topics in Cloud Computing (HotCloud 14)*. USENIX Association, Philadelphia, PA.
- [104] E. Vandervieren and M Huber. 2004. An adjusted boxplot for skewed distributions. 52, 12 (2004), 5186 – 5201.
- [105] W. N. Venables and B. D. Ripley. 2002. *Modern Applied Statistics with S* (fourth ed.). New York. ISBN 0-387-95457-0.
- [106] Mark Wade and William Woodall. 1993. A review and analysis of cause-selecting control charts. *Journal of Quality Technology* 25, 3 (1993).
- [107] Z Wu and Trevor Spedding. 2000. A synthetic control chart for detecting small shifts in the process mean. *Faculty of Commerce - Papers (Archive)* (Jan. 2000), 32–38.
- [108] Kenji Yamanishi and Junichi Takeuchi. 2002. A Unifying Framework for Detecting Outliers and Change Points from Nonstationary Time Series Data. In *Proceedings of the Eighth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '02)*. 676–681.
- [109] Kenji Yamanishi, Junichi Takeuchi, Graham Williams, and Peter Milne. 2004. OnLine Unsupervised Outlier Detection Using Finite Mixtures with Discounting Learning Algorithms. *Data Mining and Knowledge Discovery* 8, 3 (2004), 275–300.
- [110] Xiaohua Yan and Joy Ying Zhang. 2013. A Early Detection of Cyber Security Threats using Structured Behavior Modeling.
- [111] Victor J. Yohai and Ruben H. Zamar. 1988. High Breakdown-Point Estimates of Regression by Means of the Minimization of an Efficient Scale. *J. Amer. Statist. Assoc.* 83, 402 (1988), 406–413.
- [112] S. L. Zabell. 2008. On Student's 1908 Article "The Probable Error of a Mean". *J. Amer. Statist. Assoc.* 103, 481 (2008), 1–7.
- [113] Ke Zhai and Jordan Boyd-Graber. 2013. Online Latent Dirichlet Allocation with Infinite Vocabulary. In *International Conference on Machine Learning*.
- [114] Yang Zhang, N. Meratnia, and P. Havinga. 2010. Outlier Detection Techniques for Wireless Sensor Networks: A Survey. *Commun. Surveys Tuts.* 12, 2 (April 2010), 159–170.