

An unbounded number of independent observers can share the nonlocality of a single maximally entangled qubit pair

Peter J. Brown^{1,2,*} and Roger Colbeck^{2,†}

¹*ENS Lyon, LIP, F-69342, Lyon Cedex 07, France*

²*Department of Mathematics, University of York, United Kingdom*

(Dated: 26th March 2020)

Alice and Bob each have half of a pair of entangled qubits. Bob measures his half and then passes his qubit to a second Bob who measures again and so on. The parties work together to try to maximize the number of them that can have an expected violation of the Clauser-Horne-Shimony-Holt (CHSH) Bell inequality with the single Alice. It was conjectured in [Phys. Rev. Lett. **114**, 250401 (2015)] that when the Bobs act independently and with unbiased inputs then at most two of them can expect to violate the CHSH inequality with Alice. Here we show that, contrary to the conjecture, arbitrarily many independent Bobs can have an expected CHSH violation with the single Alice. Our proof is constructive and our measurement strategies can be generalized to work with a larger class of two-qubit states that includes all pure entangled two-qubit state. Since violation of a Bell inequality is necessary for device-independent tasks, our work represents a step towards an eventual understanding of the limitations on how much device-independent randomness can be robustly generated from a single pair of qubits.

I. INTRODUCTION

Quantum theory predicts the possibility of measuring correlations that cannot be explained by standard notions of causality [1]. These ‘non-local’ correlations are a crucial resource for device-independent tasks such as key-distribution [2, 3], randomness expansion [4–6] and randomness amplification [7]. The idea is that because such correlations cannot be explained using local hidden variables, the individual outcomes are random and unpredictable to an adversary [3, 8, 9]. Several recent advances have enabled the first experimental demonstrations of device-independence [10–12]. However, further theoretical and experimental advances are needed before this can become a practical technology.

In this work we study fundamental limits on non-locality, asking whether a single pair of entangled qubits could generate a long sequence of non-local correlations. Such an approach could be useful for situations where a significant bottleneck lies in the state generation, such as in nitrogen vacancy based experiments [13]. We study a scenario in which a single Alice tries to establish non-local correlations with a sequence of Bobs who measure sequentially one half of an entangled qubit pair. An additional restriction we impose is that each Bob in the sequence can only send a single qubit (his post-measurement state) to the next. In particular, the classical information pertaining to measurement choices and outcomes of each Bob is not shared. It is in this sense that the Bobs act independently of one another.

This sequential scenario (see Fig. 1 and Sec. II) was introduced in [14]. There it was shown that by modifying the input distributions of the Bobs, so that one of

the inputs is highly favoured, an unbounded number of Bobs could each have an expected CHSH violation [15] with the single Alice who measures once. However, it was conjectured that if the input distributions were not modified (each Bob chooses a binary input uniformly at random) then at most two Bobs would be able to have an expected CHSH violation with Alice.

By constructing an explicit measurement strategy, we show that, contrary to the conjecture, there is no bound on the number of independent Bobs (with uniform inputs) that can have an expected violation of the CHSH inequality with Alice. We exhibit a class of initial two-qubit entangled states that are capable of achieving an unbounded number of violations, which includes all pure two-qubit entangled states. A previous work [16] claimed a proof of the conjecture of [14]. However, within [16] an implicit assumption that the sharpness of the two measurements that each Bob used was equal. This assumption is not without loss of generality and it is precisely an unequal sharpness that enables the measurement strategies we construct here to achieve a large a number of violations.

II. THE SEQUENTIAL CHSH SCENARIO

We consider the following measurement scenario wherein a single party (Alice) attempts to share nonlocal correlations with n independent parties (Bob⁽¹⁾, ..., Bob⁽ⁿ⁾) using only a single maximally entangled qubit pair, one half of which is passed between the n parties (see Fig. 1). We denote the binary input and output of Alice by X and A respectively. For each $k \in \mathbb{N}$ we denote the binary input and output of Bob^(k) by $Y^{(k)}$ and $B^{(k)}$ respectively.

To begin, a two-qubit state $\rho_{AB^{(1)}}$ is shared between Alice and Bob⁽¹⁾. Bob⁽¹⁾ then proceeds by choosing a uniformly random input, performing the corre-

* peter.brown@ens-lyon.fr

† roger.colbeck@york.ac.uk

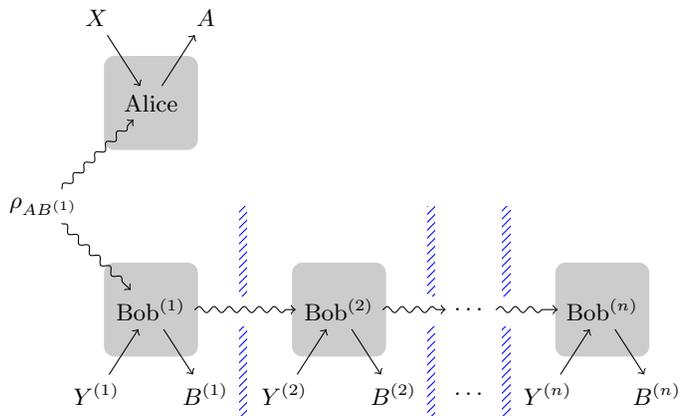


FIG. 1. A schematic of the considered sequential CHSH scenario. All random variables $X, A, Y^{(i)}, B^{(i)}$ for $i = 1, \dots, n$ have only two outcomes. A quantum state $\rho_{AB^{(1)}}$ is initially shared between Alice and Bob⁽¹⁾. After Bob⁽¹⁾ has performed his randomly selected measurement and recorded the outcome he passes the qubit post-measurement state to Bob⁽²⁾ who repeats this process. Only the qubit post-measurement states are sent to the next Bob (the classical information regarding the measurement inputs and outputs are not conveyed).

sponding measurement and recording the outcome. The post-measurement state is then sent to Bob⁽²⁾. Suppose Bob⁽¹⁾ performed the measurement according to $Y^{(1)} = y$ and received the outcome $B^{(1)} = b$, the post-measurement state is described by the Lüder's transform¹

$$\rho_{AB^{(1)}} \mapsto \left(\mathbb{I} \otimes \sqrt{F_{b|y}^{(1)}} \right) \rho_{AB^{(1)}} \left(\mathbb{I} \otimes \sqrt{F_{b|y}^{(1)}} \right), \quad (1)$$

where $F_{b|y}^{(1)}$ is the POVM effect corresponding to outcome b of Bob⁽¹⁾'s measurement for input y . As each Bob is assumed to act independently of all previous Bobs, Bob⁽²⁾ is ignorant of the values of $Y^{(1)}$ and $B^{(1)}$. Thus, the state shared between Alice and Bob⁽²⁾ is averaged over the inputs and outputs of Bob⁽¹⁾, i.e.

$$\rho_{AB^{(2)}} = \frac{1}{2} \sum_{b_1, y_1} \left(\mathbb{I} \otimes \sqrt{F_{b_1|y_1}^{(1)}} \right) \rho_{AB^{(1)}} \left(\mathbb{I} \otimes \sqrt{F_{b_1|y_1}^{(1)}} \right). \quad (2)$$

Repeating this process, we can compute the state shared between Alice and Bob^(k).

We are concerned with the expected CHSH value between Alice and each of the Bobs independently. Given a

¹ More generally we could use the framework of *quantum instruments* to describe the measurement process using a collection of trace-nonincreasing completely positive maps. However, we can always construct a quantum instrument by composing an update using the Lüder's transform with a quantum channel that depends on the outcome. In this sense the Lüder's transform is the optimal update rule for the present task; it retains the largest amount of information in the state.

conditional probability distribution $p_{AB^{(k)}|XY^{(k)}}$ on the binary random variables $A, B^{(k)}, X$ and $Y^{(k)}$, the *CHSH value* is defined as

$$I_{\text{CHSH}}^{(k)} := 2(p(A = B^{(k)}|00) + p(A = B^{(k)}|01) + p(A = B^{(k)}|10) + p(A \neq B^{(k)}|11) - 2). \quad (3)$$

When Alice and Bob^(k) behave classically (with shared randomness) or do not share entanglement then $I_{\text{CHSH}}^{(k)} \leq 2$, which is the CHSH inequality.

The aim of this work is to explain how, given $n \in \mathbb{N}$, we can define a sequence of pairs of POVMs for Bob⁽¹⁾, \dots , Bob⁽ⁿ⁾ such that $I_{\text{CHSH}}^{(k)} > 2$ for all $k = 1, \dots, n$. That is, by initially sharing two qubits in an appropriate entangled state, there is no bound on the number of independent Bobs that can expect to violate the CHSH inequality with a single Alice.

III. THE MEASUREMENT STRATEGY

This uses two-outcome POVMs, $\{E, \mathbb{I} - E\}$, where E has the form $E = \frac{1}{2}(\mathbb{I} + \gamma\sigma_{\mathbf{r}})$. Here $\mathbf{r} \in \mathbb{R}^3$ with $\|\mathbf{r}\| = 1$, $\gamma \in [0, 1]$ is the *sharpness* of the measurement, and $\sigma_{\mathbf{r}} = r_1\sigma_1 + r_2\sigma_2 + r_3\sigma_3$, where $\{\sigma_1, \sigma_2, \sigma_3\}$ are the Pauli operators. Since there are only two outcomes, a single effect is enough to define the POVM. Note that if $\gamma = 1$ the measurement is sharp (projective), and the post-measurement state is unentangled, while if $\gamma = 0$, the measurement ignores the state and is equivalent to an unbiased coin toss.

Our measurement strategy for nonlocality sharing between Alice and n Bobs is fully specified by $n + 1$ parameters. In this strategy Alice's POVMs are defined by the effects

$$A_{0|0} := \frac{1}{2}(\mathbb{I} + \cos(\theta)\sigma_3 + \sin(\theta)\sigma_1) \quad \text{and} \quad (4)$$

$$A_{0|1} := \frac{1}{2}(\mathbb{I} + \cos(\theta)\sigma_3 - \sin(\theta)\sigma_1) \quad (5)$$

for some $\theta \in (0, \pi/4]$. For each $k = 1, \dots, n$, Bob^(k)'s POVMs are defined by the effects

$$B_{0|0}^{(k)} := \frac{1}{2}(\mathbb{I} + \sigma_3) \quad \text{and} \quad (6)$$

$$B_{0|1}^{(k)} := \frac{1}{2}(\mathbb{I} + \gamma_k\sigma_1). \quad (7)$$

For these measurements and with an initial state $\rho_{AB^{(1)}} = |\Psi\rangle\langle\Psi|$ with $|\Psi\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle)$, the expected CHSH value between Alice and Bob^(k) is given by

$$I_{\text{CHSH}}^{(k)} = 2^{2-k} \left(\gamma_k \sin(\theta) + \cos(\theta) \prod_{j=1}^{k-1} \left(1 + \sqrt{1 - \gamma_j^2} \right) \right). \quad (8)$$

(see Appendix A.)

IV. AN UNBOUNDED NUMBER OF VIOLATIONS

Our aim is to choose the values of γ_k and θ to achieve $I_{\text{CHSH}}^{(k)} > 2$ for arbitrarily many values of k . Using (8), we require

$$\gamma_k > \frac{2^{k-1} - \cos(\theta) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2})}{\sin(\theta)}. \quad (9)$$

Our strategy is as follows. If $\gamma_j \in (0, 1)$ for all $j = 1, \dots, k-1$ then set

$$\gamma_k(\theta) = (1 + \varepsilon) \frac{2^{k-1} - \cos(\theta) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2(\theta)})}{\sin(\theta)}, \quad (10)$$

for some $\varepsilon > 0$. Otherwise we set $\gamma_k(\theta) = \infty$, which indicates that violation of $I_{\text{CHSH}}^{(k)} > 2$ is not possible for this k .

The following lemma shows that the sharpness parameters of such a measurement strategy (when they are finite) are strictly increasing, i.e., $0 < \gamma_1(\theta) < \gamma_2(\theta) < \dots < \gamma_n(\theta)$.

Lemma 1. *Let $\theta \in (0, \pi/4]$ and let $\varepsilon > 0$. Then the sequence $(\gamma_k(\theta))_{k \in \mathbb{N}}$ as defined in (10), with $\gamma_1(\theta) = (1 + \varepsilon) \frac{1 - \cos(\theta)}{\sin(\theta)}$, is a positive and increasing sequence. Moreover, the subsequence consisting of all finite terms is a strictly increasing sequence.*

In addition to the sequence being monotonically increasing, each term in the sequence also has a vanishing limit as θ approaches 0.

Lemma 2. *Let $\varepsilon > 0$. Then for the sequence $(\gamma_k(\theta))_{k \in \mathbb{N}}$ as defined in (10), with $\gamma_1(\theta) = (1 + \varepsilon) \frac{1 - \cos(\theta)}{\sin(\theta)}$, for any $n \in \mathbb{N}$ there exists some $\theta_n \in (0, \pi/4]$ such that*

$$\gamma_n(\theta_n) \leq 1. \quad (11)$$

Moreover, we have

$$\lim_{\theta \rightarrow 0^+} \gamma_k(\theta) = 0, \quad (12)$$

for all $k \in \mathbb{N}$.

Using the two lemmas above, the proofs of which are given in Appendices B and C, we can now state and prove our main result.

Theorem 1. *For each $n \in \mathbb{N}$, there exists a sequence $(\gamma_k(\theta))_1^n$ and a $\theta_n \in (0, \pi/4]$ such that $I_{\text{CHSH}}^{(k)} > 2$ for all $k = 1, \dots, n$.*

Proof. By Lemma 2, we know that there exists some $\theta_n \in (0, \pi/4]$ such that $\gamma_n(\theta_n) \leq 1$. By Lemma 1, we then also have that $0 < \gamma_1(\theta_n) < \gamma_2(\theta_n) < \dots < \gamma_n(\theta_n) \leq 1$. As such, this value of θ_n defines a sequence of n valid sharpness parameters which, by construction, each satisfy the conditions (9) and thus each achieve an expected CHSH value greater than 2. \square

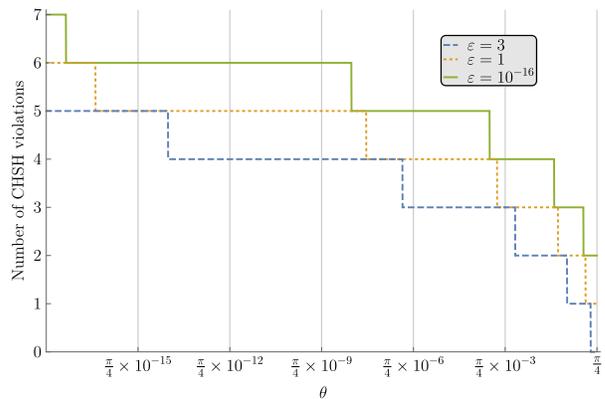


FIG. 2. The number of Bobs that can violate CHSH using our strategy as a function of θ . This was computed numerically for several values of ε by finding, for a fixed θ , the maximum k such that $\gamma_k(\theta) < 1$. As the θ -axis is plotted log-scale, the nature of the plot indicates that the sequence (θ_n) will likely decrease faster than exponentially in n .

The above theorem shows that an unbounded number of independent Bobs are able to violate the CHSH inequality with a single Alice, by sequentially measuring one half of a maximally entangled pair.

Remark 1. To increase the number n of Bobs violating the CHSH inequality, we require smaller values of $\theta_n \in (0, \pi/4]$. By upper and lower bounding γ_n by polynomials of θ , we find evidence to suggest that θ_n must decrease double-exponentially fast with n . A more detailed discussion of this is given in Appendix E. Our findings agree with the numerics presented in Fig. 2 where we plot θ (log-scale) against the number of CHSH violations possible. The appearance of the curves in the plot indicate that θ_n should decrease faster than exponential even for small ε .

Remark 2. We also investigate the behaviour of the sequence of violations of the CHSH inequality. For the strategy described in this paper, we can bound $I_{\text{CHSH}}^{(k)} < 2^{2-k} (\gamma_k(\theta_n)\theta_n + 2^{k-1}) < 2 + 2^{2-k}\theta_n$ for $k = 1, \dots, n$, where we have used $1 + \sqrt{1 - \gamma_j^2(\theta_n)} < 2$ for each $j = 1, \dots, n$ and $\gamma_k(\theta_n) < 1$. Therefore, the sizes of the CHSH violations must decrease as least as fast as θ_n .

Remark 3. The analysis of this section was restricted to the setting where Alice and Bob⁽¹⁾ initially share a maximally entangled qubit pair. However, the measurement strategy presented can be readily extended to a larger class of two qubit states. In particular, if Alice and Bob⁽¹⁾ initially share any pure two-qubit entangled state then it is also possible to define a measurement strategy such that (1) still holds. The full class of states and their respective measurement strategies are discussed in Appendix A.

V. DISCUSSION

In this work we have shown that it is possible for arbitrarily many independent Bobs to violate the CHSH inequality with a single Alice using only a single maximally entangled qubit pair and while making uniformly distributed inputs, answering the conjecture of [14] in the negative and overturning a claim in [16] due to an implicit assumption made there. In addition, we showed that the same can be achieved if the parties initially share any pure, entangled two-qubit state. We also provided bounds on the size of the violations achievable with our strategy, giving evidence that they decrease double-exponentially fast with the number of Bobs.

The magnitude of the violations suggests that our measurement strategies, whilst able to achieve an unbounded number of violations, are not suited to device-independent tasks like randomness expansion in which the quantity of randomness certifiable increases with the size of the CHSH violation. However, it is known that by using the tilted CHSH inequality [17] and allowing one party to choose from an exponentially large number of measurements, an unbounded number of random bits can (in principle, but not in a robust way) be certified from a single pair of entangled qubits in a device-independent manner [18]. More recently, in [19] it was shown that more than two bits of local randomness can be robustly certified by performing sequential measurements on a two-qubit system and with each party choosing from at most three measurements. Further work is needed to understand the limitations on robust device-independent randomness expansion from a single pair of entangled qubits.

Instead of looking at Bell inequality violation, in [20] the authors considered the number of Bobs that could detect entanglement with Alice in the same scenario used in the present paper. They found that no more than twelve Bobs could do so. Since entanglement is necessary for the generation of nonlocal correlations, our work also overturns this claim as an unbounded number of Bobs capable of sharing nonlocal correlations implies that an unbounded number of Bobs can detect entanglement with

Alice. Again, an implicit assumption that each of the Bobs use the same sharpness explains the discrepancy.

Several interesting questions remain open. Firstly, can we fully characterise the set of two-qubit states that allow for an unbounded number of CHSH violations? Here, we gave a sufficient condition for two-qubit state to achieve unbounded violations. In the standard case of a single Bob the set of states for which a violation of the CHSH inequality is possible has been fully characterised [21]. It would be interesting to know whether the conditions presented in Theorem 2 are both necessary and sufficient for unbounded violations.

Second, in the scenario analysed here we only permit a single qubit to be transmitted between subsequent Bobs. We could also consider the setting in which we additionally allow the Bobs to share classical information, i.e., the inputs and outputs of previous Bobs. Such a setting would open up the possibility of the Bobs using an adaptive strategy. In [22] some steps were made in this direction but the authors' strategy required that the inputs and outputs of the Bobs were also sent to Alice before she made her measurement. Whilst our work here implies that it is also possible in the classically-assisted setting to achieve unbounded violations, it would be interesting to know if the classical communication could be used to produce larger violations and more noise-tolerant strategies.

Finally, in a different direction, it would be interesting to explore the scenario where we also consider multiple Alices. In particular, how many expected pairwise violations could a sequence of Alices and Bobs achieve from a single pair of qubits if they act independently?

ACKNOWLEDGMENTS

PB thanks Mirjam Weilenmann for feedback on an earlier version of the manuscript. This work was supported by EPSRC's Quantum Communications Hub (grant numbers EP/M013472/1 and EP/T001011/1), an EPSRC First Grant (grant number EP/P016588/1) and the French National Research Agency via Project No. ANR-18-CE47-0011 (ACOM). The majority of this work was carried out whilst PB was at the University of York.

-
- [1] J. S. Bell, "On the Einstein-Podolsky-Rosen paradox," *Physics* **1**, 195 (1964).
- [2] D. Mayers and A. Yao, "Quantum cryptography with imperfect apparatus," in *Proceedings of the 39th Annual Symposium on Foundations of Computer Science (FOCS-98)* (IEEE Computer Society, Los Alamitos, CA, USA, 1998) pp. 503–509.
- [3] J. Barrett, L. Hardy, and A. Kent, "No signalling and quantum key distribution," *Physical Review Letters* **95**, 010503 (2005).
- [4] R. Colbeck, *Quantum and Relativistic Protocols For Secure Multi-Party Computation*, Ph.D. thesis, University of Cambridge (2007), also available as [arXiv:0911.3814](https://arxiv.org/abs/0911.3814).
- [5] R. Colbeck and A. Kent, "Private randomness expansion with untrusted devices," *Journal of Physics A* **44**, 095305 (2011).
- [6] S. Pironio, A. Acin, S. Massar, A. Boyer de la Giroday, D. N. Matsukevich, P. Maunz, S. Olmschenk, D. Hayes, L. Luo, T. A. Manning, and C. Monroe, "Random numbers certified by Bell's theorem," *Nature* **464**, 1021–1024 (2010).
- [7] R. Colbeck and R. Renner, "Free randomness can be am-

- plified,” *Nature Physics* **8**, 450–454 (2012).
- [8] A. K. Ekert, “Quantum cryptography based on Bell’s theorem,” *Physical Review Letters* **67**, 661–663 (1991).
- [9] L. Masanes, A. Acín, and N. Gisin, “General properties of nonsignaling theories,” *Physical Review A* **73**, 012112 (2006).
- [10] W.-Z. Liu, M.-H. Li, S. Ragy, S.-R. Zhao, B. Bai, Y. Liu, P. J. Brown, J. Zhang, R. Colbeck, J. Fan, *et al.*, “Device-independent randomness expansion against quantum side information,” e-print [arXiv:1912.11159](https://arxiv.org/abs/1912.11159) (2019).
- [11] L. K. Shalm, Y. Zhang, J. C. Bienfang, C. Schlager, M. J. Stevens, M. D. Mazurek, C. Abellán, W. Amaya, M. W. Mitchell, M. A. Alhejji, *et al.*, “Device-independent randomness expansion with entangled photons,” e-print [arXiv:1912.11158](https://arxiv.org/abs/1912.11158) (2019).
- [12] M.-H. Li, X. Zhang, W.-Z. Liu, S.-R. Zhao, B. Bai, Y. Liu, Q. Zhao, Y. Peng, J. Zhang, Y. Zhang, *et al.*, “Experimental realization of device-independent quantum randomness expansion,” e-print [arXiv:1902.07529](https://arxiv.org/abs/1902.07529) (2019).
- [13] B. Hensen, H. Bernien, A. E. Dréau, A. Reiserer, N. Kalb, M. S. Blok, J. Ruitenbergh, R. F. L. Vermeulen, R. N. Schouten, C. Abella, W. Amaya, V. Pruneri, M. W. Mitchell, M. Markham, D. J. Twitchen, D. Elkouss, S. Wehner, T. H. Taminiau, and R. Hanson, “Loophole-free Bell inequality violation using electron spins separated by 1.3 kilometres,” *Nature* **526**, 682–686 (2015).
- [14] R. Silva, N. Gisin, Y. Guryanova, and S. Popescu, “Multiple observers can share the nonlocality of half of an entangled pair by using optimal weak measurements,” *Physical Review Letters* **114**, 250401 (2015).
- [15] J. F. Clauser, M. A. Horne, A. Shimony, and R. A. Holt, “Proposed experiment to test local hidden-variable theories,” *Physical Review Letters* **23**, 880–884 (1969).
- [16] S. Mal, A. Majumdar, and D. Home, “Sharing of nonlocality of a single member of an entangled pair of qubits is not possible by more than two unbiased observers on the other wing,” *Mathematics* **4**, 48 (2016).
- [17] A. Acín, S. Massar, and S. Pironio, “Randomness versus nonlocality and entanglement,” *Physical Review Letters* **108**, 100402 (2012).
- [18] F. J. Curchod, M. Johansson, R. Augusiak, M. J. Hoban, P. Wittek, and A. Acín, “Unbounded randomness certification using sequences of measurements,” *Physical Review A* **95**, 020102 (2017).
- [19] J. Bowles, F. Baccari, and A. Salavrakos, “Bounding sets of sequential quantum correlations and device-independent randomness certification,” e-print [arXiv:1911.11056](https://arxiv.org/abs/1911.11056) (2019).
- [20] A. Bera, S. Mal, A. Sen(De), and U. Sen, “Witnessing bipartite entanglement sequentially by multiple observers,” *Physical Review A* **98**, 062304 (2018).
- [21] R. Horodecki, P. Horodecki, and M. Horodecki, “Violating Bell inequality by mixed spin-12 states: necessary and sufficient condition,” *Physics Letters A* **200**, 340–344 (1995).
- [22] G. Foletto, L. Calderaro, A. Tavakoli, M. Schiavon, F. Picciariello, A. Cabello, P. Villoresi, and G. Vallone, “Experimental demonstration of sustained entanglement and nonlocality after sequential measurements,” e-print [arXiv:1906.07412](https://arxiv.org/abs/1906.07412) (2019).

Appendix A: Derivation of CHSH expression

In this section we will derive the CHSH value for a more general strategy, recovering the expression Equation (8) from the main text as a special case. The notation here and basis for the strategy is inspired by [21]. Given a state ρ_{AB} of two qubits, we define $T(\rho_{AB})$ to be the 3×3 matrix whose entries are given by $T_{i,j}(\rho_{AB}) = \text{Tr}[\rho_{AB}(\sigma_i \otimes \sigma_j)]$. Considering this matrix for the initial state $\rho_{AB(1)}$ shared between Alice and Bob⁽¹⁾, we define λ_0, λ_1 be the two largest eigenvalues of $T(\rho_{AB(1)})T^T(\rho_{AB(1)})$ and let $\mathbf{c}_0, \mathbf{c}_1$ be the corresponding orthonormal eigenvectors. We also define $\mathbf{b}_i = \frac{T^T(\rho_{AB(1)})\mathbf{c}_i}{\|T^T(\rho_{AB(1)})\mathbf{c}_i\|}$. Note that for two unit-length vectors $\mathbf{a}, \mathbf{b} \in \mathbb{R}^3$ we have $\text{Tr}[\rho(\sigma_{\mathbf{a}} \otimes \sigma_{\mathbf{b}})] = (\mathbf{a}, T(\rho)\mathbf{b})$ where (\cdot, \cdot) is the standard Euclidean inner product for the real vector space \mathbb{R}^3 .

Let the measurement strategy of Alice and Bob^(k) be defined by the effects

$$\begin{aligned}
 A_{0|0} &= \frac{1}{2}(\mathbb{I} + \cos(\theta)\sigma_{\mathbf{c}_0} + \sin(\theta)\sigma_{\mathbf{c}_1}), \\
 A_{0|1} &= \frac{1}{2}(\mathbb{I} + \cos(\theta)\sigma_{\mathbf{c}_0} - \sin(\theta)\sigma_{\mathbf{c}_1}), \\
 B_{0|0}^{(k)} &= \frac{1}{2}(\mathbb{I} + \sigma_{\mathbf{b}_0}), \\
 B_{0|1}^{(k)} &= \frac{1}{2}(\mathbb{I} + \gamma_k \sigma_{\mathbf{b}_1}).
 \end{aligned} \tag{A1}$$

Defining the *expectation operators* $A_x = A_{0|x} - A_{1|x}$ and $B_y = B_{0|y} - B_{1|y}$, the CHSH value of Alice and Bob^(k) can be written

$$\begin{aligned}
 I_{\text{CHSH}}^{(k)} &= \text{Tr} \left[\rho_{AB^{(k)}}((A_0 + A_1) \otimes B_0^{(k)}) \right] + \text{Tr} \left[\rho_{AB^{(k)}}((A_0 - A_1) \otimes B_1^{(k)}) \right], \\
 &= 2 \cos(\theta)(\mathbf{c}_0, T(\rho_{AB^{(k)}})\mathbf{b}_0) + 2\gamma_k \sin(\theta)(\mathbf{c}_1, T(\rho_{AB^{(k)}})\mathbf{b}_1).
 \end{aligned} \tag{A2}$$

For the case $k = 1$ this gives

$$\begin{aligned}
I_{\text{CHSH}}^{(1)} &= 2 \cos(\theta) (\mathbf{c}_0, T(\rho_{AB^{(1)}}) \mathbf{b}_0) + 2\gamma_1 \sin(\theta) (\mathbf{c}_1, T(\rho_{AB^{(1)}}) \mathbf{b}_1), \\
&= 2 \cos(\theta) \frac{(\mathbf{c}_0, T(\rho_{AB^{(1)}}) T^T(\rho_{AB^{(1)}}) \mathbf{c}_0)}{\|T^T(\rho_{AB^{(1)}}) \mathbf{c}_0\|} + 2\gamma_1 \sin(\theta) \frac{(\mathbf{c}_1, T(\rho_{AB^{(1)}}) T^T(\rho_{AB^{(1)}}) \mathbf{c}_1)}{\|T^T(\rho_{AB^{(1)}}) \mathbf{c}_1\|}, \\
&= 2 \cos(\theta) \|T^T(\rho_{AB^{(1)}}) \mathbf{c}_0\| + 2\gamma_1 \sin(\theta) \|T^T(\rho_{AB^{(1)}}) \mathbf{c}_1\|, \\
&= 2 \cos(\theta) \sqrt{\lambda_0} + 2\gamma_1 \sin(\theta) \sqrt{\lambda_1}.
\end{aligned} \tag{A3}$$

To derive the general expression we will show how to relate $(\mathbf{c}_0, T(\rho_{AB^{(k)}}) \mathbf{b}_0)$ to $(\mathbf{c}_0, T(\rho_{AB^{(1)}}) \mathbf{b}_0)$ and $(\mathbf{c}_1, T(\rho_{AB^{(k)}}) \mathbf{b}_1)$ to $(\mathbf{c}_1, T(\rho_{AB^{(1)}}) \mathbf{b}_1)$.

Let $\rho_{AB^{(k-1)}}$ be the state shared between Alice and Bob $^{(k-1)}$ prior to Bob $^{(k-1)}$'s measurement (and where Alice has not measured). Using the Lüders update rule the state sent to Bob $^{(k)}$ is

$$\begin{aligned}
\rho_{AB^{(k)}} &= \frac{1}{2} \sum_{b,y} \left(\mathbb{I} \otimes \sqrt{B_{b|y}^{(k)}} \right) \rho_{AB^{(k-1)}} \left(\mathbb{I} \otimes \sqrt{B_{b|y}^{(k)}} \right) \\
&= \left(\mathbb{I} \otimes \frac{1}{2} (\mathbb{I} + \sigma_{\mathbf{b}_0}) \right) \rho_{AB^{(k-1)}} \left(\mathbb{I} \otimes \frac{1}{2} (\mathbb{I} + \sigma_{\mathbf{b}_0}) \right) + \left(\mathbb{I} \otimes \frac{1}{2} (\mathbb{I} - \sigma_{\mathbf{b}_0}) \right) \rho_{AB^{(k-1)}} \left(\mathbb{I} \otimes \frac{1}{2} (\mathbb{I} - \sigma_{\mathbf{b}_0}) \right) \\
&\quad + \left(\mathbb{I} \otimes \sqrt{\frac{1}{2} (\mathbb{I} + \gamma_k \sigma_{\mathbf{b}_1})} \right) \rho_{AB^{(k-1)}} \left(\mathbb{I} \otimes \sqrt{\frac{1}{2} (\mathbb{I} + \gamma_k \sigma_{\mathbf{b}_1})} \right) + \left(\mathbb{I} \otimes \sqrt{\frac{1}{2} (\mathbb{I} - \gamma_k \sigma_{\mathbf{b}_1})} \right) \rho_{AB^{(k-1)}} \left(\mathbb{I} \otimes \sqrt{\frac{1}{2} (\mathbb{I} - \gamma_k \sigma_{\mathbf{b}_1})} \right) \\
&= \frac{2 + \sqrt{1 - \gamma_{k-1}^2}}{4} \rho_{AB^{(k-1)}} + \frac{1}{4} (\mathbb{I} \otimes \sigma_{\mathbf{b}_0}) \rho_{AB^{(k-1)}} (\mathbb{I} \otimes \sigma_{\mathbf{b}_0}) + \frac{1 - \sqrt{1 - \gamma_{k-1}^2}}{4} (\mathbb{I} \otimes \sigma_{\mathbf{b}_1}) \rho_{AB^{(k-1)}} (\mathbb{I} \otimes \sigma_{\mathbf{b}_1}).
\end{aligned} \tag{A4}$$

The final line follows from a direct calculation using the identity

$$\sqrt{\frac{1}{2} (\mathbb{I} \pm \gamma_k \sigma_{\mathbf{b}_1})} = \frac{(\sqrt{1 + \gamma_k} + \sqrt{1 - \gamma_k}) \mathbb{I} \pm (\sqrt{1 + \gamma_k} - \sqrt{1 - \gamma_k}) \sigma_{\mathbf{b}_1}}{2\sqrt{2}}.$$

Now consider the quantity $(\mathbf{c}_0, T(\rho_{AB^{(k)}}) \mathbf{b}_0)$. Using (A4) we may write this as

$$\begin{aligned}
(\mathbf{c}_0, T(\rho_{AB^{(k)}}) \mathbf{b}_0) &= \frac{2 + \sqrt{1 - \gamma_{k-1}^2}}{4} (\mathbf{c}_0, T(\rho_{AB^{(k-1)}}) \mathbf{b}_0) + \frac{\text{Tr}[(\mathbb{I} \otimes \sigma_{\mathbf{b}_0}) \rho_{AB^{(k-1)}} (\mathbb{I} \otimes \sigma_{\mathbf{b}_0}) (\sigma_{\mathbf{c}_0} \otimes \sigma_{\mathbf{b}_0})]}{4} \\
&\quad + (1 - \sqrt{1 - \gamma_{k-1}^2}) \frac{\text{Tr}[(\mathbb{I} \otimes \sigma_{\mathbf{b}_1}) \rho_{AB^{(k-1)}} (\mathbb{I} \otimes \sigma_{\mathbf{b}_1}) (\sigma_{\mathbf{c}_0} \otimes \sigma_{\mathbf{b}_0})]}{4}.
\end{aligned} \tag{A5}$$

Using the cyclicity of the trace this may be written more succinctly as

$$\begin{aligned}
(\mathbf{c}_0, T(\rho_{AB^{(k)}}) \mathbf{b}_0) &= \frac{2 + \sqrt{1 - \gamma_{k-1}^2}}{4} (\mathbf{c}_0, T(\rho_{AB^{(k-1)}}) \mathbf{b}_0) + \frac{\text{Tr}[\rho_{AB^{(k-1)}} (\mathbf{c}_0 \otimes \sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_0})]}{4} \\
&\quad + (1 - \sqrt{1 - \gamma_{k-1}^2}) \frac{\text{Tr}[\rho_{AB^{(k-1)}} (\mathbf{c}_0 \otimes \sigma_{\mathbf{b}_1} \sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_1})]}{4}.
\end{aligned} \tag{A6}$$

We then use the identity $\sigma_{\mathbf{a}} \sigma_{\mathbf{b}} = (\mathbf{a}, \mathbf{b}) \mathbb{I} + i \sigma_{\mathbf{a} \times \mathbf{b}}$ to simplify the matrix products in the above expressions. In particular we have $\sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_0} = \sigma_{\mathbf{b}_0}$ and $\sigma_{\mathbf{b}_1} \sigma_{\mathbf{b}_0} \sigma_{\mathbf{b}_1} = -\sigma_{\mathbf{b}_0}$. Inserting this into the above expression we get

$$\begin{aligned}
(\mathbf{c}_0, T(\rho_{AB^{(k)}}) \mathbf{b}_0) &= \left(\frac{2 + \sqrt{1 - \gamma_{k-1}^2}}{4} + \frac{1}{4} - \frac{1 - \sqrt{1 - \gamma_{k-1}^2}}{4} \right) (\mathbf{c}_0, T(\rho_{AB^{(k-1)}}) \mathbf{b}_0) \\
&= \left(\frac{1 + \sqrt{1 - \gamma_{k-1}^2}}{2} \right) (\mathbf{c}_0, T(\rho_{AB^{(k-1)}}) \mathbf{b}_0).
\end{aligned} \tag{A7}$$

Performing an analogous calculation for $(\mathbf{c}_1, T(\rho_{AB^{(k)}}) \mathbf{b}_1)$ yields

$$\begin{aligned}
(\mathbf{c}_1, T(\rho_{AB^{(k)}}) \mathbf{b}_1) &= \left(\frac{2 + \sqrt{1 - \gamma_{k-1}^2}}{4} - \frac{1}{4} + \frac{1 - \sqrt{1 - \gamma_{k-1}^2}}{4} \right) (\mathbf{c}_1, T(\rho_{AB^{(k-1)}}) \mathbf{b}_1) \\
&= \frac{1}{2} (\mathbf{c}_1, T(\rho_{AB^{(k-1)}}) \mathbf{b}_1).
\end{aligned} \tag{A8}$$

By recursion these give

$$(\mathbf{c}_0, T(\rho_{AB^{(k)}})\mathbf{b}_0) = 2^{1-k}(\mathbf{c}_0, T(\rho_{AB^{(1)}})\mathbf{b}_0) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2}) \quad (\text{A9})$$

$$(\mathbf{c}_1, T(\rho_{AB^{(k)}})\mathbf{b}_1) = 2^{1-k}(\mathbf{c}_1, T(\rho_{AB^{(1)}})\mathbf{b}_1). \quad (\text{A10})$$

Inserting these into the CHSH expression (A2) and noting that $\sqrt{\lambda_i} = (\mathbf{c}_i, T(\rho_{AB^{(1)}})\mathbf{b}_i)$ we obtain

$$I_{\text{CHSH}}^{(k)} = 2^{2-k} \left(\gamma_k \sqrt{\lambda_1} \sin(\theta) + \sqrt{\lambda_0} \cos(\theta) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2}) \right). \quad (\text{A11})$$

Note that for the maximally entangled state we have $\lambda_0 = \lambda_1 = 1$ and so in this case $I_{\text{CHSH}}^{(k)}$ reduces to the CHSH expression (8) from the main text.

Appendix B: Proof of Lemma 1

We prove this for the more general sequence (cf. the expression given in Section IV of the main text),

$$\gamma_k(\theta) := \begin{cases} (1 + \varepsilon) \frac{2^{k-1} - \cos(\theta) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2(\theta)})}{\sqrt{\lambda_1} \sin(\theta)} & \text{if } 0 < \gamma_{k-1}(\theta) < 1, \\ \infty & \text{otherwise} \end{cases}, \quad (\text{B1})$$

with $\varepsilon > 0$, $\lambda_1 > 0$ and $\gamma_1(\theta) = (1 + \varepsilon) \frac{1 - \cos(\theta)}{\sqrt{\lambda_1} \sin(\theta)}$. The lemma as stated in the main text corresponds to the case where $\lambda_1 = 1$.

First we note that $\gamma_1(\theta) > 0$ for all $\theta \in (0, \pi/4]$ and $\varepsilon > 0$. Furthermore, $\gamma_1(\theta) < 1$ whenever $0 < \theta < \arctan\left(\frac{2(1+\varepsilon)\sqrt{\lambda_1}}{(1+\varepsilon)^2 - \lambda_1}\right)$, so the sequence may admit additional finite terms.

If a term in the sequence is infinite then so are all subsequent terms. Suppose then that the k^{th} term of the sequence is finite. This implies that $0 < \gamma_j(\theta) < 1$ for all $j = 1, \dots, k-1$ and in particular we have $1 < 1 + \sqrt{1 - \gamma_{k-1}^2(\theta)} < 2$. The bound $1 + \sqrt{1 - \gamma_{k-1}^2(\theta)} < 2$ then implies that $\gamma_k(\theta)/\gamma_{k-1}(\theta) > 2$ and so the finite terms of the sequence are strictly increasing and the sequence as a whole is a positive, increasing sequence.

Appendix C: Proof of Lemma 2

Again, we prove this lemma for the more general sequence (cf. the expression given in Section IV of the main text),

$$\gamma_k(\theta) := \begin{cases} (1 + \varepsilon) \frac{2^{k-1} - \cos(\theta) \prod_{j=1}^{k-1} (1 + \sqrt{1 - \gamma_j^2(\theta)})}{\sqrt{\lambda_1} \sin(\theta)} & \text{if } 0 < \gamma_{k-1}(\theta) < 1, \\ \infty & \text{otherwise} \end{cases}, \quad (\text{C1})$$

with $\varepsilon > 0$, $\lambda_1 > 0$ and $\gamma_1(\theta) = (1 + \varepsilon) \frac{1 - \cos(\theta)}{\sqrt{\lambda_1} \sin(\theta)}$. The lemma as stated in the main text corresponds to the case where $\lambda_1 = 1$.

We use the inequalities $\sqrt{1 - x^2} \geq 1 - x^2$, for $x \in [0, 1]$; $\cos(\theta) \geq 1 - \theta^2/2$, for $\theta \in (0, \pi/4]$; and $\sin(\theta) \geq \theta/2$, for $\theta \in (0, \pi/4]$. Applying these to $\gamma_k(\theta)$ we have that when $\gamma_k(\theta)$ is finite,

$$\begin{aligned} \gamma_k(\theta) &\leq (1 + \varepsilon) \frac{2^{k-1} - (1 - \theta^2/2) \prod_{j=1}^{k-1} (2 - \gamma_j^2(\theta))}{\sqrt{\lambda_1} \theta/2} \\ &= (1 + \varepsilon) 2^k \frac{1 - (1 - \theta^2/2) \prod_{j=1}^{k-1} (1 - \gamma_j^2(\theta)/2)}{\sqrt{\lambda_1} \theta}. \end{aligned} \quad (\text{C2})$$

Now define a new sequence $p_k(\theta)$ based on this upper bound where

$$p_k(\theta) = (1 + \varepsilon) 2^k \frac{1 - (1 - \theta^2/2) \prod_{j=1}^{k-1} (1 - p_j^2(\theta)/2)}{\sqrt{\lambda_1} \theta}, \quad (\text{C3})$$

and $p_1(\theta) = (1 + \varepsilon) \frac{\theta}{\sqrt{\lambda_1}}$. As $\gamma_k(\theta)$ is increasing whenever finite, we have that for all $k \in \mathbb{N}$, $\gamma_k(\theta) \leq p_k(\theta)$ whenever $\gamma_k(\theta)$ is finite.

A converse implication also holds, $p_k(\theta) \leq 1 \implies \gamma_k(\theta) \leq 1$, as we will now show. Note that $p_k(\theta)$ is a strictly increasing sequence by the same argument used in the proof of Lemma 1. Therefore if $p_k(\theta) \leq 1$ then it must also be that $0 < p_1(\theta) < p_2(\theta) < \dots < p_k(\theta) \leq 1$. As $\gamma_1(\theta)$ is finite for all $\theta \in (0, \pi/4]$ and $\gamma_1(\theta) < p_1(\theta) < 1$ we must have $\gamma_2(\theta)$ is finite. But then $\gamma_2(\theta) < p_2(\theta) < 1$ and so $\gamma_3(\theta)$ must also be finite. By induction $p_k(\theta) \leq 1$ implies $\gamma_k(\theta) \leq 1$.

We now show that there always exists a $\theta_k \in (0, \pi/4]$ such that $p_k(\theta_k) \leq 1$. Moreover, we have $\lim_{\theta \rightarrow 0^+} p_k(\theta) = 0$ and hence, since $\gamma_k(\theta) > 0$, we must have $\lim_{\theta \rightarrow 0^+} \gamma_k(\theta) = 0$.

Firstly, note that $p_1(\theta) = \frac{1+\varepsilon}{\sqrt{\lambda_1}}\theta$ is a polynomial in θ with no constant term. Suppose then all $p_j(\theta)$ for $j = 1, \dots, k-1$ are all also polynomials in θ with a zero constant term. If this is the case then the numerator in (C3) is a polynomial in θ with no constant term or linear term, i.e., it has the form $c_2\theta^2 + c_3\theta^3 + \dots$. Cancelling the θ in the denominator, $p_k(\theta)$ is a polynomial in θ with a zero constant term. Thus, for any $n \in \mathbb{N}$, $p_n(\theta)$ is a polynomial in θ with a zero constant term. In particular, this implies that $\lim_{\theta \rightarrow 0^+} p_k(\theta) = 0$ for all $k \in \mathbb{N}$. Because $0 < \gamma_k(\theta) \leq p_k(\theta)$ when $p_k(\theta) < 1$, it follows that $\lim_{\theta \rightarrow 0^+} \gamma_k(\theta) = 0$.

Finally, since $p_k(\theta)$ is a continuous, positive function on the interval $(0, \pi/4]$ with $\lim_{\theta \rightarrow 0^+} p_k(\theta) = 0$ there must exist some $\theta_k \in (0, \pi/4]$ such that $p_k(\theta_k) \leq 1$. Therefore, there exists some $\theta_k \in (0, \pi/4]$ such that $\gamma_k(\theta_k) \leq 1$.

Appendix D: Unbounded violations for a larger set of two-qubit states

Following the same proof strategy as presented in the main text, in order to observe $I_{\text{CHSH}}^{(k)} > 2$ for the more general measurement strategy (A1) we require

$$\gamma_k > \frac{2^{k-1} - \sqrt{\lambda_0} \cos(\theta) \prod_{j=1}^{k-1} \left(1 + \sqrt{1 - \gamma_j^2}\right)}{\sqrt{\lambda_1} \sin(\theta)}. \quad (\text{D1})$$

We can define a sequence $(\gamma_i(\theta))_i$ analogous to that of (10) from the main text, i.e., for some fixed $\varepsilon > 0$ we have

$$\gamma_k(\theta) = (1 + \varepsilon) \frac{2^{k-1} - \sqrt{\lambda_0} \cos(\theta) \prod_{j=1}^{k-1} \left(1 + \sqrt{1 - \gamma_j^2}\right)}{\sqrt{\lambda_1} \sin(\theta)} \quad (\text{D2})$$

if $\gamma_j \in (0, 1)$ for all $j = 1, \dots, k-1$ and otherwise $\gamma_k(\theta) = \infty$. By Lemma 1 we have that for any non-zero $\lambda_0, \lambda_1, \gamma_k(\theta)$ is a strictly increasing sequence when finite. However, in the more general setting Lemma 2 holds only when $\lambda_0 = 1$. From this, the proof of unbounded violations (Theorem 1 from the main text) can be replicated for the measurement strategy (A1) when $\lambda_0 = 1$ and $\lambda_1 > 0$. We therefore arrive at the following, more general, theorem.

Theorem 2. *Let $\rho_{AB^{(1)}}$ be an entangled two-qubit state and let λ_0, λ_1 be the two largest eigenvalues of the matrix $T(\rho_{AB^{(1)}})T^T(\rho_{AB^{(1)}})$. If $\lambda_0 = 1$ and $\lambda_1 > 0$, then for any $n \in \mathbb{N}$, there exists a sequence $(\gamma_i)_i$ and a $\theta \in (0, \pi/4]$ such that the measurement strategy (A1) achieves*

$$I_{\text{CHSH}}^{(k)} > 2, \quad (\text{D3})$$

for all $k = 1, \dots, n$.

As an example, for two-qubit states of the form

$$\begin{pmatrix} \alpha & 0 & 0 & \beta \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ \beta^* & 0 & 0 & 1 - \alpha \end{pmatrix} \quad (\text{D4})$$

where $\alpha \in [0, 1]$ and $|\beta| \leq \sqrt{\alpha(1-\alpha)}$, we have $\lambda_0 = 1$ and $\lambda_1 = 4|\beta|^2$. Moreover, we have $\sigma_{\mathbf{b}_0} = \sigma_3$ and $\sigma_{\mathbf{b}_1} = \sigma_1$ and so their measurement strategy coincides with the strategy presented in the main text.² By the Schmidt-decomposition we can always write a pure two-qubit entangled state as $|\psi\rangle = \cos(\varphi)|00\rangle + \sin(\varphi)|11\rangle$ for $\varphi \in (0, \pi/4]$. As such, all pure two-qubit entangled states may be written in the form (D4) for some suitably chosen basis. Furthermore, we have $\lambda_1 = \sin^2(2\varphi)$ which means that $\lambda_1 > 0$ for all $\varphi \in (0, \pi/4]$.

² For this family of states the second and third largest eigenvalues

coincide, i.e., $\lambda_1 = \lambda_2$, and so one could take $\sigma_{\mathbf{b}_1} = \sigma_2$ instead.

Corollary 1. *By initially sharing any pure, entangled two-qubit state, the number of Bobs that can violate the CHSH inequality with a single Alice is unbounded.*

Remark 4. There are also some mixed states that satisfy the conditions $\lambda_0 = 1$ and $\lambda_1 > 0$. The condition $\lambda_0 = 1$ is true iff there exists some vector $\mathbf{c} \in \mathbb{R}^3$ of unit length such that $\text{Tr}[\rho(\sigma_{\mathbf{c}} \otimes \sigma_{\mathbf{c}})] = \pm 1$. If $|c_+\rangle\langle c_+|$ and $|c_-\rangle\langle c_-|$ are the projectors onto the eigenstates of $\sigma_{\mathbf{c}}$, then any mixture of ρ with $|c_+\rangle\langle c_+| \otimes |c_+\rangle\langle c_+|$ or $|c_-\rangle\langle c_-| \otimes |c_-\rangle\langle c_-|$ will produce a state that still satisfies $\lambda_0 = 1$.

Appendix E: Bounds on the sequence (θ_n)

Suppose θ is chosen small enough such that the k^{th} term in the sequence $(\gamma_k)_{k \in \mathbb{N}}$ is finite, i.e.

$$\gamma_k(\theta) = (1 + \varepsilon) \frac{2^{k-1} - \cos(\theta) \prod_{j=1}^{k-1} \left(1 + \sqrt{1 - \gamma_j^2(\theta)}\right)}{\sin(\theta)}. \quad (\text{E1})$$

Using the inequalities $\sqrt{1 - x^2} \geq 1 - x^2$ for $x \in [0, 1]$, $\cos(\theta) \geq 1 - \theta^2/2$ for $\theta \in \mathbb{R}$, and $\sin(\theta) \geq \theta/2$ for $\theta \in [0, \pi/2]$ we arrive at the upper bound

$$\gamma_k(\theta) \leq (1 + \varepsilon) 2^k \frac{1 - (1 - \theta^2/2) \prod_{j=1}^{k-1} (1 - \gamma_j^2(\theta)/2)}{\theta}. \quad (\text{E2})$$

Similarly, using the inequalities $\sqrt{1 - x^2} \leq 1 - x^2/2$ for $x \in [0, 1]$, $\cos(\theta) \leq 1 - \theta^2/4$ for $\theta \in (0, \pi/4]$, and $\sin(\theta) \leq \theta$ for $\theta \in [0, \pi/2]$ we find the lower bound

$$\gamma_k(\theta) \geq (1 + \varepsilon) 2^{k-1} \frac{1 - (1 - \theta^2/4) \prod_{j=1}^{k-1} (1 - \gamma_j^2(\theta)/4)}{\theta}. \quad (\text{E3})$$

We now define two sequences $p_k^\uparrow(\theta)$ and $p_k^\downarrow(\theta)$ based on the upper and lower bounds respectively:

$$p_k^\uparrow(\theta) := (1 + \varepsilon) 2^k \frac{1 - (1 - \theta^2/2) \prod_{j=1}^{k-1} \left(1 - p_j^\uparrow(\theta)^2/2\right)}{\theta}, \quad (\text{E4})$$

$$p_k^\downarrow(\theta) := (1 + \varepsilon) 2^{k-1} \frac{1 - (1 - \theta^2/4) \prod_{j=1}^{k-1} \left(1 - p_j^\downarrow(\theta)^2/4\right)}{\theta}, \quad (\text{E5})$$

with $p_1^\uparrow(\theta) = (1 + \varepsilon)\theta$ and $p_1^\downarrow(\theta) = (1 + \varepsilon)\theta/4$. This gives us two sequences that satisfy $p_k^\downarrow(\theta) \leq \gamma_k(\theta) \leq p_k^\uparrow(\theta)$ whenever $\gamma_k(\theta) < \infty$. For all k , $p_k^\uparrow(\theta)$ and $p_k^\downarrow(\theta)$ are polynomials in θ with no constant term. We proceed to estimate the growth of $\gamma_k(\theta)$ by bounding the growth of the coefficients of θ . Let c_k^\uparrow and c_k^\downarrow be the coefficient of θ in $p_k^\uparrow(\theta)$ and $p_k^\downarrow(\theta)$ respectively. Then,

$$c_k^\uparrow = (1 + \varepsilon) 2^{k-1} \left(1 + \sum_{j=1}^{k-1} (c_j^\uparrow)^2\right) \quad (\text{E6})$$

and

$$c_k^\downarrow = (1 + \varepsilon) 2^{k-3} \left(1 + \sum_{j=1}^{k-1} (c_j^\downarrow)^2\right) \quad (\text{E7})$$

with $c_1^\uparrow = (1 + \varepsilon)$ and $c_1^\downarrow = (1 + \varepsilon)/4$. Unfortunately, no general method exists for solving nonlinear recurrence relations of higher orders. A simpler lower bounding sequence for c_k^\downarrow can be found by noting $\sum_{j=1}^{k-1} c_j^2 \geq c_{k-1}^2$. Using this we get a sequence

$$d_k^\downarrow = (1 + \varepsilon) 2^{k-3} (d_{k-1}^\downarrow)^2. \quad (\text{E8})$$

By direct computation we can compute c_4^\downarrow , a polynomial in ε with positive co-efficients, and with constant term larger than 4. We choose to start the sequence d_k^\downarrow at $d_4^\downarrow = 4 \leq c_4^\downarrow$. Note that in principle we could start the sequence at $d_1^\downarrow = (1 + \varepsilon)/4$, but starting at the fourth term, which is always larger than 1, gives a tighter bound. (In addition, the choice of the bound of 4 enables a neater final expression). Now consider an upper bound for c_k^\uparrow , using $\sum_{j=1}^{k-1} c_j^2 \leq (k-1)c_{k-1}^2$ we have

$$\begin{aligned} c_k^\uparrow &= (1 + \varepsilon)2^{k-1} \left(1 + \sum_{j=1}^{k-1} (c_j^\uparrow)^2 \right) \\ &\leq (1 + \varepsilon)2^{k-1} k (c_{k-1}^\uparrow)^2 \\ &\leq (1 + \varepsilon)2^{2k-1} (c_{k-1}^\uparrow)^2, \end{aligned}$$

where on the second line we used $k \leq 2^k$. Using this upper bound we define the new sequence

$$d_k^\uparrow = (1 + \varepsilon)2^{2k-1} (d_{k-1}^\uparrow)^2, \quad (\text{E9})$$

with $d_1^\uparrow = (1 + \varepsilon)$. The following two lemmas give us a closed form for d_k^\uparrow and d_k^\downarrow .

Lemma 3. *Let $k \in \mathbb{N}$ with $k \geq k_0$ and $t, c \in \mathbb{R}$. Then the sequence*

$$b_k := 2b_{k-1} + tk + c \quad (\text{E10})$$

admits the closed form solution

$$b_k = 2^{k-1} (b_{k_0} + (2 + k_0)t + c) - (k + 2)t - c. \quad (\text{E11})$$

Proof. Rearranging, we find the relation

$$b_k - 2b_{k-1} = tk + c$$

and through a telescoping procedure we can write

$$\begin{aligned} b_k - 2^{k-k_0} b_{k_0} &= \sum_{r=0}^{k-k_0-1} 2^r (b_{k-r} - 2b_{k-r-1}) \\ &= \sum_{r=0}^{k-k_0-1} 2^r (t(k-r) + c). \end{aligned}$$

Evaluating the summation we find

$$b_k - 2^{k-k_0} b_{k_0} = 2^{k-k_0} ((2 + k_0)t + c) - (k + 2)t - c$$

and so

$$b_k = 2^{k-k_0} (b_{k_0} + (2 + k_0)t + c) - (k + 2)t - c. \quad \square$$

Lemma 4. *Let $\varepsilon > 0$ and $k \in \mathbb{N}$ with $k \geq 1$. Let*

$$d_k^\downarrow = (1 + \varepsilon)2^{k-3} (d_{k-1}^\downarrow)^2$$

and

$$d_k^\uparrow = (1 + \varepsilon)2^{2k-1} (d_{k-1}^\uparrow)^2$$

define two sequences with $d_4^\downarrow = 4$ and $d_1^\uparrow = (1 + \varepsilon)$. Then for $k \geq 4$ we have

$$d_k^\downarrow = (1 + \varepsilon)^{2^{k-4}-1} 2^{5 \times 2^{k-4} - k + 1}$$

and for $k \geq 1$ we have

$$d_k^\uparrow = (1 + \varepsilon)^{2^k-1} 2^{5 \times 2^{k-1} - 2k - 3}.$$

Proof. We derive a closed-form expression for the sequence

$$d_k = (1 + \varepsilon)2^{tk-a}d_{k-1}^2,$$

for $t, a, k \in \mathbb{N}$ and $k \geq k_0$. Taking logarithms of both sides we have

$$\log(d_k) = (tk - a) + \log(1 + \varepsilon) + 2\log(d_{k-1}).$$

Defining a new sequence via the replacements $b_k = \log(d_k)$ and $c = \log(1 + \varepsilon) - a$, we may apply Lemma 3 to get

$$b_k = 2^{k-k_0}(b_{k_0} + (2 + k_0)t + c) - (k + 2)t - c.$$

Equivalently,

$$\begin{aligned} d_k &= 2^{2^{k-k_0}(\log(d_{k_0}) + (2+k_0)t + c) - (k+2)t - c} \\ &= 2^{2^{k-k_0}(\log(d_{k_0}) + (2+k_0)t + \log(1+\varepsilon) - a) - (k+2)t - \log(1+\varepsilon) + a} \end{aligned}$$

To recover d_k^\downarrow we first set $t = 1$, $a = 3$, $k_0 = 4$ and $d_4 = 4$ to obtain

$$\begin{aligned} d_k^\downarrow &= 2^{2^{k-4}(5 + \log(1+\varepsilon)) - (k+2) - \log(1+\varepsilon) + 3} \\ &= 2^{(2^{k-4} - 1)(\log(1+\varepsilon)) + 5 \times 2^{k-4} - k + 1} \\ &= (1 + \varepsilon)^{2^{k-4} - 1} 2^{5 \times 2^{k-4} + 1 - k}. \end{aligned}$$

Setting $t = 2$, $a = 1$, $k_0 = 1$ and $d_1 = (1 + \varepsilon)$ we find

$$\begin{aligned} d_k^\uparrow &= 2^{2^{k-1}(\log(1+\varepsilon) + \log(1+\varepsilon) + 5) - 2(k+2) - \log(1+\varepsilon) + 1} \\ &= 2^{2^{k-1}(2\log(1+\varepsilon) + 5) - (2k+3) - \log(1+\varepsilon)} \\ &= 2^{(2^k - 1)\log(1+\varepsilon) + 5 \times 2^{k-1} - 2k - 3} \\ &= (1 + \varepsilon)^{2^k - 1} 2^{5 \times 2^{k-1} - 2k - 3} \end{aligned} \quad \square$$

Hence both d_k^\uparrow and d_k^\downarrow exhibit double-exponential growth with k . Relating this back to $\gamma_n(\theta)$, we have established that there exist polynomials $d_n^\downarrow\theta + O(\theta^2)$ and $d_n^\uparrow\theta + O(\theta^2)$ such that whenever $\gamma_n(\theta) < \infty$ we have

$$d_n^\downarrow\theta + O(\theta^2) \leq \gamma_n(\theta) \leq d_n^\uparrow\theta + O(\theta^2). \quad (\text{E12})$$

For small enough $\theta > 0$, the second inequality implies that if θ is double-exponentially small in n then $\gamma_n(\theta) \leq 1$ and we have a valid measurement strategy. On the other hand, by demanding that $\gamma_n(\theta) \leq 1$, the first inequality implies that θ_n should decrease double-exponentially fast with n .