

- 7) Warrant Threats
- 8) IRS Calls

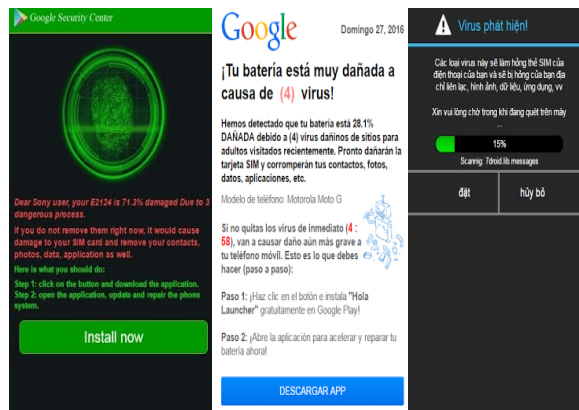


Fig. 2. Examples of deceptive ads.

When you are doing web surfing, you might have experience on being informed that your cellphone is infected by malware/virus or on being forced to download unknown Apps. Deceptive ads, a particular type of ads, is the use of false or misleading statements in advertising, and may cause negative impact on stakeholders. Deceptive ads is a particular type of malicious advertising [1] that tricks you to download unnecessary Apps. Deceptive ads might give you false alarms, saying you are infected or your cellphone needs to be updated. These false alarms sometimes cannot be turned off by refreshing the webpage, making you uncomfortable with the status of the cellphone. Such deceptive ads is pretty annoying; the advertisers may in turn gain reverse effect (e.g., awful reputation) by adopting deceptive ads. The detection and even capture of deceptive ads is definitely not easy; the contents and wordings varied in different regions, time zones, and countries. Phone scams and deceptive ads are not a new threat; however, since mobile devices are always on and carried 24/7, such a threat has quickly ascended on the list of everyday Internet threats. Deceptive ads exhibit fast-flux behavior, while phone scams exhibit caller ID spoofing behavior and therefore is more difficult to be caught. Fig. 2 shows examples of deceptive ads whose pop-up ads show falsified information and instructions.

On the other hand, we found that deceptive ads is increasing its impact on cellphone. In general, the typical procedures of how deceptive ads work are shown as follows (see Fig. 3).

- 1) Browse the porn website and click the temptation ads.
- 2) Pop up a false or misleading statement.
- 3) Orientate user towards the anti-virus App on Google Play.

Among the deceptive ads, three main categories in terms of the contents will be displayed (see Fig. 4).

- Pretend to have an alert for malware/virus infection.
- Pretend to have a notification for updating Android system.



Fig. 3. Procedures of deceptive ads.

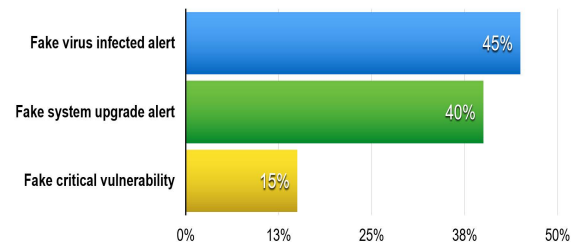


Fig. 4. Three categories of deceptive ads.

- Pretend to have a notification for patching the critical vulnerability.

Note that among the three categories, fake infection alert occupies almost the half. Only a few deceptive ads are the fake patching notification. Note also that through the analysis of advertising alliance traffic of April 2016, we discovered that deceptive ads occupy up to 21% in the global advertising alliance traffic.

Google is one of the biggest victims from the false and misleading contents perspective. In essence, the tool Apps, such as security and power-saving Apps, suffers the most, in terms of App categories. Most of the deceptive ads falsely warn the user about malware/virus infection or battery dying. An observation from our collected ads is that the targets of deceptive ads are mostly emerging companies. An explanation to such an observation is that the deceptive ads are usually associated with the tool Apps. The emerging companies such as Qihoo 360 and Cheetah Mobile have developed and published a number of tool Apps as strategic software for expanding the market, and then deceptive ads have more impact on emerging companies. As a result, the investment of the advertising will turn to have negative impact on the reputation. Based on our study, we find that the porn websites are the major sources of the deceptive ads. Of course, the rest of the deceptive ads are mainly from the game portal, file hosting service, and news websites. The typical scenario is that a banner showing an alert about the malware/virus infection jumps out, once the user clicks the ads, it will be directed to Google Play. The user may click to check and then will be directed to download

the unnecessary App (see Fig. 3).

II. DEEP LEARNING APPROACH FOR PROBLEM SOLVING

Deep learning allows computational models that are composed of multiple processing layers to learn representations of data with multiple levels of abstraction [3]. Recently, Alpha Go from Google DeepMind gains a huge success in Computer Go. The deep learning behind the Alpha Go receives huge attentions from both publics and academics [4]. Neural network mimics how human brain works and can apply to perform pattern recognition. Therefore, the image can be input to the neural network and the burdensome procedures such as feature extraction and data model can be omitted. Based on the convolutional layer and pooling layer, CNN strengthens the effectiveness of pattern recognition. The most well-known convolutional neural network (CNN) models are AlexNet [5], VGG [6], GoogleNet [7], and ResNet in ImageNet Large Scale Visual Recognition Challenge (ILSVRC). Due to the use of deceptive ads, the existence of bad actors may lead to the vicious competition, and therefore the benign actors have less earning. We observe that the deceptive ads mutate very frequently, almost in real time. Thus, in the case of no dedicated real-time detection, it is very difficult to promise the contents of the ads.

The technical challenge in differentiating between benign and deceptive ads is that the contents of deceptive ads is not fixed; instead, the contents of deceptive ads vary according to the factors such as the region, time zone, language, etc. The conventional detections are useless in detecting deceptive ads. Our previous research results have adopted machine learning approach (with automated feature extraction for further text-mining and pattern recognitions to handle multilingual deceptive ads) and integrated it with techniques including Ontology, Type-2 Fuzzy Logic etc. However, our previous mechanism was unable to smoothly handle these fast flux-like behaviors as above technical challenge [8]. Thus, our goal is to increase expressiveness of our mechanism, while smoothly handling these fast flux-like behaviors of the deceptive ads challenge.

The most frequently used method of detecting deceptive behavior includes phone scams and deceptive ads. There have only been few research efforts for yellow pages, blacklist, detecting malicious ads and phishing on malicious URLs. For example, the pre-defined features or fixed delimiters for feature selection and reactive URL or phone number blacklisting can be used for the detection [9] [10]. However, these techniques are inefficient in detecting phone scams or deceptive ads due to the short lifetime of deceptive behavior. In fact, the most common type of phone scams is fake phone number which makes phone calls from outside and deceptive ads exhibit a fast flux-like and region-aware behaviors. The former means that the phone number exhibit caller ID spoofing behavior, while the latter means that the deceptive ads would be valid for only a very short time interval and by visiting the same deceptive ads URL, the browsers in different countries or even the same browser with different language settings may see

different contents¹² (see Fig. 2). These two features make tracking down the deceptive behavior much more difficult.

III. OUR PROPOSED SYSTEM

Our system try to combine the novel techniques on users cellphone (client-side), and deep learning, a branch of machine learning based on a set of algorithms that attempt to model high-level abstractions in data by using multiple processing layers, with complex structures or otherwise, composed of multiple non-linear transformations, on our back-end system (server-side) to address the challenge of accurately detecting phone scams for the loss of money and deceptive ads for the product reputation, and the ads cost saving. Based on the DNN and CNN in deep learning, we proposed a mechanism to detect phone scams and deceptive ads. Our system is a cloud-assisted host-based detection. One may see that once the user device (e.g., smartphone) is reached by a unknown people or goes to an URL, the encoded or hashed information about the browsing (e.g., URL) will be sent to the cloud service implemented with our detection core. Afterwards, the cloud will return the detection result to the user device. Our mechanism is featured by both the client-side real-time lightweight defense and the cloud-side deep inspection. Such a hybrid detection mechanism aims to detect the deceptive ads with significantly low false positives and false negatives. As the first step toward the detection, our system is implemented by Python language and integrated with some open source projects such as asynchronous and customizable analysis platform: IRMA³, Elasticsearch which provides the most powerful full-text search capabilities⁴ and Kibana which easily visualizes data⁵. We also provide a simple RESTful API using JSON formatted report over HTTP.

Here, the *unknown calling data* refers to the calling data contributed only by the strangers. In our system implementation, for detecting phone scams, first we collect a huge set of unknown calling data from users feedback, based on our user-base and back-end system. We collected 1500 thousands of unknown calling data in July, 2016 from countries such as Brasil, Italy, UK and France etc., and then captured the feature as the input to our system to learn the difference between benign and deceptive phone numbers.

More specifically, as shown in Fig. 5, the user received the call from the strangers. Our App on the users cellphone sent a feedback to the back-end system (step 1). On the way to the back-end system, an online database with regional data was checked. In our mechanism, the aim of doing so is to trigger the region-specific and country-specific phone scams, with the observation that certain phone scams may check where the user is from and shows different behavior (step 2). And then, our mechanism extracted the time length of ringing, speaking time, user action, hanging out, picking up, timeout, blacklist,

¹<https://www.youtube.com/watch?v=qxqvtKrrVBA>

²<https://www.youtube.com/watch?v=16nbnkUdX6k>

³<http://irma.quarkslab.com>

⁴<https://www.elastic.co>

⁵<https://www.elastic.co/products/kibana>

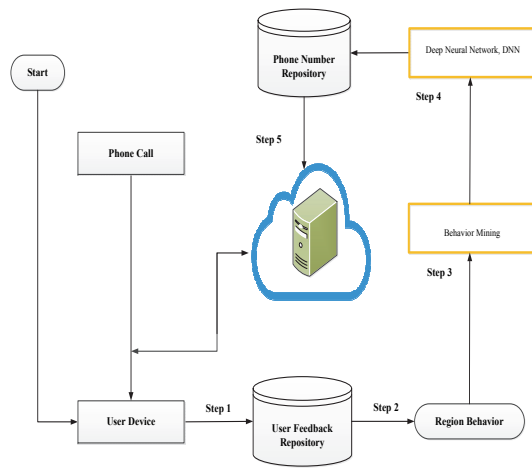


Fig. 5. The architecture of our phone scams detection system.

and calling time etc. from the phone numbers records as features and then feed to our DNN system (step 3). Afterwards, we obtain the classification results from DNN (step 4, via Google's TensorFlow [11]).

More precisely, all of the phone numbers records' feature from the unknown calling data were input to neural network and the layers of neural network learned the best results. The neural network ran many times until the overall error rate reached the minimum. Thus, in the records of phone number, deep learning helped us find the results for the classification. After that, both the cloud-side system and client-side defense were updated (step 5). A brief description of our model is shown as followings:

- 1) the activation function is relu.
- 2) for the first layer, the number of input neurons is 9 while the number of output neurons is 14.
- 3) for the second layer, the number of input neurons is 14 while the number of output neurons is 9.
- 4) for the third layer, the number of input neurons is 9 while the number of output neurons is 5.
- 5) the last layer is the output layer with the sigmoid activation function.

On the other hand, for detecting deceptive ads, first we collected a huge number of ads from the Internet, based on our user base and back-end system. We collected more than 150 thousand advertising URLs daily, and then captured the advertising figures and texts as the input to our system to learn the difference between benign and deceptive ads. More specifically, as shown in Fig. 6, the user browsed the webpages. Our App on the users cellphone sent a feedback to the back-end system (step 1). On the way to the back-end system, an online database with regional data were checked. In our mechanism, we deployed virtual private servers (VPSs) around the world. The aim of doing so is to trigger the region-specific and country-specific deceptive ads, with the observation that certain deceptive ads may check where the clicking user is from and shows different contents (step 2). After the VPS,

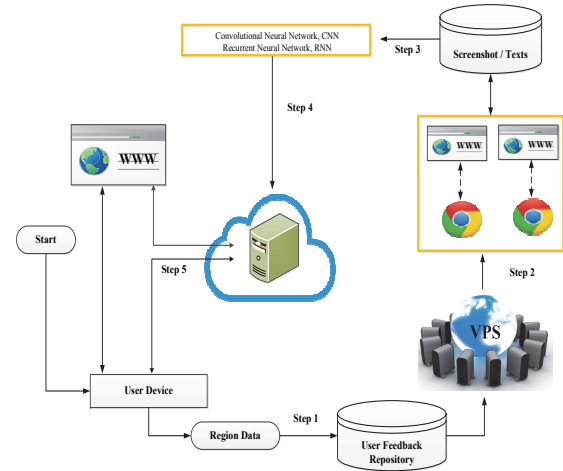


Fig. 6. The architecture of our Ads detection system.

```
{
  "status_code": "OK",
  "result": {
    {
      "page_id": "201605241826241da",
      "destination_url": "http://www.xerotica.com/video/seductive-michaela-isizzu-displays-her-amazing-sexy-body-on-the-sofa-9286.html",
      "origin_url": "http://www.xerotica.com/video/seductive-michaela-isizzu-displays-her-amazing-sexy-body-on-the-sofa-9286.html",
      "screenshot_url": "http://securebase.cmc.com/data/img/201605241826241da.png",
      "wording": "",
      "market_url": "market://details?id=com.xerotica.isizzu-displays-her-amazing-sexy-body-on-the-sofa-9286.html",
      "country_code": "Taiwan",
      "validation_datetime": "2016-05-24T10:26:24Z",
      "app_package_name": "com.xerotica.isizzu-displays-her-amazing-sexy-body-on-the-sofa-9286.html"
    }
  }
}
```

Fig. 7. Our deceptive ads analysis report.

our mechanism extracted the figures, texts, and HTML source file from the ads for deep learning (step 3). Afterwards, we obtained the classification results from deep learning (re-train and fine-tune Google's Inception-V3 model⁶ via TensorFlow [11]). More precisely, all of images are input to neural network and the layers of neural network may automatically generate the best features, instead of manually extracting features. The neural network ran many times until the overall error rate reached the minimum (step 4). In the structure of our mechanism, one can see that more convolutional layers implied more capabilities of recognizing the object in an abstract sense. Thus, in the context of ads, deep learning helps us find the features for the classification. After that, both the cloud-side system and client-side defense were updated (step 5). In addition, we also offered RESTful API for checking whether deceptive ads cause economic impacts on their business that

⁶. It is trained for the ImageNet Large Visual Recognition Challenge using the data from 2012. AlexNet achieved by setting a top-5 error rate of 15.3% on the 2012 validation data set; BN-Inception-v2 achieved 6.66%; Inception-v3 reaches 3.46%

showed how destination URL, original URL, screenshot and date and time helped in detection, as shown in Fig. 7.

IV. EVALUATION RESULTS

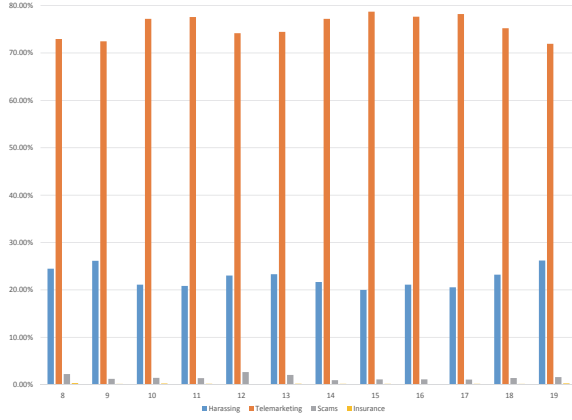


Fig. 8. The average of collection of phone numbers in 1 day.

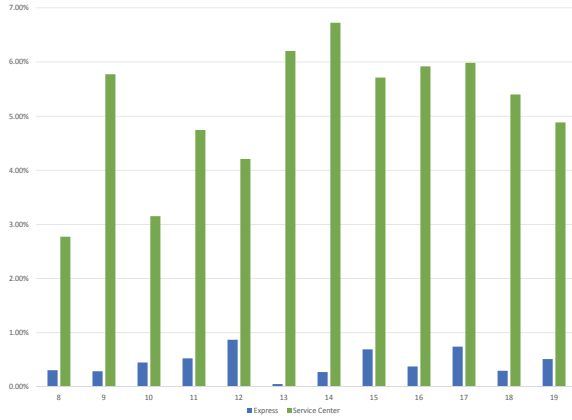


Fig. 9. The average of collection of phone numbers in 1 day.

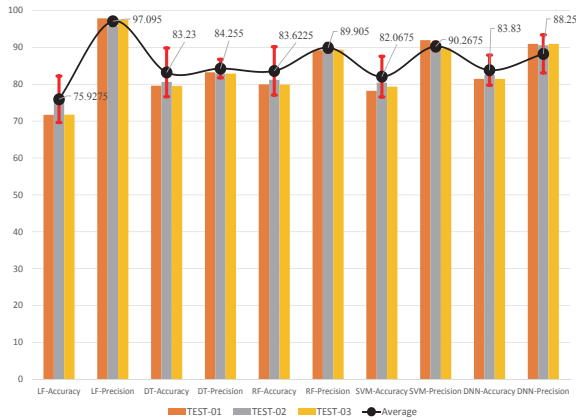


Fig. 10. Our mini experiment results.

Our featured products have reached 38 billion installations globally with 623 million monthly active users each month

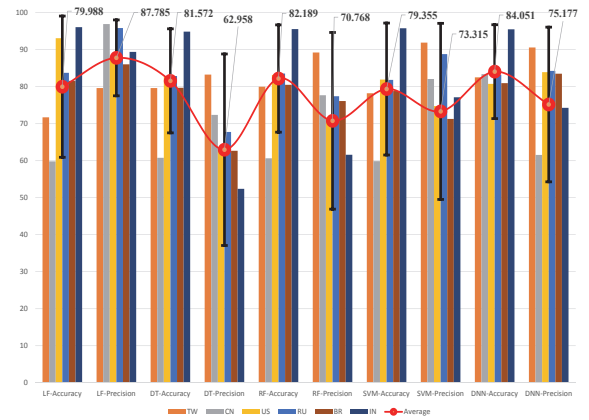


Fig. 11. Our experiment results.

by December, 2016. For phone scams, our core product has 80 million daily active users, and 23 million daily active users have received phone call from strangers including 10% phone scams. Fig. 8 and Fig. 9 show the average of collection of phone numbers in one day. We found that during the working time, the so-called malicious calling such as harassing, telemarketing, scams and insurance could be a huge portion. We also found that the normal calling from, for example, express, service center, occupy only less than 10%. According to the data above, we created and adapted our DNN model. Fig. 10 shows our mini experiment results, which are analyzed by Logistic Regression, Decision Tree, Random Forest and SVM algorithms with DNN. We found that accuracy and precision of DNN are more stable. Thus we included more countries in our experiment. According to our experiment, we can perceive except for the arithmetic mean of deep neural network which has reached 85%. The rests of the Logistic Regression, Decision Tree, Random Forest algorithm only reached between 70% and 80%, and SVM only reached 75% (shown as Fig. 11). Moreover, the standard deviation is applied to evaluate the stability of each learning method. Our DNN model has a low standard deviation which indicated that the data points tend to be close to the mean. With the consideration of long term defense and system maintenance of phone scams and the consideration of the detection accuracy of deep neural network, we are pretty sure that the adapted deep learning approach is better than conventional machine learning approaches.

Usually, we can collect 150 thousand URLs including the advertising screenshots and texts per day. According to the data above, we integrated and adapted Googles deep learning model that has previously trained Inception-v3 for screenshots via TensorFlow. At the same time, due to Android Fragmentation, we found that deceptive ads also has the same Location Based Service (LBS) function of benign advertising. Therefore, we focused on TOP 10 mobile brands market share and further discussed the difference between feature extractions, as shown in Fig. 12. For instance, Samsung has huge amount of users in the United State, and Huawei also

