

# A Unified Study of Conforming and Discontinuous Galerkin Methods\*

Qingguo Hong<sup>†</sup> Fei Wang<sup>‡</sup> Shuonan Wu<sup>§</sup> Jinchao Xu<sup>¶</sup>

## Abstract

A unified study is presented in this paper for the design and analysis of different finite element methods (FEMs), including conforming and nonconforming FEMs, mixed FEMs, hybrid FEMs, discontinuous Galerkin (DG) methods, hybrid discontinuous Galerkin (HDG) methods and weak Galerkin (WG) methods. Both HDG and WG are shown to admit inf-sup conditions that hold uniformly with respect to both mesh and penalization parameters. In addition, by taking the limit of the stabilization parameters, a WG method is shown to converge to a mixed method whereas an HDG method is shown to converge to a primal method. Furthermore, a special class of DG methods, known as the *mixed DG methods*, is presented to fill a gap revealed in the unified framework.

**Keywords.** Finite element methods, DG-derivatives, Unified study

## 1 Introduction

In this paper, we propose a general framework to derive most of the existing finite element methods (FEMs), and discuss their relationships. We will illustrate the main idea by using the following elliptic boundary value problem

$$\begin{cases} -\operatorname{div}(\alpha \nabla u) = f & \text{in } \Omega, \\ u = 0 & \text{on } \partial\Omega, \end{cases} \quad (1.1)$$

where  $\Omega \subset \mathbb{R}^d$  ( $d \geq 1$ ) is a bounded domain and  $\alpha : \mathbb{R}^d \rightarrow \mathbb{R}^d$  is a bounded and symmetric positive definite matrix, with its inverse denoted by  $c = \alpha^{-1}$ .

Setting  $\mathbf{p} = -\alpha \nabla u$ , the above problem can be formally written in two different forms. The first, known as the primal formulation, can be written as

$$\begin{cases} c\mathbf{p} + \nabla u = 0 & \text{in } \Omega, \\ -\nabla^* \mathbf{p} = f & \text{in } \Omega, \end{cases} \quad (1.2)$$

which requires that  $u \in H_0^1(\Omega)$  and  $\mathbf{p} \in \mathbf{L}^2(\Omega)$ .

---

\*The work of the last author was supported by US Department of Energy Grant DE-SC0014400 and NSF grant DMS-1522615. The work of the second author was partially supported by the National Natural Science Foundation of China (Grant No. 11771350).

<sup>†</sup>huq11@psu.edu@psu.edu, Department of Mathematics, Pennsylvania State University, University Park, PA, 16802, USA

<sup>‡</sup>feiwang.xjtu@xjtu.edu.cn, School of Mathematics and Statistics, Xi'an Jiaotong University, Xi'an, Shaanxi, 710049, China

<sup>§</sup>sxw58@psu.edu, Department of Mathematics, Pennsylvania State University, University Park, PA, 16802, USA

<sup>¶</sup>xu@math.psu.edu, Department of Mathematics, Pennsylvania State University, University Park, PA, 16802, USA

The second, known as the mixed formulation, can be written as

$$\begin{cases} c\mathbf{p} - \operatorname{div}^* u = 0 & \text{in } \Omega, \\ \operatorname{div} \mathbf{p} = f & \text{in } \Omega, \end{cases} \quad (1.3)$$

which requires that  $u \in L^2(\Omega)$  and  $\mathbf{p} \in \mathbf{H}(\operatorname{div}; \Omega)$ .

The design of FEMs then becomes an appropriate discretization of  $\nabla$  and  $\operatorname{div}$ , which amounts to imposing certain continuity conditions on  $u$  and  $\mathbf{p} \cdot \mathbf{n}$  in the following five different approaches:

1. strongly ( $H^1$  or  $\mathbf{H}(\operatorname{div})$  conforming elements),
2. weakly (nonconforming),
3. via Lagrangian multiplier (hybrid methods),
4. via Lagrangian multiplier and stabilization — stabilized hybrid primal methods and stabilized hybrid mixed methods, and
5. via penalization (DG).

The resulting different types of FEMs can then be fully described in a uniform framework by the notion of DG-gradient —  $\nabla_{\text{dg}}$ , DG-divergence —  $\operatorname{div}_{\text{dg}}$ . Here,  $\nabla_{\text{dg}}$  (see (1.4)) is a generalization of the piecewise gradient which allows  $u_h$  to be discontinuous across element boundaries, but uses an additional Lagrangian multiplier space on the element boundaries. We note that  $\nabla_{\text{dg}}$  and  $\operatorname{div}_{\text{dg}}$  in this context, as shown in Table 2.1 below, directly correspond to the weak derivatives introduced by Wang and Ye [109]. We denote by  $\{\mathcal{T}_h\}_h$  a family of triangulations of  $\bar{\Omega}$  which satisfy the minimal angle condition. Let  $h_K = \operatorname{diam}(K)$  and  $h = \max\{h_K : K \in \mathcal{T}_h\}$ . For any  $K \in \mathcal{T}_h$ , denote  $\mathbf{n}_K$  as the outward unit normal of  $K$ . Denote by  $\mathcal{E}_h$  the union of the boundaries of the elements  $K$  of  $\mathcal{T}_h$ . Let  $P_h : L^2(\Omega) \rightarrow V_h$  be the  $L^2$  projection and  $f_h = P_h f$ .

**Definition 1.1 (DG-derivatives)** Let  $\tilde{u}_h = (u_h, \hat{u}_h) \in \tilde{V}_h$ , and  $\tilde{\mathbf{p}}_h = (\mathbf{p}_h, \hat{\mathbf{p}}_h) \in \tilde{\mathbf{Q}}_h$ . Then the DG-gradient  $\nabla_{\text{dg}} : V_h \mapsto \tilde{\mathbf{Q}}_h^*$  and the DG-divergence  $\operatorname{div}_{\text{dg}} : \mathbf{Q}_h \mapsto \tilde{V}_h^*$  are defined by

$$\langle \nabla_{\text{dg}} u_h, \tilde{\mathbf{q}}_h \rangle = (\nabla_h u_h, \mathbf{q}_h)_\Omega - \sum_{K \in \mathcal{T}_h} \langle u_h, \hat{\mathbf{q}}_h \cdot \mathbf{n}_K \rangle_{\partial K} \quad \forall u_h \in V_h, \forall \tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h, \quad (1.4)$$

$$\langle \operatorname{div}_{\text{dg}} \mathbf{p}_h, \tilde{v}_h \rangle = (\operatorname{div}_h \mathbf{p}_h, v_h)_\Omega - \sum_{K \in \mathcal{T}_h} \langle \mathbf{p}_h \cdot \mathbf{n}_K, \hat{v}_h \rangle_{\partial K} \quad \forall \tilde{v}_h \in \tilde{V}_h, \forall \mathbf{p}_h \in \mathbf{Q}_h. \quad (1.5)$$

Here,  $V_h$  and  $\mathbf{Q}_h$  are the piecewise scalar and vector-valued discrete spaces on the triangulation  $\mathcal{T}_h$ , respectively, and  $\hat{V}_h$  and  $\hat{\mathbf{Q}}_h$  are the piecewise scalar and vector-valued discrete spaces on  $\mathcal{E}_h$ , respectively.  $\tilde{V}_h$  and  $\tilde{\mathbf{Q}}_h$  are defined as

$$\tilde{V}_h := V_h \times \hat{V}_h, \quad \tilde{\mathbf{Q}}_h = \mathbf{Q}_h \times \hat{\mathbf{Q}}_h.$$

$\tilde{\mathbf{Q}}_h^*$  and  $\tilde{V}_h^*$  are the dual spaces of  $\tilde{\mathbf{Q}}_h$  and  $\tilde{V}_h$ , respectively.

As for the DG-derivatives defined in Definition 1.1, we will specify  $V_h$ ,  $\hat{V}_h$ ,  $\mathbf{Q}_h$  and  $\hat{\mathbf{Q}}_h$  at different concurrences. Let  $\hat{u}_h$  and  $\hat{\mathbf{p}}_h$  be defined as single-valued functions on  $\mathcal{E}_h$ . They can be viewed as certain numerical traces of DG functions. We want to emphasize that the DG-derivatives on the discrete spaces are

globally defined. The dual operators of  $\nabla_{\text{dg}}$  and  $\text{div}_{\text{dg}}$  are denoted by  $\nabla_{\text{dg}}^* : \tilde{\mathbf{Q}}_h \mapsto V_h^*$  and  $\text{div}_{\text{dg}}^* : \tilde{V}_h \mapsto \mathbf{Q}_h^*$ , respectively, such that

$$\langle \nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h, v_h \rangle = \langle \tilde{\mathbf{p}}_h, \nabla_{\text{dg}} v_h \rangle \quad \forall v_h \in V_h, \quad (1.6)$$

$$\langle \text{div}_{\text{dg}}^* \tilde{u}_h, \mathbf{q}_h \rangle = \langle \tilde{u}_h, \text{div}_{\text{dg}} \mathbf{q}_h \rangle \quad \forall \mathbf{q}_h \in \mathbf{Q}_h. \quad (1.7)$$

We shall now use these DG-derivatives to formulate different types of Galerkin methods in §1.1–§1.3 below and summarize these different methods in Table 1.1. We further give some brief bibliographic comments on the development of these methods in §1.4.

## 1.1 Primal formulation

**Conforming and nonconforming methods** The first example of the FEMs using a primal formulation is the conforming or nonconforming finite element, which requires the continuity (or some weak continuity) of  $u_h$  across the element boundaries

$$\begin{cases} c\mathbf{p}_h + \nabla_h u_h = 0 & \text{in } \mathbf{Q}_h^*, \\ -\nabla_h^* \mathbf{p}_h = f_h & \text{in } V_h^*. \end{cases} \quad (1.8)$$

Here,  $\nabla_h$  is derived by taking the gradient piecewise on each element.

**Hybrid primal methods** The hybrid formulation enforces the (weak) continuity of the aforementioned primal method through a Lagrangian space on element boundaries, and it can be formally written as

$$\begin{cases} c\mathbf{p}_h + \nabla_{\text{dg}} u_h = 0 & \text{in } \tilde{\mathbf{Q}}_h^*, \\ -\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h = f_h & \text{in } V_h^*. \end{cases} \quad (1.9)$$

**Stabilized hybrid primal methods** The hybrid primal methods are unstable for even-order elements. As a remedy, a stabilization term can be added to the first equation in (1.9) to obtain

$$\begin{cases} c\mathbf{p}_h + \mathcal{S}_p^\eta \tilde{\mathbf{p}}_h + \nabla_{\text{dg}} u_h = 0 & \text{in } \tilde{\mathbf{Q}}_h^*, \\ -\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h = f_h & \text{in } V_h^*, \end{cases} \quad (1.10)$$

where  $\langle c\mathbf{p}_h, \tilde{\mathbf{q}}_h \rangle := (c\mathbf{p}_h, \mathbf{q}_h)$ , and

$$\langle \mathcal{S}_p^\eta \tilde{\mathbf{p}}_h, \tilde{\mathbf{q}}_h \rangle := \sum_{K \in \mathcal{T}_h} \langle \eta(\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}_K, (\mathbf{q}_h - \hat{\mathbf{q}}_h) \cdot \mathbf{n}_K \rangle_{\partial K}. \quad (1.11)$$

Here,  $\eta > 0$  is a stabilization parameter. In most cases, the stabilized hybrid primal methods are also named weak Galerkin (WG) methods.

## 1.2 Mixed formulation

**Mixed methods** The first example of the FEMs using a mixed formulation is the mixed finite element method, which requires the continuity of  $\mathbf{p}_h$  across elements, i.e.,

$$\begin{cases} c\mathbf{p}_h - \text{div}_h^* u_h = 0 & \text{in } \mathbf{Q}_h^*, \\ \text{div}_h \mathbf{p}_h = f_h & \text{in } V_h^*. \end{cases} \quad (1.12)$$

Here,  $\text{div}_h$  is calculated by taking the gradient piecewise on each element.

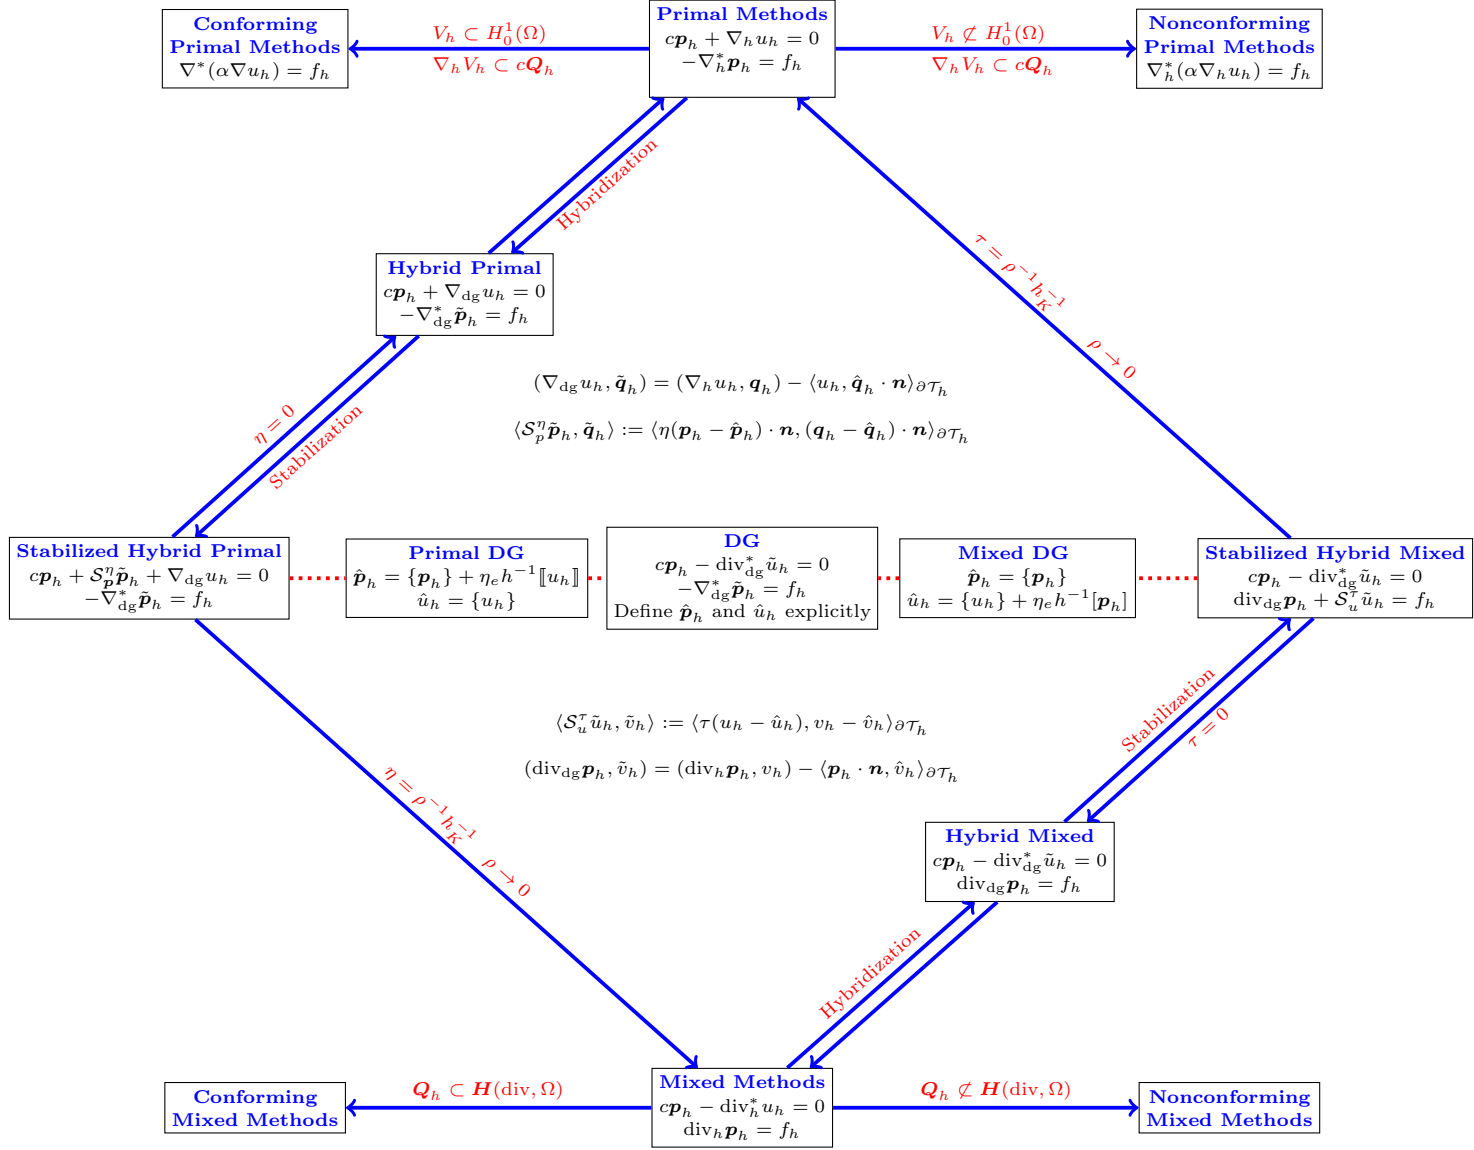


Table 1.1: A unified framework of FEMs

**Hybrid mixed methods** To reduce the number of the globally-coupled degrees of freedom, hybrid mixed methods are also developed using the Lagrange multiplier technique. Similar to the hybrid primal methods (1.9), the mixed form (1.3) can be reformulated in terms of DG-divergence as

$$\begin{cases} c\mathbf{p}_h - \operatorname{div}_{\text{dg}}^* \tilde{u}_h = 0 & \text{in } \mathbf{Q}_h^*, \\ \operatorname{div}_{\text{dg}} \mathbf{p}_h = f_h & \text{in } \tilde{V}_h^*. \end{cases} \quad (1.13)$$

**Stabilized hybrid mixed methods** Under some choices of the space  $\mathbf{Q}_h$  and  $\tilde{V}_h$ , the hybrid mixed method is no longer stable. Again, as a natural device, a stabilization term is then added to the hybrid mixed methods to obtain

$$\begin{cases} c\mathbf{p}_h - \operatorname{div}_{\text{dg}}^* \tilde{u}_h = 0 & \text{in } \mathbf{Q}_h^*, \\ \operatorname{div}_{\text{dg}} \mathbf{p}_h + \mathcal{S}_u^\tau \tilde{u}_h = f_h & \text{in } \tilde{V}_h^*, \end{cases} \quad (1.14)$$

where  $\langle c\mathbf{p}_h, \mathbf{q}_h \rangle := (c\mathbf{p}_h, \mathbf{q}_h)$ , and

$$\langle \mathcal{S}_u^\tau \tilde{u}_h, \tilde{v}_h \rangle := \sum_{K \in \mathcal{T}_h} \langle \tau(\hat{u}_h - \hat{u}_h), v_h - \hat{v}_h \rangle_{\partial K}. \quad (1.15)$$

Here,  $\tau > 0$  is a stabilization parameter. In most cases, the stabilized hybrid mixed methods are also named hybrid discontinuous Galerkin (HDG) methods.

**Remark 1.2** If  $\alpha$  (or  $c$ ) is piecewise constant, we can eliminate  $\mathbf{p}_h$  in (1.14) to obtain the primal WG-FEM introduced in [83, 109]:

$$(\alpha \operatorname{div}_{\text{dg}}^* \tilde{u}_h, \operatorname{div}_{\text{dg}}^* \tilde{v}_h)_\Omega + \sum_{K \in \mathcal{T}_h} \eta \langle u_h - \hat{u}_h, v_h - \hat{v}_h \rangle_{\partial K} = (f, v_h) \quad \forall \{v_h, \hat{v}_h\} \in \tilde{V}_h. \quad (1.16)$$

### 1.3 Discontinuous Galerkin methods

Instead of using the Lagrange multiplier technique, a penalty term is added in the bilinear form of the discontinuous Galerkin (DG) method to force continuity. With the concepts of DG-gradient and DG-divergence defined as in Definition 1.1, most of the DG methods for approximating the elliptic problem can be written as

$$\begin{cases} c\mathbf{p}_h - \operatorname{div}_{\text{dg}}^* \tilde{u}_h = 0 & \text{in } \mathbf{Q}_h^*, \\ -\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h = f_h & \text{in } V_h^*, \\ \hat{\mathbf{p}}_h = \bar{\mathbf{p}}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h, \\ \hat{u}_h = \bar{u}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h, \end{cases} \quad \begin{aligned} (1.17a) \\ (1.17b) \\ (1.17c) \\ (1.17d) \end{aligned}$$

where  $\bar{\mathbf{p}}$  and  $\bar{u}$  are the formulas for defining  $\hat{\mathbf{p}}_h$  and  $\hat{u}_h$ , respectively, in the terms  $\mathbf{p}_h$  and  $u_h$ , respectively.

If penalization is forced to impose the continuity of  $u_h$ , we refer to the DG method as a primal DG method. In this paper, we also use penalization to impose the continuity of  $\mathbf{p}_h \cdot \mathbf{n}$ , which is called mixed DG method.

Using the definition of DG-derivatives, we summarize the relationships of different FEMs in Table 1.1. From the table, we observe that the primal and mixed methods are the discretization of primal and mixed forms, respectively. Under certain restrictions pertaining to finite element spaces, the (non)conforming

primal and mixed FEMs are obtained. In addition, by introducing Lagrange multipliers, the hybrid primal and hybrid mixed FEMs can be derived from primal and mixed FEMs, respectively. Generally speaking, these hybrid methods are not stable, and specific finite element spaces need to be identified to make the schemes work. By adding stabilization terms to the hybrid primal and hybrid mixed FEMs, one obtains the stabilized hybrid primal (weak Galerkin) and stabilized hybrid mixed (hybrid discontinuous Galerkin) FEMs, which are the approximation of the primal form and mixed form, respectively. Moreover, when the stabilization terms dominate, the solution of the stabilized primal (mixed) FEMs approaches the approximation of the mixed (primal) form under certain choices of discrete spaces, which completes the outer loop in Table 1.1. We emphasize that only  $\nabla_{\text{dg}}$  and  $\nabla_{\text{dg}}^*$  appear in the primal formulations, and only  $\text{div}_{\text{dg}}$  and  $\text{div}_{\text{dg}}^*$  are found in the mixed formulations.

Traditionally, the DG methods in our framework can be viewed as a compromise between the primal and mixed formulations by introducing both  $\nabla_{\text{dg}}^*$  and  $\text{div}_{\text{dg}}^*$ . Then different DG schemes can be obtained by proper choices of numerical fluxes, see Table 6.1. With the help of this framework, we derive a new family of mixed DG methods, which can be regarded as the dual form of primal DG methods.

## 1.4 Brief bibliographic comments

The idea of conforming FEMs can be traced back to the 1940s [75] and the Courant element [57]. After a decade, many works, such as [77, 62, 65, 120, 121, 93, 36, 87], proposed more conforming elements and presented serious mathematical proofs concerning error analysis and, hence, established the basic theory of FEMs. The first nonconforming element, the Wilson element [115], was proposed for rectangle meshes. In 1972, Strang [101] developed the concept of variational crimes in a nonconforming finite element method. The well-known Crouzeix-Raviart [58] finite element appeared in 1973. For more examples on nonconforming elements, we refer the reader to [64, 63, 98, 89, 13] for second-order elliptic problems, and [112, 113, 76, 119, 118] for higher-order elliptic problems.

The mixed FEMs are tailored for approximating problems with several primary variables. These include linear elasticity in a stress-displacement system, Stokes equations, and flow of a porous media within a velocity-pressure system. The condition for the well-posedness of mixed formulations is known as inf-sup or the Ladyzhenskaya-Babuška-Brezzi (LBB) condition [16]. Common simplicial mixed finite elements are the Raviart-Thomas elements [95, 86] and the Brezzi-Douglas-Marini finite element [19, 17]. Another family of mixed finite elements was proposed in [85] for tetrahedra, cubes, and prisms by Nédélec. Further, a family of rectangular mixed finite elements in two- and three-space variables were designed in [18] by Brezzi, Douglas, Fortin, and Marini. Mixed FEMs and their applications to various problems were summarized in monographs by Brezzi, Fortin, and Boffi [21, 11].

The idea of hybrid methods was proposed in [65, 92, 93, 91, 68]. The discrete spaces used in the hybrid primal FEMs are discontinuous [94, 116, 96], and Lagrange multipliers are adopted to force continuity across the element boundary. For instance, based on a primal hybrid variational principle, Raviart and Thomas [96] viewed the nonconforming finite elements as discontinuous spaces on which weak continuity was imposed by multiplier space. Further work on this hybrid idea was done by Babuška, Oden and Lee in [7], in which a flux variable was introduced in bilinear form. In 1985, hybridization was shown to be more than an implementation trick by Arnold and Brezzi in [3]. More precisely, it was proven that the new unknown introduced by hybridization could also be interpreted as the Lagrange multiplier associated with a continuity condition on the approximate flux which contains additional information about the exact solution. After yet nearly another decade, a new hybridization approach was put forward by Cockburn and Gopalakrishnan [41], one in which the hybrid formulation not only simplifies the task of assembling

the stiffness matrix for the multiplier, but also can be used to establish links between apparently unrelated mixed methods. Their approach also allows new, variable degree versions of those methods to be devised and analyzed [42, 43, 44, 45]. Recently, a hybrid mixed method for working with linear elasticity problem was presented in [67].

For the mathematical theory behind the above methods, we refer to the monographs by Ciarlet [35] and by Brenner and Scott [14]. For more detailed discussion on mixed and hybrid methods, we refer to the monographs [21, 97, 11].

The idea of using DG methods for elliptic equations can be traced back to the late 1960s [79], and the same approach was studied again in [5]. Recently, DG methods have been applied to purely elliptic problems; examples include the interior penalty methods studied in [6, 59, 114, 2], and the local DG method for elliptic problem in [54]. DG methods for diffusion and elliptic problems were considered in [25, 26]. Additional problems utilizing DG methods can be found in [15, 80, 81, 69]. A review of the development of DG methods up to 1999 can be found in [48] by Cockburn, Karniadakis, and Shu. In [4], Arnold, Brezzi, Cockburn, and Marini unified the analysis of DG methods for elliptic problems. An abstract theory for using quasi-optimal nonconforming and DG methods for elliptic problems was very recently presented in [104, 105].

In 2004, a new hybridization approach was presented in [41] by Cockburn and Gopalakrishnan. This new hybridization approach was also applied to a DG method in [28]. Using the LDG method to define the local solvers, a super-convergent LDG-hybridizable Galerkin method for second-order elliptic problems was designed in [38]. In 2009, a unified analysis for the hybridization of discontinuous Galerkin, mixed, and continuous Galerkin methods for second order elliptic problems was presented in [46] by Cockburn, Gopalakrishnan, and Lazarov. In 2010, a projection-based error analysis of HDG methods was presented in [47] by Cockburn, Gopalakrishnan, and Sayas, in which a projection operator was tailored to obtain the  $L^2$  error estimates for both potential and flux. A projection-based analysis of the HDG methods used for convection-diffusion equations for semi-matching nonconforming meshes was presented in [32]. A connection between the staggered DG method and an HDG method was shown in [34]. Applications of HDG methods to linear and nonlinear elasticity problems can be found in [100, 66, 78]. More references to the recent developments of HDG methods can be found in [37], to other applications in [31, 49, 53], to super-convergence analysis in [51, 52, 39, 40], and to a posteriori error analysis in [55, 56, 50].

With the introduction of weak gradient and weak divergence, Wang and Ye [109, 110] proposed and analyzed a WG method for a second order elliptic equation formulated as a system of two first-order linear equations. Wang and Wang [108] gave a summary of the idea and applications of WG methods for various problems since the publication of [109]. Wang and Wang [107] also developed a primal-dual WG finite method for second-order elliptic equations in non-divergence form, and then they further extended their methods to Fokker-Planck type equations in [106]. Applications of WG to other problems can be found. See [111] for Stokes equations, [30] for Darcy-Stokes flow, and [84] for Maxwell equations.

In view of derivations, the *stabilized hybrid mixed method* aims to properly choose the numerical trace of the flux and can be viewed as a stabilization approach for the hybrid mixed method, while the *stabilized hybrid primal method* stems from the proper definitions of the weak gradient and weak divergence and can be viewed as a stabilization approach for the hybrid primal method. In the contexts of HDG and WG, their relationship has been discussed in [37].

The rest of the paper is organized as follows. In §2, we present some preliminary materials. In §3, using a second-order elliptic problem as an example, we show that most of the existing FEMs can be rewritten in compact form by using the concept of DG-derivatives and discuss their relationships. In §4, we present the well-posedness of WG methods under the specific, parameter-dependent norms and further the convergence

analysis of WG. We present a similar result for the HDG methods in §5. In §6, we discuss the DG and derive the mixed DG methods by making a dual choice of numerical traces of primal DG methods. In §7, we analyze the relationship between various FEMs and show that WG methods converge to mixed methods and that HDG methods converge to primal methods under the limitation of parameter. We give a brief summary in the last section.

Throughout this paper, we shall use letter  $C$ , which is independent of mesh-size and stabilization parameters, to denote a generic positive constant which may stand for different values at different occurrences. The notations  $x \lesssim y$  and  $x \gtrsim y$  mean  $x \leq Cy$  and  $x \geq Cy$ , respectively.

## 2 Preliminaries

In this section, we shall describe some basic notation and properties of DG-derivatives.

### 2.1 DG notation

Given a bounded domain  $D \subset \mathbb{R}^d$  and a positive integer  $m$ ,  $H^m(D)$  is the Sobolev space with the corresponding usual norm and semi-norm, which are denoted by  $\|\cdot\|_{m,D}$  and  $|\cdot|_{m,D}$ , respectively. We abbreviate these by  $\|\cdot\|_m$  and  $|\cdot|_m$ , respectively, when  $D$  is chosen as  $\Omega$ . The  $L^2$ -inner product on  $D$  and  $\partial D$  are denoted by  $(\cdot, \cdot)_D$  and  $\langle \cdot, \cdot \rangle_{\partial D}$ , respectively.  $\|\cdot\|_{0,D}$  and  $\|\cdot\|_{0,\partial D}$  are the norms of Lebesgue spaces  $L^2(D)$  and  $L^2(\partial D)$ , respectively, and  $\|\cdot\| = \|\cdot\|_{0,\Omega}$ .

Let  $\mathcal{E}_h^i = \mathcal{E}_h \setminus \partial\Omega$  be the set of interior edges and  $\mathcal{E}_h^\partial = \mathcal{E}_h \setminus \mathcal{E}_h^i$  be the set of boundary edges. Further, let  $h_e = \text{diam}(e)$ . For  $e \in \mathcal{E}_h^i$ , we select a fixed normal unit direction, denoted by  $\mathbf{n}_e$ . For  $e \in \mathcal{E}_h^\partial$ , we specify the outward unit normal as  $\mathbf{n}_e$ . Let  $e$  be the common edge of two elements  $K^+$  and  $K^-$ , and let  $\mathbf{n}^i = \mathbf{n}|_{\partial K^i}$  be the unit outward normal vector on  $\partial K^i$  with  $i = +, -$ . For any scalar-valued function  $v$  and vector-valued function  $\mathbf{q}$ , let  $v^\pm = v|_{\partial K^\pm}$ ,  $\mathbf{q}^\pm = \mathbf{q}|_{\partial K^\pm}$ . Then, we define averages  $\{\cdot\}$ ,  $\{\!\!\{\cdot\}\!\!\}$  and jumps  $[\![\cdot]\!]$ ,  $[\cdot]$  as follows:

$$\begin{aligned} \{v\} &= \frac{1}{2}(v^+ + v^-), & \{\mathbf{q}\} &= \frac{1}{2}(\mathbf{q}^+ + \mathbf{q}^-), & \{\!\!\{\mathbf{q}\}\!\!\} &= \frac{1}{2}(\mathbf{q}^+ + \mathbf{q}^-) \cdot \mathbf{n}_e & \text{on } e \in \mathcal{E}_h^i, \\ [\![v]\!] &= v^+ \mathbf{n}^+ + v^- \mathbf{n}^-, & [v] &= [\![v]\!] \cdot \mathbf{n}_e, & [\mathbf{q}] &= \mathbf{q}^+ \cdot \mathbf{n}^+ + \mathbf{q}^- \cdot \mathbf{n}^- & \text{on } e \in \mathcal{E}_h^i, \\ [\![v]\!] &= v \mathbf{n}, & [v] &= v, & \{\mathbf{q}\} &= \mathbf{q}, & \{\!\!\{\mathbf{q}\}\!\!\} &= \mathbf{q} \cdot \mathbf{n} & \text{on } e \in \mathcal{E}_h^\partial. \end{aligned}$$

Here, we specify  $\mathbf{n}$  as the outward unit normal direction on  $\partial\Omega$ .

We define some inner products as follows:

$$(\cdot, \cdot)_{\mathcal{T}_h} = \sum_{K \in \mathcal{T}_h} (\cdot, \cdot)_K, \quad \langle \cdot, \cdot \rangle_{\mathcal{E}_h} = \sum_{e \in \mathcal{E}_h} \langle \cdot, \cdot \rangle_e, \quad \langle \cdot, \cdot \rangle_{\mathcal{E}_h^i} = \sum_{e \in \mathcal{E}_h^i} \langle \cdot, \cdot \rangle_e, \quad \langle \cdot, \cdot \rangle_{\partial \mathcal{T}_h} = \sum_{K \in \mathcal{T}_h} \langle \cdot, \cdot \rangle_{\partial K}. \quad (2.1)$$

We now give more details about the last inner product. For any scalar-valued function  $v$  and vector-valued function  $\mathbf{q}$ ,

$$\langle v, \mathbf{q} \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = \sum_{K \in \mathcal{T}_h} \langle v, \mathbf{q} \cdot \mathbf{n} \rangle_{\partial K} = \sum_{K \in \mathcal{T}_h} \langle v, \mathbf{q} \cdot \mathbf{n}_K \rangle_{\partial K}.$$

Here, we specify the outward unit normal direction  $\mathbf{n}$  corresponding to the element  $K$ , namely  $\mathbf{n}_K$ . In addition, let  $\nabla_h$  and  $\text{div}_h$  be defined by the relation

$$\nabla_h v|_K = \nabla v|_K, \quad \text{div}_h \mathbf{q}|_K = \text{div} \mathbf{q}|_K \quad \forall K \in \mathcal{T}_h.$$



With the definition of averages and jumps, we have the following identity:

$$\sum_{K \in \mathcal{T}_h} \int_{\partial K} (\mathbf{q} \cdot \mathbf{n}_K) v \, ds = \int_{\mathcal{E}_h} \{\mathbf{q}\} \cdot \llbracket v \rrbracket \, ds + \int_{\mathcal{E}_h^i} [\mathbf{q}] \cdot \{v\} \, ds, \quad (2.2)$$

namely,

$$\langle v, \mathbf{q} \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = \langle \{\mathbf{q}\}, \llbracket v \rrbracket \rangle_{\mathcal{E}_h} + \langle [\mathbf{q}], \{v\} \rangle_{\mathcal{E}_h^i}. \quad (2.3)$$

Further,

$$\{\mathbf{q}\} \cdot \llbracket v \rrbracket = \llbracket \mathbf{q} \rrbracket [v] \quad \forall e \in \mathcal{E}_h. \quad (2.4)$$

Before discussing various Galerkin methods, we need to introduce the finite element spaces associated with the triangulation  $\mathcal{T}_h$ . For  $k \geq 0$ , we first define the spaces as follows

$$\begin{aligned} V_h^k &= \{v_h \in L^2(\Omega) : v_h|_K \in \mathcal{P}_k(K), \forall K \in \mathcal{T}_h\}, \\ \mathbf{Q}_h^k &= \{\mathbf{p}_h \in \mathbf{L}^2(\Omega) : \mathbf{p}_h|_K \in \mathcal{P}_k(\mathbf{K}), \forall K \in \mathcal{T}_h\}, \\ \mathbf{Q}_h^{k,RT} &= \{\mathbf{p}_h \in \mathbf{L}^2(\Omega) : \mathbf{p}_h|_K \in \mathcal{P}_k(\mathbf{K}) + \mathbf{x}P_k(K), \forall K \in \mathcal{T}_h\}, \end{aligned} \quad (2.5)$$

where  $\mathcal{P}_k(K)$  is the space of polynomial functions of degree at most  $k$  on  $K$ . We also use the following spaces associated with  $\mathcal{E}_h$

$$\begin{aligned} \widehat{\mathbf{Q}}_h &= \{\hat{\mathbf{p}}_h : \hat{\mathbf{p}}_h|_e \in \widehat{Q}(e)\mathbf{n}_e, \forall e \in \mathcal{E}_h\}, \\ \widehat{Q}_h &= \{\hat{p}_h : \hat{p}_h|_e \in \widehat{Q}(e), \forall e \in \mathcal{E}_h\}, \\ \widehat{V}_h &= \{\hat{v}_h : \hat{v}_h|_e \in \widehat{V}(e), e \in \mathcal{E}_h^i, \hat{v}_h|_{\mathcal{E}_h^\partial} = 0\}, \\ \widehat{Q}_h^k &= \{\hat{p}_h \in L^2(\mathcal{E}_h) : \hat{p}_h|_e \in \mathcal{P}_k(e), \forall e \in \mathcal{E}_h\}, \\ \widehat{V}_h^k &= \{\hat{v}_h \in L^2(\mathcal{E}_h) : \hat{v}_h|_e \in \mathcal{P}_k(e), \forall e \in \mathcal{E}_h^i, \hat{v}_h|_{\mathcal{E}_h^\partial} = 0\}, \end{aligned} \quad (2.6)$$

where  $\widehat{Q}(e), \widehat{V}(e)$  are some local spaces on  $e$  and  $\mathcal{P}_k(e)$  is the space of polynomial functions of degree at most  $k$  on  $e$ .

## 2.2 Some properties of DG-derivatives

Are the DG-gradient  $\nabla_{\text{dg}}$  and DG-divergence  $-\text{div}_{\text{dg}}$  operators dual operators with each other like the classical gradient and divergence operators? Generally, the answer is no. However, by the definition of DG-derivatives (1.4), (1.5), we have the following relationship:

$$\begin{aligned} \langle -\text{div}_{\text{dg}}^* \tilde{u}_h, \mathbf{p}_h \rangle &= -\langle \tilde{u}_h, \text{div}_{\text{dg}} \mathbf{p}_h \rangle \\ &= (\nabla_h u_h, \mathbf{p}_h)_{\mathcal{T}_h} + \langle \hat{u}_h - u_h, \mathbf{p}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}, \\ \langle \nabla_{\text{dg}} u_h, \tilde{\mathbf{p}}_h \rangle &= (\nabla_h u_h, \mathbf{p}_h)_{\mathcal{T}_h} - \langle u_h, \hat{\mathbf{p}}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}, \end{aligned} \quad (2.7)$$

and

$$\begin{aligned} \langle \nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h, u_h \rangle &= \langle \tilde{\mathbf{p}}_h, \nabla_{\text{dg}} u_h \rangle \\ &= -(\text{div}_h \mathbf{p}_h, u_h)_{\mathcal{T}_h} + \langle (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}, u_h \rangle_{\partial \mathcal{T}_h}, \\ \langle -\text{div}_{\text{dg}} \mathbf{p}_h, \tilde{u}_h \rangle &= -(\text{div}_h \mathbf{p}_h, u_h)_{\mathcal{T}_h} + \langle \mathbf{p}_h \cdot \mathbf{n}, \hat{u}_h \rangle_{\partial \mathcal{T}_h}. \end{aligned} \quad (2.8)$$

By direct calculation, we have the following lemma.

**Lemma 2.1** *Assume  $\hat{u}_h = 0$  on  $\mathcal{E}_h^\partial$ . Then,  $\nabla_{\text{dg}} = -\text{div}_{\text{dg}}^*$  if one of the following conditions holds:*

- (i)  $\mathbf{p}_h \cdot \mathbf{n}_K|_{\mathcal{E}_h} = \hat{\mathbf{p}}_h \cdot \mathbf{n}_K$ ;
- (ii)  $u_h|_{\mathcal{E}_h} = \hat{u}_h$ ;
- (iii)  $\hat{\mathbf{p}}_h \cdot \mathbf{n}_K = \{\mathbf{p}_h\} \cdot \mathbf{n}_K$  and  $\hat{u}_h = \{u_h\}$ .

Therefore, we say  $\nabla_{\text{dg}}$  and  $-\text{div}_{\text{dg}}$  are *conditionally dual* with each other. Based on this observation, we find that the DG-derivatives are good approximations for classical weak derivatives when one of the above conditions is satisfied. Furthermore, in the following subsections, we see that the (stabilized) hybrid primal and (stabilized) hybrid mixed methods weakly satisfy condition (i) or (ii), and that the DG methods adopt condition (iii) approximately.

DG-derivatives	$\nabla_{\text{dg}}$	$\nabla_{\text{dg}}^*$	$\text{div}_{\text{dg}}$	$\text{div}_{\text{dg}}^*$
Weak derivatives [65, 109]	$-\text{div}_w^*$	$-\text{div}_w$	$-\nabla_w^*$	$-\nabla_w$

Table 2.1: Relationship of DG-derivatives and weak derivatives when  $\hat{u}$  and  $\hat{\mathbf{p}}$  are single-valued

The DG-derivatives introduced in this paper are essentially the same as the weak derivatives first introduced by Wang and Ye [109], where the weak derivatives are locally defined at the first place. Weak derivatives then can be defined globally element-by-element. To distinguish the original definition of weak derivatives by Wang and Ye [109], we introduce the different names *DG-derivatives*. If  $\hat{u}$  and  $\hat{\mathbf{p}}$  are single-valued globally, then the relationship between DG-derivatives and weak derivatives is shown in Table 2.1. We introduce DG-derivatives mainly due to their consistency with the classical weak derivatives on the conforming spaces as shown in the following lemma.

**Lemma 2.2** *It holds that*

$$\nabla_{\text{dg}} = \nabla_h \quad \text{if} \quad V_h \subset V_{\text{non}} = \{u_h \in V_h : \langle u_h, \hat{\mathbf{q}}_h \cdot \mathbf{n}_K \rangle_{\partial\mathcal{T}_h} = 0, \forall \hat{\mathbf{q}}_h \in \hat{\mathbf{Q}}_h\}. \quad (2.9)$$

Further,

$$\nabla_{\text{dg}} = \nabla \quad \text{if} \quad V_h \subset H^1(\Omega), \quad \text{and} \quad \text{div}_{\text{dg}} = \text{div} \quad \text{if} \quad \mathbf{Q}_h \subset \mathbf{H}(\text{div}, \Omega). \quad (2.10)$$

**Proof.** If  $u_h \in V_{\text{non}}$ , for any  $\tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h$ , we have

$$\begin{aligned} \langle \nabla_{\text{dg}} u_h, \tilde{\mathbf{q}}_h \rangle &= -(u_h, \text{div} \mathbf{q}_h)_{\mathcal{T}_h} + \langle u_h, (\mathbf{q}_h - \hat{\mathbf{q}}_h) \cdot \mathbf{n}_K \rangle_{\partial\mathcal{T}_h} \\ &= -(u_h, \text{div} \mathbf{q}_h)_{\mathcal{T}_h} + \langle u_h, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial\mathcal{T}_h} \\ &= (\nabla_h u_h, \mathbf{q}_h)_{\mathcal{T}_h}, \end{aligned}$$

which gives rise to the first consistency relationship (2.9). The second can be proven in a similar way. ■

### 3 Basic setup

Now we start with the second-order elliptic equation (1.1) and set  $\mathbf{p} = -\alpha \nabla u$  to obtain the following form

$$\begin{cases} c\mathbf{p} + \nabla u = 0 & \text{in } \Omega, \\ \text{div} \mathbf{p} = f & \text{in } \Omega. \end{cases} \quad (3.1)$$

Multiplying the first and second equations by  $\mathbf{q}_h \in \mathbf{Q}_h$  and  $v_h \in V_h$ , respectively, then integrating on an element  $K \in \mathcal{T}_h$  we get

$$\begin{cases} (c\mathbf{p}, \mathbf{q}_h)_K - (u, \operatorname{div} \mathbf{q}_h)_K + \langle u, \mathbf{q}_h \cdot \mathbf{n}_K \rangle_{\partial K} = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ (\mathbf{p}, \nabla v_h)_K - \langle \mathbf{p} \cdot \mathbf{n}_K, v_h \rangle_{\partial K} = -(f, v_h)_K & \forall v_h \in V_h. \end{cases} \quad (3.2)$$

Summing on all  $K \in \mathcal{T}_h$ , we have

$$\begin{cases} (c\mathbf{p}, \mathbf{q}_h)_{\mathcal{T}_h} - (u, \operatorname{div}_h \mathbf{q}_h)_{\mathcal{T}_h} + \langle u, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ (\mathbf{p}, \nabla_h v_h)_{\mathcal{T}_h} - \langle \mathbf{p} \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} = -(f, v_h)_{\mathcal{T}_h} & \forall v_h \in V_h. \end{cases} \quad (3.3)$$

Now, we approximate  $u$  and  $\mathbf{p}$  by  $u_h \in V_h$  and  $\mathbf{p}_h \in \mathbf{Q}_h$ , respectively, and the trace of  $u$  and the flux  $\mathbf{p} \cdot \mathbf{n}$  on  $\partial K$  by  $\tilde{u}_h, \check{\mathbf{p}}_h \cdot \mathbf{n}$  (see Figure 3.1). Hence, we have

$$\begin{cases} (c\mathbf{p}_h, \mathbf{q}_h)_{\mathcal{T}_h} - (u_h, \operatorname{div}_h \mathbf{q}_h)_{\mathcal{T}_h} + \langle \tilde{u}_h, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ (\mathbf{p}_h, \nabla_h v_h)_{\mathcal{T}_h} - \langle \check{\mathbf{p}}_h \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} = -(f, v_h)_{\mathcal{T}_h} & \forall v_h \in V_h. \end{cases} \quad (3.4)$$

Next, we derive appropriate equations for the variables of  $\tilde{u}_h$  and  $\check{\mathbf{p}}_h$ . There are three different approaches. The starting point of the first two approaches is the following relationship:

$$\check{\mathbf{p}}_h \cdot \mathbf{n}_K + \tau \tilde{u}_h = \mathbf{p}_h \cdot \mathbf{n}_K + \tau \hat{P}_h(u_h), \quad \check{\mathbf{p}}_h = \check{p}_h \mathbf{n}_e. \quad (3.5)$$

Here,  $\hat{P}_h$  is an operator which will be specified later. Note that we only use one of  $\check{\mathbf{p}}_h$  and  $\tilde{u}_h$  as an unknown and then use (3.5) to determine the other. The third approach is to define  $\check{p}_h$  and  $\tilde{u}_h$  in terms of  $u_h$  and  $\mathbf{p}_h$ . The details are given below.




Figure 3.1:  $\check{\mathbf{p}}_h \cdot \mathbf{n}$  and  $\tilde{u}_h$

**First approach: Stabilized hybrid primal (WG)** We first set  $\hat{P}_h$  to be an identity operator in (3.5) and  $\check{\mathbf{p}}_h := \hat{\mathbf{p}}_h = \hat{p}_h \mathbf{n}_e \in \hat{\mathbf{Q}}_h$  to be a single-valued unknown. The “continuity” of  $\tilde{u}_h$  is then enforced weakly as follows:

$$\langle \tilde{u}_h, \hat{\mathbf{q}}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = 0 \quad \forall \hat{\mathbf{q}}_h \in \hat{\mathbf{Q}}_h, \quad (3.6)$$

where  $\tilde{u}_h$  is again given by (3.5). From the identity (2.2) and the fact that  $[\hat{\mathbf{q}}_h] = 0$ , a straightforward calculation shows that (3.6) can be rewritten as

$$\langle [\tilde{u}_h], \hat{\mathbf{q}}_h \rangle_{\mathcal{E}_h} := \sum_{e \in \mathcal{E}_h} \langle [\tilde{u}_h], \hat{\mathbf{q}}_h \rangle_e = 0 \quad \forall \hat{\mathbf{q}}_h \in \hat{\mathbf{Q}}_h. \quad (3.7)$$

From Definition 1.1 for the DG-gradient, WG methods can be rewritten exactly as (1.10). We should note that the stabilization parameter  $\eta$  in (1.11) is in fact  $\tau^{-1}$ , where  $\tau$  is the parameter shown in (3.5). As a special case, when  $\eta = 0$ , we obtain the hybrid primal methods [94, 116, 96], namely (1.9).

As a further special case, when  $\eta = 0$  and  $\widehat{\mathbf{Q}}_h = \{\mathbf{0}\}$ , we obtain the primal methods. Then, under certain “continuity” properties pertaining to  $V_h$  and  $\mathbf{Q}_h$ , the operator  $\nabla_{\text{dg}}^*$  reduces to  $\nabla_h^*$  and the operator  $\nabla_{\text{dg}}$  reduces to  $\nabla_h$  (see Lemma 2.2). Hence, the primal methods read as (1.8). For instance, if we choose  $V_h$  satisfying the “continuity” condition  $V_h \subset H_0^1(\Omega)$  and  $\mathbf{Q}_h$  such that  $\nabla V_h \subset c\mathbf{Q}_h$ , we obtain the conforming FEMs [1, 103, 82, 29, 90, 62]. And if we choose the  $V_h$  satisfying the weak “continuity” condition

$$V_h = V_{\text{non}}^{k+1} = \{v_h \in V_h^{k+1}, \int_e [v_h] \cdot \hat{\mathbf{q}}_h \, ds = 0, \forall \hat{\mathbf{q}}_h \in \widehat{\mathbf{Q}}_h^k, \forall e \in \mathcal{E}_h^i\}, \quad (3.8)$$

we obtain the Crouzeix-Raviart (CR) nonconforming element [58] when  $k = 0$  and  $\nabla_h V_h \subset c\mathbf{Q}_h$ .

**Second approach: Stabilized hybrid mixed (HDG)** We set  $\check{u}_h := \hat{u}_h \in \widehat{V}_h$  to be a single-valued unknown. The “continuity” of  $\check{\mathbf{p}}_h$  is then enforced weakly as follows:

$$\langle \check{\mathbf{p}}_h \cdot \mathbf{n}, \hat{v}_h \rangle_{\partial \mathcal{T}_h} = 0 \quad \forall \hat{v}_h \in \widehat{V}_h, \quad (3.9)$$

where  $\check{\mathbf{p}}_h$  is given by (3.5). From the identity (2.2) and the fact that  $[\hat{v}_h] = 0$ , a straightforward calculation shows that (3.9) can be rewritten as

$$\langle [\check{\mathbf{p}}_h], \hat{v}_h \rangle_{\mathcal{E}_h^i} := \sum_{e \in \mathcal{E}_h^i} \langle [\check{\mathbf{p}}_h], \hat{v}_h \rangle_e = 0 \quad \forall \hat{v}_h \in \widehat{V}_h. \quad (3.10)$$

If  $\hat{P}_h$  is an identity operator, using the DG-divergence from Definition 1.1, we can rewrite the standard HDG method as (1.14). If  $\hat{P}_h$  is a local  $L^2$  projection, namely

$$\hat{P}_h|_{\partial K} := \hat{P}_{\partial K} : L^2(\partial K) \mapsto \widehat{\mathbf{Q}}(\partial K),$$

where  $\widehat{\mathbf{Q}}(\partial K)$  is the trace space on  $\partial K$ , namely  $\widehat{\mathbf{Q}}(\partial K) = \bigcup_{e \in \partial K} \widehat{\mathbf{Q}}(e)$ , we obtain the modified HDG methods with reduced stabilization [88].

As a special case, when  $\tau = 0$ , we obtain the hybrid mixed methods [3, 21, 41], namely (1.13). As a further special case, when  $\tau = 0$  and  $\widehat{V}_h = \{0\}$ , we obtain the mixed methods. Then, under certain “continuity” properties pertaining to  $\mathbf{Q}_h$  and  $V_h$ , the operator  $\text{div}_{\text{dg}}$  reduces to  $\text{div}_h$ . Hence, the mixed methods [95, 86, 19, 17, 21, 11] read as (1.12).

**Third approach: DG** We define  $\check{\mathbf{p}}_h = \hat{\mathbf{p}}_h$  and  $\check{u}_h = \hat{u}_h$  in terms of  $u_h$  and  $\mathbf{p}_h$ , namely

$$\begin{cases} \hat{\mathbf{p}}_h = \bar{\mathbf{p}}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h, \\ \hat{u}_h = \bar{u}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h. \end{cases} \quad (3.11)$$

These three different approaches can be summarized in Table 3.1.

## 4 Stability and convergence analysis of stabilized hybrid primal (WG) methods

The stabilized hybrid primal (WG) methods read: Find  $(\check{\mathbf{p}}_h, u_h) \in \widetilde{\mathbf{Q}}_h \times V_h$  such that for any  $(\tilde{\mathbf{q}}_h, v_h) \in \widetilde{\mathbf{Q}}_h \times V_h$ ,

$$\begin{cases} a_w(\check{\mathbf{p}}_h, \tilde{\mathbf{q}}_h) + b_w(u_h, \tilde{\mathbf{q}}_h) = 0, \\ b_w(\check{\mathbf{p}}_h, v_h) = -(f, v_h)_{\mathcal{T}_h}. \end{cases} \quad (4.1)$$

Volume Equations	$(c\mathbf{p}_h, \mathbf{q}_h)_{\mathcal{T}_h} + (u_h, \operatorname{div}_h \mathbf{q}_h)_{\mathcal{T}_h} + \langle \tilde{u}_h, \mathbf{q}_h \rangle_{\partial \mathcal{T}_h} = 0, \quad \forall \mathbf{q}_h \in \mathbf{Q}_h,$ $(\mathbf{p}_h, \nabla_h v_h)_{\mathcal{T}_h} - \langle v_h, \tilde{\mathbf{p}}_h \rangle_{\partial \mathcal{T}_h} = -(f, v_h)_{\mathcal{T}_h} \quad \forall v_h \in V_h.$		
Interelement Equations	$\tilde{\mathbf{p}}_h \cdot \mathbf{n}_K + \tau \tilde{u}_h = \mathbf{p}_h \cdot \mathbf{n}_K + \tau u_h$		$\hat{\mathbf{p}}_h = \bar{\mathbf{p}}(\mathbf{p}_h, u_h)$
	$\langle [\tilde{u}_h], \hat{q}_h \rangle_{\mathcal{E}_h} = 0 \quad \forall \hat{q}_h \in \tilde{Q}_h$	$\langle \hat{v}_h, [\tilde{\mathbf{p}}_h] \rangle_{\mathcal{E}_h^i} = 0 \quad \forall \hat{v}_h \in \tilde{V}_h$	$\hat{u}_h = \bar{u}(\mathbf{p}_h, u_h)$
Type of Methods	WG	HDG	DG

Table 3.1: Summary of WG, HDG and DG methods

Here,

$$\begin{aligned}
a_w(\tilde{\mathbf{p}}_h, \tilde{\mathbf{q}}_h) &= (c\mathbf{p}_h, \mathbf{q}_h) + \langle \eta(\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}, (\mathbf{q}_h - \hat{\mathbf{q}}_h) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}, \\
b_w(\tilde{\mathbf{p}}_h, v_h) &= (\mathbf{p}_h, \nabla_h v_h)_{\mathcal{T}_h} - (\hat{\mathbf{p}}_h \cdot \mathbf{n}_K, v_h)_{\partial \mathcal{T}_h},
\end{aligned} \tag{4.2}$$

and  $\eta > 0$  is the stabilized parameter.

The following lemma shows the consistency property of stabilized hybrid primal (WG) methods.

**Lemma 4.1** *Let  $f \in L^2(\Omega)$  and  $(\mathbf{p}, u)$  be the solution of (1.2) or (1.3), then  $(\mathbf{p}, u)$  satisfies the following consistency property*

$$\begin{cases} a_w(\mathbf{p}, \tilde{\mathbf{q}}_h) + b_w(u, \tilde{\mathbf{q}}_h) = 0 & \forall \tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h, \\ b_w(\mathbf{p}, v_h) = -(f, v_h)_{\mathcal{T}_h} & \forall v_h \in V_h. \end{cases} \tag{4.3}$$

#### 4.1 Gradient-based uniform inf-sup condition

In this subsection, we shall show the well-posedness of WG methods (4.2) when choosing the parameter  $\eta$  as  $\eta = \rho h_K$  for  $\rho > 0$ . More precisely, we will give the uniform inf-sup condition under the following parameter-dependent norms

$$\begin{aligned}
\|\tilde{\mathbf{p}}_h\|_{0,\rho,h}^2 &= (c\mathbf{p}_h, \mathbf{p}_h)_{\mathcal{T}_h} + \rho \sum_{K \in \mathcal{T}_h} h_K \langle (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}_K, (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}_K \rangle_{\partial K}, \\
\|v_h\|_{1,\rho,h}^2 &= \|\nabla_h v_h\|^2 + \rho^{-1} \sum_{e \in \mathcal{E}_h} h_e^{-1} \|\hat{Q}_e([v_h])\|_{0,e}^2,
\end{aligned} \tag{4.4}$$

where  $\hat{Q}_e$  is the  $L^2$  projection from  $L^2(e)$  to  $\hat{Q}(e)$ . We point out that  $\|v_h\|_{1,\rho,h}$  is indeed a norm on  $V_h$  if  $\hat{Q}_h^0 \subset \hat{Q}_h$ , namely  $\hat{Q}_h$  contains the piecewise constant space on  $\mathcal{E}_h$ .

Using these parameter-dependent norms (4.4), we have the following results, whose details will be reported in [74, 73].

**Theorem 4.2** ([74, 73]) *For any  $0 < \rho \leq 1$ , and for any  $\tilde{\mathbf{p}}_h, \tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h, v_h \in V_h$ , we have*

$$\begin{aligned}
|a_w(\tilde{\mathbf{p}}_h, \tilde{\mathbf{q}}_h)| &\leq \|\tilde{\mathbf{p}}_h\|_{0,\rho,h} \|\tilde{\mathbf{q}}_h\|_{0,\rho,h}, \\
b_w(\tilde{\mathbf{p}}_h, v_h) &\leq C_w \|\tilde{\mathbf{p}}_h\|_{0,\rho,h} \|v_h\|_{1,\rho,h}, \\
a_w(\tilde{\mathbf{p}}_h, \tilde{\mathbf{p}}_h) &\geq \|\tilde{\mathbf{p}}_h\|_{0,\rho,h}^2,
\end{aligned} \tag{4.5}$$

where  $C_w$  is independent of both mesh size  $h$  and  $\rho$ .

**Theorem 4.3** ([74, 73]) Assume that  $\nabla_h V_h \subset \mathbf{Q}_h$ , then for any  $0 < \rho \leq 1$ , we have

$$\inf_{v_h \in V_h} \sup_{\tilde{\mathbf{p}}_h \in \tilde{\mathbf{Q}}_h} \frac{b_w(\tilde{\mathbf{p}}_h, v_h)}{\|v_h\|_{1,\rho,h} \|\tilde{\mathbf{p}}_h\|_{0,\rho,h}} \geq \beta_{w,0}, \quad (4.6)$$

where  $\beta_{w,0}$  is independent of both mesh size  $h$  and  $\rho$ .

**Corollary 4.4** ([74, 73]) Assume that  $\nabla_h V_h \subset \mathbf{Q}_h$ . Then there exists a unique solution  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  satisfying (4.1) with  $\eta = \rho h_K$ . Further, for any  $0 < \rho \leq 1$  the following estimate holds

$$\|\tilde{\mathbf{p}}_h\|_{0,\rho,h} + \|u_h\|_{1,\rho,h} \leq C_{w,1} \|f\|_{-1,\rho,h}, \quad (4.7)$$

where  $C_{w,1}$  is a uniform constant with respect to both  $\rho$  and  $h$  and  $\|f\|_{-1,\rho,h} := \sup_{v_h \in V_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\|v_h\|_{1,\rho,h}}$ .

**Theorem 4.5** ([74]) Let  $(\mathbf{p}, u)$  be the solution of (1.2) and assume that  $\mathbf{p} \in \mathbf{H}^1(\Omega)$ . Further, let  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  be the solution of (4.1) with  $\eta = \rho h_K$ . If we choose the spaces  $\tilde{\mathbf{Q}}_h \times V_h$  such that  $\nabla_h V_h \subset \mathbf{Q}_h$ , then for any  $0 < \rho \leq 1$  the following estimate holds

$$\|\mathbf{p} - \tilde{\mathbf{p}}_h\|_{0,\rho,h} + \|u - u_h\|_{1,\rho,h} \leq C_{e,1} \inf_{\tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h, v_h \in V_h} (\|\mathbf{p} - \tilde{\mathbf{q}}_h\|_{0,\rho,h} + \|u - v_h\|_{1,\rho,h}), \quad (4.8)$$

where  $C_{e,1}$  is a uniform constant with respect to both  $\rho$  and  $h$ .

**Corollary 4.6** ([74]) Let  $(\mathbf{p}, u)$  be the solution of (1.2) and  $\mathbf{p} \in \mathbf{H}^{k+1}(\Omega)$ ,  $u \in H^{k+2}(\Omega)$ , and  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  be the solution of (4.1) with  $\eta = \rho h_K$ . If we choose the spaces  $V_h \times \mathbf{Q}_h \times \hat{\mathbf{Q}}_h$  as  $V_h^{k+1} \times \mathbf{Q}_h^k \times \hat{\mathbf{Q}}_h^k$ , then for any  $0 < \rho \leq 1$  the following estimate holds

$$\|\mathbf{p} - \tilde{\mathbf{p}}_h\|_{0,\rho,h} + \|u - u_h\|_{1,\rho,h} \leq C_{r,1} h^{k+1} (\|\mathbf{p}\|_{k+1} + \|u\|_{k+2}), \quad (4.9)$$

where  $C_{r,1}$  is independent of both  $h$  and  $\rho$ .

The above three theorems improve the results of [110], where the inf-sup condition for a given constant  $\rho$  was proven.

## 4.2 Divergence-based uniform inf-sup condition

Next, we shall show the well-posedness of WG methods under another pair of the parameter-dependent norms. We choose the parameter  $\eta$  as  $\eta = \rho^{-1} h_K^{-1}$  in (4.2) and define the norms as follows

$$\begin{aligned} \|\tilde{\mathbf{p}}_h\|_{\widetilde{\text{div}},\rho,h}^2 &= (c\mathbf{p}_h, \mathbf{p}_h)_{\mathcal{T}_h} + (\text{div}\mathbf{p}_h, \text{div}\mathbf{p}_h)_{\mathcal{T}_h} + \rho^{-1} \sum_{K \in \mathcal{T}_h} h_K^{-1} \langle (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}_K, (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}_K \rangle_{\partial K}, \\ \|u_h\|^2 &= (u_h, u_h)_{\mathcal{T}_h}. \end{aligned} \quad (4.10)$$

We have the uniform inf-sup condition for the following formulation

$$A_w((\tilde{\mathbf{p}}_h, u_h), (\tilde{\mathbf{q}}_h, v_h)) = a_w(\tilde{\mathbf{p}}_h, \tilde{\mathbf{q}}_h) + b_w(\tilde{\mathbf{q}}_h, u_h) + b_w(\tilde{\mathbf{p}}_h, v_h). \quad (4.11)$$

**Theorem 4.7** ([74, 73]) Let  $\mathbf{R}_h \subset \mathbf{H}(\text{div}, \Omega) \cap \mathbf{Q}_h$  be the Raviart-Thomas finite element space. Assume that  $\{\{\mathbf{R}_h\}\} \subset \hat{\mathbf{Q}}_h$  and  $V_h = \text{div}_h \mathbf{Q}_h$ . Then, we have

$$\inf_{(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h} \sup_{(\tilde{\mathbf{q}}_h, v_h) \in \tilde{\mathbf{Q}}_h \times V_h} \frac{A_w((\tilde{\mathbf{p}}_h, u_h), (\tilde{\mathbf{q}}_h, v_h))}{(\|u_h\| + \|\tilde{\mathbf{p}}_h\|_{\widetilde{\text{div}},\rho,h})(\|v_h\| + \|\tilde{\mathbf{q}}_h\|_{\widetilde{\text{div}},\rho,h})} \geq \beta_{w,1}, \quad (4.12)$$

where  $\beta_{w,1}$  is independent of both  $\rho$  and mesh size  $h$ .

**Corollary 4.8** ([74, 73]) *Assume that the spaces  $\tilde{\mathbf{Q}}_h \times V_h$  satisfy the conditions of Theorem 4.7. Then there exists a unique solution  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  satisfying (4.1) with  $\eta = \rho^{-1}h_K^{-1}$ , and for any  $0 < \rho \leq 1$  the following estimate holds*

$$\|\tilde{\mathbf{p}}_h\|_{\widetilde{\text{div}}, \rho, h} + \|u_h\| \leq C_{w,2} \|f_h\|, \quad (4.13)$$

where  $C_{w,2}$  is a uniform constant with respect to both  $\rho$  and  $h$ .

**Theorem 4.9** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.3) and assume that  $\mathbf{p} \in \mathbf{H}^1(\Omega)$ . Let  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  be the solution of (4.1). If we choose the spaces  $\tilde{\mathbf{Q}}_h \times V_h$  such that the inf-sup condition (4.12) is satisfied, then for any  $0 < \rho \leq 1$  the following estimate holds*

$$\|\mathbf{p} - \tilde{\mathbf{p}}_h\|_{\widetilde{\text{div}}, \rho, h} + \|u - u_h\| \leq C_{e,2} \inf_{\tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h, v_h \in V_h} \left( \|\mathbf{p} - \tilde{\mathbf{q}}_h\|_{\widetilde{\text{div}}, \rho, h} + \|u - v_h\| \right), \quad (4.14)$$

where  $C_{e,2}$  is a uniform constant with respect to both  $\rho$  and  $h$ .

**Corollary 4.10** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.3) and assume that  $\mathbf{p} \in \mathbf{H}^{k+1}(\Omega)$ ,  $\text{div} \mathbf{p} \in H^{k+1}(\Omega)$ ,  $u \in H^{k+1}(\Omega)$ . Let  $(\tilde{\mathbf{p}}_h, u_h) \in \tilde{\mathbf{Q}}_h \times V_h$  be the solution of (4.1) with  $\eta = \rho^{-1}h_K^{-1}$ . If we choose the spaces  $V_h \times \mathbf{Q}_h \times \hat{\mathbf{Q}}_h$  as  $V_h^k \times \mathbf{Q}_h^{k,RT} \times \hat{\mathbf{Q}}_h^k$ , then for any  $0 < \rho \leq 1$  the following estimate holds*

$$\|\mathbf{p} - \tilde{\mathbf{p}}_h\|_{\widetilde{\text{div}}, \rho, h} + \|u - u_h\| \leq C_{r,2} h^{k+1} (\|\mathbf{p}\|_{k+1} + \|\text{div} \mathbf{p}\|_{k+1} + \|u\|_{k+1}), \quad (4.15)$$

where  $C_{r,2}$  is independent of both  $h$  and  $\rho$ .

We show here some convergence results which are uniform with respect to the stabilization parameter, which, again, improve the convergence results in [110, 30]. These are mainly based on the uniform inf-sup conditions we present in Theorems 4.3 and 4.7.

## 5 Stability and convergence analysis of stabilized hybrid mixed (HDG) methods

The stabilized hybrid mixed (HDG) methods read: Find  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  such that for any  $(\mathbf{q}_h, \tilde{v}_h) \in \mathbf{Q}_h \times \tilde{V}_h$ ,

$$\begin{cases} a_h(\mathbf{p}_h, \mathbf{q}_h) + b_h(\mathbf{q}_h, \tilde{u}_h) = 0, \\ b_h(\mathbf{p}_h, \tilde{v}_h) + c_h(\tilde{u}_h, \tilde{v}_h) = -(f, v_h)_{\mathcal{T}_h}. \end{cases} \quad (5.1)$$

Here, the bilinear forms are defined as follows

$$\begin{aligned} a_h(\mathbf{p}_h, \mathbf{q}_h) &= (c\mathbf{p}_h, \mathbf{q}_h)_{\mathcal{T}_h}, \\ b_h(\mathbf{q}_h, \tilde{u}_h) &= -(u_h, \text{div} \mathbf{q}_h)_{\mathcal{T}_h} + \langle \hat{u}_h, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}, \\ c_h(\tilde{u}_h, \tilde{v}_h) &= -\langle \tau(\hat{P}_h(u_h) - \hat{u}_h), \hat{P}_h(v_h) - \hat{v}_h \rangle_{\partial \mathcal{T}_h}, \end{aligned} \quad (5.2)$$

and  $\tau > 0$  is the stabilization parameter. If  $\hat{P}_h$  is an identity operator, then we obtain the standard HDG method. If  $\hat{P}_h$  is a local  $L^2$  projection, i.e.

$$\hat{P}_h|_{\partial K} := \hat{P}_{\partial K} : L^2(\partial K) \rightarrow \hat{Q}(\partial K), \quad (5.3)$$

where  $\hat{Q}(\partial K)$  is the trace space on  $\partial K$ , namely  $\hat{Q}(\partial K) = \bigcup_{e \in \partial K} \hat{Q}(e)$ , we obtain the modified HDG methods with reduced stabilization [88].

The following lemma shows the consistency property of stabilized hybrid mixed (HDG) methods.

**Lemma 5.1** *Let  $f \in L^2(\Omega)$ , and  $(\mathbf{p}, u)$  be the solution of (1.2) or (1.3), then  $(\mathbf{p}, u)$  satisfies the following consistency property*

$$\begin{cases} a_h(\mathbf{p}, \mathbf{q}_h) + b_h(\mathbf{q}_h, u) = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ b_h(\mathbf{p}, \tilde{v}_h) + c_h(u, \tilde{v}_h) = -(f, v_h)_{\mathcal{T}_h} & \forall \tilde{v}_h \in \tilde{V}_h. \end{cases} \quad (5.4)$$

### 5.1 Divergence-based uniform inf-sup condition

In this subsection, we will give the uniform inf-sup condition for (5.2) when  $\tau = \rho h_K$  under the following parameter-dependent norms

$$\begin{aligned} \|\mathbf{p}_h\|_{\text{div}, \rho, h}^2 &= (c\mathbf{p}_h, \mathbf{p}_h)_{\mathcal{T}_h} + (\text{div}\mathbf{p}_h, \text{div}\mathbf{p}_h)_{\mathcal{T}_h} + \rho^{-1} \sum_{e \in \mathcal{E}_h^i} h_e^{-1} \langle \hat{P}_e([\mathbf{p}_h]), \hat{P}_e([\mathbf{p}_h]) \rangle_e, \\ \|\tilde{v}_h\|_{0, \rho, h}^2 &= (v_h, v_h)_{\mathcal{T}_h} + \rho \sum_{e \in \mathcal{E}_h^i} h_e \langle \hat{v}_h, \hat{v}_h \rangle_e. \end{aligned} \quad (5.5)$$

where  $\hat{P}_e : L^2(e) \mapsto \hat{V}(e)$  is the  $L^2$  projection.

Using the parameter-dependent norms (5.5), we have the following results, whose details will be reported in [74, 73].

**Theorem 5.2** *For any  $0 < \rho \leq 1$ , the boundedness of  $a_h(\cdot, \cdot)$ ,  $b_h(\cdot, \cdot)$  and  $c_h(\cdot, \cdot)$  is as follows [74]*

$$\begin{aligned} |a_h(\mathbf{p}_h, \mathbf{q}_h)| &\leq \|\mathbf{p}_h\|_{\text{div}, \rho, h} \|\mathbf{q}_h\|_{\text{div}, \rho, h}, \\ |b_h(\mathbf{q}_h, \tilde{u}_h)| &\leq \|\mathbf{q}_h\|_{\text{div}, \rho, h} \|\tilde{u}_h\|_{0, \rho, h}, \\ |c_h(\tilde{u}_h, \tilde{v}_h)| &\leq C \|\tilde{u}_h\|_{0, \rho, h} \|\tilde{v}_h\|_{0, \rho, h}, \end{aligned} \quad (5.6)$$

where  $C$  is independent of both mesh size  $h$  and  $\rho$ .

Denote

$$\text{Ker}(B) := \{\mathbf{q}_h \in \mathbf{Q}_h : b_h(\mathbf{q}_h, \tilde{u}_h) = 0, \forall \tilde{u}_h \in \tilde{V}_h\}.$$

Then we have the coercivity of  $a_h(\cdot, \cdot)$  on the  $\text{Ker}(B)$  and the inf-sup condition of  $b_h(\cdot, \cdot)$  as follows.

**Theorem 5.3** ([74, 73]) *Assume that  $\text{div}_h \mathbf{Q}_h \subset V_h$ . Then*

$$a_h(\mathbf{p}_h, \mathbf{p}_h) \geq \|\mathbf{p}_h\|_{\text{div}, \rho, h}^2 \quad \forall \mathbf{p}_h \in \text{Ker}(B). \quad (5.7)$$

**Theorem 5.4** ([74, 73]) *For  $k \geq 0$ , if  $\mathbf{Q}_h = \mathbf{Q}_h^{k+1}$ ,  $V_h = V_h^k$ ,  $\hat{V}_h = \hat{V}_h^r$  where  $0 \leq r \leq k+1$ , or  $\mathbf{Q}_h = \mathbf{Q}_h^{k, RT}$ ,  $V_h = V_h^k$ ,  $\hat{V}_h = \hat{V}_h^r$  where  $0 \leq r \leq k$ , then we have*

$$\inf_{\tilde{u}_h \in \tilde{V}_h} \sup_{\mathbf{q}_h \in \mathbf{Q}_h} \frac{b_h(\mathbf{q}_h, \tilde{u}_h)}{\|\mathbf{q}_h\|_{\text{div}, \rho, h} \|\tilde{u}_h\|_{0, \rho, h}} \geq \beta_0, \quad (5.8)$$

where  $\beta_0$  is a constant independent of both  $\rho$  and mesh size  $h$ .

**Remark 5.5** *When  $\tau = 0$ , we can also have the stability result as Theorem 5.4, when choosing the following norms for any  $\tilde{v}_h \in \tilde{V}_h$ , and  $\mathbf{p}_h \in \mathbf{Q}_h$*

$$\begin{aligned} \|\mathbf{p}_h\|_{\text{div}, 1, h}^2 &= (c\mathbf{p}_h, \mathbf{p}_h)_{\mathcal{T}_h} + (\text{div}\mathbf{p}_h, \text{div}\mathbf{p}_h)_{\mathcal{T}_h} + \sum_{e \in \mathcal{E}_h^i} h_e^{-1} \langle \hat{P}_e([\mathbf{p}_h]), \hat{P}_e([\mathbf{p}_h]) \rangle_e, \\ \|\tilde{v}_h\|_{0, 1, h}^2 &= (v_h, v_h)_{\mathcal{T}_h} + \sum_{e \in \mathcal{E}_h^i} h_e \langle \hat{v}_h, \hat{v}_h \rangle_e. \end{aligned}$$



**Theorem 5.6** ([74]) *Let  $(\mathbf{p}, u)$  be the solution for (1.3) and  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  be the solution for (5.1) with  $\tau = \rho h_K$ . If we choose the spaces  $\mathbf{Q}_h \times \tilde{V}_h$  that satisfy the condition in Theorem 5.4, then for any  $0 < \rho \leq 1$  the following estimate holds*

$$\|\mathbf{p} - \mathbf{p}_h\|_{\text{div}, \rho, h} + \|u - \tilde{u}_h\|_{0, \rho, h} \leq C_{e,3} \inf_{\mathbf{q}_h \in \mathbf{Q}_h, \tilde{v}_h \in \tilde{V}_h} (\|\mathbf{p} - \mathbf{q}_h\|_{\text{div}, \rho, h} + \|u - \tilde{v}_h\|_{0, \rho, h}), \quad (5.9)$$

where  $C_{e,3}$  is a uniform constant with respect to both  $\rho$  and  $h$ .

**Corollary 5.7** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.3) and  $\mathbf{p} \in \mathbf{H}^{k+1}(\Omega)$ ,  $\text{div} \mathbf{p} \in H^{k+1}(\Omega)$ ,  $u \in H^{k+1}(\Omega)$ , and  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  be the solution of (5.1) with  $\tau = \rho h_K$ . If we choose the spaces  $V_h \times \mathbf{Q}_h \times \hat{V}_h$  as  $V_h^k \times \mathbf{Q}_h^{k,RT} \times \hat{V}_h^k$ , then the following estimate holds*

$$\|\mathbf{p} - \mathbf{p}_h\|_{\text{div}, \rho, h} + \|u - \tilde{u}_h\|_{0, \rho, h} \leq C_{r,3} h^{k+1} (\|\mathbf{p}\|_{k+1} + \|\text{div} \mathbf{p}\|_{k+1} + \|u\|_{k+1}), \quad (5.10)$$

where  $C_{r,3}$  is independent of both  $h$  and  $\rho$ .

## 5.2 Gradient-based uniform inf-sup condition

Next, we shall present the well-posedness of stabilized hybrid mixed (HDG) methods under another pair of parameter-dependent norms. We choose  $\tau = \rho^{-1} h_K^{-1}$  in (5.2) and define for any  $\mathbf{q}_h \in \mathbf{Q}_h$  and  $\tilde{v}_h \in \tilde{V}_h$

$$\begin{aligned} \|\mathbf{q}_h\|^2 &= (c\mathbf{q}_h, \mathbf{q}_h)_{\mathcal{T}_h} \\ \|\tilde{v}_h\|_{1, \rho, h}^2 &= (\nabla_h v_h, \nabla_h v_h)_{\mathcal{T}_h} + \rho^{-1} \sum_{K \in \mathcal{T}_h} h_K^{-1} \langle \hat{P}_h(v_h) - \hat{v}_h, \hat{P}_h(v_h) - \hat{v}_h \rangle_{\partial K}, \end{aligned} \quad (5.11)$$

where  $\hat{P}_h$  is either an identity operator or a local projection as illustrated in (5.3). A straightforward calculation shows that

$$\langle \hat{P}_h(v_h) - \hat{v}_h, \hat{P}_h(v_h) - \hat{v}_h \rangle_{\partial \mathcal{T}_h} = 2 \langle \{\hat{P}_h(v_h) - \hat{v}_h\}, \{\hat{P}_h(v_h) - \hat{v}_h\} \rangle_{\mathcal{E}_h} + \frac{1}{2} \langle [\hat{P}_h(v_h) - \hat{v}_h], [\hat{P}_h(v_h) - \hat{v}_h] \rangle_{\mathcal{E}_h}.$$

Hence, if  $\hat{P}_h$  is the identity operator, then  $\|\tilde{v}_h\|_{1, \rho, h}$  is indeed a norm on  $\tilde{V}_h$ . Moreover, if  $\hat{P}_h$  is the local projection defined in (5.3), then  $\|\tilde{v}_h\|_{1, \rho, h}$  is indeed a norm on  $\tilde{V}_h$  when  $\hat{V}_h^0 \subset \hat{V}_h$ , i.e.  $\hat{V}_h$  contains the piecewise constant space on  $\mathcal{E}_h$ .

We have the uniform inf-sup condition for the following formulation

$$A_h((\mathbf{p}_h, \tilde{u}_h), (\mathbf{q}_h, \tilde{v}_h)) = a_h(\mathbf{p}_h, \mathbf{q}_h) + b_h(\mathbf{q}_h, \tilde{u}_h) + b_h(\mathbf{p}_h, \tilde{v}_h) + c_h(\tilde{u}_h, \tilde{v}_h). \quad (5.12)$$

**Theorem 5.8** ([74, 73]) *Assume that  $\nabla_h V_h \subset \mathbf{Q}_h$ . Then there exists a positive constant  $\rho_0$  which only depends on the shape regularity of the mesh, such that for any  $0 < \rho \leq \rho_0$ , we have*

$$\inf_{(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h} \sup_{\mathbf{q}_h, \tilde{v}_h \in \mathbf{Q}_h \times \tilde{V}_h} \frac{A_h((\mathbf{p}_h, \tilde{u}_h), (\mathbf{q}_h, \tilde{v}_h))}{(\|\tilde{u}_h\|_{1, \rho, h} + \|\mathbf{p}_h\|)(\|\tilde{v}_h\|_{1, \rho, h} + \|\mathbf{q}_h\|)} \geq \beta_1, \quad (5.13)$$

where  $\beta_1$  is independent of both  $\rho$  and mesh size  $h$ .

**Corollary 5.9** ([74, 73]) *Assume that  $\nabla_h V_h \subset \mathbf{Q}_h$ . Then there exists a unique solution  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  satisfying (5.1) with  $\tau = \rho^{-1} h_K^{-1}$ . Further, there exists a positive constant  $\rho_0$  such that for any  $0 < \rho \leq \rho_0$  the following estimate holds*

$$\|\mathbf{p}_h\| + \|\tilde{u}_h\|_{1, \rho, h} \leq C_{d,2} \|f\|_{-1, \rho, h}, \quad (5.14)$$

where  $C_{d,2}$  is a uniform constant with respect to both  $\rho$  and  $h$  and  $\|f\|_{-1, \rho, h} = \sup_{\tilde{v}_h \in \tilde{V}_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\|\tilde{v}_h\|_{1, \rho, h}}.$

From the above corollary and the discrete Poincaré–Friedrichs inequalities for piecewise  $H^1$  functions [12], i.e.,  $\|v_h\| \lesssim \|\nabla_h v_h\| + \sum_{e \in \mathcal{E}_h} h_e^{-1} \|[[v_h]]\|_{0,e}$ , we further have  $\|\mathbf{p}_h\| + \|\tilde{u}_h\|_{\bar{1},\rho,h} \leq C_{d,3} \|f_h\|$ . The stability and consistency results of the stabilized hybrid mixed (HDG) methods lead to the following quasi-optimal approximation.

**Theorem 5.10** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.2) and  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  be the solution of (5.1) with  $\tau = \rho^{-1} h_K^{-1}$ . If we choose the spaces  $\mathbf{Q}_h \times \tilde{V}_h$  such that  $\nabla_h V_h \subset \mathbf{Q}_h$ , then there exists a constant  $\rho_0$  such that for any  $0 < \rho \leq \rho_0$  the following estimate holds*

$$\|\mathbf{p} - \mathbf{p}_h\| + \|u - \tilde{u}_h\|_{\bar{1},\rho,h} \leq C_{e,4} \inf_{\mathbf{q}_h \in \mathbf{Q}_h, \tilde{v}_h \in \tilde{V}_h} (\|\mathbf{p} - \mathbf{q}_h\| + \|u - \tilde{v}_h\|_{\bar{1},\rho,h}), \quad (5.15)$$

where  $C_{e,4}$  is a uniform constant with respect to both  $\rho$  and  $h$ .

**Corollary 5.11** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.2) and  $\mathbf{p} \in \mathbf{H}^{k+1}(\Omega), u \in H^{k+2}(\Omega)$ ,  $(\mathbf{p}_h, \tilde{u}_h) \in \mathbf{Q}_h \times \tilde{V}_h$  be the solution of (5.1) with  $\tau = \rho^{-1} h_K^{-1}$ , and  $\hat{P}_h$  be an identity operator. If we choose the spaces  $V_h \times \mathbf{Q}_h \times \hat{V}_h$  as  $V_h^{k+1} \times \mathbf{Q}_h^k \times \hat{V}_h^{k+1}$ , then the following estimate holds*

$$\|\mathbf{p} - \mathbf{p}_h\| + \|u - \tilde{u}_h\|_{\bar{1},\rho,h} \leq C_{r,4} h^{k+1} (\|\mathbf{p}\|_{k+1} + \|u\|_{k+2}), \quad (5.16)$$

where  $C_{r,4}$  is independent of both  $h$  and  $\rho$ .

**Corollary 5.12** ([74]) *Let  $(\mathbf{p}, u)$  be the solution of (1.2) and  $\mathbf{p} \in \mathbf{H}^{k+1}(\Omega), u \in H^{k+2}(\Omega)$ ,  $(\tilde{\mathbf{p}}_h, u_h) \in \mathbf{Q}_h \times \tilde{V}_h$  be the solution of (5.1) with  $\tau = \rho^{-1} h_K^{-1}$  and  $\hat{P}_h$  be a local  $L^2$  projection illustrated in (5.2). If we choose the spaces  $V_h \times \mathbf{Q}_h \times \hat{V}_h$  as  $V_h^{k+1} \times \mathbf{Q}_h^k \times \hat{V}_h^k$ , then the following estimate holds*

$$\|\mathbf{p} - \mathbf{p}_h\| + \|u - \tilde{u}_h\|_{\bar{1},\rho,h} \leq C_{r,5} h^{k+1} (\|\mathbf{p}\|_{k+1} + \|u\|_{k+2}), \quad (5.17)$$

where  $C_{r,5}$  is independent of both  $h$  and  $\rho$ .

In [47], Cockburn, Gopalakrishnan and Sayas established the error analysis for stabilized hybrid mixed (HDG) methods based on a carefully designed projection operator. In this paper, we present several uniform convergence results with respect to the stabilization parameter. As a result, the constants in the error estimates  $C_{r,i} (i = 1, 2, \dots, 5)$  are independent of  $\rho$ .

## 6 Discontinuous Galerkin methods

In recent years, DG methods have been applied to the solution of various differential equations due to their flexibility in constructing feasible local-shape function spaces and their advantage in capturing non-smooth or oscillatory solutions effectively. Instead of using the Lagrange multiplier technique, a penalty term is added to the bilinear form of the DG method to force the continuity (see [4, 26, 70, 72, 71] and the references therein). With the concept of DG-gradient and DG-divergence defined as in Definition 1.1, most of the DG methods for approximating the elliptic problem can be written as

$$\left\{ \begin{array}{ll} c\mathbf{p}_h - \operatorname{div}_{\text{dg}}^* \tilde{u}_h = 0 & \text{in } \Omega, \\ -\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h = f_h & \text{in } \Omega, \\ \tilde{\mathbf{p}}_h = \bar{\mathbf{p}}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h, \\ \hat{u}_h = \bar{u}(\mathbf{p}_h, u_h) & \text{on } \mathcal{E}_h, \end{array} \right. \quad \begin{array}{l} (6.1a) \\ (6.1b) \\ (6.1c) \\ (6.1d) \end{array}$$

where  $\bar{\mathbf{p}}$  and  $\bar{u}$  are the formulas for defining  $\hat{\mathbf{p}}_h$  and  $\hat{u}_h$  in the terms of  $\mathbf{p}_h$  and  $u_h$ , respectively. A crucial feature of DG methods is that  $\hat{\mathbf{p}}_h$  and  $\hat{u}_h$  are given explicitly in (6.1c) – (6.1d). A basic question is: How do we define  $\hat{\mathbf{p}}_h$  and  $\hat{u}_h$  in order for the DG schemes to result in good approximations of the original problems? In the DG schemes, the local problems on each element  $K$  are connected through the  $\hat{\mathbf{p}}_h \cdot \mathbf{n}_K$  and  $\hat{u}_h$ . Therefore, in order for make the schemes to be good approximations,  $\hat{\mathbf{p}}_h$  and  $\hat{u}_h$  should be single-valued on the element edges. Recalling condition (iii) in Lemma 2.1 when  $\nabla_{\text{dg}}$  and  $-\text{div}_{\text{dg}}$  are mutually dual, we see that  $\hat{\mathbf{p}}_h = \{\mathbf{p}_h\}$  and  $\hat{u}_h = \{u_h\}$  are natural choices. However, it is known that such choices cannot ensure the stability of the DG schemes. Hence, penalty terms are used to force the continuity of either  $\mathbf{p}_h$  or  $u_h$ . Consequently, in general, to define the numerical traces, (6.1c) – (6.1d) can be given as

$$\begin{cases} \hat{\mathbf{p}}_h = \gamma\{\mathbf{p}_h\} + (1 - \gamma)\{-\alpha\nabla_h u_h\} - \beta[\mathbf{p}_h] + \mu_1(\llbracket u_h \rrbracket) & \text{on } \mathcal{E}_h, \\ \hat{u}_h = \{u_h\} + \beta \cdot \llbracket u_h \rrbracket + \mu_2([\mathbf{p}_h]) & \text{on } \mathcal{E}_h^i, \quad \hat{u}_h = 0 \quad \text{on } \mathcal{E}_h^\partial. \end{cases} \quad (6.2)$$

Here,  $\gamma$  and  $\beta$  are parameters that we can choose, and  $\mu_1(\llbracket u_h \rrbracket)$  and  $\mu_2([\mathbf{p}_h])$  are penalty terms. The possible choices of numerical fluxes in the literature are summarized in Table 6.1. In [8, 25],  $r_e : L^2(\mathcal{E}_h) \rightarrow \mathbf{Q}_h$  is a lifting operator defined by

$$\int_{\Omega} r_e(\mathbf{w}) \cdot \mathbf{q}_h \, dx = - \int_e \mathbf{w} \cdot \{\mathbf{q}_h\} \, ds \quad \forall \mathbf{q}_h \in \mathbf{Q}_h. \quad (6.3)$$

Method	$\gamma$	$\beta$	$\mu_1(\llbracket u_h \rrbracket)$	$\mu_2([\mathbf{p}_h])$
IP method [59, 114]	0	$\mathbf{0}$	$\eta_e h_e^{-1} \llbracket u_h \rrbracket$	0
LDG method [54]	1	$\mathcal{O}(1)$	$\eta_e h_e^{-1} \llbracket u_h \rrbracket$	0
DG Method of Bassi et. al. [8]	0	$\mathbf{0}$	$\eta_e \{r_e(\llbracket u_h \rrbracket)\}$	0
DG Method of Brezzi et. al. [25]	1	$\mathbf{0}$	$\eta_e \{r_e(\llbracket u_h \rrbracket)\}$	0
Mixed DG method	1	$\mathbf{0}$	0	$\eta_e h_e^{-1} [\mathbf{p}_h]$

Table 6.1: DG methods: Numerical fluxes,  $\eta_e = \mathcal{O}(1)$

In the next two subsections, we introduce two classes of DG methods. The first class of DG methods is used to approximate the form (1.2) so a penalty term  $\mu_1(\llbracket u_h \rrbracket)$  is needed to force the continuity of  $u_h$ , and we name this class of DG methods primal DG methods. The second class of DG methods, which is named mixed DG methods, is aimed to approximate the mixed form of the elliptic problem. Hence, a penalty term  $\mu_2([\mathbf{p}_h])$  is added to force the normal continuity of  $\mathbf{p}_h$ .

## 6.1 Primal discontinuous Galerkin methods

By Definition 1.1, since  $\hat{u}_h$  and  $\hat{\mathbf{p}}_h$  are single-valued, we establish the following relations using integration by parts and (2.2):

$$\langle -\text{div}_{\text{dg}}^* \tilde{u}_h, \mathbf{q}_h \rangle = -(u_h, \text{div} \mathbf{q}_h)_{\mathcal{T}_h} + \langle \hat{u}_h, [\mathbf{q}_h] \rangle_{\mathcal{E}_h^i} \quad (6.4)$$

$$= (\nabla_h u_h, \mathbf{q})_{\mathcal{T}_h} - \langle \llbracket u_h \rrbracket, \{\mathbf{q}_h\} \rangle_{\mathcal{E}_h} + \langle \hat{u}_h - \{u_h\}, [\mathbf{q}_h] \rangle_{\mathcal{E}_h^i}, \quad (6.5)$$

$$\langle -\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h, v_h \rangle = -(\mathbf{p}_h, \nabla_h v_h)_{\mathcal{T}_h} + \langle \hat{\mathbf{p}}_h, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} \quad (6.6)$$

$$= (\text{div} \mathbf{p}_h, v_h)_{\mathcal{T}_h} + \langle \hat{\mathbf{p}}_h - \{\mathbf{p}_h\}, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} - \langle [\mathbf{p}_h], \{v_h\} \rangle_{\mathcal{E}_h^i}. \quad (6.7)$$

Motivated by (6.5) and (6.6), most of the existing primal DG methods can be written as (6.1a) – (6.1b) and (6.2) with specific choices of the parameters  $\gamma$ ,  $\beta$ , and the penalty term  $\mu_1(\llbracket u_h \rrbracket)$ . Examples of primal

methods are the IP method [59, 114], the LDG method [54], the method of Bassi et. al. [8], and the method of Brezzi et. al. [25] listed in Table 6.1. Note that all of these DG methods have a penalty term on  $u_h$  so they intend to approximate the solution of the primal form. To put it simply, if  $\alpha$  is piecewise constant and  $\nabla_h V_h \subset \mathbf{Q}_h$ , then we can eliminate  $\mathbf{p}_h$  to obtain the DG formulations with  $u_h$  solely. We refer to [4] for a detailed discussion of primal DG methods.

**Remark 6.1** *As a combination of continuous and discontinuous Galerkin methods, the so-called enriched DG (EDG) methods [9, 102], which are locally conservative, enrich the approximation space of the continuous Galerkin methods with piecewise constant functions. EDG methods adopt the same weak formulation as DG methods, but have a smaller number of degrees of freedom than the DG methods.*

## 6.2 Mixed discontinuous Galerkin methods

In this subsection, we derive a new family of mixed DG methods, which can be regarded as the dual form of primal DG methods. In the literature, there are some existing works that discuss mixed DG methods for elliptic problems [22, 27, 33], but all of these schemes are aimed at approximating the primal form (1.2). Alternatively, the mixed DG methods we propose are designated to approximate the mixed form (1.3).

Instead of penalizing  $u_h$ , we consider a penalty term for  $\mathbf{p}_h$  to obtain the mixed DG schemes. Let us choose  $\gamma = 1$ ,  $\beta = \mathbf{0}$ ,  $\mu_1(\llbracket u_h \rrbracket) = 0$ , and  $\mu_2([\mathbf{p}_h]) = \eta_e h_e^{-1} [\mathbf{p}_h]$  in (6.2), i.e.,

$$\begin{cases} \hat{\mathbf{p}}_h = \{\mathbf{p}_h\} & \text{on } \mathcal{E}_h, \\ \hat{u}_h = \{u_h\} + \eta_e h_e^{-1} [\mathbf{p}_h] & \text{on } \mathcal{E}_h^i, \quad \hat{u}_h = 0 \quad \text{on } \mathcal{E}_h^\partial. \end{cases} \quad (6.8)$$

We can see that this choice is the dual of the simplified LDG method [54] (when  $\beta = \mathbf{0}$ ) in the sense that the definitions  $\bar{p}$  and  $\bar{u}$  in (6.1c) – (6.1d) are exchanged in the two schemes. The numerical scheme (6.1a) – (6.1d) with such choices can be written as the mixed DG formulation: Find  $(\mathbf{p}_h, u_h) \in \mathbf{Q}_h \times V_h$  such that

$$\begin{cases} a_h^{\text{MDG}}(\mathbf{p}_h, \mathbf{q}_h) + b_h^{\text{MDG}}(\mathbf{q}_h, u_h) = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ b_h^{\text{MDG}}(\mathbf{p}_h, v_h) = - \int_{\Omega} f v_h dx & \forall v_h \in V_h. \end{cases} \quad (6.9)$$

Here, we choose  $\eta_e = \mathcal{O}(1)$ , and define

$$a_h^{\text{MDG}}(\mathbf{p}, \mathbf{q}) = (c\mathbf{p}, \mathbf{q})_{\mathcal{T}_h} + \langle \eta_e h_e^{-1} [\mathbf{p}], [\mathbf{q}] \rangle_{\mathcal{E}_h^i} \quad \forall \mathbf{p}, \mathbf{q} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega), \quad (6.10)$$

$$b_h^{\text{MDG}}(\mathbf{p}, v) = -(\text{div}_h \mathbf{p}, v)_{\mathcal{T}_h} + \langle [\mathbf{p}], \{v\} \rangle_{\mathcal{E}_h^i} \quad \forall \mathbf{p} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega), \forall v \in V_h \cup H^1(\Omega). \quad (6.11)$$

**Remark 6.2** *With the choice of the numerical traces:  $\gamma = 1$ ,  $\beta = \mathbf{0}$ ,  $\mu_1(\llbracket u_h \rrbracket) = 0$  and  $\mu_2([\mathbf{p}_h]) = \eta_e \{r_e([\mathbf{p}_h])\}$ , we can obtain another mixed DG scheme, which is the dual form of the method of Brezzi et al. [25]. Here, the lifting operator  $r_e : L^2(\mathcal{E}_h) \mapsto V_h$  is defined by*

$$\int_{\Omega} r_e(w) v_h dx = - \int_e w \{v_h\} ds \quad \forall v_h \in V_h. \quad (6.12)$$

*We are also aware that if  $\gamma = 0$  or  $\beta \neq \mathbf{0}$ , the resulting mixed DG schemes are not symmetric.*

Next, we prove the well-posedness of the mixed DG formulation (6.9) when choosing

$$V_h = V_h^k, \quad \mathbf{Q}_h = \mathbf{Q}_h^{k+1}, \quad (6.13)$$

for  $k \geq 0$ , which leads to the optimal order of convergence in the  $L^2$  norm  $\|\cdot\|$  for  $u$  and the following norm for  $\mathbf{p}$ :

$$\|\mathbf{q}\|_{\text{MDG},h}^2 := (c\mathbf{q}, \mathbf{q})_{\mathcal{T}_h} + (\text{div}_h \mathbf{q}, \text{div}_h \mathbf{q})_{\mathcal{T}_h} + \langle \eta_e h_e^{-1} [\mathbf{q}], [\mathbf{q}] \rangle_{\mathcal{E}_h^i} \quad \forall \mathbf{q} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega). \quad (6.14)$$

**Boundedness.** A direct calculation shows that  $a_h^{\text{MDG}}(\cdot, \cdot)$  satisfies

$$a_h^{\text{MDG}}(\mathbf{p}, \mathbf{q}) \leq \|\mathbf{p}\|_{\text{MDG},h} \|\mathbf{q}\|_{\text{MDG},h} \quad \forall \mathbf{p}, \mathbf{q} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega). \quad (6.15)$$

From the estimate of lifting operator (see also [4, 26])

$$\|r_e(w)\|_{0,\Omega} \lesssim h_e^{-1/2} \|w\|_{0,e}, \quad (6.16)$$

we have the boundedness of  $b_h^{\text{MDG}}(\cdot, \cdot)$ .

**Lemma 6.3** *It holds that*

$$b_h^{\text{MDG}}(\mathbf{q}, v_h) \lesssim \|\mathbf{q}\|_{\text{MDG},h} \|v_h\|_0 \quad \forall \mathbf{q} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega), \quad \forall v_h \in V_h, \quad (6.17)$$

$$b_h^{\text{MDG}}(\mathbf{q}, v) \lesssim \|\mathbf{q}\|_{\text{MDG},h} (\|v\|_0 + h|v|_{1,h}) \quad \forall \mathbf{q} \in \mathbf{Q}_h \cup \mathbf{H}(\text{div}; \Omega), \quad \forall v \in H^1(\Omega). \quad (6.18)$$

**Stability.** According to the theory of mixed methods, the stability of the saddle point problem (6.9) is the corollary of the following two conditions [16, 21]:

1. K-ellipticity:

$$a_h^{\text{MDG}}(\mathbf{q}_h, \mathbf{q}_h) \gtrsim \|\mathbf{q}_h\|_{\text{MDG},h}^2 \quad \forall \mathbf{q}_h \in Z_h, \quad (6.19)$$

where  $Z_h = \{\mathbf{q}_h \in \mathbf{Q}_h \mid b_h^{\text{MDG}}(\mathbf{q}_h, v_h) = 0, \forall v_h \in V_h\}$ .

2. The discrete inf-sup condition:

$$\inf_{v_h \in V_h} \sup_{\mathbf{q}_h \in \mathbf{Q}_h} \frac{b_h^{\text{MDG}}(\mathbf{q}_h, v_h)}{\|\mathbf{q}_h\|_{\text{MDG},h} \|v_h\|} \gtrsim 1. \quad (6.20)$$

**Theorem 6.4** *The mixed DG schemes (6.9) are well-posed for  $(\mathbf{Q}_h^{k+1}, \|\cdot\|_{\text{MDG},h})$  and  $(V_h^k, \|\cdot\|)$ .*

**Proof.** We first show the K-ellipticity (6.19). By the definition of the lifting operator (6.12), we have

$$b_h^{\text{MDG}}(\mathbf{q}_h, v_h) = \int_{\Omega} \left( \text{div}_h \mathbf{q}_h + \sum_{e \in \mathcal{E}_h^i} r_e([\mathbf{q}_h]) \right) v_h \, dx,$$

which implies that

$$Z_h = \{\mathbf{q}_h \in \mathbf{Q}_h^{k+1} \mid \text{div}_h \mathbf{q}_h + \sum_{e \in \mathcal{E}_h^i} r_e([\mathbf{q}_h]) = 0\}.$$

Let  $\eta_0 = \inf_{e \in \mathcal{E}_h^i} \eta_e$  be a positive constant that is independent of the grid size. Then (6.16) implies

$$a(\mathbf{q}_h, \mathbf{q}_h) \geq \|\mathbf{q}_h\|_{0,\Omega}^2 + \eta_0 \sum_{e \in \mathcal{E}_h^i} h_e^{-1} \|[q_h]\|_{0,e}^2 \gtrsim \|\mathbf{q}_h\|_{\text{MDG},h}^2 \quad \forall \mathbf{q}_h \in Z_h. \quad (6.21)$$

The inf-sup condition (6.20) follows from the inf-sup condition for the BDM element. ■

**Remark 6.5** *A similar argument shows that the penalty term  $\langle \eta_e h_e^{-1} [\mathbf{p}_h], [\mathbf{q}_h] \rangle_{\mathcal{E}_h^i}$  can be replaced by  $\langle \eta_e r_e([\boldsymbol{\sigma}_h]), r_e([\mathbf{q}_h]) \rangle_{\mathcal{E}_h^i}$ , and the well-posedness of the corresponding scheme can be proved similarly with the modified norm  $\|\mathbf{q}\|_{*,h}^2 = (c\mathbf{q}, \mathbf{q})_{\mathcal{T}_h} + (\text{div}_h \mathbf{q}, \text{div}_h \mathbf{q})_{\mathcal{T}_h} + \langle \eta_e r_e([\mathbf{q}]), r_e([\mathbf{q}]) \rangle_{\mathcal{E}_h^i}$ .*

**Lemma 6.6** Assume that the solution  $(\mathbf{q}, u) \in \mathbf{H}(\text{div}; \Omega) \times H^1(\Omega)$ . Then we have

$$\begin{cases} a_h^{\text{MDG}}(\mathbf{p} - \mathbf{p}_h, \mathbf{q}_h) + b_h^{\text{MDG}}(\mathbf{q}_h, u - u_h) = 0 & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ b_h^{\text{MDG}}(\mathbf{p} - \mathbf{p}_h, v_h) = 0 & \forall v_h \in V_h. \end{cases} \quad (6.22)$$

By combining Lemma 6.6 and the well-posedness of the mixed DG formulation (6.9), we have the following a priori error estimates.

**Theorem 6.7** Let  $(\mathbf{p}_h, u_h) \in \mathbf{Q}_h^{k+1} \times V_h^k$  be the solution for the mixed DG formulation (6.9), and  $(\mathbf{p}, u) \in \mathbf{H}(\text{div}; \Omega) \times H^1(\Omega)$  be the solution for (1.3). Then we have

$$\|\mathbf{p} - \mathbf{p}_h\|_{\text{MDG}, h} + \|u - u_h\| \lesssim \inf_{\mathbf{p}_h \in \mathbf{Q}_h^{k+1}} \|\mathbf{p} - \mathbf{p}_h\|_{\text{MDG}, h} + \inf_{v_h \in V_h^k} (\|u - v_h\|_0 + h|u - v_h|_{1, h}). \quad (6.23)$$

Using the Scott-Zhang interpolation [99], we have the following theorem.

**Theorem 6.8** Let  $(\mathbf{p}_h, u_h) \in \mathbf{Q}_h^{k+1} \times V_h^k$  be the solution of the mixed DG formulation (6.9). Assume that the solution of (1.3) satisfies  $(\mathbf{p}, u) \in \mathbf{H}^{k+2}(\Omega) \times H^{k+1}(\Omega)$ . Then we have

$$\|\mathbf{p} - \mathbf{p}_h\|_{\text{MDG}, h} + \|u - u_h\|_0 \lesssim h^{k+1}(|\mathbf{p}|_{k+2} + |u|_{k+1}). \quad (6.24)$$

**Remark 6.9**  $\mathbf{Q}_h$  can be chosen as a discontinuous RT finite element, i.e.,  $\mathbf{Q}_h = \mathbf{Q}_h^{k, \text{RT}}$ , and the corresponding well-posedness and error estimates can also be obtained similarly.

**Remark 6.10** The mixed DG method for linear elasticity and the proof of the well-posedness can also be provided due to the stability analysis in [117], which shows that optimal convergence rates are achieved for both stress and displacement variables.

**Numerical examples of mixed DG methods** We next illustrate the performance of mixed DG methods for the Poisson problem in 2D. The problem is computed on the unit square  $\Omega = [0, 1]^2$  with a homogeneous boundary condition that  $u = 0$  on  $\partial\Omega$ . The coefficient matrix  $\alpha = \mathbf{I}_2$ , where  $\mathbf{I}_2 \in \mathbb{R}^{2 \times 2}$  is the identity matrix. The exact solution satisfies

$$u = \sin(2\pi x) \sin(\pi y) \quad \text{and} \quad \mathbf{p} = \begin{pmatrix} 2\pi \cos(2\pi x) \sin(\pi y) \\ \pi \sin(2\pi x) \cos(\pi y) \end{pmatrix}. \quad (6.25)$$

The exact load function  $f$  can be analytically derived for the given  $u$ . Non-nested, quasi-uniform unstructured grids with different grid sizes are used in the computation. The parameter  $\eta_e$  is set to be 1. For the unstructured grid, we define  $h = N_{ele}^{-1/d}$ , where  $N_{ele}$  is the number of elements. From Table 6.2, the optimal convergence can be observed. Moreover, we observe that the  $L^2$  error of  $\mathbf{p}$  is of order  $k + 2$ , which is one order higher than the error estimate (6.24).

## 7 Relationship between different methods

In this section, we shall discuss the relationship between different methods.

(a) Poisson problem:  $\mathcal{P}_1^{-1} - \mathcal{P}_0^{-1}$ , unstructured grids

$N_{ele}$	$\ u - u_h\ _{0,\Omega}$	$h^n$	$\ \mathbf{p} - \mathbf{p}_h\ _{0,\Omega}$	$h^n$	$\ \text{div}_h(\mathbf{p} - \mathbf{p}_h)\ _{0,\Omega}$	$h^n$
220	0.0772588	—	0.111405	—	3.79529	—
976	0.0369387	0.99	0.0255594	1.98	1.82077	0.99
4054	0.0180824	1.00	0.006156	2.00	0.89211	1.00

(b) Poisson problem:  $\mathcal{P}_2^{-1} - \mathcal{P}_1^{-1}$ , unstructured grids

$N_{ele}$	$\ u - u_h\ _{0,\Omega}$	$h^n$	$\ \mathbf{p} - \mathbf{p}_h\ _{0,\Omega}$	$h^n$	$\ \text{div}_h(\mathbf{p} - \mathbf{p}_h)\ _{0,\Omega}$	$h^n$
220	0.0066776	—	0.00557092	—	0.332017	—
976	0.00146501	2.04	0.000581936	3.03	0.0726511	2.04
4054	0.000357469	1.98	6.98718e-05	2.98	0.0177161	1.98

(c) Poisson problem:  $\mathcal{P}_3^{-1} - \mathcal{P}_2^{-1}$ , unstructured grids

$N_{ele}$	$\ u - u_h\ _{0,\Omega}$	$h^n$	$\ \mathbf{p} - \mathbf{p}_h\ _{0,\Omega}$	$h^n$	$\ \text{div}_h(\mathbf{p} - \mathbf{p}_h)\ _{0,\Omega}$	$h^n$
220	0.000389143	—	0.00022748	—	0.0193726	—
976	4.20827e-05	2.99	1.16707e-05	3.99	0.00209091	2.99
4054	4.95135e-06	3.01	6.79925e-07	3.99	0.000245922	3.01

Table 6.2: Poisson problem: the convergence order on 2D non-nested unstructured grids

## 7.1 From stabilized hybrid methods to the LDG methods

Let us show that the stabilized hybrid mixed methods can deduce the LDG scheme if we set  $\hat{u}_h = \{u_h\} + \beta \cdot \llbracket u_h \rrbracket$  and  $\hat{v}_h = \{v_h\} + \beta \cdot \llbracket v_h \rrbracket$ . First, we can see that the first equation for the stabilized hybrid mixed (HDG) methods (1.14) is equivalent to (6.1a) formally. Further, the left hand of the second equation of (1.14) is

$$\begin{aligned}
& -(\text{div} \mathbf{p}_h, v_h)_{\mathcal{T}_h} + \langle \mathbf{p}_h \cdot \mathbf{n}, \hat{v}_h \rangle_{\partial \mathcal{T}_h} - \langle \tau(u_h - \hat{u}_h), v_h - \hat{v}_h \rangle_{\partial \mathcal{T}_h} \\
& = (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} + \langle \mathbf{p}_h \cdot \mathbf{n}, \hat{v}_h - v_h \rangle_{\partial \mathcal{T}_h} - \langle \tau(u_h - \hat{u}_h), v_h - \hat{v}_h \rangle_{\partial \mathcal{T}_h} \\
& = (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} + \langle \{\mathbf{p}_h\}, \llbracket \hat{v}_h - v_h \rrbracket \rangle_{\mathcal{E}_h} + \langle [\mathbf{p}_h], \{\hat{v}_h - v_h\} \rangle_{\mathcal{E}_h^i} \quad (\text{by (2.3)}) \\
& \quad - 2\langle \tau\{u_h - \hat{u}_h\}, \{v_h - \hat{v}_h\} \rangle_{\mathcal{E}_h} - \frac{1}{2}\langle \tau \llbracket u_h - \hat{u}_h \rrbracket, \llbracket v_h - \hat{v}_h \rrbracket \rangle_{\mathcal{E}_h} \\
& = (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} - \langle \{\mathbf{p}_h\}, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} + \langle [\mathbf{p}_h], \beta \cdot \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} - 2\langle \tau \beta \cdot \llbracket u_h \rrbracket, \beta \cdot \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} - \frac{1}{2}\langle \tau \llbracket u_h \rrbracket, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} \\
& = (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} - \langle \{\mathbf{p}_h\} - \beta[\mathbf{p}_h] + \frac{1}{2}\tau(1 + 4|\beta \cdot \mathbf{n}_e|^2) \llbracket u_h \rrbracket, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h},
\end{aligned} \tag{7.1}$$

which is same as (6.6) under  $\hat{\mathbf{p}}_h = \{\mathbf{p}_h\} - \beta[\mathbf{p}_h] + \frac{1}{2}\tau(1 + 4|\beta \cdot \mathbf{n}_e|^2) \llbracket u_h \rrbracket$ . This is exactly the definition of the numerical trace  $\hat{\mathbf{p}}_h$  of the primal LDG methods (see the LDG methods in Table 6.1) when  $\tau = \mathcal{O}(h^{-1})$ . Therefore, primal LDG methods can be formally deduced from stabilized hybrid mixed (HDG) methods when choosing the space

$$\tilde{V}_h = \{(v_h, \hat{v}_h) : v_h \in V_h, \hat{v}_h = \{v_h\} + \beta \cdot \llbracket v_h \rrbracket\}. \tag{7.2}$$

On the other hand, when considering the DG scheme (6.1) with  $\hat{\mathbf{p}}_h = \{\mathbf{p}_h\} + \eta_e h_e^{-1} \llbracket u_h \rrbracket$ , we obtain the

following from (7.1) that

$$\begin{aligned}
(\nabla_{\text{dg}}^* \tilde{\mathbf{p}}_h, v_h) &= (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} - \langle v_h, \hat{\mathbf{p}}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} \\
&= (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} - \langle \{\mathbf{p}_h\} + \eta_e h_e^{-1} \llbracket u_h \rrbracket, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h} \\
&= -(\text{div} \mathbf{p}_h, v_h)_{\mathcal{T}_h} + \langle \mathbf{p}_h \cdot \mathbf{n}, \{v_h\} \rangle_{\partial \mathcal{T}_h} - \sum_{K \in \mathcal{T}_h} 2\eta_e h_e^{-1} \langle u_h - \{u_h\}, v_h - \{v_h\} \rangle_{\partial K} \\
&= -(\text{div}_{\text{dg}} \mathbf{p}_h, (v_h, \{v_h\})) - \sum_{K \in \mathcal{T}_h} 2\eta_e h_e^{-1} \langle u_h - \{u_h\}, v_h - \{v_h\} \rangle_{\partial K}.
\end{aligned}$$

Hence, the (simplified) primal LDG will formally return to the stabilized hybrid mixed methods (1.14) by replacing  $\{u_h\}$  and  $\{v_h\}$  with the new trial variable  $\hat{u}_h$  and test variable  $\hat{v}_h$ , respectively. In the same way, it is readily seen that mixed LDG methods (6.8) can be formally deduced from stabilized hybrid primal (WG) methods (1.10) if the space is specified as

$$\tilde{\mathcal{Q}}_h = \{(\mathbf{q}_h, \hat{\mathbf{q}}_h) : \mathbf{q}_h \in \mathcal{Q}_h, \hat{\mathbf{q}}_h = \{\mathbf{q}_h\}\}. \quad (7.3)$$

And the mixed LDG methods (6.8) can also formally return to the WG methods (1.10) by replacing  $\{\mathbf{p}_h\}$  and  $\{\mathbf{q}_h\}$  with the new trial variable  $\hat{\mathbf{p}}_h$  and test variable  $\hat{\mathbf{q}}_h$ , respectively.

**Remark 7.1** *In order to derive the other DG schemes in a similar fashion, we need to introduce another stabilization to the hybrid method. For instance, instead of  $\mathcal{S}_u^\tau$ , we can introduce another non-symmetric stabilization term in the stabilized hybrid primal methods (1.15), i.e.,*

$$\langle \tau(\{r_e(u_h \mathbf{n})\} \cdot \mathbf{n} - \hat{u}_h), v_h - \hat{v}_h \rangle_{\partial \mathcal{T}_h}.$$

In light of (7.1), when choosing the special space with  $\beta = \mathbf{0}$ , we obtain

$$\begin{aligned}
& -(\text{div} \mathbf{p}_h, v_h)_{\mathcal{T}_h} + \langle \mathbf{p}_h \cdot \mathbf{n}, \hat{v}_h \rangle_{\partial \mathcal{T}_h} - \langle \tau(\{r_e(u_h \mathbf{n})\} \cdot \mathbf{n} - \hat{u}_h), v_h - \hat{v}_h \rangle_{\partial \mathcal{T}_h} \\
&= (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} + \langle \{\mathbf{p}_h\}, \llbracket \hat{v}_h - v_h \rrbracket \rangle_{\mathcal{E}_h} + \langle \{\mathbf{p}_h\}, \{\hat{v}_h - v_h\} \rangle_{\mathcal{E}_h^i} - \frac{1}{2} \langle \tau \llbracket r_e(u_h \mathbf{n}_e) \cdot \mathbf{n}_e - \hat{u}_h \rrbracket, \llbracket v_h - \hat{v}_h \rrbracket \rangle_{\mathcal{E}_h} \quad (7.4) \\
&= (\mathbf{p}_h, \nabla v_h)_{\mathcal{T}_h} - \langle \{\mathbf{p}_h\} + \frac{1}{2} \tau \{r_e(\llbracket u_h \rrbracket)\}, \llbracket v_h \rrbracket \rangle_{\mathcal{E}_h},
\end{aligned}$$

which gives rise to the  $\hat{\mathbf{p}}_h$  by Brezzi et al. [25] when  $\tau = \mathcal{O}(1)$  (see the DG Method of Brezzi et. al. in Table 6.1). Similarly, the following non-symmetric stabilization term can be adopted for (1.11) in place of  $\mathcal{S}_p^\eta$

$$\langle \eta(\{r_e(\mathbf{p}_h)\} - \hat{\mathbf{p}}_h) \cdot \mathbf{n}, (\mathbf{q}_h - \hat{\mathbf{q}}_h) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}.$$

Then the mixed DG method of Brezzi et. al (see Remark 6.2) can be derived when  $\eta = \mathcal{O}(1)$ .

## 7.2 Mixed methods as the limiting case of WG methods

For a given mesh, we will now try to prove the convergence of WG methods (1.10) to mixed methods (1.12) when  $\rho \rightarrow 0$ , where the stabilization parameter is set as  $\eta = \rho^{-1} h_K^{-1}$ .

Consider the  $\mathbf{H}(\text{div})$  conforming subspace  $\mathcal{Q}_h^c := \mathcal{Q}_h \cap \mathbf{H}(\text{div}, \Omega) \subset \mathcal{Q}_h$ , the mixed methods (1.12) in variational form are written as: Find  $(\mathbf{p}_h^c, u_h^c) \in \mathcal{Q}_h^c \times V_h$  such that

$$\begin{cases} (c\mathbf{p}_h^c, \mathbf{q}_h^c)_{\mathcal{T}_h} - (u_h^c, \text{div} \mathbf{q}_h^c)_{\mathcal{T}_h} = (g_1, \mathbf{q}_h^c)_{\mathcal{T}_h} & \forall \mathbf{q}_h^c \in \mathcal{Q}_h^c, \\ (\text{div} \mathbf{p}_h^c, v_h)_{\mathcal{T}_h} = (f, v_h)_{\mathcal{T}_h} + \langle g_2, v_h \rangle_{\partial \mathcal{T}_h} & \forall v_h \in V_h, \end{cases} \quad (7.5)$$



where  $g_1 = 0$  and  $g_2 = 0$  when applied to the Poisson equation (1.3). Then, by  $V_h \subset \text{div} \mathbf{Q}_h^c \subset \text{div}_h \mathbf{Q}_h \subset V_h$ , the well-posedness of the mixed methods (cf. [21, 11]) implies that

$$\|\mathbf{p}_h^c\|_{\mathbf{H}(\text{div})} + \|v_h^c\| \leq C_M \left( \|f\| + \sup_{\mathbf{q}_h^c \in \mathbf{Q}_h^c} \frac{(g_1, \mathbf{q}_h^c)_{\mathcal{T}_h}}{\|\mathbf{q}_h^c\|_{\mathbf{H}(\text{div})}} + \sup_{v_h \in V_h} \frac{\langle g_2, v_h \rangle_{\partial \mathcal{T}_h}}{\|v_h\|} \right). \quad (7.6)$$

Recall that the spaces defined on  $\mathcal{E}_h$  (see (2.6)) of WG methods are given by

$$\widehat{\mathbf{Q}}_h = \{\hat{\mathbf{p}}_h : \hat{\mathbf{p}}_h|_e \in \widehat{\mathbf{Q}}(e) \mathbf{n}_e, \forall e \in \mathcal{E}_h\}, \quad \widehat{Q}_h = \{\hat{p}_h : \hat{p}_h|_e \in \widehat{Q}(e), \forall e \in \mathcal{E}_h\}.$$

We make the following assumption on the finite element spaces of WG methods.

**Assumption 7.2** Assume that the spaces  $\mathbf{Q}_h$ ,  $\widehat{\mathbf{Q}}_h$  and  $V_h$  satisfy

1.  $\text{div}_h \mathbf{Q}_h = V_h$ ;
2.  $\{\{\mathbf{Q}_h\}\}_e \subset \widehat{\mathbf{Q}}(e)$ ,  $\forall e \in \mathcal{E}_h$ ;
3. There exists a constant  $C_M^I$  independent of  $h$ , such that for any  $\mathbf{p}_h \in \mathbf{Q}_h$ ,

$$\inf_{\mathbf{p}_h^I \in \mathbf{Q}_h^I} (\|\mathbf{p}_h^I - \mathbf{p}_h\| + \|\text{div}_h(\mathbf{p}_h^I - \mathbf{p}_h)\|) \leq C_M^I \sum_{e \in \mathcal{E}_h^i} h_e^{-1/2} \|\mathbf{p}_h\|_{0,e}, \quad (7.7)$$

where  $\mathbf{Q}_h^c = \mathbf{Q}_h \cap \mathbf{H}(\text{div}; \Omega)$ .

We note that the first assumption in Assumption 7.2 ensures well-posedness of the mixed methods (7.5). Several examples are given below.

**Example 7.3** Raviart-Thomas type:  $\mathbf{Q}_h = \mathbf{Q}_h^{k,RT}$ ,  $\widehat{\mathbf{Q}}(e) = \mathcal{P}_k(e)$ ,  $V_h = V_h^k$ , for  $k \geq 0$ .

**Example 7.4** Brezzi-Douglas-Marini type:  $\mathbf{Q}_h = \mathbf{Q}_h^{k+1}$ ,  $\widehat{\mathbf{Q}}(e) = \mathcal{P}_{k+1}(e)$ ,  $V_h = V_h^k$ , for  $k \geq 0$ .

**Lemma 7.5** If we choose the spaces as in Example 7.4 or Example 7.3, then Assumption 7.2 holds.

**Proof.** We only sketch the proof of (7.7) in Assumption 7.2. Denote the set of degrees of freedom of RT or BDM element by  $D$ , see [21, 11]. We then define  $\mathbf{p}_h^I$  as

$$d(\mathbf{p}_h^I) = \frac{1}{|\mathcal{T}_d|} \sum_{K \in \mathcal{T}_d} d(\mathbf{p}_h|_K) \quad \forall d \in D,$$

where  $\mathcal{T}_d$  denotes the set of elements that share the degrees of freedom  $d$  and  $|\mathcal{T}_d|$  denotes the cardinality of this set. By the standard scaling argument,

$$\sum_{K \in \mathcal{T}_h} \|\mathbf{p}_h^I - \mathbf{p}_h\| \lesssim \sum_{e \in \mathcal{E}_h^i} h_e^{1/2} \|\mathbf{p}_h\|_{0,e}.$$

Then (7.7) follows from the inverse inequality.  $\blacksquare$

We rewrite the WG methods (1.10) in the variational form as: Find  $(\mathbf{p}_h^\eta, u_h^\eta, \hat{\mathbf{p}}_h^\eta) \in \mathbf{Q}_h \times V_h \times \widehat{\mathbf{Q}}_h$  such that for any  $(\mathbf{q}_h, v_h, \hat{\mathbf{q}}_h) \in \mathbf{Q}_h \times V_h \times \widehat{\mathbf{Q}}_h$

$$\begin{cases} (c\mathbf{p}_h^\eta, \mathbf{q}_h)_{\mathcal{T}_h} + \rho^{-1} \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{q}_h - \hat{\mathbf{q}}_h) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} + (\nabla u_h^\eta, \mathbf{q}_h)_{\mathcal{T}_h} - \langle u_h^\eta, \hat{\mathbf{q}}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = 0, \\ -(\mathbf{p}_h^\eta, \nabla v_h)_{\partial \mathcal{T}_h} + \langle \hat{\mathbf{p}}_h^\eta \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} = (f, v_h). \end{cases} \quad (7.8)$$

**Theorem 7.6** Under the Assumption 7.2, WG methods (1.10) converge to the mixed methods (1.12) as  $\rho \rightarrow 0$  with  $\eta = \rho^{-1}h_K^{-1}$ . More precisely, we have

$$\|\mathbf{p}_h^\eta - \mathbf{p}_h^c\|_{\mathbf{H}_h(\text{div})} + \|u_h^\eta - u_h^c\| \leq C_{w,3}\rho^{1/2}\|f\|, \quad (7.9)$$

where  $C_{w,3}$  is independent of both mesh size  $h$  and  $\rho$ .

**Proof.** From the assumption  $\{\{\mathbf{Q}_h\}\}_e \subset \widehat{Q}(e)$ , by taking  $\mathbf{q}_h = \mathbf{q}_h^c$  and  $\hat{\mathbf{q}}_h|_e = (\mathbf{q}_h^c \cdot \mathbf{n}_e)\mathbf{n}_e$  in (7.8) and integrating by parts, we see that  $(\mathbf{p}_h^\eta, u_h^\eta)$  satisfies

$$(c\mathbf{p}_h^\eta, \mathbf{q}_h^c)_{\mathcal{T}_h} - (u_h^\eta, \text{div} \mathbf{q}_h^c)_{\mathcal{T}_h} = 0 \quad \forall \mathbf{q}_h^c \in \mathbf{Q}_h^c. \quad (7.10)$$

Subtracting (7.5) from (7.10) and the second equation of (7.8), we have

$$\begin{cases} (c(\mathbf{p}_h^\eta - \mathbf{p}_h^c), \mathbf{q}_h^c)_{\mathcal{T}_h} - (u_h^\eta - u_h^c, \text{div} \mathbf{q}_h^c)_{\mathcal{T}_h} = 0 & \forall \mathbf{q}_h^c \in \mathbf{Q}_h^c, \\ (\text{div}(\mathbf{p}_h^\eta - \mathbf{p}_h^c), v_h)_{\mathcal{T}_h} = \langle (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} & \forall v_h \in V_h. \end{cases} \quad (7.11)$$

Noting that  $\mathbf{p}_h^\eta \notin \mathbf{Q}_h^c$ , we have that, for any  $\mathbf{p}_h^I \in \mathbf{Q}_h^c$ ,

$$\begin{cases} (c(\mathbf{p}_h^I - \mathbf{p}_h^c), \mathbf{q}_h^c)_{\mathcal{T}_h} - (u_h^\eta - u_h^c, \text{div} \mathbf{q}_h^c)_{\mathcal{T}_h} = (c(\mathbf{p}_h^I - \mathbf{p}_h^\eta), \mathbf{q}_h^c)_{\mathcal{T}_h} & \forall \mathbf{q}_h^c \in \mathbf{Q}_h^c, \\ (\text{div}(\mathbf{p}_h^I - \mathbf{p}_h^c), v_h)_{\mathcal{T}_h} = \langle (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} + (\text{div}(\mathbf{p}_h^I - \mathbf{p}_h^\eta), v_h)_{\mathcal{T}_h} & \forall v_h \in V_h. \end{cases} \quad (7.12)$$

Because  $(\mathbf{p}_h^I - \mathbf{p}_h^c) \in \mathbf{Q}_h^c$ ,  $(u_h^\eta - u_h^c) \in V_h$ , by the well-posedness of the mixed methods (7.6), trace inequality, inverse inequality and Cauchy inequality, we have

$$\begin{aligned} & \|\mathbf{p}_h^I - \mathbf{p}_h^c\|_{\mathbf{H}(\text{div})} + \|u_h^\eta - u_h^c\| \\ & \leq C_M \left( \sup_{\mathbf{q}_h^c \in \mathbf{Q}_h^c} \frac{(c(\mathbf{p}_h^I - \mathbf{p}_h^\eta), \mathbf{q}_h^c)_{\mathcal{T}_h}}{\|\mathbf{q}_h^c\|_{\mathbf{H}(\text{div})}} + \sup_{v_h \in V_h} \frac{\langle (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, v_h \rangle_{\partial \mathcal{T}_h} + (\text{div}(\mathbf{p}_h^I - \mathbf{p}_h^\eta), v_h)_{\mathcal{T}_h}}{\|v_h\|} \right) \\ & \lesssim \|\mathbf{p}_h^I - \mathbf{p}_h^\eta\| + \|\text{div}_h(\mathbf{p}_h^I - \mathbf{p}_h^\eta)\| + \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}^{1/2}. \end{aligned}$$

Hence, by Assumption 7.2 and inverse inequality, we have

$$\begin{aligned} \|\mathbf{p}_h^\eta - \mathbf{p}_h^c\|_{\mathbf{H}(\text{div})} + \|u_h^\eta - u_h^c\| & \lesssim \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}^{1/2} + \inf_{\mathbf{p}_h^I \in \mathbf{Q}_h^c} (\|\mathbf{p}_h^I - \mathbf{p}_h^\eta\| + \|\text{div}_h(\mathbf{p}_h^I - \mathbf{p}_h^\eta)\|) \\ & \lesssim \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}^{1/2} + \sum_{e \in \mathcal{E}_h^i} h_e^{-1/2} \|[\mathbf{p}_h^\eta]\|_{0,e}. \end{aligned}$$

From the fact that

$$\langle (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} = 2\langle \{\{\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta\}\}, \{\{\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta\}\} \rangle_{\mathcal{E}_h} + \frac{1}{2} \langle [\mathbf{p}_h^\eta], [\mathbf{p}_h^\eta] \rangle_{\mathcal{E}_h},$$

we obtain

$$\begin{aligned} \|\mathbf{p}_h^\eta - \mathbf{p}_h^c\|_{\mathbf{H}(\text{div})} + \|u_h^\eta - u_h^c\| & \lesssim \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}^{1/2} + \sum_{e \in \mathcal{E}_h^i} h_e^{-1/2} \|[\mathbf{p}_h^\eta]\|_{0,e} \\ & \lesssim \langle h^{-1}(\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n}, (\mathbf{p}_h^\eta - \hat{\mathbf{p}}_h^\eta) \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h}^{1/2} \lesssim \rho^{1/2} \|f\|, \end{aligned}$$

where we used Corollary 4.8 in the last step. This completes the proof.  $\blacksquare$

(a) From WG to RT:  $\eta = \rho^{-1}h^{-1}$ ,  $k = 0$ , uniform grid

$\rho$	$\ u_h^\eta - u_h^{c,RT}\ $	$\rho^\alpha$	$\ \mathbf{p}_h^\eta - \mathbf{p}_h^{c,RT}\ _0$	$\rho^\alpha$	$\ \operatorname{div}_h(\mathbf{p}_h^\eta - \mathbf{p}_h^{c,RT})\ $	$\rho^\alpha$
1/4	0.003539	–	0.025589	–	0.101364	–
1/8	0.001777	0.99	0.012850	0.99	0.050819	1.00
1/16	0.000890	1.00	0.006439	1.00	0.025444	1.00

(b) From WG to RT:  $\eta = \rho^{-1}h^{-1}$ ,  $k = 1$ , uniform grid

$\rho$	$\ u_h^\eta - u_h^{c,RT}\ $	$\rho^\alpha$	$\ \mathbf{p}_h^\eta - \mathbf{p}_h^{c,RT}\ _0$	$\rho^\alpha$	$\ \operatorname{div}_h(\mathbf{p}_h^\eta - \mathbf{p}_h^{c,RT})\ $	$\rho^\alpha$
1/4	0.0003681	–	0.004955	–	0.102957	–
1/8	0.0001843	1.00	0.002482	1.00	0.051582	1.00
1/16	0.0000922	1.00	0.001242	1.00	0.025817	1.00

Table 7.1: Convergence rate from WG to RT mixed methods on 2D uniform grids

**Numerical examples on the convergence from WG methods to mixed methods** We present some numerical examples to support the theoretical results. We consider the 2D Poisson problem described in (6.25). A uniform grid with  $h = 1/4$  is fixed for different  $\rho$ 's with  $\eta = \rho^{-1}h_K^{-1}$ . First, we choose the RT-type discrete spaces in WG methods, see Example 7.3. When  $\rho \rightarrow 0$ , WG methods do converge to the mixed methods, see Table 7.1.

Next, we choose the BDM-type discrete spaces in WG methods, see Example 7.4. When  $\rho \rightarrow 0$ , WG methods do converge to BDM, see Table 7.2. Further, we observe the first-order convergence on  $\rho$  in both Table 7.1 and Table 7.2, which is 1/2-order higher than our theoretical finding in Theorem 7.6.

(a) From WG to BDM:  $\eta = \rho^{-1}h^{-1}$ ,  $k = 0$ , uniform grid

$\rho$	$\ u_h^\eta - u_h^{c,BDM}\ $	$\rho^\alpha$	$\ \mathbf{p}_h^\eta - \mathbf{p}_h^{c,BDM}\ _0$	$\rho^\alpha$	$\ \operatorname{div}_h(\mathbf{p}_h^\eta - \mathbf{p}_h^{c,BDM})\ $	$\rho^\alpha$
1/4	0.005046	–	0.045969	–	0.096506	–
1/8	0.002547	0.99	0.023223	0.99	0.048526	0.99
1/16	0.001280	0.99	0.011672	0.99	0.024332	1.00

(b) From WG to BDM:  $\eta = \rho^{-1}h^{-1}$ ,  $k = 1$ , uniform grid

$\rho$	$\ u_h^\eta - u_h^{c,BDM}\ $	$\rho^\alpha$	$\ \mathbf{p}_h^\eta - \mathbf{p}_h^{c,BDM}\ _0$	$\rho^\alpha$	$\ \operatorname{div}_h(\mathbf{p}_h^\eta - \mathbf{p}_h^{c,BDM})\ $	$\rho^\alpha$
1/4	0.000617	–	0.009329	–	0.102282	–
1/8	0.000310	0.99	0.004683	0.99	0.051316	1.00
1/16	0.000155	1.00	0.002346	1.00	0.025702	1.00

Table 7.2: Convergence rate from WG to BDM mixed methods on 2D uniform grids

### 7.3 Primal methods as the limiting case of HDG methods

For a given mesh, we next try to prove that the HDG methods (1.14) converge to primal methods (1.8) when  $\rho \rightarrow 0$  and the stabilization parameter is set to be  $\tau = \rho^{-1}h_K^{-1}$ .

Consider the  $H^1$  conforming subspace  $V_h^c = V_h \cap H_0^1(\Omega) \subset V_h$ , then the primal methods (1.8) in the

variational form are written as: Find  $(u_h^c, \mathbf{p}_h^c) \in V_h^c \times \mathbf{Q}_h$  such that

$$\begin{cases} (c\mathbf{p}_h^c, \mathbf{q}_h)_{\mathcal{T}_h} + (\nabla u_h^c, \mathbf{q}_h)_{\mathcal{T}_h} = (\mathbf{g}_1, \mathbf{q}_h)_{\mathcal{T}_h} + \langle g_2, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial\mathcal{T}_h} & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ -(\mathbf{p}_h^c, \nabla v_h^c)_{\mathcal{T}_h} = (f, v_h^c)_{\mathcal{T}_h} & \forall v_h^c \in V_h^c, \end{cases} \quad (7.13)$$

where  $\mathbf{g}_1 = 0$  and  $g_2 = 0$  when applied to the Poisson equation (1.2). Then, by  $\nabla V_h^c \subset \nabla_h V_h \subset \mathbf{Q}_h$ , the well-posedness of the primal methods (cf. [14]) implies that

$$\|\mathbf{p}_h^c\| + \|u_h^c\|_1 \leq C_p \left( \|f\|_{-1,h} + \sup_{\mathbf{q}_h \in \mathbf{Q}_h} \frac{(\mathbf{g}_1, \mathbf{q}_h)_{\mathcal{T}_h} + \langle g_2, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial\mathcal{T}_h}}{\|\mathbf{q}_h\|} \right), \quad (7.14)$$

where  $\|f\|_{-1,h} = \sup_{v_h^c \neq 0, v_h^c \in V_h^c} \frac{(f, v_h^c)_{\mathcal{T}_h}}{\|v_h^c\|_1}$ .

Recall that the space define on  $\mathcal{E}_h$  (see (2.6)) of HDG methods is given by

$$\widehat{V}_h = \{\hat{v}_h : \hat{v}_h|_e \in \widehat{V}(e), \forall e \in \mathcal{E}_h^i, \hat{v}_h|_{\mathcal{E}_h^\partial} = 0\}.$$

We make the following assumption on the finite element spaces of HDG methods.

**Assumption 7.7** Assume that the spaces  $\mathbf{Q}_h, V_h$  and  $\widehat{V}_h$  satisfy

1.  $\nabla_h V_h \subset \mathbf{Q}_h$ ;
2.  $\{V_h\}|_e \subset \widehat{V}(e), \forall e \in \mathcal{E}_h^i$ ;
3. There exists a constant  $C_p^I$  independent of  $h$ , such that for any  $u_h \in V_h$ ,

$$\inf_{u_h^I \in V_h^c} (\|u_h^I - u_h^c\| + \|\nabla_h(u_h^I - u_h^c)\|) \leq C_p^I \sum_{e \in \mathcal{E}_h} h_e^{-1/2} \|[[u_h]]\|_{0,e}, \quad (7.15)$$

where  $V_h^c = V_h \cap H^1(\Omega)$ .

We note that the first assumption in Assumption 7.7 ensures the well-posedness of the primal methods (7.13). The following example satisfies Assumption 7.7 (see the conforming relatives in [15, 14]).

**Example 7.8**  $\mathbf{Q}_h = \mathbf{Q}_h^k, V_h = V_h^{k+1}, \widehat{V}(e) = \mathcal{P}_{k+1}(e)$ , for  $k \geq 0$ .

We rewrite the HDG methods (1.14) in the variational form as: Find  $(\mathbf{p}_h^\tau, u_h^\tau, \hat{u}_h^\tau) \in \mathbf{Q}_h \times V_h \times \widehat{V}_h$  such that for any  $(\mathbf{q}_h, v_h, \hat{v}_h) \in \mathbf{Q}_h \times V_h \times \widehat{V}_h$

$$\begin{cases} (c\mathbf{p}_h^\tau, \mathbf{q}_h)_{\mathcal{T}_h} - (u_h^\tau, \operatorname{div} \mathbf{q}_h)_{\mathcal{T}_h} + \langle \hat{u}_h^\tau, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial\mathcal{T}_h} = 0, \\ (\operatorname{div} \mathbf{p}_h^\tau, v_h)_{\mathcal{T}_h} - \langle \mathbf{p}_h^\tau \cdot \mathbf{n}, \hat{v}_h \rangle_{\partial\mathcal{T}_h} + \rho^{-1} \langle h^{-1}(u_h^\tau - \hat{u}_h^\tau), v_h - \hat{v}_h \rangle_{\partial\mathcal{T}_h} = (f, v_h)_{\mathcal{T}_h}. \end{cases} \quad (7.16)$$

**Theorem 7.9** Under the Assumption 7.7, the HDG methods (1.14) converge to the primal methods (1.8) as  $\rho \rightarrow 0$  with  $\tau = \rho^{-1} h_K^{-1}$ . More precisely, we have

$$\|\mathbf{p}_h^\tau - \mathbf{p}_h^c\| + \|u_h^\tau - u_h^c\|_{1,h} \leq C_{d,3} \rho^{1/2} \|f\|_{-\bar{1},\rho,h}, \quad (7.17)$$

where  $C_{d,3}$  is independent of both mesh size  $h$  and  $\rho$ , and  $\|f\|_{-\bar{1},\rho,h} = \sup_{\hat{v}_h \in \widehat{V}_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\|\hat{v}_h\|_{\bar{1},\rho,h}}$ .

**Proof.** From the assumption  $\{V_h\}|_e \subset \widehat{V}(e)$ , by taking  $v_h = v_h^c$  and  $\hat{v}_h|_e = v_h^c|_e$  in (7.16) and integrating by parts, we see that

$$-(\mathbf{p}_h^\tau, \nabla v_h^c)_{\mathcal{T}_h} = (f, v_h^c)_{\mathcal{T}_h} \quad \forall v_h^c \in V_h^c. \quad (7.18)$$

Subtracting (7.13) from the first equation of (7.16) and (7.18), we have

$$\begin{cases} (c(\mathbf{p}_h^\tau - \mathbf{p}_h^c), \mathbf{q}_h)_{\mathcal{T}_h} + (\nabla u_h^\tau - \nabla u_h^c, \mathbf{q}_h)_{\mathcal{T}_h} = \langle u_h^\tau - \hat{u}_h^\tau, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ -(\mathbf{p}_h^\tau - \mathbf{p}_h^c, \nabla v_h^c)_{\mathcal{T}_h} = 0 & \forall v_h^c \in V_h^c. \end{cases} \quad (7.19)$$

Again, for any  $u_h^I \in V_h^c$ , we have

$$\begin{cases} (c(\mathbf{p}_h^\tau - \mathbf{p}_h^c), \mathbf{q}_h)_{\mathcal{T}_h} + (\nabla u_h^I - \nabla u_h^c, \mathbf{q}_h)_{\mathcal{T}_h} = \langle u_h^\tau - \hat{u}_h^\tau, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} + (\nabla u_h^I - \nabla u_h^\tau, \mathbf{q}_h)_{\mathcal{T}_h} & \forall \mathbf{q}_h \in \mathbf{Q}_h, \\ -(\mathbf{p}_h^\tau - \mathbf{p}_h^c, \nabla v_h^c)_{\mathcal{T}_h} = 0 & \forall v_h^c \in V_h^c. \end{cases} \quad (7.20)$$

Because  $\mathbf{p}_h^\tau - \mathbf{p}_h^c \in \mathbf{Q}_h$  and  $v_h^c - u_h^c \in V_h^c$ , using (7.14), trace inequality, inverse inequality and Cauchy inequality, we obtain

$$\begin{aligned} \|\mathbf{p}_h^\tau - \mathbf{p}_h^c\| + \|u_h^I - u_h^c\|_1 &\leq C_p \sup_{\mathbf{q}_h \in \mathbf{Q}_h} \frac{\langle u_h^\tau - \hat{u}_h^\tau, \mathbf{q}_h \cdot \mathbf{n} \rangle_{\partial \mathcal{T}_h} + (\nabla u_h^I - \nabla u_h^\tau, \mathbf{q}_h)_{\mathcal{T}_h}}{\|\mathbf{q}_h\|} \\ &\lesssim |u_h^I - u_h^\tau|_{1,h} + \langle h^{-1}(u_h^\tau - \hat{u}_h^\tau), u_h^\tau - \hat{u}_h^\tau \rangle_{\partial \mathcal{T}_h}^{1/2}. \end{aligned} \quad (7.21)$$

Noting that the local projection  $\hat{P}_h$  in (5.11) is an identity operator as  $\{V_h\}|_e \subset \widehat{V}(e)$ , and

$$\langle u_h^\tau - \hat{u}_h^\tau, u_h^\tau - \hat{u}_h^\tau \rangle_{\partial \mathcal{T}_h} = 2\langle \{u_h^\tau - \hat{u}_h^\tau\}, \{u_h^\tau - \hat{u}_h^\tau\} \rangle_{\mathcal{E}_h} + \frac{1}{2} \langle \llbracket u_h^\tau \rrbracket, \llbracket u_h^\tau \rrbracket \rangle_{\mathcal{E}_h}. \quad (7.22)$$

Therefore, Assumption 7.7, (7.21), and (7.22) imply that

$$\begin{aligned} \|\mathbf{p}_h^\tau - \mathbf{p}_h^c\| + \|u_h^\tau - u_h^c\|_{1,h} &\leq \inf_{u_h^I \in V_h^c} (\|\mathbf{p}_h^\tau - \mathbf{p}_h^c\| + \|u_h^I - u_h^c\|_1 + \|u_h^\tau - u_h^I\|_{1,h}) \\ &\lesssim \langle h^{-1}(u_h^\tau - \hat{u}_h^\tau), u_h^\tau - \hat{u}_h^\tau \rangle_{\partial \mathcal{T}_h}^{1/2} + \inf_{u_h^I \in V_h^c} \|u_h^\tau - u_h^I\|_{1,h} \\ &\lesssim \langle h^{-1}(u_h^\tau - \hat{u}_h^\tau), u_h^\tau - \hat{u}_h^\tau \rangle_{\partial \mathcal{T}_h}^{1/2} + \sum_{e \in \mathcal{E}_h} h_e^{-1/2} \|\llbracket u_h \rrbracket\|_{0,e} \\ &\lesssim \langle h^{-1}(u_h^\tau - \hat{u}_h^\tau), u_h^\tau - \hat{u}_h^\tau \rangle_{\partial \mathcal{T}_h}^{1/2} \\ &\lesssim \rho^{1/2} \|f\|_{-\bar{1}, \rho, h}, \end{aligned}$$

where Corollary 5.9 was used in the last step. ■

**Remark 7.10** We have  $\hat{P}_h$  as an identity operator in the definition of  $\|\cdot\|_{\bar{1}, \rho, h}$  (see (5.11)). Therefore, when  $\rho \lesssim 1$ , we have

$$\begin{aligned} \inf_{\hat{v}_h \in \widehat{V}_h} \|\tilde{v}_h\|_{\bar{1}, \rho, h}^2 &= \inf_{\hat{v}_h \in \widehat{V}_h} (\nabla v_h, \nabla v_h)_{\mathcal{T}_h} + \sum_{K \in \mathcal{T}_h} \rho^{-1} h_K^{-1} \langle v_h - \hat{v}_h, v_h - \hat{v}_h \rangle_{\partial K} \\ &\simeq (\nabla v_h, \nabla v_h)_{\mathcal{T}_h} + \rho^{-1} \sum_{e \in \mathcal{E}_h} h_e^{-1} \|\llbracket v_h \rrbracket\|_{0,e}^2 \gtrsim \|v_h\|_{1,h}. \end{aligned}$$

Hence, when  $\rho \lesssim 1$ ,

$$\|f\|_{-\bar{1}, \rho, h} = \sup_{\tilde{v}_h \in \widehat{V}_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\|\tilde{v}_h\|_{\bar{1}, \rho, h}} = \sup_{v_h \in V_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\inf_{\hat{v}_h \in \widehat{V}_h} \|\tilde{v}_h\|_{\bar{1}, \rho, h}} \lesssim \sup_{v_h \in V_h} \frac{(f, v_h)_{\mathcal{T}_h}}{\|v_h\|_{1,h}} \lesssim \|f\|,$$

which means that the solutions of HDG methods converge to the those of primal methods of order  $\rho^{1/2}$  at least.

**Numerical examples on the convergence from HDG methods to primal methods** We present some numerical examples to support the theoretical results. We consider the 2D Poisson problem described in (6.25). A uniform grid with  $h = 1/4$  is fixed for different  $\rho$ 's with  $\tau = \rho^{-1}h_K^{-1}$ . We choose the discrete spaces in Example 7.8 for HDG methods. We observe the convergence from HDG methods to primal methods in Table 7.3. Similar to the numerical examples from WG to mixed methods, the convergence rate seems to be of order one, which is higher than our theoretical finding in Theorem 7.9.

(a) $\tau = \rho^{-1}h^{-1}$ : $k = 0$ , uniform grid					(b) $\tau = \rho^{-1}h^{-1}$ , $k = 1$ , uniform grid				
$\rho$	$\ u_h^\tau - u_h^c\ _0$	$\rho^\alpha$	$ u_h^\tau - u_h^c _{1,h}$	$\rho^\alpha$	$\rho$	$\ u_h^\tau - u_h^c\ _0$	$\rho^\alpha$	$ u_h^\tau - u_h^c _{1,h}$	$\rho^\alpha$
1/4	0.307403	—	1.639017	—	1/4	0.037789	—	0.686199	—
1/8	0.205585	0.58	1.066058	0.62	1/8	0.022577	0.74	0.383381	0.84
1/16	0.137903	0.58	0.727442	0.55	1/16	0.014676	0.62	0.240527	0.67
1/32	0.088576	0.64	0.484124	0.59	1/32	0.009914	0.57	0.165801	0.54
1/64	0.053204	0.73	0.300815	0.69	1/64	0.006539	0.60	0.114649	0.53
1/128	0.029933	0.83	0.173458	0.79	1/128	0.004046	0.69	0.074111	0.63
1/256	0.016031	0.90	0.094330	0.88	1/256	0.002331	0.80	0.044007	0.75
1/512	0.008321	0.95	0.049389	0.93	1/512	0.001269	0.88	0.024376	0.85

Table 7.3: Convergence rate from HDG to primal methods on 2D uniform grids

## 7.4 Duality relationship

To make DG-derivatives good approximations of classical weak derivatives, the dual relationship between gradient and divergence operators should be preserved as shown in Lemma 2.1. The (stabilized) hybrid primal methods and (stabilized) hybrid mixed methods approximately satisfy conditions (i) and (ii) in Lemma 2.1, respectively, and the DG methods adopt condition (iii) approximately. In this subsection, we discuss the duality relationship of various Galerkin methods in the context of convex optimization.

To begin with, we know that the primal form (1.2) can be characterized as the following saddle point problem: Find  $(\mathbf{p}, u) \in \mathbf{L}^2(\Omega) \times H_0^1(\Omega)$  such that

$$L(\mathbf{p}, u) = \inf_{v \in H_0^1(\Omega)} \sup_{\mathbf{q} \in \mathbf{L}^2(\Omega)} L(\mathbf{q}, v),$$

where

$$L(\mathbf{q}, v) := -(\mathbf{q}, \nabla v)_\Omega - \frac{1}{2}(c\mathbf{q}, \mathbf{q})_\Omega - (f, v)_\Omega.$$

In contrast, the mixed form of the elliptic problem is equivalent to the following saddle point problem: Find  $(\mathbf{p}, u) \in \mathbf{H}(\text{div}, \Omega) \times L^2(\Omega)$  such that

$$L^*(\mathbf{p}, u) = \sup_{\mathbf{q} \in \mathbf{H}(\text{div}, \Omega)} \inf_{v \in L^2(\Omega)} L^*(\mathbf{q}, v),$$

where

$$L^*(\mathbf{q}, v) := (\text{div} \mathbf{q}, v)_\Omega - \frac{1}{2}(c\mathbf{q}, \mathbf{q})_\Omega - (f, v)_\Omega.$$

The above two saddle point problems are dual with each other from the point of view of duality in convex optimization [11, 60].

To mimic the above duality at the discrete level, we define the following optimization target

$$L_h(\tilde{\mathbf{q}}_h, v_h) = -(\nabla_{\text{dg}} v_h, \tilde{\mathbf{q}}_h)_\Omega - \frac{1}{2}(c\mathbf{q}_h, \mathbf{q}_h)_\Omega - (f_h, v_h)_\Omega,$$

and the hybrid primal methods (1.9) can be derived from the optimization problem

$$\inf_{v_h \in V_h} \sup_{\tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h} L_h(\tilde{\mathbf{q}}_h, v_h). \quad (7.23)$$

Furthermore, the hybrid mixed methods (1.13) can be derived from the optimization problem

$$\sup_{\mathbf{q}_h \in \mathbf{Q}_h} \inf_{\tilde{v}_h \in \tilde{V}_h} L_h^*(\mathbf{q}_h, \tilde{v}_h), \quad (7.24)$$

where

$$L_h^*(\mathbf{q}_h, \tilde{v}_h) := (\text{div}_{\text{dg}} \mathbf{q}_h, \tilde{v}_h)_\Omega - \frac{1}{2}(c\mathbf{q}_h, \mathbf{q}_h)_\Omega - (f_h, v_h)_\Omega.$$

We immediately see that hybrid primal and hybrid mixed methods are dual to each other as (7.23) and (7.24) are mutually dual in the context of convex optimization.

A similar argument can be applied to the stabilized methods. Given the stabilized hybrid primal (WG) methods (1.10), we can prove that it is equivalent to the optimization problem

$$\inf_{v_h \in V_h} \sup_{\tilde{\mathbf{q}}_h \in \tilde{\mathbf{Q}}_h} L_h(\tilde{\mathbf{q}}_h, v_h) - \frac{1}{2} \langle \eta(\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n}, (\mathbf{p}_h - \hat{\mathbf{p}}_h) \cdot \mathbf{n} \rangle_{\partial\mathcal{T}_h}, \quad (7.25)$$

The stabilized hybrid mixed (HDG) methods (1.14) is equivalent to the optimization problem

$$\sup_{\mathbf{q}_h \in \mathbf{Q}_h} \inf_{\tilde{v}_h \in \tilde{V}_h} L_h^*(\mathbf{q}_h, \tilde{v}_h) + \frac{1}{2} \langle \tau(v_h - \hat{v}_h), v_h - \hat{v}_h \rangle_{\partial\mathcal{T}_h}. \quad (7.26)$$

Since primal DG and mixed DG can be deduced formally from stabilized hybrid mixed methods and stabilized hybrid primal methods, respectively, by taking  $\hat{u}_h = \{u_h\}$  and  $\hat{\mathbf{p}}_h = \{\mathbf{p}_h\}$ , respectively, they are formally dual with each other as well.

## 8 Summary

In this paper, we present a unified study for the design of various finite element methods through the concept of DG-derivatives. Then we compare these methods and show their relationships in Table 1.1. We find that the schemes of stabilized hybrid mixed methods and stabilized hybrid primal methods are mutually dual, and hybrid primal and hybrid mixed are dual with each other as well.

Furthermore, we see that each finite element method approximates either a primal or mixed form of the problem. Continuity of  $u$  is needed for the primal form, and on the other hand,  $\mathbf{H}(\text{div})$  continuity of  $\mathbf{p}$  is required for the mixed form. To design finite element methods, we have to use certain mechanics to make the numerical approximations  $u_h$  or  $\mathbf{p}_h$  satisfy certain continuity requirements. There are five approaches: (1) choosing a finite element space with strongly continuity (conforming FEMs); (2) choosing a finite element space with weakly continuity (nonconforming FEMs); (3) using the Lagrange multiplier to force the continuity (hybrid methods); and (4) using the Lagrange multiplier and stabilization to force the continuity (HDG and WG methods); (5) adding a penalty term in the weak form (DG methods).

Through this study, we derive the mixed DG methods. The well-posedness of this method is proven, and optimal error estimates are obtained. We also present rigorous proofs of the convergence from WG to mixed methods as well as the convergence from HDG to primal methods, as the stabilization parameter goes to infinity.

There are some other important FEMs that are not covered by our framework, such as finite volume methods [61], mimetic finite difference methods [24, 23], and virtual element methods [10, 20]. Our study is mainly done for second-order elliptic boundary value problems. Extension of this study to higher-order problems is currently under investigation and will be reported in a future work.

## References

- [1] J. H. Argyris. Energy theorems and structural analysis: a generalized discourse with applications on energy principles of structural analysis including the effects of temperature and non-linear stress-strain relations. *Aircraft Engineering and Aerospace Technology*, 26(10):347–356, 1954.
- [2] D. N. Arnold. An interior penalty finite element method with discontinuous elements. *SIAM Journal on Numerical Analysis*, 19(4):742–760, 1982.
- [3] D. N. Arnold and F. Brezzi. Mixed and nonconforming finite element methods: implementation, postprocessing and error estimates. *RAIRO-Modélisation mathématique et analyse numérique*, 19(1):7–32, 1985.
- [4] D. N. Arnold, F. Brezzi, B. Cockburn, and L. D. Marini. Unified analysis of discontinuous Galerkin methods for elliptic problems. *SIAM Journal on Numerical Analysis*, 39(5):1749–1779, 2002.
- [5] J. P. Aubin. Approximation des problèmes aux limites non homogènes pour des opérateurs non linéaires. *Journal of Mathematical Analysis and Applications*, 30(3):510–521, 1970.
- [6] I. Babuška and M. Zlámal. Nonconforming elements in the finite element method with penalty. *SIAM Journal on Numerical Analysis*, 10(5):863–875, 1973.
- [7] I. Babuška, J. T. Oden, and J. K. Lee. Mixed-hybrid finite element approximations of second-order elliptic boundary-value problems. *Computer Methods in Applied Mechanics and Engineering*, 11(2):175–206, 1977.
- [8] F. Bassi, S. Rebay, G. Mariotti, S. Pedinotti, and M. Savini. A high-order accurate discontinuous finite element method for inviscid and viscous turbomachinery flows. In *Proceedings of the 2nd European Conference on Turbomachinery Fluid Dynamics and Thermodynamics*, pages 99–109. Technologisch Instituut, Antwerpen, Belgium, 1997.
- [9] R. Becker, E. Burman, P. Hansbo, and M. Larson. A reduced P1-discontinuous Galerkin method. Technical report, Chalmers Finite Element Center Preprint 2003-13, 2004.
- [10] L. Beirão da Veiga, F. Brezzi, A. Cangiani, G. Manzini, L. D. Marini, and A. Russo. Basic principles of virtual element methods. *Mathematical Models and Methods in Applied Sciences*, 23(1):199–214, 2013.
- [11] D. Boffi, F. Brezzi, and M. Fortin. *Mixed finite element methods and applications*, volume 44 of *Springer Series in Computational Mathematics*. Springer, 2013.



- [12] S. C. Brenner. Poincaré–Friedrichs inequalities for piecewise  $H_1$  functions. *SIAM Journal on Numerical Analysis*, 41(1):306–324, 2003.
- [13] S. C. Brenner. Forty years of the Crouzeix-Raviart element. *Numerical Methods for Partial Differential Equations*, 31(2):367–396, 2015.
- [14] S. C. Brenner and L. R. Scott. *The mathematical theory of finite element methods*, volume 15. Springer Science & Business Media, 2007.
- [15] S. C. Brenner and L.-Y. Sung.  $C^0$  interior penalty methods for fourth order elliptic boundary value problems on polygonal domains. *Journal of Scientific Computing*, 22(1-3):83–118, 2005.
- [16] F. Brezzi. On the existence, uniqueness and approximation of saddle-point problems arising from Lagrangian multipliers. *Revue française d’automatique, informatique, recherche opérationnelle. Analyse numérique*, 8(2):129–151, 1974.
- [17] F. Brezzi, J. Douglas Jr, R. Durán, and M. Fortin. Mixed finite elements for second order elliptic problems in three variables. *Numerische Mathematik*, 51(2):237–250, 1987.
- [18] F. Brezzi, J. Douglas Jr, M. Fortin, and L. D. Marini. Efficient rectangular mixed finite elements in two and three space variables. *RAIRO-Modélisation mathématique et analyse numérique*, 21(4):581–604, 1987.
- [19] F. Brezzi, J. Douglas Jr, and L. D. Marini. Two families of mixed finite elements for second order elliptic problems. *Numerische Mathematik*, 47(2):217–235, 1985.
- [20] F. Brezzi, R. S. Falk, and L. D. Marini. Basic principles of mixed virtual element methods. *ESAIM: Mathematical Modelling and Numerical Analysis*, 48(4):1227–1240, 2014.
- [21] F. Brezzi and M. Fortin. *Mixed and hybrid finite element methods*, volume 15 of *Springer Series in Computational Mathematics*. Springer-Verlag, 1991.
- [22] F. Brezzi, T. Hughes, L. D. Marini, and A. Masud. Mixed discontinuous Galerkin methods for Darcy flow. *Journal of Scientific Computing*, 22(1):119–145, 2005.
- [23] F. Brezzi, K. Lipnikov, and M. Shashkov. Convergence of the mimetic finite difference method for diffusion problems on polyhedral meshes. *SIAM Journal on Numerical Analysis*, 43(5):1872–1896, 2005.
- [24] F. Brezzi, K. Lipnikov, and V. Simoncini. A family of mimetic finite difference methods on polygonal and polyhedral meshes. *Mathematical Models and Methods in Applied Sciences*, 15(10):1533–1551, 2005.
- [25] F. Brezzi, G. Manzini, D. Marini, P. Pietra, and A. Russo. Discontinuous finite elements for diffusion problems. *Atti Convegno in onore di F. Brioschi (Milano 1997), Istituto Lombardo, Accademia di Scienze e Lettere*, pages 197–217, 1999.
- [26] F. Brezzi, G. Manzini, L. D. Marini, P. Pietra, and A. Russo. Discontinuous Galerkin approximations for elliptic problems. *Numerical Methods for Partial Differential Equations*, 16(4):365–378, 2000.
- [27] E. Burman and B. Stamm. Local discontinuous Galerkin method for diffusion equations with reduced stabilization. *Communications in Computational Physics*, 5:498–514, 2009.

- [28] J. Carrero, B. Cockburn, and D. Schötzau. Hybridized globally divergence-free LDG methods. Part I: The Stokes problem. *Mathematics of Computation*, 75(254):533–563, 2006.
- [29] J. Céa. Approximation variationnelle des problèmes aux limites. *Ann. Inst. Fourier (Grenoble)*, 14(fasc. 2):345–444, 1964.
- [30] W. Chen, F. Wang, and Y. Wang. Weak Galerkin method for the coupled Darcy–Stokes flow. *IMA Journal of Numerical Analysis*, 36(2):897–921, 2016.
- [31] Y. Chen and B. Cockburn. Analysis of variable-degree HDG methods for convection-diffusion equations. Part I: general nonconforming meshes. *IMA Journal of Numerical Analysis*, 32(4):1267–1293, 2012.
- [32] Y. Chen and B. Cockburn. Analysis of variable-degree HDG methods for convection-diffusion equations. Part II: Semimatching nonconforming meshes. *Mathematics of Computation*, 83(285):87–111, 2014.
- [33] Y. Chen, J. Huang, X. Huang, and Y. Xu. On the local discontinuous Galerkin method for linear elasticity. *Mathematical Problems in Engineering*, 2010, 2010.
- [34] E. Chung, B. Cockburn, and G. Fu. The staggered DG method is the limit of a hybridizable DG method. *SIAM Journal on Numerical Analysis*, 52(2):915–932, 2014.
- [35] P. G. Ciarlet. *The finite element method for elliptic problems*, volume 4 of *Studies in Mathematics and its Applications*. North-Holland, 1978.
- [36] P. G. Ciarlet and C. Wagschal. Multipoint Taylor formulas and applications to the finite element method. *Numerische Mathematik*, 17(1):84–100, 1971.
- [37] B. Cockburn. Static condensation, hybridization, and the devising of the HDG methods. In *Building Bridges: Connections and Challenges in Modern Approaches to Numerical Partial Differential Equations*, pages 129–177. Springer, 2016.
- [38] B. Cockburn, B. Dong, and J. Guzmán. A superconvergent LDG-hybridizable Galerkin method for second-order elliptic problems. *Mathematics of Computation*, 77(264):1887–1916, 2008.
- [39] B. Cockburn and G. Fu. Devising superconvergent HDG methods with symmetric approximate stresses for linear elasticity by  $\mathbf{M}$ -decompositions. *IMA Journal of Numerical Analysis*, 2017.
- [40] B. Cockburn, G. Fu, and F. Sayas. Superconvergence by  $M$ -decompositions. Part I: General theory for HDG methods for diffusion. *Mathematics of Computation*, 86(306):1609–1641, 2017.
- [41] B. Cockburn and J. Gopalakrishnan. A characterization of hybridized mixed methods for second order elliptic problems. *SIAM Journal on Numerical Analysis*, 42(1):283–301, 2004.
- [42] B. Cockburn and J. Gopalakrishnan. Error analysis of variable degree mixed methods for elliptic problems via hybridization. *Mathematics of Computation*, 74(252):1653–1677, 2005.
- [43] B. Cockburn and J. Gopalakrishnan. Incompressible finite elements via hybridization. Part I: The Stokes system in two space dimensions. *SIAM Journal on Numerical Analysis*, 43(4):1627–1650, 2005.
- [44] B. Cockburn and J. Gopalakrishnan. Incompressible finite elements via hybridization. Part II: The Stokes system in three space dimensions. *SIAM Journal on Numerical Analysis*, 43(4):1651–1672, 2005.

- [45] B. Cockburn and J. Gopalakrishnan. New hybridization techniques. *GAMM-Mitteilungen*, 28(2):154–182, 2005.
- [46] B. Cockburn, J. Gopalakrishnan, and R. Lazarov. Unified hybridization of discontinuous Galerkin, mixed, and continuous Galerkin methods for second order elliptic problems. *SIAM Journal on Numerical Analysis*, 47(2):1319–1365, 2009.
- [47] B. Cockburn, J. Gopalakrishnan, and F. Sayas. A projection-based error analysis of HDG methods. *Mathematics of Computation*, 79(271):1351–1367, 2010.
- [48] B. Cockburn, G. E. Karniadakis, and C.-W. Shu. The development of discontinuous Galerkin methods. In *Discontinuous Galerkin Methods*, pages 3–50. Springer, 2000.
- [49] B. Cockburn and K. Mustapha. A hybridizable discontinuous Galerkin method for fractional diffusion problems. *Numerische Mathematik*, 130(2):293–314, 2015.
- [50] B. Cockburn, R. H. Nochetto, and W. Zhang. Contraction property of adaptive hybridizable discontinuous Galerkin methods. *Mathematics of Computation*, 85(299):1113–1141, 2016.
- [51] B. Cockburn, W. Qiu, and K. Shi. Conditions for superconvergence of HDG methods for second-order elliptic problems. *Mathematics of Computation*, 81(279):1327–1353, 2012.
- [52] B. Cockburn, W. Qiu, and K. Shi. Superconvergent HDG methods on isoparametric elements for second-order elliptic problems. *SIAM Journal on Numerical Analysis*, 50(3):1417–1432, 2012.
- [53] B. Cockburn and J. Shen. A hybridizable discontinuous Galerkin method for the  $p$ -Laplacian. *SIAM Journal on Scientific Computing*, 38(1):A545–A566, 2016.
- [54] B. Cockburn and C.-W. Shu. The local discontinuous Galerkin method for time-dependent convection-diffusion systems. *SIAM Journal on Numerical Analysis*, 35(6):2440–2463, 1998.
- [55] B. Cockburn and W. Zhang. A posteriori error estimates for HDG methods. *Journal of Scientific Computing*, 51(3):582–607, 2012.
- [56] B. Cockburn and W. Zhang. A posteriori error analysis for hybridizable discontinuous Galerkin methods for second order elliptic problems. *SIAM Journal on Numerical Analysis*, 51(1):676–693, 2013.
- [57] R. Courant. Variational methods for the solution of problems of equilibrium and vibrations. *Bulletin of the American Mathematical Society*, 49(1):1–23, 1943.
- [58] M. Crouzeix and P. A. Raviart. Conforming and nonconforming finite element methods for solving the stationary Stokes equations I. *Revue française d’automatique, informatique, recherche opérationnelle. Mathématique*, 7(3):33–75, 1973.
- [59] J. Douglas, Jr and T. Dupont. Interior penalty procedures for elliptic and parabolic Galerkin methods. In *Computing Methods in Applied Sciences*, pages 207–216. Springer, 1976.
- [60] I. Ekeland and R. Temam. *Convex analysis and variational problems*. SIAM, 1976.
- [61] R. Eymard, T. Gallouët, and R. Herbin. Finite volume methods. *Handbook of numerical analysis*, 7:713–1018, 2000.
- [62] K. Feng. Finite difference method based on variation principle. *Communication on Applied Mathematics and Computation*, 2(4):237–261, 1965.

- [63] M. Fortin. A three-dimensional quadratic nonconforming element. *Numerische Mathematik*, 46(2):269–279, 1985.
- [64] M. Fortin and M. Soulie. A non-conforming piecewise quadratic finite element on triangles. *International Journal for Numerical Methods in Engineering*, 19(4):505–520, 1983.
- [65] B. Fraeijs de Veubeke. Displacement and equilibrium models in the finite element method. *Stress analysis*, pages 145–197, 1965.
- [66] G. Fu, B. Cockburn, and H. Stolarski. Analysis of an HDG method for linear elasticity. *International Journal for Numerical Methods in Engineering*, 102(3-4):551–575, 2015.
- [67] S. Gong, S. Wu, and J. Xu. New hybridized mixed methods for linear elasticity and optimal multilevel solvers. *arXiv preprint arXiv:1704.07540*, 2017.
- [68] R. D. Henshell. On hybrid finite elements. *The Mathematics of Finite Elements and Applications*, pages 299–312, 1973.
- [69] Q. Hong, J. Hu, S. Shu, and J. Xu. A discontinuous Galerkin method for the fourth-order curl problem. *Journal of Computational Mathematics*, 30(6):565–578, 2012.
- [70] Q. Hong and J. Kraus. Uniformly stable discontinuous Galerkin discretization and robust iterative solution methods for the Brinkman problem. *SIAM Journal on Numerical Analysis*, 54(5):2750–2774, 2016.
- [71] Q. Hong and J. Kraus. Parameter-robust stability of classical three-field formulation of Biot’s consolidation model. *arXiv preprint arXiv:1706.00724*, 2017.
- [72] Q. Hong, J. Kraus, J. Xu, and L. Zikatanov. A robust multigrid method for discontinuous Galerkin discretizations of Stokes and linear elasticity equations. *Numerische Mathematik*, 132(1):23–49, 2016.
- [73] Q. Hong, S. Wu, and J. Xu. Extended Galerkin methods for second order elliptic problems. *Preprint*, 2018.
- [74] Q. Hong and J. Xu. Uniformly stable results and error estimates for HDG and WG methods. *Preprint*, 2017.
- [75] A. Hrennikoff. Solution of problems of elasticity by the framework method. *Journal of Applied Mechanics*, 8(4):169–175, 1941.
- [76] J. Hu and S. Zhang. A canonical construction of  $H^m$ -nonconforming triangular finite elements. *preprint*, 2017.
- [77] R. E. Jones. A generalization of the direct-stiffness method of structural analysis. *AIAA Journal*, 2(5):821–826, 1964.
- [78] H. Kabaria, A. J. Lew, and B. Cockburn. A hybridizable discontinuous galerkin formulation for non-linear elasticity. *Computer Methods in Applied Mechanics and Engineering*, 283:303–329, 2015.
- [79] J. L. Lions. Problèmes aux limites non homogènes à données irrégulières: Une méthode d’approximation., in *Numerical Analysis of Partial Differential Equations (C.I.M.E.2 Ciclo, Ispra.1967)*. Edizioni Cremonese, Rome, pages 283–292, 1968.

- [80] H. Liu and J. Yan. The direct discontinuous Galerkin (DDG) methods for diffusion problems. *SIAM Journal on Numerical Analysis*, 47(1):675–698, 2009.
- [81] H. Liu and J. Yan. The direct discontinuous Galerkin (DDG) method for diffusion with interface corrections. *Communications in Computational Physics*, 8(3):541, 2010.
- [82] S. G. Mikhlin. *Variational methods in mathematical physics*, volume 50. Pergamon Press; [distributed by Macmillan, New York], 1964 (original Russian edition: 1957).
- [83] L. Mu, J. Wang, and X. Ye. Weak Galerkin finite element methods on polytopal meshes. *International Journal of Numerical Analysis and Modeling*, 12:31–53, 2015.
- [84] L. Mu, J. Wang, X. Ye, and S. Zhang. A weak Galerkin finite element method for the Maxwell equations. *Journal of Scientific Computing*, 65(1):363–386, 2015.
- [85] J. Nédélec. A new family of mixed finite elements in  $R^3$ . *Numerische Mathematik*, 50(1):57–81, 1986.
- [86] J. C. Nédélec. Mixed finite elements in  $\mathbb{R}^3$ . *Numerische Mathematik*, 35(3):315–341, 1980.
- [87] R. A. Nicolaides. On a class of finite elements generated by lagrange interpolation. *SIAM Journal on Numerical Analysis*, 9(3):435–445, 1972.
- [88] I. Oikawa. A hybridized discontinuous Galerkin method with reduced stabilization. *Journal of Scientific Computing*, 65(1):327–340, 2015.
- [89] C. Park and D. Sheen. P1-nonconforming quadrilateral finite element methods for second-order elliptic problems. *SIAM Journal on Numerical Analysis*, 41(2):624–640, 2003.
- [90] T. H. H. Pian. Derivation of element stiffness matrices by assumed stress distributions. *AIAA Journal*, 2(7):1333–1336, 1964.
- [91] T. H. H. Pian. Finite element formulation by variational principles with relaxed continuity requirements. *The mathematical foundations of the finite element method with applications to partial differential equations*, pages 671–687, 1972.
- [92] T. H. H. Pian and P. Tong. Basis of finite element methods for solid continua. *International Journal for Numerical Methods in Engineering*, 1(1):3–28, 1969.
- [93] T. Pin and T. H. H. Pian. A variational principle and the convergence of a finite-element method based on assumed stress distribution. *International Journal of Solids and Structures*, 5(5):463–472, 1969.
- [94] P. A. Raviart. Hybrid finite element methods for solving 2nd order elliptic equations. *Topics in numerical analysis, II (JJM Miller, ed.)*, pages 141–155, 1975.
- [95] P. A. Raviart and J. M. Thomas. A mixed finite element method for 2nd order elliptic problems. In *Mathematical Aspects of Finite Element Methods*, pages 292–315. Springer, 1977.
- [96] P. A. Raviart and J. M. Thomas. Primal hybrid finite element methods for 2nd order elliptic equations. *Mathematics of Computation*, 31(138):391–413, 1977.
- [97] J. E. Roberts and J. M. Thomas. Mixed and hybrid methods. *Handbook of numerical analysis*, 2:523–639, 1991.

- [98] J. E. Santos, D. Sheen, and X. Ye. Nonconforming Galerkin methods based on quadrilateral elements for second order elliptic problems. *ESAIM: Mathematical Modelling and Numerical Analysis*, 33(4):747–770, 1999.
- [99] L. R. Scott and S. Zhang. Finite element interpolation of nonsmooth functions satisfying boundary conditions. *Mathematics of Computation*, 54(190):483–493, 1990.
- [100] S.-C. Soon, B. Cockburn, and H. K. Stolarski. A hybridizable discontinuous Galerkin method for linear elasticity. *International Journal for Numerical Methods in Engineering*, 80(8):1058–1092, 2009.
- [101] G. Strang. Variational crimes in the finite element method. *The Mathematical Foundations of the Finite Element Method with Applications to Partial Differential Equations*, pages 689–710, 1972.
- [102] S. Sun and J. Liu. A locally conservative finite element method based on piecewise constant enrichment of the continuous Galerkin method. *SIAM Journal on Scientific Computing*, 31(4):2528–2548, 2009.
- [103] M. J. Turner, R. W. Clough, H. C. Martin, and L. J. Topp. Stiffness and deflection analysis of complex structures. *Journal of the Aeronautical Sciences*, 23:805–823, 1956.
- [104] A. Veerer and P. Zanotti. Quasi-optimal nonconforming methods for symmetric elliptic problems. I—Abstract theory. *arXiv preprint arXiv:1710.03331*, 2017.
- [105] A. Veerer and P. Zanotti. Quasi-optimal nonconforming methods for symmetric elliptic problems. III—DG and other interior penalty methods. *arXiv preprint arXiv:1710.03452*, 2017.
- [106] C. Wang and J. Wang. A primal-dual weak Galerkin finite element method for Fokker-Planck type equations. *arXiv preprint arXiv:1704.05606*, 2017.
- [107] C. Wang and J. Wang. A primal-dual weak Galerkin finite element method for second order elliptic equations in non-divergence form. *Mathematics of Computation*, 2017.
- [108] J. Wang and C. Wang. Weak Galerkin finite element methods for elliptic PDEs. *Scientia Sinica Mathematica*, 45(7):1061–1092, 2015.
- [109] J. Wang and X. Ye. A weak Galerkin finite element method for second-order elliptic problems. *Journal of Computational and Applied Mathematics*, 241:103–115, 2013.
- [110] J. Wang and X. Ye. A weak Galerkin mixed finite element method for second order elliptic problems. *Mathematics of Computation*, 83(289):2101–2126, 2014.
- [111] J. Wang and X. Ye. A weak Galerkin finite element method for the Stokes equations. *Advances in Computational Mathematics*, 42(1):155–174, 2016.
- [112] M. Wang and J. Xu. The Morley element for fourth order elliptic equations in any dimensions. *Numerische Mathematik*, 103(1):155–169, 2006.
- [113] M. Wang and J. Xu. Minimal finite element spaces for  $2m$ -th-order partial differential equations in  $\mathbb{R}^n$ . *Mathematics of Computation*, 82(281):25–43, 2013.
- [114] M. F. Wheeler. An elliptic collocation-finite element method with interior penalties. *SIAM Journal on Numerical Analysis*, 15(1):152–161, 1978.
- [115] E. L. Wilson and R. L. Taylor. Incompatible displacement models. In *Proceedings of the Symposium on Numerical and Computer Methods in Structural Engineering*. University of Illinois, 1971.

- [116] J. P. Wolf. Alternate hybrid stress finite element models. *International Journal for Numerical Methods in Engineering*, 9(3):601–615, 1975.
- [117] S. Wu, S. Gong, and J. Xu. Interior penalty mixed finite element methods of any order in any dimension for linear elasticity with strongly symmetric stress tensor. *Mathematical Models and Methods in Applied Sciences*, 27(14):2711–2743, 2017.
- [118] S. Wu and J. Xu.  $\mathcal{P}_m$  interior penalty nonconforming finite element methods for  $2m$ -th order PDEs in  $\mathbb{R}^n$ . *arXiv preprint arXiv:1710.07678*, 2017.
- [119] S. Wu and J. Xu. Nonconforming finite element spaces for  $2m$ -th order partial differential equations on  $\mathbb{R}^n$  simplicial grids when  $m = n + 1$ . *arXiv:1705.10873*, 2017.
- [120] Y. Yamamoto. *A formulation of matrix displacement method*. [Cambridge, Mass.]: Massachusetts Institute of Technology, Dept. of Aeronautics and Astronautics, 1966.
- [121] M. Zlámal. On the finite element method. *Numerische Mathematik*, 12(5):394–409, 1968.