

Characterising Determinism in MBQCs involving Pauli Measurements

Mehdi Mhalla¹, Luc Sanselme², and Simon Perdrix³

¹Université Grenoble Alpes, CNRS, Grenoble INP, LIG, F-38000 Grenoble, France

²LORIA, Lycée Poincaré

³Inria Mocqua, LORIA, CNRS, Université de Lorraine, F-54000 Nancy, France

We introduce a new characterisation of determinism in measurement-based quantum computing. The one-way model of computation consists in performing local measurements over a large entangled state represented by a graph. The ability to perform an overall deterministic computation requires a correction strategy because of the non-determinism of each measurement. The existence of such correction strategy depends on the underlying graph and the basis of the performed measurements. GFlow is a well-known graphical characterisation of robust determinism in MBQC when every measurement is performed in some specific planes of the Bloch sphere. While Pauli measurements are ubiquitous in MBQC, GFlow fails to be necessary for determinism when a measurement-based quantum computation involves Pauli measurements. As a consequence, Pauli Flow was designed more than 15 years ago as a generalisation of GFlow to handle MBQC with Pauli measurements: Pauli flow guarantees robust determinism, however it has been shown more recently that it fails to be a necessary condition. We introduce a further extension called *Extended Pauli Flow* that we prove necessary and sufficient for robust determinism.

1 Introduction

Measurement-Based Quantum Computing (MBQC), also called one-way model, has been introduced by Briegel and Raussendorf in [1]. The key idea is to perform single-qubit measurements over a large resource (entangled) state. It had shown very interesting properties like robustness to noise [2] and is also useful for photonic quantum computing proposals [3] via a variant called FBQC. Another application is to decrease the quantum depth: for instance the Quantum Fourier Transform can be approximated in constant quantum depth using MBQC [4] and thus providing a logarithmic speed-up compared to quantum circuits.

A fundamental property of MBQC is its probabilistic behavior: every measurement leads to two possible outcomes. In this context, performing an overall ‘deterministic’ computation – e.g. for implementing a unitary evolution – requires a correction strategy, an adaptive computation which depends on the classical outcomes of the measured qubits, so that the outcome of the overall computation does not depend on the intermediate measurement outcomes. Some standard additional technical requirements, for instance that the computation remains deterministic under small variations of the measurement

basis, or that partial computations are also deterministic, lead to the notion of robust determinism.

The existence of such a correction strategy essentially depends on two parameters: the initial resource state and the performed measurements. In MBQC, every measurement can be performed in three possible planes of the Bloch sphere (the so-called XY , YZ , and XZ -planes). The resource state and the measurements can be abstracted away into an *open graph*, i.e., a graph that describes the resource state together with a labelling of the vertices with the corresponding measurement plane (e.g. XZ). In [5], it has been shown that a robust deterministic computation is possible if and only if the corresponding open graph has a GFlow. Hence GFlow, an easy to compute graphical property, characterises robust determinism in MBQC. GFlow had several applications in MBQC but also in related topics like ZX-calculus [6] and quantum circuit optimisation [7, 8].

Pauli measurements are ubiquitous in MBQC, for instance in the context of error correcting codes, or for implementing Clifford transformations. Some graphical transformations can be performed using Pauli measurements so that they can be used to locally transform a resource state into another one satisfying for instance some architecture constraints. More generally, it is reasonable to assume that a significant portion of the measurements of a practical MBQC are Pauli measurements. In terms of determinism, Pauli measurements satisfy some particular properties that are not captured by GFlow. Hence a generalisation of GFlow, called Pauli Flow has been introduced in the original paper introducing GFlow [5]. Pauli Flow has been proved to be a sufficient condition for robust determinism. Pauli Flow has been proved to be also a necessary condition for determinism when all measurements are real¹, but is not necessary in general [9]. Notice that recently, Pauli Flow has been used to obtain very efficient circuit optimisations [10] and rewrite rules for MBQC patterns preserving Pauli flow has been derived in [?].

We introduce an extension of the Pauli Flow simply called *Extended Pauli Flow* (EPF) that we prove to be a necessary and sufficient condition for robust determinism. We first show that when all Pauli measurements are performed at the beginning of the computation, then the Pauli Flow is actually necessary and sufficient for robust determinism. The rest of the proof is obtained by showing how Pauli measurements can be moved forwards or backwards in an MBQC, and how such moves preserve robust determinism and/or Extended Pauli Flow existence.


We obtain as a corollary the first formal proof that for any MBQC, one can perform the Pauli measurements first, preserving robust determinism. Notice however that in practice this is not always possible to perform all Pauli measurement at first because of architecture constraints, for instance in photonic implementations the qubits may appear only after a certain number of time steps.

The paper is structured as follows. We start by recalling the basic definitions of MBQC patterns and their semantics in section 2.1, then in section 2.2 we define the Extended Pauli Flows (EPF). In section 3, we show that EPF is sufficient for robust determinism. Finally we show in Section 4.1 that GFlow is necessary when there are no Pauli measurements (fixing a mistake in the proof published in [5]), then we show in section 4.2 that Pauli Flow is necessary when the Pauli measurements are done first, and finally that EPF is sufficient for a general pattern in section 4.3.

¹i.e. measurements described by real observables: X , Z and any measurement in the XZ -plane.

2 Determinism in MBQC

An MBQC can be informally represented as follows:



where the underlying graph represents the entangled resource state of the computation, the squared vertices represent the input qubits, the white ones the output qubits. For each measured qubit, a description of the measurement basis is given: it is either a Pauli measurement (X , Y , or Z) or a measurement in a plane of the Bloch sphere (XY , XZ , or YZ). Notice that such a graphical representation provides a partial information of the MBQC: the actual angles describing the measurement basis, the order of the measurements and the correction strategy are not depicted. In this section, we provide a more formal description of MBQC based on the Measurement calculus [11].

2.1 MBQC syntax and semantics

We use the notation $<$ to denote a strict partial order, i.e. a transitive asymmetric binary relation. The reflexive closure of $<$ is denoted \leq . Conversely, given a non strict partial order \leq , we denote $<$ its irreflexive kernel. We use \leq (resp. $<$) to denote a (resp. strict) total order.

The measurement calculus is a formal framework for describing MBQC using patterns, a pattern being a sequence of commands. There are five kinds of commands: N , E , M , X , Z ; describing how the qubits are initialized (N), entangled (E), measured (M), and corrected (X , Z).

A pattern is made of two parts: a description of the initial entanglement and then a description of the measurements and their associated corrections. Given a graph G whose vertices $V(G)$ represent the qubits – including a set I of input qubits – the commands $N_{V(G)\setminus I}$ and E_G describe the initial entanglement of the computation.

The measurement of a qubit u is denoted by $M_u^{\lambda, \alpha}$, where (λ, α) characterizes the measurement basis. λ is either a Pauli observable or a plane defined by two Pauli observables², and α is the measurement angle. Notice that the measurements of the input qubits are restricted to the XY -plane of the Bloch sphere.

The necessary corrections (Pauli operators $X_A^{s_u}, Z_A^{s_u}$ applied to a subset of vertices A depending on the classical outcome s_u of the measurement of u) are also represented in a pattern. Each qubit is measured at most once, and the unmeasured ones form the set O of output qubits.

Definition 1 (Pattern) A pattern $\mathcal{P} : I \rightarrow O$, with I and O two finite sets, is inductively defined as:

- for any simple undirected finite graph G , and any $I \subseteq V(G)$,

$$E_G N_{V(G)\setminus I} : I \rightarrow V(G)$$

is a pattern;

² λ can be seen as a set of one or two Pauli observables e.g. $\{X\}$ for X -measurement and $\{X, Y\}$ for XY -plane measurement.

- for any pattern $\mathcal{P} : I \rightarrow O$, any qubit $u \in O$, any subsets $A, B \subseteq O \setminus \{u\}$, any $\lambda \subseteq \{X, Y, Z\}$ s.t. $|\lambda| \geq 1$ and any angle $\alpha \in [0, 2\pi)$

$$X_A^{s_u} Z_B^{s_u} M_u^{\lambda, \alpha} \mathcal{P} : I \rightarrow O \setminus \{u\}$$

is a pattern where $\alpha \in \{0, \pi\}$ when $|\lambda| = 1$, and $\lambda \subseteq \{X, Y\}$ when $u \in I$.

Remark 1 Some more general form of patterns have been defined in the literature [11]. It has been proved [11] however that, using a standardisation procedure, any pattern can be transformed, preserving the semantics, into a pattern of the form of Definition 1.

Remark 2 Notice that Pauli corrections can also be integrated to the upcoming measurements, leading to adaptive measurements instead of Pauli corrections. The two presentations being equivalent [11] we choose w.l.o.g. to represent MBQC patterns with Pauli corrections.

We use the following notation to denote an arbitrary pattern:

$$\left(\prod_{u \in O^c}^{\leq} X_{\mathbf{x}(u)}^{s_u} Z_{\mathbf{z}(u)}^{s_u} M_u^{\lambda_u, \alpha_u} \right) E_G N_{I^c} = X_{\mathbf{x}(u_k)}^{s_{u_k}} Z_{\mathbf{z}(u_k)}^{s_{u_k}} M_{u_k}^{\lambda_{u_k}, \alpha_{u_k}} \dots X_{\mathbf{x}(u_1)}^{s_{u_1}} Z_{\mathbf{z}(u_1)}^{s_{u_1}} M_{u_1}^{\lambda_{u_1}, \alpha_{u_1}} E_G N_{I^c}$$

where $<$ is the total order over $O^c := V(G) \setminus O$ s.t. $u_1 < \dots < u_k$.

Each MBQC pattern has an underlying structure that is an extension of graph states taking into account inputs, outputs and measurements that is called an open graph.

Definition 2 (Open graph) The quadruplet (G, I, O, λ) is the underlying open graph of a pattern $\left(\prod_{u \in O^c}^{\leq} X_{\mathbf{x}(u)}^{s_u} Z_{\mathbf{z}(u)}^{s_u} M_u^{\lambda_u, \alpha_u} \right) E_G N_{I^c}$ with $\lambda : u \mapsto \lambda_u$.

An open graph is an abstraction of a pattern where three properties are essentially abstracted away: the order (or scheduling) of the measurements, the actual angle of the measurements (only the measurement-plane is kept for non-Pauli measurements), and finally the corrections.

Several patterns can lead to the same open graph, it is however convenient to consider, among all these patterns, those which share the same correction strategy (represented as a function from non output qubits to sets of non input qubits) and have compatible measurement schedulings (represented as a partial order):

Definition 3 (Induced Pattern) Given $p : O^c \rightarrow 2^{I^c}$ and $<$, a partial order, a pattern $\left(\prod_{u \in O^c}^{\leq} X_{\mathbf{x}(u)}^{s_u} Z_{\mathbf{z}(u)}^{s_u} M_u^{\lambda_u, \alpha_u} \right) E_G N_{I^c}$ is said to be induced by an $(p, <)$ if $\forall u \in O^c$, $\mathbf{x}(u) = \{v \in p(u) \mid u < v\}$, $\mathbf{z}(u) = \{v \in \text{Odd}(p(u)) \mid u < v\}$, and $\forall v \in O^c$, $u < v \Rightarrow u < v$, where $\text{Odd}(p(u))$ is the set of vertices that have an odd number of neighbours in $p(u)$.

A pattern involves quantum measurements: each non-output qubit u is measured, which produces a classical outcome $m(u) \in \{0, 1\}$. The action of a pattern on a quantum input state can then be described as a collection of linear maps, one for each possible branch of the computation which corresponds to a sequence of classical outcomes:

Definition 4 (Branch semantics) Given a pattern $\mathcal{P} : I \rightarrow O$ and a sequence of classical outcomes $m : O^c \rightarrow \{0, 1\}$, let $\llbracket \mathcal{P} \rrbracket_m : \mathbb{C}^{2^I} \rightarrow \mathbb{C}^{2^O}$ be inductively defined as

$$\llbracket E_G N_{V(G) \setminus I} \rrbracket_m = |\phi\rangle \mapsto E_G |+\rangle_{I^c} |\phi\rangle_I = \prod_{(u,v) \in G} \Lambda_{Z_{u,v}} \left(\bigotimes_{u \in V(G) \setminus I} \frac{|0_u\rangle + |1_u\rangle}{\sqrt{2}} \right) \otimes |\phi\rangle$$

$$\llbracket X_A^{s_u} Z_B^{s_u} M_u^{\lambda, \alpha} \mathcal{P} \rrbracket_m = \begin{cases} \langle +_{\alpha_u}^{\lambda_u} | \llbracket \mathcal{P} \rrbracket_{m'} \rangle, & \text{if } m(u) = 0 \\ X_A Z_B \langle -_{\alpha_u}^{\lambda_u} | \llbracket \mathcal{P} \rrbracket_{m'} \rangle, & \text{if } m(u) = 1 \end{cases}$$

where m' is the restriction of m to $O^c \setminus \{u\}$, and $\{|+_{\alpha_u}^{\lambda_u}\rangle, |-_{\alpha_u}^{\lambda_u}\rangle\}$ is the measurement basis defined as:

$$|+_{\alpha}^{\lambda}\rangle = \begin{cases} \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) & \text{if } \lambda = \{X\} \\ \frac{1}{\sqrt{2}}(|0\rangle + i|1\rangle) & \text{if } \lambda = \{Y\} \\ |0\rangle & \text{if } \lambda = \{Z\} \end{cases} \text{ and } |-_{\alpha}^{\lambda}\rangle = \begin{cases} \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) & \text{if } \lambda = \{X\} \\ \frac{1}{\sqrt{2}}(|0\rangle - i|1\rangle) & \text{if } \lambda = \{Y\}, \text{ and} \\ |1\rangle & \text{if } \lambda = \{Z\} \end{cases}$$

when $|\lambda| = 2$, $|+_{\alpha}^{\lambda}\rangle = \frac{1}{\sqrt{2}}(|+_{\alpha}^P\rangle + e^{i\alpha} |-_{\alpha}^P\rangle)$ and $|-_{\alpha}^{\lambda}\rangle = \frac{1}{\sqrt{2}}(|+_{\alpha}^P\rangle - e^{i\alpha} |-_{\alpha}^P\rangle)$ where $P \notin \lambda$.

The overall semantics of a pattern can then be described as a superoperator:

Definition 5 (Semantics) Given a pattern $\mathcal{P} : I \rightarrow O$, its semantics is the superoperator $\llbracket \mathcal{P} \rrbracket = \rho \mapsto \sum_{m \in \{0,1\}^{O^c}} \llbracket \mathcal{P} \rrbracket_m \rho \llbracket \mathcal{P} \rrbracket_m^\dagger$.

A pattern is deterministic if the overall evolution does not depend on the intermediate classical outcomes. We consider a robust version of determinism which is *strong* (all branches occur with the same probability), *uniform* (for any variation of the measurement angles the pattern remains strongly deterministic), and *stepwise* (every partial computation is also robust deterministic).

Definition 6 (Robust determinism) We inductively define robustly deterministic patterns as:

- $E_G N_{V(G) \setminus I}$ is robustly deterministic;
- $X_A^{s_u} Z_B^{s_u} M_u^{\lambda, \alpha} \mathcal{P}$ with $|\lambda| = 1$ is robustly deterministic when \mathcal{P} is robustly deterministic and $\forall \rho, \langle +_{\alpha}^{\lambda} | \llbracket \mathcal{P} \rrbracket(\rho) |+_{\alpha}^{\lambda}\rangle = \langle -_{\alpha}^{\lambda} | X_A Z_B \llbracket \mathcal{P} \rrbracket(\rho) X_A Z_B |-_{\alpha}^{\lambda}\rangle_u$
- $X_A^{s_u} Z_B^{s_u} M_u^{\lambda, \alpha} \mathcal{P}$ with $|\lambda| = 2$ is robustly deterministic when \mathcal{P} is robustly deterministic and $\forall \epsilon \in \mathbb{R}, \forall \rho, \langle +_{\alpha+\epsilon}^{\lambda} | \llbracket \mathcal{P} \rrbracket(\rho) |+_{\alpha+\epsilon}^{\lambda}\rangle_u = \langle -_{\alpha+\epsilon}^{\lambda} | X_A Z_B \llbracket \mathcal{P} \rrbracket(\rho) X_A Z_B |-_{\alpha+\epsilon}^{\lambda}\rangle_u$

2.2 Characterising Determinism

A central question in MBQC is to decide whether a deterministic computation can be driven on a given resource, represented as an open graph (G, I, O, λ) . Several sufficient conditions for robust determinism have been introduced: Causal Flow [12] which has been generalised to GFlow and Pauli Flow [5]. GFlow has been proved to be a necessary and sufficient condition for robust determinism when all measurements are performed in a plane ($\forall u \in O^c, |\lambda_u| = 2$), and Pauli Flow has been proved to be necessary when all measurements are real ($\forall u \in O^c, \lambda_u \subseteq \{X, Z\}$), whereas counter examples are known in the general case.

The correction strategy in MBQC fundamentally relies on some fixed-point properties of graph states: for any subset D of (non input) qubits, the Pauli operator $X_D Z_{\text{Odd}(D)}$ (i.e. applying X on the qubits in $D \setminus \text{Odd}(D)$; Y on those in $D \cap \text{Odd}(D)$; and Z on those in $\text{Odd}(D) \setminus D$) is called a stabiliser, because it leaves the resource state invariant. Such property can be intuitively used as follows: the measurement of a vertex u in $\text{Odd}(D) \setminus D$ (appearing with Z in the stabiliser) in the XY -plane can be “corrected” by the rest of the stabiliser if the vertices involved are not yet measured (see left part of Figure 1).

Fixed-point properties of graph states led to the notion of Gflow. Intuitively, as $X_D Z_{\text{Odd}(D)}$ is in the stabiliser, the measurement of a vertex u in $\text{Odd}(D) \setminus D$ (appearing

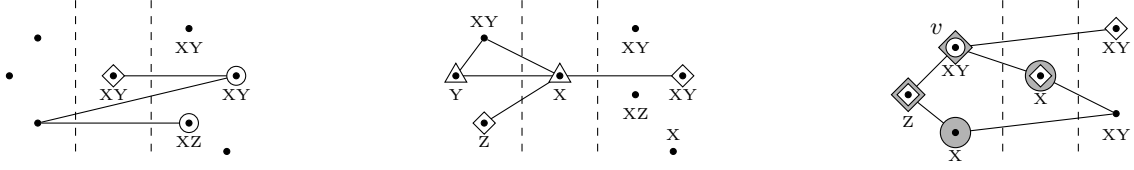


Figure 1: We illustrate the 3 kinds of flow : Gflow on the left, Pauli flow in the middle, and Extended Pauli flow on the right. In each case, the correction required by the measurement of the central vertex involves the vertices with different Paulis represented with white shapes: triangle = $D \cap \text{Odd}(D)$, diamond = $\text{Odd}(D) \setminus D$ and circle = $D \setminus \text{Odd}(D)$. A dependency on the past (vertex v) is allowed in the Extend Pauli flow case when it is compensated by a D_v in the past represented by grey shapes.

with Z in the stabiliser) in the XY -plane can be "corrected" by the rest of the stabiliser if the vertices involved are not yet measured (see left part of Figure 1).

Pauli flow takes into account that a vertex that is Z measured can appear in $\text{Odd}(D) \setminus D$ even if it is in the past (already measured). We introduce the notion of D -corrector to describe such dependencies in an MBQC.

Definition 7 Let (G, I, O, λ) an open graph and $D \subseteq I^c$. Given $u, v \in O^c$, we say that v is a D -corrector of u , denoted $\kappa_{u,v}^D$, if at least one of the following conditions is satisfied:

- $X \in \lambda_v$ and $(v \in \text{Odd}(D)) \oplus (u = v)$
- $Y \in \lambda_v$ and $(v \in \text{Odd}[D]) \oplus (u = v)$
- $Z \in \lambda_v$ and $(v \in D) \oplus (u = v)$

Where $\text{Odd}[D]$ is the symmetric difference between D and $\text{Odd}(D)$ and \oplus is the XOR operator. Given $v \in O^c$, we say that v is a D -corrector if there exists $u \in O^c$, $u \neq v$, such that v is a D -corrector of u .

The notion of correctors introduced in Definition 7 leads to a simple reformulation of the Pauli flow condition:

Proposition 8 Given $p : O^c \rightarrow 2^{I^c}$ and $<$ a strict partial order over O^c , $(p, <)$ is a Pauli Flow of (G, I, O, λ) iff $\forall (u, v) \in (O^c)^2$, $\kappa_{u,v}^{p(u)} \Rightarrow u < v$.

In the rest of the paper, we will use the Proposition 8 as a definition of Pauli Flow as it is simpler than the original one. The proof is given in the Appendix A.

This notion of correctors provides a set of constraints on the order according to which the qubits of the pattern can be measured:

Corollary 9 (G, I, O, λ) has a Pauli Flow iff there exists p s.t. K_p is a DAG³, where $K_p = (V(G), \{(u, v) \in (O^c)^2; \kappa_{u,v}^{p(u)}\})$.

For such a p , $(p, <)$ will be a Pauli Flow for every partial order $<$ compatible with the DAG.

While the Pauli flow condition is based on the fixed-point properties of the underlying graph state and the specific properties of Pauli measurements, we identify a third property

³Directed Acyclic Graph




Figure 2: Example of open graph with Extended Pauli Flow but no Pauli Flow with order $0 < 1 < 2 < 3$ and $p(0) = \{0, 4\}, p(1) = 4, p(2) = 1, p(3) = 3, U_1 = \{2, 3\}, D_1 = \{2\}, U_0 = \{2\}, D_0 = \{0, 2\}$

which allows deterministic computation in MBQC. Indeed, at a given step of the computation, if there exist, among the already measured qubits, a qubit v and a set D_v such that v is a D_v -corrector, then whatever the plane of measurement according to which v has been measured, it can be freely used as a $p(u)$ -corrector for any up coming measurement u (see figure 1).

We extend the Pauli Flow allowing to have an already measured corrector in this specific cases.

Definition 10 (Extended Pauli Flow) *An open graph (G, I, O, λ) has an Extended Pauli Flow $(p, <)$, where $p : O^c \rightarrow 2^{I^c}$ and $<$ partial order, if $\forall v \in O^c$ such that $U_v = \{u \text{ s.t. } v \leq u \text{ and } \kappa_{u,v}^{p(u)}\}$ is not empty, we have $|\lambda_v| = 2$, $v \notin U_v$, and $\exists D_v \subseteq I^c$ such that*

$$v \in D_v \cup \text{Odd}(D_v), \text{ and, } \forall u \in U_v, \forall w \in D_v \cup \text{Odd}(D_v), \neg \kappa_{v,w}^{D_v} \text{ and } w \leq u.$$

Note that for any vertex $w \in O^c$, and for any set $D \subset V$, if $w \in D \cup \text{Odd}(D)$ and w is not a D -corrector then $|\lambda_w| = 1$. This means that the new condition for Extended Pauli Flow implies that when v is a corrector of u that has already been measured, v must be measured with a plane, and have an extra set of correctors D_v that are already measured Pauli measurements that are not D_v -correctors.

Remark 3 *Similarly to GFlow and Pauli flow, the existence of an Extended Pauli flow implies that any input is measured in XY-plane or a subset of it.*

Figure 2 shows an open graph that has an Extended Pauli Flow which is not a Pauli Flow.

Theorem 11 (Main result) *A pattern is robustly deterministic iff it is induced by an Extended Pauli Flow of its underlying open graph.*

To prove Theorem 11, we first prove in the next Section (Theorem 12) that the existence of an extended Pauli Flow is a sufficient condition for robust determinism. The necessity is proved in Theorem 17 section 4.

3 Extended Pauli Flow is sufficient for Robust Determinism

Theorem 12 *Any pattern induced by an Extended Pauli Flow is robustly deterministic.*

The rest of the section is dedicated to the proof of Theorem 12. The robustness of the induced pattern relies on the fixed-point properties of underlying graph state and also the properties of the particular measurements.

Given an extended Pauli Flow $(p, <)$ of an open graph (G, I, O, λ) , the patterns $\mathcal{P}^{<, \alpha}$ induced by $(p, <)$ are obtained as follows, by refining the partial order $<$ into a total order $<$ and by fixing the angles of measurements α_u for every $u \in O^c$.

Indeed, given a vertex u , the total order $<$ induces the following partition of the set $p(u) \cup \text{Odd}(p(u))$ of “correctors”:

- $A^u := \{v \in p(u) \cup \text{Odd}((p(u)) \mid v < u \wedge |\lambda_v| = 2\}$ the set of correctors which are already measured according to a plane;
- $B^u := \{v \in p(u) \cup \text{Odd}((p(u)) \mid v < u \wedge |\lambda_v| = 1\}$ the set of correctors which are already Pauli-measured;
- $C^u := \{v \in p(u) \cup \text{Odd}((p(u)) \mid u < v \text{ or } v \in O\}$, the set of correctors of u which are not yet measured;
- $F^u := \{u\} \cap (p(u) \cup \text{Odd}(p(u)))$ completes the partition of $p(u) \cup \text{Odd}(p(u))$. Notice that $F^u = \{u\}$ since the Extended Pauli Flow conditions guarantees that $u \in p(u) \cup \text{Odd}(p(u))$.

Moreover for any set $S \in \{A^u, B^u, C^u, F^u\}$, we define $S_X := S \cap p(u)$ and $S_Z := S \cap \text{Odd}(p(u))$. Notice that $S_X \cup S_Z = S$.

The induced pattern is then $\mathcal{P}^{<, \alpha} = \left(\prod_{u \in O^c}^< X_{C_X^u}^{s_u} Z_{C_X^u}^{s_u} M_u^{\lambda_u, \alpha_u} \right) E_G N_{I^c}$.

The fundamental property of graph states gives us the first useful fixed-point property.

Fact 13 For any $D \subseteq I^c$, and any $|\phi\rangle \in \mathbb{C}^{2^I}$,

$$X_D Z_{\text{Odd}(D)} E_G |+\rangle_{I^c} |\phi\rangle_I = \pm E_G |+\rangle_{I^c} |\phi\rangle_I \quad (1)$$

We also have the following standard fixed point property.

Fact 14 For any $v \in O^c$, there exist $P_v, Q_v \in \lambda_v$, such that

$$(\cos(\alpha_v)P_v + \sin(\alpha_v)Q_v) \left| +_{\alpha_v}^{\lambda_v} \right\rangle = \left| +_{\alpha_v}^{\lambda_v} \right\rangle \quad (2)$$

Notice that if $|\lambda_v| = 1$ then $P_v = Q_v$ and $\alpha_v = 0 \bmod \pi$, thus $(\cos(\alpha_v)P_v + \sin(\alpha_v)Q_v) = \pm P_v$.

To begin with, we state a few more almost fixed-point equations which are then used to prove that the existence of an extended Pauli Flow is a sufficient condition for robust determinism.

Lemma 15 For any $v \in B^u$,

$$\left(\prod_{v \in B^u} \left\langle +_{\alpha_v}^{\lambda_v} \right| \right) X_{B_X^u} Z_{B_Z^u} = \pm i^{|B_X^u \cap B_Z^u|} \prod_{v \in B^u} \left\langle +_{\alpha_v}^{\lambda_v} \right| \quad (3)$$

The proof is given in the Appendix B.

Lemma 16 For any $v \in A^u$, for any one-qubit Pauli operator L_v , and any multi-qubit Pauli operator R , $\exists \theta$ s.t.

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) R E_G |+\rangle_{I^c} |\phi\rangle_I = e^{i\theta} \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) L_v R E_G |+\rangle_{I^c} |\phi\rangle_I \quad (4)$$

The proof is given in the Appendix C.

Proof of Theorem 12:

We are now ready to prove by induction that the Extended Pauli Flow is a sufficient condition for robust determinism of $\mathcal{P}^{<, \alpha}$. By induction hypothesis, there exists $r \in \mathbb{C}$ s.t. the state before the measurement of u is $|\psi\rangle = r (\prod_{v < u} \langle +_{\alpha_v}^{\lambda_v} |) E_G |+\rangle_{I^c} |\phi\rangle_I$.

The measurement of u leads, up to a renormalisation, to either $\langle +_{\alpha_u}^{\lambda_u} | \psi \rangle$ or $\langle -_{\alpha_u}^{\lambda_u} | \psi \rangle$. In the second case the correction $X_{C_X^u} Z_{C_Z^u}$ is applied. Thus it is enough to show $|\psi_0\rangle = \langle +_{\alpha_u}^{\lambda_u} | \psi \rangle$ and $|\psi_1\rangle = X_{C_X^u} Z_{C_Z^u} \langle -_{\alpha_u}^{\lambda_u} | \psi \rangle$ are equal up to a global phase, to show strong determinism.

The extended Pauli Flow condition guarantees $-\kappa_{uu}^{p(u)}$, which implies that for any α_u ,

$$\langle -_{\alpha_u}^{\lambda_u} | \simeq \langle +_{\alpha_u}^{\lambda_u} | X_{F_X^u} Z_{F_Z^u} \quad (5)$$

As a consequence:

$$\begin{aligned} |\psi_1\rangle &\simeq X_{C_X^u} Z_{C_Z^u} \langle +_{\alpha_u}^{\lambda_u} | Z_{F_Z^u} X_{F_X^u} |\psi\rangle & (Eq. 5) \\ &\simeq r X_{C_X^u} Z_{C_Z^u} \left(\prod_{v \leq u} \langle +_{\alpha_v}^{\lambda_v} | \right) Z_{F_Z^u} X_{F_X^u} E_G |+\rangle_{I^c} |\phi\rangle_I \\ &\simeq r X_{C_X^u} Z_{C_Z^u} \left(\prod_{v \leq u} \langle +_{\alpha_v}^{\lambda_v} | \right) X_{B_X^u} Z_{B_Z^u} Z_{F_Z^u} X_{F_X^u} E_G |+\rangle_{I^c} |\phi\rangle_I & (Eq. 3) \\ &\simeq r X_{C_X^u} Z_{C_Z^u} \left(\prod_{v \leq u} \langle +_{\alpha_v}^{\lambda_v} | \right) X_{A_X^u} Z_{A_Z^u} X_{B_X^u} Z_{B_Z^u} Z_{F_Z^u} X_{F_X^u} E_G |+\rangle_{I^c} |\phi\rangle_I & (Eq. 4) \\ &\simeq r \left(\prod_{v \leq u} \langle +_{\alpha_v}^{\lambda_v} | \right) X_{p(u)} Z_{\text{Odd}(p(u))} E_G |+\rangle_{I^c} |\phi\rangle_I \\ &\simeq r \left(\prod_{v \leq u} \langle +_{\alpha_v}^{\lambda_v} | \right) E_G |+\rangle_{I^c} |\phi\rangle_I \simeq |\psi_0\rangle & (Eq. 1) \end{aligned}$$

□

4 Extended Pauli Flow is necessary for robust determinism

The main result of this Section is the proof of the necessity condition of Extended Pauli Flow.

Theorem 17 *If a pattern \mathcal{P} is robustly deterministic then it is induced by an Extended Pauli Flow of its underlying open graph.*

To prove this, we start by proving a useful property of strong deterministic computations, that allows to have necessity conditions for the GFlow (fixing the original proof from [5]), then we prove that for patterns that have the Pauli measurements first, the Pauli Flow is necessary. Finally we prove that for general patterns, Extended Pauli Flow is a necessary condition.

4.1 Necessity of GFlow for Pauli measurement-free patterns

The GFlow is a particular case of Pauli flow, when all measurements are performed according to a plane (i.e. $\forall u \in O^c, |\lambda_u| = 2$). The original proof from [9] showing the necessity of GFlow used a wrong Lemma (Lemma 4 of [5]) that stated that if two states were the same after any measurement of one qubit in a plane then they were the same. Indeed, as can be seen in Lemma 18 below, there is a case where the measured qubit is separated from the rest and is in a state that is an eigenvector of the observable not in the plane (Z in the XY -plane measurement case). We show in Theorem 21 that the necessity

of Gflow still holds in this particular case as by robust determinism it can be corrected: indeed, as the $\langle -|_\alpha$ branch can be changed to the $\langle +|_\alpha$ branch by applying precisely the observable not in the plane, it cannot be an eigenvector.

Lemma 18 *Let $\lambda \subset \{X, Y, Z\}$ a set of two elements and P be the Pauli not in λ . Given $|\phi\rangle$ and $|\phi'\rangle$ two states of a register V of qubits, and $u \in V$, if $\forall \alpha$, $\langle +^\lambda_\alpha |_u |\phi\rangle \simeq \langle +^\lambda_\alpha |_u |\phi'\rangle$ and $|\langle +^\lambda_\alpha |_u |\phi\rangle| = \frac{1}{\sqrt{2}}$ then*

$$\begin{cases} |\phi\rangle \simeq |\phi'\rangle, \text{ or} \\ \exists x \in \{0, 1\}, \exists |\psi\rangle \text{ s.t. } |\phi\rangle \simeq |+_x^P\rangle \otimes |\psi\rangle \text{ and } |\phi'\rangle \simeq |-_{x\pi}^P\rangle \otimes |\psi\rangle \end{cases}$$

Proof: Since $\{|+_0^P\rangle_u, |-_0^P\rangle_u\}$ is a basis, $|\phi\rangle$ and $|\phi'\rangle$ can be written as $|\phi\rangle = |+_0^P\rangle_u |\phi_+\rangle + |-_0^P\rangle_u |\phi_-\rangle$ and $|\phi'\rangle = |+_0^P\rangle_u |\phi'_+\rangle + |-_0^P\rangle_u |\phi'_-\rangle$ where $|\phi_+\rangle, |\phi_-\rangle, |\phi'_+\rangle$ and $|\phi'_-\rangle$ are not normalized. Considering $\alpha = 0$, we have $|\phi_+\rangle \simeq |\phi'_+\rangle$ and similarly when $\alpha = \pi$, $|\phi_-\rangle \simeq |\phi'_-\rangle$. So $\exists \theta, \theta'$ s.t. $|\phi'\rangle = e^{i\theta} |+_0^P\rangle_u |\phi_+\rangle + e^{i\theta'} |-_0^P\rangle_u |\phi_-\rangle$. When $\alpha = \pi/2$, it implies $|\phi_+\rangle + i |\phi_-\rangle \simeq e^{i\theta} |\phi_+\rangle + e^{i\theta'} i |\phi_-\rangle$.

- if $|\phi_+\rangle$ and $|\phi_-\rangle$ are not colinear, we have $\theta = \theta'$ and thus $|\phi\rangle \simeq |\phi'\rangle$.
- Otherwise, since $|\langle +^\lambda_0 |_u |\phi\rangle| = |\langle +^\lambda_\pi |_u |\phi\rangle| = \frac{1}{\sqrt{2}}$, there exists γ s.t. $|\phi_+\rangle = e^{i\gamma} |\phi_-\rangle$. Moreover, the condition $|\langle +^\lambda_{\pi/2} |_u |\phi\rangle| = \frac{1}{\sqrt{2}}$ implies $\gamma = 0 \bmod \pi$. As a consequence there exist $x \in \{0, 1\}$, and $|\psi\rangle$ s.t. $|\phi\rangle = |x\rangle \otimes |\psi\rangle$. Similarly, there exist $y \in \{0, 1\}$, and $|\psi'\rangle$ s.t. $|\phi'\rangle = |y\rangle \otimes |\psi'\rangle$. If $x = y$ then $|\phi\rangle \simeq |\phi'\rangle$, otherwise $|\phi'\rangle \simeq |\bar{x}\rangle \otimes |\psi\rangle$.

□

Corollary 19 *Given $|\phi\rangle$ a state of a register V of qubits, and let $u \in V$, and C a multi-qubit Pauli not acting on u and $P \in \{X, Y, Z\} \setminus \lambda_u$ if $\forall \alpha$, $\langle +^\lambda_\alpha |_u |\phi\rangle \simeq C \langle -^\lambda_\alpha |_u |\phi\rangle$ then $|\phi\rangle \simeq (C \otimes P_u) |\phi\rangle$.*

Proof: Let $|\phi'\rangle = (C \otimes P_u) |\phi\rangle$. According to Lemma 18, $|\phi'\rangle \simeq |\phi\rangle$ or $\exists x \in \{0, 1\}, \exists |\psi\rangle$ s.t. $|\phi\rangle \simeq |x\rangle \otimes |\psi\rangle$ and $|\phi'\rangle \simeq |\bar{x}\rangle \otimes |\psi\rangle$. In this second case, we would have $|\phi'\rangle = (C \otimes P_u) |\phi\rangle \simeq (C \otimes P_u) |x\rangle \otimes |\psi\rangle \simeq |x\rangle \otimes C |\psi\rangle$ since $P_u |x\rangle \simeq |x\rangle$ which is a contradiction. □

Corollary 20 *In a robustly deterministic MBQC where all the angles are planes, the state $|\phi\rangle$ before the measurement of u in the plane λ is not of the form $|x\rangle_u \otimes |\psi\rangle$ with $|x\rangle$ eigenvector of $P \in \{X, Y, Z\} \setminus \lambda_u$.*

Theorem 21 *If \mathcal{P} is robustly deterministic and has no Pauli measurement then the underlying open graph has a GFlow.*

Proof:

For any $u \in O^c$, the robust determinism condition implies the two states obtained after the measurement of u , for any angle α , and the corresponding corrections are equal up to a global phase:

$$\forall \vec{\beta} \in [0, 2\pi)^{\{v \in O^c \mid v < u\}}, \langle +_\alpha | \langle +_{\vec{\beta}} | E_G N_{V \setminus I} |\phi_I\rangle \simeq X_{C_X^u} Z_{C_Z^u} \langle -_\alpha | \langle +_{\vec{\beta}} | E_G N_{V \setminus I} |\phi_I\rangle$$

According to corollary 19, we have

$$\forall \vec{\beta} \in [0, 2\pi)^{\{v \in O^c \mid v < u\}}, \langle +_{\vec{\beta}} | E_G N_{V \setminus I} |\phi_I\rangle \simeq \langle +_{\vec{\beta}} | (X_{C_X^u} Z_{C_Z^u} \otimes P_u) E_G N_{V \setminus I} |\phi_I\rangle$$

where $P \in \{X, Y, Z\} \setminus \lambda_u$.

For every $v \in O^c$ s.t. $v < u$, one can remove the term $\langle +_{\beta_v} |$ by combining lemma 18 and Corollary 20, leading to

$$E_G N_{V \setminus I} |\phi_I\rangle \simeq X_{C_X^u} Z_{C_Z^u} P_u E_G N_{V \setminus I} |\phi_I\rangle.$$

We show that $C_u^X \cap I = \emptyset$. Indeed, by contradiction, assume there exists $e \in I \cap C_u^X$. Let initialize this qubit e in the $|0\rangle$ -state then $E_G N_{V \setminus I} |\phi_I\rangle = |0\rangle_e \otimes |\phi\rangle$ for some $|\phi\rangle$, but, if $e \neq u$, then $X_{C_X^u} Z_{C_Z^u} P_u |0\rangle_e \otimes |\phi\rangle \simeq |1\rangle_e \otimes X_{C_X^u \setminus \{e\}} Z_{C_Z^u \setminus \{e\}} P_u |\phi\rangle$. If $u = e$ then $\lambda_u = \{X, Y\}$, so $P_u = Z_u$ (see remark 3). As a consequence similarly $X_{C_X^u} Z_{C_Z^u} Z_u |0\rangle_e \otimes |\phi\rangle \simeq |1\rangle_e \otimes X_{C_X^u \setminus \{e\}} Z_{C_Z^u} |\phi\rangle$.

Moreover, if $|\phi_I\rangle = |+\rangle_I$, then $E_G N_{V \setminus I} |\phi_I\rangle$ is nothing but the graph state $|G\rangle$. Hence $X_{C_X^u} Z_{C_Z^u} P_u$ is in the stabilizer of $|G\rangle$ so it must be of the form $X_D Z_{\text{Odd}(D)}$ for some D .

We define $g(u)$ to be this set D , i.e. $g(u) := \begin{cases} C_X^u & \text{if } \lambda_u = \{X, Y\} \\ C_X^u \cup \{u\} & \text{otherwise} \end{cases}$. Notice that

$$\text{Odd}(g(u)) = \begin{cases} C_Z^u & \text{if } \lambda_u = \{Y, Z\} \\ C_Z^u \cup \{u\} & \text{otherwise} \end{cases}.$$

We can show that $(g, <)$ is a GFlow, where $<$ is the order according to which the qubits are measured. Indeed all vertices of $g(u) \setminus \{u\}$ and $\text{Odd}(g(u)) \setminus \{u\}$ are larger than u . Moreover if $\lambda_u = \{X, Y\}$ then $u \notin g(u)$ and $u \in \text{Odd}(g(u))$; if $\lambda_u = \{Y, Z\}$ then $u \in g(u)$ and $u \notin \text{Odd}(g(u))$; and if $\lambda_u = \{X, Z\}$ then $u \in g(u)$ and $u \in \text{Odd}(g(u))$. \square

4.2 Necessity of Pauli Flow for Pauli measurement first patterns

We consider here patterns where the Pauli measurements are done first and we prove that for this family of patterns, the "standard" Pauli flow is a necessary condition for robust determinism.

Definition 22 A pattern $\left(\prod_{u \in O^c}^< X_{\mathbf{x}(u)}^{s_u} Z_{\mathbf{z}(u)}^{s_u} M_u^{\lambda_u, \alpha_u} \right) E_G N_{I^c}$ is Pauli-first if $|\lambda_u| < |\lambda_v| \Rightarrow u < v$.

In the following we give a characterisation of the stabilizers of any graph state partially measured using Pauli observables.

Definition 23 Given a set A , and a collection $P_A = \{r_i P_i\}_{i \in A}$ where $P_i \in \{X, Y, Z\}$ and $r_i \in \{-1, 1\}$ of Pauli observables, let $\langle P_A | := \prod_i \langle +_{r_i P_i} |$, $x(P_A) := \{i \in A \mid P_i = X \text{ or } Y\}$ and $z(P_A) := \{i \in A \mid P_i = Y \text{ or } Z\}$.

Lemma 24 Given a graph state $|G\rangle$, a Pauli operator M , and a collection P_A of Pauli observables s.t. $|\langle P_A | G \rangle| = 2^{\frac{-|A|}{2}}$,

$$M \langle P_A | G \rangle \simeq \langle P_A | G \rangle \text{ iff } \exists S \subseteq V(G), S \cap z(P_A) = \text{Odd}(S) \cap x(P_A) \text{ and } M \simeq X_{S \setminus x(P_A)} Z_{\text{Odd}(S) \setminus z(P_A)}$$

Proof: (\Leftarrow) First notice that $S \cap z(P_A) = \text{Odd}(S) \cap x(P_A)$ implies $S \cap z(P_A) \subseteq x(P_A)$, so $S \setminus x(P_A) \subseteq V \setminus (z(P_A) \cup x(P_A)) = V \setminus A$. Similarly, $\text{Odd}(S) \setminus z(P_A) \subseteq V \setminus A$.

$$X_{S \setminus x(P_A)} Z_{\text{Odd}(S) \setminus z(P_A)} \langle P_A | G \rangle = \langle P_A | X_{S \setminus x(P_A)} Z_{\text{Odd}(S) \setminus z(P_A)} | G \rangle \quad (6)$$

$$\simeq \langle P_A | X_{S \cap (x(P_A) \setminus z(P_A))} Z_{\text{Odd}(S) \cap (z(P_A) \setminus x(P_A))} \quad (7)$$

$$(ZX)_{S \cap \text{Odd}(S) \cap x(P_A) \cap z(P_A)} X_{S \setminus x(P_A)} Z_{\text{Odd}(S) \setminus z(P_A)} | G \rangle \quad (8)$$

$$\simeq \langle P_A | X_S Z_{\text{Odd}(S)} | G \rangle \quad (9)$$

(\Rightarrow) By induction on the size of A . If $A = \emptyset$ the property is true. Assume the property is true for A of size k , and let $u \in V \setminus A$. W.l.o.g. assume u is X-measured, and $|\langle +_u | \langle P_A | | G \rangle \rangle| = \frac{|\langle P_A | | G \rangle|}{\sqrt{2}}$.

$$\exists |\phi\rangle \text{ s.t. } \langle P_A | | G \rangle = \frac{|+\rangle_u \otimes \langle + |_u \langle P_A | | G \rangle + |-\rangle_u \otimes |\phi\rangle}{\sqrt{2}}$$

Strongness also implies that $\exists S_0$ s.t. $u \in \text{Odd}(S_0)$ and $S_0 \cap z(P_A) = \text{Odd}(S_0) \cap x(P_A)$. Since

$X_{S_0 \setminus x(P_A)} Z_{\text{Odd}(S_0) \setminus z(P_A)} \langle P_A | | G \rangle = \pm \langle P_A | | G \rangle$, we have $|\phi\rangle = \pm X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A) \setminus u} \langle + |_u \langle P_A | | G \rangle$.

$$\text{So } \langle P_A | | G \rangle = \frac{|+\rangle_u \otimes \langle + |_u \langle P_A | | G \rangle \pm |-\rangle_u \otimes X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A) \setminus u} \langle + |_u \langle P_A | | G \rangle}{\sqrt{2}}$$

Let M be a Pauli operator s.t. $M \langle + |_u \langle P_A | | G \rangle \simeq \langle + |_u \langle P_A | | G \rangle$. Notice that $\langle P_A | | G \rangle$ is a eigenvector of $Z_u^m M$ where $m = \begin{cases} 0 & \text{if } M \text{ and } X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A) \setminus u} \text{ commute} \\ 1 & \text{if they anti-commute} \end{cases}$.

Thus by induction hypothesis there exists S_1 s.t. $Z_u^m \otimes M \simeq X_{S_1 \setminus z(P_A)} Z_{\text{Odd}(S_1) \setminus x(P_A)}$.

Notice that $m = 1 \iff u \in \text{Odd}(S_1)$ so $M = X_{S_1 \setminus z(P_A)} Z_{\text{Odd}(S_1) \setminus x(P_A)} Z_u^m = X_{S_1 \setminus z(P_A \cup \{u\})} Z_{\text{Odd}(S_1) \setminus x(P_A \cup \{u\})}$

□

This allows to prove the following Theorem (see appendix D)

Theorem 25 *A robust deterministic Pauli First pattern has a Pauli Flow.*

4.3 Necessity of Extended Pauli Flow

4.3.1 Pushing the Pauli measurements first in robust deterministic patterns

In early papers [13], it is mentioned that Pauli measurements can be done at the beginning of the computation, however it has never been proved that this transformation preserves robust determinism. We discuss in this section how Pauli measurement can be pushed to the beginning in robustly deterministic MBQC patterns preserving the robust determinism.

First we define the relation \triangleright_u , such that $\mathcal{P}_0 \triangleright_u \mathcal{P}_1$ if \mathcal{P}_1 can be obtained from \mathcal{P}_0 by bringing one step forward the Pauli measurement of u in \mathcal{P}_0 .

Definition 26 *The relation \triangleright_u over patterns is inductively defined as*

- $X_A^{s_v} Z_B^{s_v} M_v^{\lambda, \alpha} \mathcal{P}_0 \triangleright_u X_A^{s_v} Z_B^{s_v} M_v^{\lambda, \alpha} \mathcal{P}_1$ if $\mathcal{P}_0 \triangleright_u \mathcal{P}_1$ and $v \neq u$
- $C^{s_u} M_u^{\lambda, \alpha} \sigma_u^{s_v} R^{s_v} M_v^{\{P, Q\}, \theta} \mathcal{P} \triangleright_u R'^{s_v} M_v^{\{P, Q\}, \theta} C'^{s_u} M_u^{\lambda, \alpha} \mathcal{P}$

$$\text{with } \begin{cases} \text{If } \sigma\lambda = -\lambda\sigma & (R', C') = (CR, C) \\ \text{Otherwise if } RC = CR \text{ xor } \sigma = \lambda & (R', C') = (R, C) \\ \text{Otherwise} & (R', C') = (R, P_v C) \text{ or } (R', C') = (\emptyset, P_v C) \end{cases}$$

where R, C are (multi-qubit) Pauli correctors which do not act on u ; $\lambda, P, Q \in \{X, Y, Z\}$; $P \neq Q$; and $\sigma \in \{I, X, Z, XZ\}$ ⁴

⁴with a slight abuse of notation $\sigma = I$ means that the correctors of v do not act on u .

We say that $\mathcal{P} \triangleright \mathcal{P}'$ if there exist u_1, \dots, u_k such that $\mathcal{P} \triangleright_{u_1} \dots \triangleright_{u_k} \mathcal{P}'$.

Lemma 27 *For any pattern \mathcal{P} , if there exist no pattern \mathcal{P}' such that $\mathcal{P} \triangleright \mathcal{P}'$, then \mathcal{P} is Pauli-first.*

Theorem 28 *If $\mathcal{P}_0 \triangleright \mathcal{P}_1$ and \mathcal{P}_0 is robustly deterministic so is \mathcal{P}_1 . Moreover, $\llbracket \mathcal{P}_0 \rrbracket = \llbracket \mathcal{P}_1 \rrbracket$.*

The proof of this theorem is given in Appendix E.

Notice that the converse of Theorem 28 is not true: it is possible to turn a non robustly deterministic pattern into a robustly deterministic one by doing the Pauli measurements first. Indeed, the patterns $Z_3^{s_2} M_2^Z Z_2^{s_1} M_1^{Y,Z} E_{1,2} E_{2,3} N_1 N_2 N_3$ and $Z_3^{s_2} M_2^Z Z_3^{s_1} Z_2^{s_1} M_1^{Y,Z} E_{1,2} E_{2,3} N_1 N_2 N_3$ both lead to $M_1^{Y,Z} Z_1^{s_2} Z_3^{s_2} M_2^Z E_{1,2} E_{2,3} N_1 N_2 N_3$ which is robustly deterministic when the Pauli measurement is performed first, however only the former is robustly deterministic.

Using Lemma 31, given in appendix, from any robustly deterministic pattern one can build a robustly deterministic pattern in which the Pauli measurements are done before the general measurements.

4.3.2 Robust deterministic measurement patterns have Extended Pauli Flow

Using Theorem 28 from any robustly deterministic pattern one can build a robustly deterministic pattern in which the Pauli measurements are done before the general measurements. To prove that having an Extended Pauli Flow is necessary, we first prove Theorem 29 (proof in appendix F) that shows that if all patterns obtained by pushing forward a Pauli measurement have an Extended Pauli flow, so does the original pattern.

Theorem 29 *Given a pattern \mathcal{P}_0 and a vertex u , if for all \mathcal{P} , such that $\mathcal{P}_0 \triangleright_u \mathcal{P}$, \mathcal{P} is induced by an Extended Pauli Flow, then so is \mathcal{P}_0 .*

Proof of theorem 17: Given a robustly deterministic pattern \mathcal{P} , Lemma 27 guarantees that by pushing the Pauli measures in \mathcal{P} one obtains Pauli first patterns \mathcal{P}' with $\mathcal{P} \triangleright \mathcal{P}'$. Theorem 28 ensures that each \mathcal{P}' is robustly deterministic, and therefore is induced by a Pauli Flow by Theorem 25. By direct induction Theorem 29 implies that \mathcal{P} is induced by an EPF.

5 Conclusion

In this paper, we provide a necessary and sufficient condition for robust determinism by defining the Extended Pauli Flow. We have also shown that any Extended Pauli Flow can be changed to a Pauli Flow by pushing forward the Pauli measurements.

Future work still need to be done: for instance finding a polynomial time algorithm for finding an Extended Pauli Flow, also to see if Extended Pauli Flow allows to reduce the depth of the computation.

An other future work to be done could be to weaken the stepwise condition to a stepwise notion that would lie on a set of qubits to be measured at the same time. Indeed, until now, we have considered the analysis of the computation as the qubits were measured each alone, and that none of them could be measured simultaneously. Finally another perspective is to investigate the applications of the extended Pauli flow in the context of graphical languages like the ZX-calculus where Gflow and Pauli flow are already extensively used.

References

- [1] Robert Raussendorf and Hans J Briegel. A one-way quantum computer. *Physical Review Letters*, 86(22):5188, 2001.
- [2] Robert Raussendorf, Jim Harrington, and Kovid Goyal. Topological fault-tolerance in cluster state quantum computation. *New Journal of Physics*, 9(6):199, 2007.
- [3] Sara Bartolucci, Patrick Birchall, Hector Bombin, Hugo Cable, Chris Dawson, Mercedes Gimeno-Segovia, Eric Johnston, Konrad Kieling, Naomi Nickerson, Mihir Pant, et al. Fusion-based quantum computation. *arXiv preprint arXiv:2101.09310*, 2021.
- [4] Dan Browne, Elham Kashefi, and Simon Perdrix. Computational depth complexity of measurement-based quantum computation. In *Conference on Quantum Computation, Communication, and Cryptography*, pages 35–46. Springer, 2010.
- [5] Daniel E Browne, Elham Kashefi, Mehdi Mhalla, and Simon Perdrix. Generalized flow and determinism in measurement-based quantum computation. *New Journal of Physics*, 9(8):250, 2007.
- [6] Ross Duncan and Simon Perdrix. Rewriting measurement-based quantum computations with generalised flow. In *International Colloquium on Automata, Languages, and Programming (ICALP)*, pages 285–296. Springer, 2010.
- [7] Ross Duncan, Aleks Kissinger, Simon Perdrix, and John Van De Wetering. Graph-theoretic simplification of quantum circuits with the zx-calculus. *Quantum*, 4:279, 2020.
- [8] Miriam Backens, Hector Miller-Bakewell, Giovanni de Felice, Leo Lobski, and John van de Wetering. There and back again: A circuit extraction tale. *Quantum*, 5:421, 2021.
- [9] Simon Perdrix and Luc Sanselme. Determinism and computational power of real measurement-based quantum computation. In *International Symposium on Fundamentals of Computation Theory*, pages 395–408. Springer, 2017.
- [10] Will Simmons. Relating measurement patterns to circuits via pauli flow. *QPL2021, arXiv preprint arXiv:2109.05654*, 2021.
- [11] Vincent Danos, Elham Kashefi, and Prakash Panangaden. The measurement calculus. *Journal of the ACM (JACM)*, 54(2):8–es, 2007.
- [12] Vincent Danos and Elham Kashefi. Determinism in the one-way model. *Physical Review A*, 74(5):052310, 2006.
- [13] Robert Raussendorf and Hans J Briegel. Quantum computing via measurements only. *arXiv preprint quant-ph/0010033*, 2000.

A Proof of Proposition 8

Let $\kappa_p := \{(u, v) \in (O^c)^2 \mid \kappa_{u,v}^{p(u)}\}$.

From the proof of property 1 in [9] we know that $(p, <)$ is a Pauli Flow for (G, I, O, λ) if the following conditions hold

$$\begin{aligned} (c_X) \quad X \in \lambda_v &\Rightarrow v \in \text{Odd}(p(v)) \setminus \left(\bigcup_{\substack{\neg(u < v) \\ u \notin O \cup \{v\}}} \text{Odd}(p(u)) \right) \\ (c_Y) \quad Y \in \lambda_v &\Rightarrow v \in \text{Odd}[p(v)] \setminus \left(\bigcup_{\substack{\neg(u < v) \\ u \notin O \cup \{v\}}} \text{Odd}[p(u)] \right) \\ (c_Z) \quad Z \in \lambda_v &\Rightarrow v \in p(v) \setminus \left(\bigcup_{\substack{\neg(u < v) \\ u \notin O \cup \{v\}}} p(u) \right) \end{aligned}$$

The previous condition is equivalent to

- $\forall (u, v) \in (O^c)^2; \neg(u < v)$ and $v = u$,
 - $X \notin \lambda_v$ or $v \in \text{Odd}(p(u))$,
 - $Y \notin \lambda_v$ or $v \in \text{Odd}[p(u)]$,
 - $Z \notin \lambda_v$ or $v \in p(u)$,
- $\forall (u, v) \in (O^c)^2; \neg(u < v)$ and $v \neq u$,
 - $X \notin \lambda_v$ or $v \notin \text{Odd}(p(u))$,
 - $Y \notin \lambda_v$ or $v \notin \text{Odd}[p(u)]$,
 - $Z \notin \lambda_v$ or $v \notin p(u)$,

That can be rewritten in the following way $\forall (u, v) \in (O^c)^2; \neg(u < v)$,

- $X \notin \lambda_v$ or $\neg((v = u) \oplus v \in \text{Odd}(p(u)))$,
- $Y \notin \lambda_v$ or $\neg((v = u) \oplus v \in \text{Odd}[p(u)])$,
- $Z \notin \lambda_v$ or $\neg((v = u) \oplus v \in p(u))$,

By contraposition this property can be rewritten to, $\forall (u, v) \in (O^c)^2$,

$$X \in \lambda_v \text{ and } ((v = u) \oplus v \in \text{Odd}(p(u))),$$

$$\text{or } (Y \in \lambda_v \text{ and } ((v = u) \oplus v \in \text{Odd}[p(u)])),$$

$$\text{or } (Z \in \lambda_v \text{ and } ((v = u) \oplus v \in p(u))),$$

implies that $u < v$.

As v is taken in O^c , the first condition of definition 7 is never verified and we can shorten last property to $\forall (u, v) \in (O^c)^2, \kappa_{u,v}^{p(u)} \Rightarrow u < v$.

B Proof of lemma 15

Let's prove equation 3. For any $v \in B^u$, the extended Pauli Flow condition implies $\neg \kappa_{u,v}^{p(u)}$. So,

- if $\lambda_v = X$ then $v \notin \text{Odd}(p(u))$, and then $v \in B_X^u \setminus B_Z^u$,
- if $\lambda_v = Y$ then $v \notin \text{Odd}[p(u)]$, and then $v \in B_X^u \cap B_Z^u$,
- if $\lambda_v = Z$ then $v \notin p(u)$, and then $v \in B_Z^u \setminus B_X^u$.

As a consequence, the Pauli operator $X_{B_X^u} Z_{B_Z^u} = (-i)^{|B_X^u \cap B_Z^u|} X_{B_X^u \setminus B_Z^u} Y_{B_Z^u \cap B_X^u} Z_{B_Z^u \setminus B_X^u}$ can be absorbed by the projectors:

$$\left(\prod_{v \in B^u} \left\langle +_{\alpha_v}^{\lambda_v} \right| \right) X_{B_X^u} Z_{B_Z^u} = \pm i^{|B_X^u \cap B_Z^u|} \prod_{v \in B^u} \left\langle +_{\alpha_v}^{\lambda_v} \right|$$

C Proof of lemma 16

Let's turn now to equation 11. For any $v \in A^u$, $|\lambda_v| = 2$. The Extended Pauli Flow condition implies that $\exists D_v \subseteq I^c$, $v \in D_v \cup \text{Odd}(D_v)$ and $\forall w \in D_v \cup \text{Odd}(D_v)$, $\neg \kappa_{v,w}^{D_v}$. For any $w \in D_v \cup \text{Odd}(D_v) \setminus \{v\}$ notice that $\neg \kappa_{v,w}^{D_v}$ means that we have the three conditions:

- $X \notin \lambda_w$ or $w \notin \text{Odd}(D_v)$,
- $Y \notin \lambda_w$ or $w \notin \text{Odd}[D_v]$,
- $Z \notin \lambda_w$ or $w \notin D_v$.

First of all, $|\lambda_w| = 2$ would contradict the fact that $w \in D_v \cup \text{Odd}(D_v)$, thus $|\lambda_w| = 1$. Moreover,

- $\lambda_w = X \Rightarrow w \in D_v \setminus \text{Odd}(D_v)$,
- $\lambda_w = Y \Rightarrow v \in D_v \cap \text{Odd}(D_v)$,
- $\lambda_w = Z \Rightarrow v \in \text{Odd}(D_v) \setminus D_v$.

As a consequence:

$$\left(\prod_{w \in (D_v \cup \text{Odd}(D_v)) \setminus \{v\}} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) X_{D_v \setminus \{v\}} Z_{\text{Odd}(D_v) \setminus \{v\}} = \pm i^{|(D_v \setminus \{v\}) \cap (\text{Odd}(D_v) \setminus \{v\})|} \prod_{w \in (D_v \cup \text{Odd}(D_v)) \setminus \{v\}} \left\langle +_{\alpha_w}^{\lambda_w} \right| \quad (10)$$

Like in Eq. 3, the complex number in Eq. 10 witnesses the fact that when $\lambda_w = Y$, we use $X_w Z_w$ rather than $Y_w = i X_w Z_w$.

Now, the Extended Pauli Flow condition guarantees also that $\neg \kappa_{vv}^{D_v}$, which means that

- $X \notin \lambda_v$ or $v \in \text{Odd}(D_v)$,
- $Y \notin \lambda_v$ or $v \in \text{Odd}[D_v]$,
- $Z \notin \lambda_v$ or $v \in D_v$.

As, $v \in D_v \cup \text{Odd}(D_v)$, we can state that

- $\lambda_v = \{X, Y\} \Rightarrow v \in \text{Odd}(D_v) \setminus D_v$,
- $\lambda_v = \{X, Z\} \Rightarrow v \in \text{Odd}(D_v) \cap D_v$,
- $\lambda_v = \{Y, Z\} \Rightarrow v \in D_v \setminus \text{Odd}(D_v)$.

Therefore, thus the previous fixed-point property (Eq. 10) can be completed to get:

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) X_{D_v} Z_{\text{Odd}(D_v)} = \pm \left(\prod_{w \in (D_v \cup \text{Odd}(D_v)) \setminus \{v\}} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) \lambda_v^\perp \quad (11)$$

where $\lambda_v^\perp = \begin{cases} Z_v & \text{if } \lambda_v = \{X, Y\} \\ Y_v = iX_v Z_v & \text{if } \lambda_v = \{X, Z\} \\ X_v & \text{if } \lambda_v = \{Y, Z\} \end{cases}$.

Notice that the term $i^{|(D_v \setminus \{v\}) \cap (\text{Odd}(D_v) \setminus \{v\})|}$ of Eq. 10 is not present in Eq. 11 has it is absorbed by λ_v^\perp . Indeed, for any D , $|D \cap \text{Odd}(D)| = 0 \pmod 2$, thus $|(D_v \setminus \{v\}) \cap (\text{Odd}(D_v) \setminus \{v\})| = 1 \pmod 2$ iff $v \in D_v \cap \text{Odd}(D_v)$, i.e. $\lambda_v = \{X, Z\}$.

Thus by combining Eq. 11 and 1, we get that for any $v \in A^u$, and any (multi-qubit) Pauli operator R ,

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) R E_G |+\rangle_{I^c} |\phi\rangle_I = \pm \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) \lambda_v^\perp R E_G |+\rangle_{I^c} |\phi\rangle_I \quad (12)$$

We additionally have, according to Eq. 2, for some $P_v, Q_v \in \lambda_v$.

$$\begin{aligned} & \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) R E_G |+\rangle_{I^c} |\phi\rangle_I \\ &= \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) (\cos(\alpha_v) P_v + \sin(\alpha_v) Q_v) R E_G |+\rangle_{I^c} |\phi\rangle_I \\ &= \cos(\alpha_v) \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) P_v R E_G |+\rangle_{I^c} |\phi\rangle_I + \sin(\alpha_v) \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) Q_v R E_G |+\rangle_{I^c} |\phi\rangle_I \end{aligned} \quad (13)$$

Thanks to Equation 11, we have

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) Q_v R E_G |+\rangle_{I^c} |\phi\rangle_I = \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) \lambda_v^\perp Q_v R E_G |+\rangle_{I^c} |\phi\rangle_I$$

Moreover, since $\lambda_v = \{P_v, Q_v\}$, we have $\lambda_v^\perp Q = \pm i P$. Thus,

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) \lambda_v^\perp Q_v R E_G |+\rangle_{I^c} |\phi\rangle_I = \pm i \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) \lambda_v^\perp P_v R E_G |+\rangle_{I^c} |\phi\rangle_I$$

As a consequence,

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) R E_G |+\rangle_{I^c} |\phi\rangle_I = (\cos(\alpha_v) \pm i \sin(\alpha_v)) \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) P_v R E_G |+\rangle_{I^c} |\phi\rangle_I$$

Hence, when $v \in A^u$, it can absorb, up to a global phase, one of the Pauli operator of the plane λ_v . Combined with equation 12, any Pauli operator on such a vertex $v \in A^u$ can be absorbed, and we get Eq 4: for any one-qubit Pauli operator L_v , and any multi-qubit Pauli operator R , $\exists \theta$ s.t.

$$\left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) R E_G |+\rangle_{I^c} |\phi\rangle_I = e^{i\theta} \left(\prod_{w \in D_v \cup \text{Odd}(D_v)} \left\langle +_{\alpha_w}^{\lambda_w} \right| \right) L_v R E_G |+\rangle_{I^c} |\phi\rangle_I$$

D Proof of Theorem 25

Proof:

$$\mathcal{P}' = \left(\prod_{u \in O^c \text{ s.t. } |\lambda_u|=2}^< C_u^{s_u} M_u^{\lambda_u, \alpha_u} \right) \left(\prod_{u \in O^c \text{ s.t. } |\lambda_u|=1}^< C_u^{s_u} M_u^{\lambda_u, \beta_u} \right) E_G N_{V \setminus I}$$

Let $\langle \vec{\alpha} | := \bigotimes_{u \in O^c \text{ s.t. } |\lambda_u|=2} \langle +_{\alpha_u}^{\lambda_u} |$.

The proof is by induction. Let u be the largest element according to $<$. For any $|\phi_I\rangle$, uniformly strong determinism implies that

$$\langle \vec{\alpha} | \langle P | E_G N_{V \setminus I} | \phi_I \rangle \simeq C_u \langle \vec{\alpha} | \langle P | \bar{\lambda}_u E_G N_{V \setminus I} | \phi_I \rangle$$

where $\bar{\lambda}_u$ is any Pauli operator which is not proportional to a Pauli operator in λ_u (typically $\bar{\lambda}_u = Z$ when $\lambda_u = \{X, Y\}$). So

$$\langle \vec{\alpha} | \langle P | E_G N_{V \setminus I} | \phi_I \rangle \simeq \langle \vec{\alpha} | C_u \langle P | \bar{\lambda}_u E_G N_{V \setminus I} | \phi_I \rangle$$

According to Corollary 19, $\exists L \subseteq \{u \mid |\lambda_u| = 2\}$, $\exists x \in \{0, 1\}^{|L|}$, $\exists |\psi\rangle$ s.t. $\langle P | E_G N_{V \setminus I} | \phi_I \rangle \simeq (B |x\rangle_L) \otimes |\psi\rangle$ and $C_u \langle P | \bar{\lambda}_u E_G N_{V \setminus I} | \phi_I \rangle \simeq (B |\bar{x}\rangle_L) \otimes |\psi\rangle$, where

$$\forall v \in L, B_v := \begin{cases} I & \text{if } \lambda_v = \{X, Y\} \\ H & \text{if } \lambda_v = \{Y, Z\} \\ \sqrt{X} & \text{if } \lambda_v = \{Z, X\} \text{ where for a Pauli } \sigma, \sqrt{\sigma} = \frac{I+i\sigma}{2} \end{cases}.$$

So $\langle P | E_G N_{V \setminus I} | \phi_I \rangle \simeq C_u \bar{\lambda}_u (B |\bar{x}\rangle_L \otimes |\psi\rangle)$

- If $u \notin L$, $E_G N_{V \setminus I} | \phi_I \rangle \simeq B |\bar{x}\rangle_L \otimes C_u \bar{\lambda}_u |\psi\rangle$, so $B |\bar{x}\rangle_L \otimes C_u \bar{\lambda}_u |\psi\rangle \simeq B |x\rangle_L \otimes |\psi\rangle$ which implies $L = \emptyset$.

- If $u \in L$, $E_G N_{V \setminus I} | \phi_I \rangle \simeq \bar{\lambda}_u B |\bar{x}\rangle_L \otimes C_u |\psi\rangle$, so $\bar{\lambda}_u B |\bar{x}\rangle_L \otimes C_u |\psi\rangle \simeq B |x\rangle_L \otimes |\psi\rangle$. Notice that $\langle x |_L B^\dagger \bar{\lambda}_u B |\bar{x}\rangle_L = 0$, indeed:

- if $\lambda_u = \{X, Y\}$ then $B_u = I$ and $\bar{\lambda}_u \simeq Z$ so $\langle x |_u B_u^\dagger \bar{\lambda}_u B_u |\bar{x}\rangle_u = 0$.
- if $\lambda_u = \{Z, X\}$ then $B_u = \sqrt{X}$ and $\bar{\lambda}_u \simeq Y$ so $\langle x |_u B_u^\dagger \bar{\lambda}_u B_u |\bar{x}\rangle_u = 0$ since $\sqrt{X}^\dagger Y \sqrt{X} \simeq Z$.
- if $\lambda_u = \{Y, Z\}$ then $B_u = H$ and $\bar{\lambda}_u \simeq X$ so $\langle x |_u B_u^\dagger \bar{\lambda}_u B_u |\bar{x}\rangle_u = 0$ since $H X H \simeq Z$. It implies $L = \emptyset$.

As a consequence $\langle P | E_G N_{V \setminus I} | \phi_I \rangle \simeq C_u \langle P | \bar{\lambda}_u E_G N_{V \setminus I} | \phi_I \rangle$

When $|\phi_I\rangle = |+_I\rangle$, when have $\langle P | |G\rangle \simeq C_u \langle P | \bar{\lambda}_u |G\rangle$.

- If $|\lambda(u)| = 2$ then $C_u \bar{\lambda}_u \langle P | G \rangle \simeq \langle P | G \rangle$, so $C_u \bar{\lambda}_u \simeq X_{S \setminus x(P)} Z_{\text{Odd}(S) \setminus z(P)}$ with $S \cap z(P) = \text{Odd}(S) \cap x(P)$ (Lemma 24). By considering the case $|\phi_I\rangle = |0\rangle_I$, it also implies $S \subseteq I^c$. Moreover C_u should not act on the already measured qubits so $\forall v \in (S \Delta K \Delta L) \cup (\text{Odd}(S) \Delta L \Delta R)$, $v = u$ or $u < v$.

We recover the Pauli Flow condition by defining $p(u) := S$.

- If $|\lambda(u)| = 1$ then let A be the set of all Pauli measured qubits but u .

$$\langle P_A | G \rangle = \frac{|+\rangle_u \otimes \langle P | G \rangle + e^{i\theta} |-\rangle_u \otimes \langle P_A | \bar{\lambda}_u | G \rangle}{\sqrt{2}}$$

Strongness implies that $\exists S_0$ s.t. $u \in \text{Odd}(S_0)$ and $S_0 \cap z(P_A) = \text{Odd}(S_0) \cap x(P_A)$.

Since $X_{S_0 \setminus x(P_A)} Z_{\text{Odd}(S_0) \setminus z(P_A)} \langle P_A | G \rangle \simeq \langle P_A | G \rangle$, we have

$$\langle P | \bar{\lambda}_u | G \rangle \simeq X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A) \setminus u} \langle P_A | G \rangle$$

So $\langle P | G \rangle \simeq C_u X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A) \setminus u} \langle P | G \rangle$

As a consequence, $\exists S_1$ s.t. $S_1 \cap z(P) = \text{Odd}(S_1) \cap x(P)$ and

$$C_u X_{S_0 \setminus x(P_A) \setminus u} Z_{\text{Odd}(S_0) \setminus z(P_A)} Z_u \simeq X_{S_1 \setminus x(P) \setminus u} Z_{\text{Odd}(S_1) \setminus z(P)}$$

So $C_u = X_{S_0 \Delta S_1 \setminus x(P)} Z_{\text{Odd}(S_0) \setminus z(P)} Z_u$

Moreover, with $|\phi\rangle_I = |0\rangle_I$, we have $S_0 \Delta S_1 \subseteq I^c$. We recover the Pauli Flow condition by defining $p(u) := S_0 \Delta S_1$.

□

E Proof of Theorem 28

To prove that pushing the Pauli preserves robustly deterministic we start by proving lemma 30, for the case where we want to push Z measurement before a Z, X one in a robustly deterministic pattern, then we prove that it can be applied to any Pauli in any measurement in lemma 31. The fact that interpretations are the same is guaranteed by the fact that they have same the main 0 branch (when no correction is needed).

Lemma 30 *For any pattern \mathcal{P} , if the pattern $\mathcal{P}' = C^{s_u} M_u^Z (Z_u^z X_u^x)^{s_v} R^{s_v} M_v^{Z,X} \mathcal{P}$ is robustly deterministic with $u \notin \text{dom}(R)$, x, z , if $\mathcal{P}' \triangleright_u \mathcal{P}''$ then there exists $b \in \{0, 1\}$ such that $\mathcal{P}'' = C^{x s_v} R^{(a \bar{x} b + 1) s_v} M_v^{Z,X} Z_v^{a \bar{x} s_u} C^{s_u} M_u^Z \mathcal{P}$, where $a \in \{0, 1\}$ is such that $(-1)^a R C = (-1)^z C R$, moreover \mathcal{P}'' is robustly deterministic for any b , and achieves the same computation.*

Proof: First we check hat So $\mathcal{P}' \triangleright_u \mathcal{P}''$. Let $\lambda = Z$, $\sigma = Z^z X^x$, $R' = C^x R^{(a \bar{x} + 1)}$, $C' = Z_v^{a \bar{x}} C$

- If $x = 1$, $\sigma \lambda = -\lambda \sigma$, we have $(R', C') = (C R, C)$
- If $x = 0, z = 1$ and $a = 0$ we have $(R', C') = (R, C)$
- If $x = 0, z = 0$ and $a = 0$ we have $(R', C') = (R, C)$
- If $x = 0, z = 0$ and $a = 1$ we have $(R', C') = (R^b, Z_v C)$

- If $x = 0, z = 1$ and $a = 1$ we have $(R', C') = (R^b, Z_v C)$

Let r and c in $\{0, 1\}$ s.t. $R^2 = (-1)^r$ and $C^2 = (-1)^c$.

Let $|\varphi\rangle$ be the state of the system after the application of \mathcal{P} . There exist four (not necessarily normalized) vectors $|\phi_{i,j}\rangle$ s.t.

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + |0_v 1_u\rangle |\phi_{01}\rangle + |1_v 0_u\rangle |\phi_{10}\rangle + |1_v 1_u\rangle |\phi_{11}\rangle$$

Let $|\Psi_{s_v}^\theta\rangle$ be the state of the system after the application of the measurements of v , and appropriate corrections. When $\theta = 0$ (i.e. v is Z -measured) and $s_v = 0$, $|\Psi_0^0\rangle = |0_u\rangle |\phi_{00}\rangle + |1_u\rangle |\phi_{01}\rangle$.

When followed by the Z -measurement of u and the corresponding corrections, the two possible states, $|\phi_{00}\rangle \simeq C |\phi_{01}\rangle$ because of the strong determinism of \mathcal{P}' . Thus $\exists \alpha$ s.t. $|\phi_{01}\rangle = e^{i\alpha} C |\phi_{00}\rangle$.

Similarly, for $\theta = \pi$, we obtain that $\exists \beta$ s.t. $|\phi_{11}\rangle = e^{i\beta} C |\phi_{10}\rangle$. Thus,

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C |\phi_{00}\rangle + |1_v 0_u\rangle |\phi_{10}\rangle + e^{i\beta} |1_v 1_u\rangle C |\phi_{10}\rangle$$

If $[x = 0]$: Now, we consider the case $\theta = 0$ and $s_v = 1$ which, after the appropriate corrections, produces the state:

$$|\Psi_1^0\rangle = |0_u\rangle R |\phi_{10}\rangle + (-1)^z e^{i\beta} |1_u\rangle RC |\phi_{10}\rangle$$

Since \mathcal{P}' is stepwise and strong deterministic the possible states of the register after the measurement of v (and the corresponding corrections) should be the same up to a global phase: $\exists \gamma$ s.t. $|\Psi_1^0\rangle = e^{i\gamma} |\Psi_0^0\rangle$. As a consequence, $R |\phi_{10}\rangle = e^{i\gamma} |\phi_{00}\rangle$ and $(-1)^z e^{i\beta} RC |\phi_{10}\rangle = e^{i(\alpha+\gamma)} C |\phi_{00}\rangle$, so $(-1)^a e^{i(\beta+\gamma)} = e^{i(\alpha+\gamma)}$. It implies $\beta = \alpha + a\pi \bmod 2\pi$.

As a consequence,

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C |\phi_{00}\rangle + e^{i(\gamma+r\pi)} |1_v 0_u\rangle R |\phi_{00}\rangle + (-1)^a e^{i(\alpha+\gamma+r\pi)} |1_v 1_u\rangle CR |\phi_{00}\rangle$$

So $\exists \alpha, \delta$ s.t.

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i\delta} |1_v 0_u\rangle R |\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C |\phi_{00}\rangle + (-1)^a e^{i(\alpha+\delta)} |1_v 1_u\rangle CR |\phi_{00}\rangle$$

By measuring v with $\theta = \pi/2$ one gets:

$$\left| \Psi_0^{\frac{\pi}{2}} \right\rangle = (1 + e^{i\delta} R) |0_u\rangle |\phi_{00}\rangle + e^{i\alpha} C (1 + (-1)^a e^{i\delta} R) |1_u\rangle |\phi_{00}\rangle$$

Then by measuring u with Z , we have that exists η s.t.

$$(1 + e^{i\delta} R) |\phi_{00}\rangle = e^{i(\alpha+\eta+c\pi)} (1 + (-1)^a e^{i\delta} R) |\phi_{00}\rangle$$

- If $|\phi_{00}\rangle$ and $R |\phi_{00}\rangle$ are not colinear then $a = 0$.

As a consequence

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i\delta} |1_v 0_u\rangle R |\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C |\phi_{00}\rangle + e^{i(\alpha+\delta)} |1_v 1_u\rangle CR |\phi_{00}\rangle$$

Since the patterns $C^{s_u} M_u \mathcal{P}$ and $R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ are strongly deterministic, $R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ is robustly deterministic.

- Otherwise $|\phi_{00}\rangle$ is an eigenvector of R , so $\exists k \in \{0, 1, 2, 3\}$ s.t. $R|\phi_{00}\rangle = i^k |\phi_{00}\rangle$, and

$$|\varphi\rangle = (|0_v\rangle + e^{i\delta+k\pi/2}|1_v\rangle)|0_u\rangle|\phi_{00}\rangle + e^{i\alpha}(|0_v\rangle + (-1)^a e^{i(\delta+k\pi/2)}|1_v\rangle)|1_u\rangle C|\phi_{00}\rangle.$$

Since the patterns $Z_v^{as_u} C^{s_u} M_u \mathcal{P}$ and $M_v^{Z,X} Z^{as_u} C^{s_u} M_u \mathcal{P}$ are strongly deterministic, $M_v^{Z,X} Z^{as_u} C^{s_u} M_u \mathcal{P}$ is robustly deterministic. Furthermore, notice that $R^{s_v} M_v^{Z,X} Z^{as_u} C^{s_u} M_u \mathcal{P}$ is also robustly deterministic.

If $[x = 1]$: We consider the case $\theta = 0$ and $s_v = 1$ which, after the appropriate corrections, produces the state:

$$|\Psi_1^0\rangle = (-1)^z |1_u\rangle R|\phi_{10}\rangle + e^{i\beta} |0_u\rangle RC|\phi_{10}\rangle$$

whereas the state, when $s_v = 0$, is

$$|\Psi_0^0\rangle = |0_u\rangle|\phi_{00}\rangle + e^{i\alpha} |1_u\rangle C|\phi_{00}\rangle$$

Since \mathcal{P}' is stepwise and strongly deterministic the possible states of the register after the measurement of v (and the corresponding corrections) should be the same up to a global phase: $\exists \gamma$ s.t. $|\Psi_1^0\rangle = e^{i\gamma} |\Psi_0^0\rangle$. As a consequence, $e^{i\beta} RC|\phi_{10}\rangle = e^{i\gamma} |\phi_{00}\rangle$ and $(-1)^z R|\phi_{10}\rangle = e^{i(\alpha+\gamma)} C|\phi_{00}\rangle$,

$$\text{So } (-1)^z R|\phi_{10}\rangle = e^{i(\alpha+\beta)} C RC|\phi_{10}\rangle = (-1)^{a+z} e^{i(\alpha+\beta)} C^2 R|\phi_{10}\rangle = (-1)^{a+z+c} e^{i(\alpha+\beta)} R|\phi_{10}\rangle.$$

It implies $\beta = -\alpha + (a+c)\pi \bmod 2\pi$, $C|\phi_{10}\rangle = (-1)^r e^{i(\gamma-\beta)} R|\phi_{00}\rangle$, and $|\phi_{10}\rangle = (-1)^{z+r} e^{i(\alpha+\gamma)} RC|\phi_{00}\rangle$.

As a consequence,

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C|\phi_{00}\rangle + (-1)^{z+r} e^{i(\alpha+\gamma)} |1_v 0_u\rangle RC|\phi_{00}\rangle + (-1)^r e^{i\gamma} |1_v 1_u\rangle R|\phi_{00}\rangle$$

So $\exists \alpha, \delta$ s.t.

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i(\alpha+\delta)} |1_v 0_u\rangle RC|\phi_{00}\rangle + e^{i\alpha} |0_v 1_u\rangle C|\phi_{00}\rangle + (-1)^z e^{i\delta} |1_v 1_u\rangle R|\phi_{00}\rangle$$

We consider two cases depending whether $|\phi_{00}\rangle$ and $RC|\phi_{00}\rangle$ are independent or not.

- If $|\phi_{00}\rangle$ and $RC|\phi_{00}\rangle$ are not colinear, then we consider the measurement of v according to $\theta = \frac{\pi}{2}$. When the outcome is $s_v = 0$ then the resulting state is

$$\left| \Psi_0^{\frac{\pi}{2}} \right\rangle = |0_u\rangle |\phi_{00}\rangle + e^{i(\alpha+\delta)} |0_u\rangle RC|\phi_{00}\rangle + e^{i\alpha} |1_u\rangle C|\phi_{00}\rangle + (-1)^z e^{i\delta} |1_u\rangle R|\phi_{00}\rangle$$

When followed by the Z -measurement of u and the corresponding corrections, the two possible states:

$$|\phi_{00}\rangle + e^{i(\alpha+\delta)} RC|\phi_{00}\rangle \quad \text{and} \quad (-1)^c e^{i\alpha} |\phi_{00}\rangle + (-1)^a e^{i\delta} RC|\phi_{00}\rangle$$

are equal up to a global phase because of the strong determinism of \mathcal{P}' . Thus $\exists \epsilon$ s.t.

$$e^{i\epsilon} (|\phi_{00}\rangle + e^{i(\alpha+\delta)} RC|\phi_{00}\rangle) = (-1)^c e^{i\alpha} |\phi_{00}\rangle + (-1)^a e^{i\delta} RC|\phi_{00}\rangle$$

It implies, since $|\phi_{00}\rangle$ and $RC|\phi_{00}\rangle$ are not colinear, that $\epsilon = \alpha + c\pi \bmod 2\pi$ and $\epsilon + \alpha + \delta = a\pi + \delta \bmod 2\pi$, so $\alpha = -\alpha + (a+c)\pi \bmod 2\pi$.

As a consequence,

$$|\varphi\rangle = |0_v 0_u\rangle |\phi_{00}\rangle + e^{i(\alpha+\delta)} |1_v 0_u\rangle RC |\phi_{00}\rangle + (-1)^{a+c} e^{-i\alpha} |0_v 1_u\rangle C |\phi_{00}\rangle + (-1)^z e^{i\delta} |1_v 1_u\rangle R |\phi_{00}\rangle$$

Hence the patterns $C^{s_u} M_u \mathcal{P}$ and $C^{s_v} R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ are strongly deterministic, so $C^{s_v} R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ is robustly deterministic.

- If $|\phi_{00}\rangle$ and $RC |\phi_{00}\rangle$ are colinear, then $|\phi_{00}\rangle$ is an eigenvector of RC , so $\exists k \in \{0, 1, 2, 3\}$ s.t. $RC |\phi_{00}\rangle = i^k |\phi_{00}\rangle$, then $C |\phi_{00}\rangle = i^{2r+k} R |\phi_{00}\rangle$, and

$$\begin{aligned} |\varphi\rangle &= |0_v 0_u\rangle |\phi_{00}\rangle + i^k e^{i(\alpha+\delta)} |1_v 0_u\rangle |\phi_{00}\rangle + i^{2r+k} e^{i\alpha} |0_v 1_u\rangle R |\phi_{00}\rangle + (-1)^z e^{i\delta} |1_v 1_u\rangle R |\phi_{00}\rangle \\ &= (|0_v\rangle + i^k e^{i(\alpha+\delta)} |1_v\rangle) |0_u\rangle |\phi_{00}\rangle + i^{2r+k} e^{i\alpha} (|0_v\rangle + i^{2z+2r-k} e^{i(\delta-\alpha)} |1_v\rangle) |1_u\rangle R |\phi_{00}\rangle \end{aligned}$$

Strongness implies $\exists \ell, m \in \{0, 1\}$ s.t. $i^k e^{i(\alpha+\delta)} = (-1)^\ell i$, $e^{i(\delta-\alpha+z\pi-r\pi-k\frac{\pi}{2})} = (-1)^m i$, which implies $2\delta = (z+r+m+\ell+1)\pi \bmod 2\pi$, and $2\alpha = (z+r+m+\ell+k)\pi \bmod 2\pi$

As a consequence,

$$|\varphi\rangle = (|0_v\rangle + (-1)^\ell i |1_v\rangle) |0_u\rangle |\phi_{00}\rangle + i^{2r+k} e^{i\alpha} (|0_v\rangle + (-1)^m i |1_v\rangle) |1_u\rangle R |\phi_{00}\rangle$$

Thus

$$\left| \Psi_0^{\frac{\pi}{2}} \right\rangle = \sqrt{2} (e^{(-1)^\ell \frac{\pi}{4} i} |0_u\rangle |\phi_{00}\rangle + i^{2r+k} e^{i\alpha} e^{(-1)^m \frac{\pi}{4} i} |1_u\rangle R |\phi_{00}\rangle)$$

and

$$\left| \Psi_1^{\frac{\pi}{2}} \right\rangle = \sqrt{2} ((-1)^z e^{(-1)^\ell \frac{\pi}{4} i} |1_u\rangle R |\phi_{00}\rangle + i^k e^{i\alpha} e^{(-1)^m \frac{\pi}{4} i} |0_u\rangle |\phi_{00}\rangle)$$

Stepwise strong determinism implies that $\exists \epsilon$ s.t. $e^{i\epsilon} e^{(-1)^\ell \frac{\pi}{4} i} = i^k e^{i\alpha} e^{(-1)^m \frac{\pi}{4} i}$ and $e^{i\epsilon} i^{2r+k} e^{i\alpha} e^{(-1)^m \frac{\pi}{4} i} = (-1)^z e^{(-1)^\ell \frac{\pi}{4} i}$. As a consequence $2\alpha = (r+k+z)\pi$. Combining with previous equations on 2α , namely $2\alpha = (z+r+m+\ell+k)\pi \bmod 2\pi$, we get $m = \ell \bmod 2$. As a consequence:

$$|\varphi\rangle = (|0_v\rangle + (-1)^\ell i |1_v\rangle) \otimes (|0_u\rangle |\phi_{00}\rangle + i^{2r+k} e^{i\alpha} R |\phi_{00}\rangle)$$

Hence the patterns $C^{s_u} M_u \mathcal{P}$ and $C^{s_v} R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ are strongly deterministic, so $C^{s_v} R^{s_v} M_v^{Z,X} C^{s_u} M_u \mathcal{P}$ is robustly deterministic. □

Lemma 31 For any pattern \mathcal{P} , if the pattern $\mathcal{P}' = C^{s_u} M_u^P \sigma_u^{s_v} R^{s_v} M_v^\theta \mathcal{P}$ is robustly deterministic where M_u^P is a Pauli measurement and σ_u is a one qubit Pauli then $C^{s_v r} R^{(\alpha+1)s_v} M_v^\theta \sigma_v'^{\alpha s_u} C^{s_u} M_u^P \mathcal{P}$ is robustly deterministic for any σ' Pauli operator in the

plane θ , where α is defined by $\alpha = \begin{cases} (y+z)(1+x) & \text{if } P = Z \\ (y+x)(1+z) & \text{if } P = X \\ (y+z)(1+x+z) & \text{if } P = Y \end{cases}$

Where $\sigma_u = X^x Z^z$, y is s.t. $(-1)^y RC = CR$ and r is such that $\sigma_u P = (-1)^r P \sigma_u$.

Proof: Lemma 30 ensures that if $\mathcal{P}' = C^{s_u} M_u^Z \sigma_u^{s_v} R^{s_v} M_v^{Z,X} \mathcal{P}$ is robustly deterministic then

$C^{x s_v} R^{(a\bar{x}+1)s_v} M_v^{Z,X} Z_v^{a\bar{x} s_u} C^{s_u} M_u^Z \mathcal{P}$ is robustly deterministic, where $a \in \{0, 1\}$ is such that $(-1)^a RC = (-1)^z CR$.

Furthermore $C^{xs_v} R^{(a\bar{x}+1)s_v} M_v^{Z,X} Z_v^{a\bar{x}s_u} C^{su} M_u^Z H_v \mathcal{P} = C^{xs_v} R^{(a\bar{x}+1)s_v} M_v^{Z,X} X_v^{a\bar{x}s_u} C^{su} M_u^Z \mathcal{P}$ is also deterministic.

Therefore, for any Pauli σ' in $\{Z, X\}$, $C^{svr} R^{(\alpha+1)s_v} M_v^{Z,X} \sigma_v'^{\alpha s_u} C^{su} M_u^P \mathcal{P}$ is robustly deterministic, as $\bar{x} = 1 + x$ and $a = y + z$ where $(-1)^R C = (-1)^y C R$.

One can change the measurement plane by adding a Clifford unitary modifying only the Pauli σ' :

$$C^{su} M_u^Z (\sigma_u^x R)^{s_v} M_v^{X,Y} \mathcal{P} = C^{su} M_u^Z (\sigma_u^x R)^{s_v} M_v^{Z,X} \sqrt{X} \mathcal{P}$$

Which allows to see that for any plane θ , and for any Pauli $\sigma' \in \theta$, if $\mathcal{P}' = C^{su} M_u^Z \sigma_u^{s_v} R^{s_v} M_v^\theta \mathcal{P}$ is robustly deterministic then $C^{svr} R^{(\alpha+1)s_v} M_v^\theta \sigma_v'^{\alpha s_u} C^{su} M_u^P \mathcal{P}$ is robustly deterministic.

When considering other Pauli measurements for u note that :

$$\begin{aligned} C^{su} M_u^X (X_u^x Z_u^z R)^{s_v} M_v^{Z,X} \mathcal{P} &= C^{su} M_u^Z H_u (X_u^x Z_u^z R)^{s_v} M_v^{Z,X} \mathcal{P} \\ &= C^{su} M_u^Z (X_u^z Z_u^x R)^{s_v} M_v^{Z,X} H_u \mathcal{P} \end{aligned}$$

$$\begin{aligned} C^{su} M_u^Y (X_u^x Z_u^z R)^{s_v} M_v^{Z,X} \mathcal{P} &= C^{su} M_u^Z \sqrt{X} (X_u^x Z_u^z R)^{s_v} M_v^{Z,X} \mathcal{P} \\ &= C^{su} M_u^Z (X_u^{x+z} Z_u^z R)^{s_v} M_v^{Z,X} \sqrt{X} \mathcal{P} \end{aligned}$$

Let y be s.t. $(-1)^y R C = C R$

- $C^{su} M_u^Z (X_u^x Z_u^z R)^{s_v} M_v^\theta \mathcal{P}$ robustly deterministic implies $C^{xs_v} R^{((y+z)(1+x)+1)s_v} M_v^\theta Z_v^{(y+z)(1+x)s_u} C^{su} M_u^Z \mathcal{P}$ robustly deterministic.
- $C^{su} M_u^X (X_u^x Z_u^z R)^{s_v} M_v^\theta \mathcal{P}$ robustly deterministic implies $C^{xs_v} R^{((y+x)(1+z)+1)s_v} M_v^\theta Z_v^{(y+x)(1+z)s_u} C^{su} M_u^X \mathcal{P}$ robustly deterministic.
- $C^{su} M_u^Y (X_u^x Z_u^z R)^{s_v} M_v^\theta \mathcal{P}$ robustly deterministic implies $C^{(x+z)s_v} R^{((y+z)(1+x+z)+1)s_v} M_v^\theta Z_v^{(y+z)(1+x+z)s_u} C^{su} M_u^Y \mathcal{P}$ robustly deterministic.

□

F Proof of Theorem 29

Proof: Let $\mathcal{P}_1 = \left(\prod_{w \in O^c}^< X_{\mathbf{x}(w)}^{s_u} Z_{\mathbf{z}(w)}^{s_u} M_w^{\lambda_w, \alpha_w} \right) E_G N_{I^c}$ such that $\mathcal{P}_0 \triangleright_u \mathcal{P}_1$ and $(p, <)$ be an extended Pauli Flow such that \mathcal{P}_1 is induced by $(p, <)$. Notice that \mathcal{P}_1 is induced by $(p, <)$.

By induction :

- If $\mathcal{P}_0 = C^{su} M_u^{\lambda, \alpha} \sigma_u^{s_v} R^{s_v} M_v^{\{P, Q\}, \theta} \mathcal{P}$ and $\mathcal{P}_1 = R^{s_v} M_v^{\{P, Q\}, \theta} C^{su} M_u^{\lambda, \alpha} \mathcal{P}$.

Let $<'$ is obtained from $<$ by exchanging u and v . Let $A = \{b \text{ s.t. } b < v \wedge |\lambda_b| = 2 \wedge b \in p(v) \cup \text{Odd}(p(v)) \wedge \lambda_b^\perp \simeq X_{p(v) \cap \{b\}} Z_{\text{Odd}(p(v)) \cap \{b\}}\}$

For any $b \in A$, $\exists D_b$, $b \in D_b \cup \text{Odd}(D_b)$, $\forall w \in D_b \cup \text{Odd}(D_b)$, $\neg \kappa_{b,w}^{D_b}$ and $w \leq v$. Let $A' = \{b \in A \text{ s.t. } u \in D_b \cup \text{Odd}(D_b)\}$.

We define p' as follows: $\forall w \neq v$, $p'(w) := p(w)$.

$$\text{Let } p'(v) := \begin{cases} p(v) \Delta_{b \in A'} D_b & \text{if } \sigma \lambda = \lambda \sigma \\ p(v) \Delta p(u) \Delta_{b \in A'} D_b & \text{otherwise} \end{cases}.$$

Let $a \in O^c$, $b \in O^c$, $b \leq' a$ and $\kappa_{a,b}^{p'(a)}$:

- If $\{a, b\} \cap \{u, v\} = \emptyset$, then $b \leq a$, $\exists D_b$, $\forall w \in D_b \cup \text{Odd}(D_b)$, $\neg \kappa_{b,w}^{D_b}$ and $w \leq a$, so $w \leq' a$.
- If $a = u$ and $b \neq v$, then $b \leq a$, $\exists D_b$, $\forall w \in D_b \cup \text{Odd}(D_b)$, $\neg \kappa_{b,w}^{D_b}$ and $w \leq a = u$, so $w \leq' a$.
- If $a = v$ and $b \neq u$, then $b \leq a$,
 - * If $\neg \kappa_{vb}^{p(v)}$, as $\forall b' \in A'$, $\forall x \in O^c$ with $x \neq b$, $\neg \kappa_{xb'}^{D_{b'}}$, and as $|\lambda_u| = 1$, $\neg \kappa_{ub}^{p(u)}$, then $\neg \kappa_{vb}^{p'(v)}$ which contradicts the hypothesis
 - * if $\kappa_{vb}^{p(v)}$, then $\exists D_b$, $\forall w \in D_b \cup \text{Odd}(D_b)$, $\neg \kappa_{b,w}^{D_b}$ and $w \leq a = v$.
 - if $u \notin D_b \cup \text{Odd}(D_b)$ then $w \leq' a$
 - if $u \in D_b \cup \text{Odd}(D_b)$, If $b \in A$, then $b \in A'$ and by construction of p' , $\neg \kappa_{v,b}^{p'(v)}$
 - * Otherwise, w.l.o.g. assume $\lambda_b = \{X, Y\}$ and $b \in p(v) \setminus \text{Odd}(p(v))$.

Notice that the condition of the ext. Pauli Flow is satisfied when we consider the specification \mathcal{P}'_X where b is measured according to X . Thus $(p, <')$ is an ext. Pauli Flow for $\mathcal{P}'_X = C^{s_u} M_u^\lambda \sigma_u^{s_v} R^{s_v} M_v^\theta \mathcal{P}_X$. By considering $p_Y(v) := p(v) \Delta D_b$ ⁵, we obtain that $(p_Y, <')$ is an ext. Pauli Flow inducing $\tilde{\mathcal{P}} = C^{s_u} M_u^\lambda \sigma_u^{s_v} Z_u^{s_v} R^{s_v} M_v^\theta \mathcal{P}_Y$, where \mathcal{P}_Y is the specification of \mathcal{P} where b is measured according to Y . Thus $\tilde{\mathcal{P}}$ is rob det.by Theorem 11. Moreover $\mathcal{P}'_Y = C^{s_u} M_u^P \sigma_u^{s_v} R^{s_v} M_v^\theta \mathcal{P}_Y$, where \mathcal{P}_Y is also robustly deterministic. This implies that before the measurement of u , u is in the pure state $|0\rangle$ or $|1\rangle$, and as $u \in D_b \cup \text{Odd}(D_b)$, $\lambda = Z$, which contradicts strongness of the measurement of u .

- If $b = u$ is not possible as $|\lambda_b| = 2$ (consequence of $\kappa_{a,b}^p$).
- If $a \neq u$ and $b = v$, then $b \leq a$, $\exists D_b$, $\forall w \in D_b \cup \text{Odd}(D_b)$, $\neg \kappa_{b,w}^{D_b}$ and $w \leq a$, so $w \leq' a$.
- If $a = u$ and $b = v$: if $\kappa_{u,v}^{p'(u)}$ then the third case has been applied in Definition 26. Therefore there exists \mathcal{P}_2 , such that $\mathcal{P}_0 \triangleright \mathcal{P}_2$ where \mathcal{P}_2 is a pattern induced by an EPF p_2 , where v has no correctors: $\forall w \in p_2(v) \cup \text{Odd}(p_2(v))$, $w \leq u$. $p_2(v)$ is a valid D_v for $p'(v)$ that is built from p .
- $\neg \kappa_{u,u}^{p'(u)}$: As p EPF, $\neg \kappa_{u,u}^{p(u)}$
- $\neg \kappa_{v,v}^{p'(v)}$: As p EPF, $\neg \kappa_{v,v}^{p(v)}$ and $\forall b' \in A'$, $\forall x \in O^c \setminus \{v\}$, $\neg \kappa_{xv}^{D_{b'}}$
 - * If $\lambda \sigma = \sigma \lambda$ then $\neg \kappa_{v,v}^{p'(v)}$.
 - * If $\lambda \sigma = -\sigma \lambda$, as the first derivation according to definition 26 has been applied C' doesn't have a Pauli on v , then $\neg \kappa_{u,v}^{p(u)}$ as \mathcal{P}_1 is induced by p , therefore $\neg \kappa_{v,v}^{p'(v)}$.

It remains to check that \mathcal{P}_0 is induced by p' ;

- * $p'(u)$ induces C as $p(u)$ induces C' which is equal to C up to a Pauli on v .
- * To prove that $p'(v)$:
 - if $\sigma \lambda = -\lambda \sigma$. As $p'(v) = p(v) \Delta p(u) \Delta_{b \in A'} D_b$ and $R = C' R'$, the robustly deterministic pattern induced by p' is therefore $\mathcal{P}'_0 = C^{s_u} M_u^{\lambda, \alpha} \sigma_u^{s_v} R^{s_v} M_v^{\{P, Q\}, \theta} \mathcal{P}$. If $\sigma \neq \sigma'$ then robust determinism implies that the qubit u is separable from the rest of the system before its measurements,

⁵for Simplicity we consider only one such b

and that there exists $|\phi\rangle = \sigma|\phi\rangle = \sigma'|\phi\rangle$. Since $\sigma \neq I$ it implies that $\sigma' = I$. Moreover $\neg\kappa_{u,u}^{p(u)} \wedge \neg\kappa_{v,u}^{p(v)}$ implies $\kappa_{v,u}^{p(u)\Delta p(v)}$. Since $\forall b \in A', \neg\kappa_{b,u}^{D_b}$, it comes that $\kappa_{v,u}^{p'(v)}$ is true, hence σ' cannot be equal to I . Thus by contradiction, $\sigma = \sigma'$.

- Otherwise as $p'(v) = p(v)\Delta_{b \in A'} D_b$, we can consider that $R = R'$ (even in the subcase of Definition 26). The robustly deterministic pattern induced by p' is therefore $\mathcal{P}'_0 = C^{s_u} M_u^{\lambda, \alpha} \sigma_u^{s_v} R^{s_v} M_v^{\{P, Q\}, \theta} \mathcal{P}$. If $\sigma \neq \sigma'$ then robust determinism implies that the qubit u is separable from the rest of the system before its measurements, and that there exists $|\phi\rangle = \sigma|\phi\rangle = \sigma'|\phi\rangle$. As $|\lambda| = 1$, we have $\neg\kappa_{v,u}^{p(v)}$. Since $\forall b \in A', \neg\kappa_{b,u}^{D_b}$, it comes that $\neg\kappa_{v,u}^{p'(v)}$. If $\{\sigma, \sigma'\} = \{I, \lambda\}$ then this implies that before the measurement of u , u is an eigen vector of λ , which contradicts strongness of the measurement of u .

- Otherwise, if $\mathcal{P}_0 = X_{\mathbf{x}(w)}^{s_w} Z_{\mathbf{z}(w)}^{s_w} M_w^{\lambda, \alpha} \mathcal{P}'_0$ and $\mathcal{P}_1 = X_{\mathbf{x}(w)}^{s_w} Z_{\mathbf{z}(w)}^{s_w} M_w^{\lambda, \alpha} \mathcal{P}'_1$ with $\mathcal{P}'_0 \triangleright \mathcal{P}'_1$. \mathcal{P}'_1 is induced by the Extended Pauli Flow $(p_{|O^c \setminus \{w\}}, <_{|O^c \setminus \{w\}})$. By Induction hypothesis \mathcal{P}'_1 is induced by an Extended Pauli Flow $(p', <')$ that can be completed to an EPF of \mathcal{P}_0 by setting $p'(w) = p(w)$ and adding w as largest element for $<'$.

□