

# Thermodynamics of deterministic finite automata operating locally and periodically

Thomas E. Ouldridge\*

*Imperial College Centre for Synthetic Biology and Department of Bioengineering,  
Imperial College London, London, SW7 2AZ, UK*

David H. Wolpert†

*Santa Fe Institute, Santa Fe, NM, 87501, USA  
Complexity Science Hub, Vienna, Austria  
Arizona State University, Tempe, AZ, USA  
International Center for Theoretical Physics, Trieste, Italy  
(Dated: August 16, 2022)*

Physical computational devices have operational constraints that necessitate nonzero entropy production (EP). In particular, almost all real-world computers are “periodic” in that they iteratively apply the same physical process, and are “local” in that not all physical variables that are statistically coupled are also physically coupled. Here we investigate the nonzero EP that necessarily results from these constraints in deterministic finite automata (DFA), a foundational system of computer science theory. First we derive expressions for the minimal EP due to implementing a DFA with a periodic, local physical process. We then relate these costs to the computational characteristics of the DFA. Specifically, we show that these costs divide “regular languages” into two classes: those with an invertible local update map, which have zero minimal cost, and those with a non-invertible local update map, which have high cost. We also demonstrate the thermodynamic advantages of implementing a DFA with a physical process that is “agnostic” about which inputs it will receive.

Szilard, Landauer and Bennett famously emphasized that computations are physical operations and so have thermodynamic properties [1–3]. In the last 20 years, this insight has been greatly enriched by stochastic thermodynamics [4–6], which allows rigorous analysis of computation far from equilibrium. Recent results include: a trade-off between memory and time requirements when implementing a computation [7]; the excess thermodynamic costs when the input distribution to a physical system does not match the thermodynamically optimal, “prior” distribution for that system [8–11] or involves statistical coupling between distinct computational variables that are not accounted for in the physical system [6, 8, 12, 13]; and results on the thermodynamics of systems implementing loop-free circuits [8], Turing machines [14–16], and Mealy machines [7, 17–19].

Some recent work has focused features of CMOS-based electric circuits [20, 21], but most results do not consider real world operational constraints on computational devices. In general, however, constraints on how logic is physically implemented can have major thermodynamic consequences [22]. To start to address this gap, we consider the minimal entropy production (EP) that arises from two ubiquitous constraints on real-world computers: they are “periodic” in that they apply the same physical process to implement each of their iterative logical steps, and they are “local” in that not all physical variables that are statistically coupled are also physically coupled.

We focus our investigation on the thermodynamics of *deterministic finite automata* (DFA). DFA iteratively

process an input string (or word) of symbols, one symbol at a time. After the final symbol, the DFA either accepts or rejects the word. DFA have applications in compilers and text searching and editing tools. They are also foundational in computer science theory, simpler cousins of machines considered in the Chomsky hierarchy [23, 24], like push-down automata and Turing machines.

Realistic physical implementations of DFA obey two constraints that we would expect to hold for any implementation of any machine in the Chomsky hierarchy. As we show, these two constraints result in nonzero minimal EP. In this paper we use DFA to investigate this ubiquitous computational EP, and how it depends on the precise computation that is implemented.

We first define DFA computationally, review the relevant thermodynamics, and introduce a minimal physical model implementing a DFA. We thereby define the “cyclic” and “local” constraints that we expect to apply broadly to iterative computational paradigms. In the case of DFA, these constraints — which mirror the computational definition of DFA — imply that the physical process is identical from one iteration to the next, and only involves a single symbol of the input word. We derive expressions for the nonzero EP — which corresponds to an unavoidable “mismatch cost” [8–11] — that results for any given DFA. We then explore how DFA could be designed to minimize the expected and worst-case mismatch costs. Next, we analyse how this cost relates to the underlying computation. We show that, surprisingly, the minimal DFA for a given language is generally neither especially thermodynamically efficient nor inefficient. Finally, we show that regular languages can be divided into a class that is thermodynamically costly to recognise, and a class that is inherently low-cost.

\* t.ouldridge@imperial.ac.uk

† david.h.wolpert@gmail.com

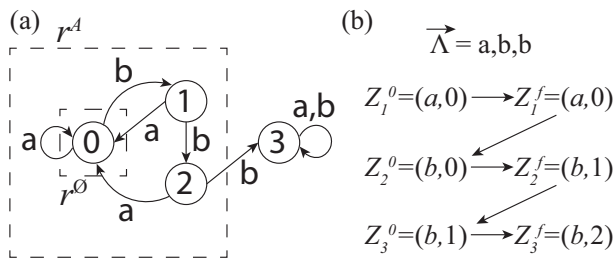


FIG. 1. Example DFA with states  $R = \{0, 1, 2, 3\}$ , alphabet  $\Lambda = \{a, b\}$ , initial state  $r^\emptyset = 0$  and accepting set  $r^A = \{0, 1, 2\}$ . The update function  $\rho$  is illustrated in (a); the current computational state and the current input symbol specify the next computational state. This DFA accepts words with no more than two consecutive  $bs$ . (b) shows the evolution of the local state through three iterations.

*Computational model.* A DFA [6, 23, 24] is a 5-tuple  $(R, \Lambda, r^\emptyset, r^A, \rho)$  where:  $R$  is a finite set of (*computational*) states;  $\Lambda$  is a finite *alphabet* of input symbols;  $\rho$  is a deterministic *update function* specifying how the current DFA state is updated to a new one based on a new input symbol, i.e.,  $\rho : R \times \Lambda \rightarrow R$ ;  $r^\emptyset \in R$  is a unique initial state; and  $r^A \subset R$  is a set of *accepting states*. A simple example is illustrated in Fig. 1. The set of all finite words is indicated as  $\Lambda^*$ .

Initially, the DFA is in state  $r^\emptyset$ , and a word  $\vec{\Lambda} \in \Lambda^*$  is selected – we assume by sampling  $P(\vec{\Lambda} = \vec{\lambda}) = p(\vec{\lambda})$ . The first symbol in the word,  $\vec{\Lambda}_1$ , is then used to change the DFA’s state to  $\rho(r^\emptyset, \vec{\Lambda}_1)$ . The computation proceeds iteratively, with each successive symbol in  $\vec{\Lambda}$  used as an argument of  $\rho$  alongside the then-current DFA state, to produce the next state. The DFA *accepts*  $\vec{\Lambda}$  if its state is contained in  $r^A$  after processing the final symbol in  $\vec{\Lambda}$ . The *language* accepted by a DFA is the set of all words it accepts. Many DFA accept the same language  $L$ ; the *minimal* DFA for  $L$  has the smallest set of computational states  $R$  for all DFA that accept  $L$  [23, 24].

We consider DFA operating once, on a single  $\vec{\Lambda}$  generated from  $p(\vec{\lambda})$ . As a result, the DFA’s state is a random variable, even though the computation is deterministic. We write  $R_{i-1}$  for the DFA’s state prior to the update due to  $\vec{\Lambda}_i$ :  $(\vec{\Lambda}_i, R_{i-1}) \rightarrow (\vec{\Lambda}_i, R_i)$  during update  $i$ . We label this map the *local dynamics*, and  $\mathcal{Z} := R \times \Lambda$  the set of *local states*, with elements  $Z$ . In particular,  $Z_i^0 = (\vec{\Lambda}_i, R_{i-1})$  is the local state prior to update  $i$ , and  $Z_i^f = (\vec{\Lambda}_i, R_i)$  is the local state after update  $i$ .  $Z_{i-1}^f \neq Z_i^0$  in general, since  $Z_i^0$  involves the next symbol in  $\vec{\Lambda}$ .

An *island* of any function  $\phi$  is a pre-image of  $\phi$ , i.e., it is a set of all inputs to  $\phi$  that map to the same output. If  $\rho$  is invertible, all local states are islands of size 1; otherwise  $\mathcal{Z}$  is partitioned by  $\rho^{-1}$  into non-intersecting islands, some of which contain multiple elements. As an illustration, the DFA in Fig. 1 is non-invertible, since  $Z_i^f = (a, 0)$  could have arisen from either  $Z_i^0 = (a, 0)$ ,  $(a, 1)$  or  $(a, 2)$ , the three of which form an island. We

write  $C_i$  for the island that contains  $Z_i^0$ .

*Relevant thermodynamics.* Consider a general system  $X$  with a finite set of states  $\mathcal{X} = \{x_1, x_2, \dots\}$ . There is a distribution  $p(x)$  over  $\mathcal{X}$  at some initial time, which then evolves according to a (potentially time-dependent) stochastic dynamics; we denote the imposed dynamics by  $\mu(t)$ . At the end of that process, the distribution over states of the system is  $p'(x') = \sum_x P(x'|x)p(x)$ , i.e.,  $p' = Pp$ . Note that the conditional distribution  $P$  is fixed by the physical process  $\mu(t)$ , not the initial distribution. Taking  $k_B T = 1$ , the EP during this process is [8, 9]

$$\sigma_\mu(p) = D(p||q_\mu) - D(Pp||Pq_\mu) + \sum_c p(c)\sigma_\mu(q_\mu^c). \quad (1)$$

Here,  $q_\mu = q_\mu(x)$  is the initial distribution that results in minimal EP for the physical process  $\mu(t)$ , and  $c$  runs over the islands of the process (see Appendix A for a precise definition of how  $q_\mu$  is minimal in this context). The first two terms in Eq. 1 are the drop in the Kullback-Leibler (KL) divergence between the actual distribution  $p$ , and  $q_\mu$ , due to the map  $P$ . This non-negative contribution to the EP is known as *mismatch cost* [6, 8, 9]. It is a thermodynamic cost for “misalignment” between the actual input distribution  $p(x)$  and the optimal *prior* distribution  $q_\mu(x)$ , which is built-in to the physical process.

The final term in Eq. 1 is the *residual entropy production*. Unlike mismatch cost, which is purely statistical, the residual EP depends on all the physical details of the process implementing the local map. Each term in the sum is non-negative, and can in principle be reduced to zero using a quasi-static process [6, 8, 9].

Consider the evolution of a subsystem  $\mathcal{X}_1 \subset \mathcal{X}$  under  $\mu(t)$ . The dynamics of  $\mathcal{X}_1$  is said to be *solitary* [6, 8, 13] if the rest of the system  $\mathcal{X} \setminus \mathcal{X}_1$  is static under  $\mu(t)$ , and if in addition there is no physical coupling between  $\mathcal{X} \setminus \mathcal{X}_1$  and the process by which  $\mathcal{X}_1$  evolves. The mismatch cost of a solitary process is given by the sum of two terms [6]. The first is the mismatch cost of  $\mathcal{X}_1$ , considered in isolation, which we call the *local* mismatch cost  $\sigma_{\text{local}}$ ; it is non-negative. The second is the reduction in mutual information between  $\mathcal{X}$  and  $\mathcal{X} \setminus \mathcal{X}_1$  [7, 13], which we call the *modularity* mismatch cost,  $\sigma_{\text{mod}}$ , after Ref. [12]. By the data processing inequality [25],  $\sigma_{\text{mod}} \geq 0$ . Intuitively,  $\sigma_{\text{mod}}$  captures the fact that information between  $\mathcal{X}_1$  and  $\mathcal{X}_1 \subset \mathcal{X}$  is a store of non-equilibrium free energy, which is lost if information is reduced by the solitary process.

*Physical model.* We assume that the DFA’s state, the input symbol and the index  $i$  correspond to well-defined discrete physical states [4, 26]. For example, the DFA could be a molecular assembly processing a copolymer tape [14]. An iteration corresponds to incrementing  $i$  and then allowing the next symbol to interact with the DFA, driving its update. This update will, in general, involve an externally applied *control protocol* that varies the physical conditions of the system during the update. This protocol defines the dynamics  $\mu(t)$ . We assume that  $\mu(t)$  generates accurate, deterministic computation. In practice, doing so would require limits of protocols with

stochastic outcomes [27]. Henceforth we abuse notation, and use  $\mu(t)$  to refer to both the external protocol and the dynamics over the system's states it induces.

In this paper we do not consider further the residual EP, nor the costs of incrementing  $i$  between updates. Both can in principle be zero. We also assume that the DFA has access to an ancillary hidden state – which has zero probability at both the start and end of any update – if necessary to implement  $\rho$  [28]. Finally, we neglect costs associated with actually generating  $\mu(t)$  itself, as discussed in Ref. [14]. Henceforth, we will use EP to refer to the minimal EP due to the mismatch cost.

In principle, it is possible to identify a minimal EP for the overall computation, ignoring the constraints arising from the details of the DFA's operation, as has been done for Turing Machines [15] and DFA [29]. We, however, focus on costs arising from constraints that reflect the underlying logic of each computational step, and therefore focus on the EP at each iteration of the DFA.

The first of these constraints is that the process coupling symbol  $\vec{\Lambda}_i$  in the input word to the DFA and then performing the local map  $(\vec{\Lambda}_i, R_{i-1}) \rightarrow (\vec{\Lambda}_i, R_i)$  is assumed to be solitary. Only the local state  $Z_i$  is involved in the physical process of iteration  $i$ , with no other symbols in  $\vec{\Lambda}$  involved. This assumption of solitary evolution reflects the computational logic:  $Z_i^0 = (\vec{\Lambda}_i, R_{i-1})$  is the entire argument of  $\rho$ . Allowing all elements of the input word to influence the dynamics of the local state would be both logically unnecessary and pathologically complex.

As a result, the overall EP when applying a solitary dynamics  $\mu_i(t)$  to an initial distribution  $p(z_i^0, \vec{\lambda}_{j \neq i})$  at the update stage of iteration  $i$  can be written [13]

$$\sigma_{\rho, q_{\mu_i}}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) = \sigma_{\text{local}}^i + \sigma_{\text{mod}}^i, \quad (2)$$

where  $\sigma_{\text{local}}^i = D(p(z_i^0) || q_{\mu_i}(z_i^0)) - D(p(z_i^f) || q_{\mu_i}(z_i^f))$  is the local mismatch cost of update  $i$ , and  $\sigma_{\text{mod}}^i = I(Z_i^0; \vec{\Lambda}_{j \neq i}) - I(Z_i^f; \vec{\Lambda}_{j \neq i})$  is the modularity mismatch cost of update  $i$  [30]. Here we represent the state of the whole system via the local state,  $Z_i$  and the rest of the input word,  $\vec{\Lambda}_{j \neq i}$ . We also write  $\sigma_{\rho, q_{\mu_i}}^i(p(z_i^0, \vec{\lambda}_{j \neq i}))$  rather than  $\sigma_{\mu_i}^i(p(z_i^0, \vec{\lambda}_{j \neq i}))$ , since the dependence of the mismatch-induced EP on  $\mu_i(t)$  arises through  $\rho$  and  $q_{\mu_i}$ .

Typically  $p(z_i^0)$  will vary with iteration  $i$ . In theory, one could design the protocol  $\mu_i(t)$  to match these variations, ensuring  $q_{\mu_i}(z_i^0) = p(z_i^0)$  at each update. This choice would eliminate  $\sigma_{\text{local}}^i$  in Eq. 2. However, designing such a protocol would require us to know  $p(z_i^0)$  — which in turn would require us to run a computation that emulates the DFA before running the DFA, gaining us nothing. Accordingly (and to reflect real-world DFA), here we impose the second constraint that the protocol  $\mu_i(t)$ , just like the logical update  $\rho$ , is identical at each update  $i$ . Formally, we define a *local, periodic* DFA (LPDFA) as any process that implements a DFA via a repetitive, solitary process on the local state  $Z_i$ .

*Local and modularity mismatch costs for LPDFA.* We now present our first results. Given that each update

in an LPDFA deterministically collapses all probability within an island to one state,  $p(z_i^f | c_i) = q(z_i^f | c_i)$ , it can be shown that (Appendix B):

$$\sigma_{\text{local}}^i = \sum_{c_i} p(c_i) D(p(z_i^0 | c_i) || q_{\mu}(z_i^0 | c_i)). \quad (3)$$

So  $\sigma_{\text{local}}^i$  is the divergence between the initial distribution,  $p(z_i^0)$  and the prior distribution,  $q_{\mu}(z_i^0)$ , conditioned on the island of the initial state,  $Z_i^0 = (\Lambda_i, R_{i-1})$ . So EP is large if  $p(z_i^0)$  and  $q_{\mu}(z_i^0)$  are poorly aligned within any islands that have significant probability.

To calculate  $\sigma_{\text{mod}}^i$ , note that since the update function is single-valued, and there is a single initial state  $r^\varnothing$ , the DFA's state  $R_i$  is specified by the first  $i$  symbols in  $\vec{\Lambda}$ . As shown in Appendix C, the result is

$$\sigma_{\text{mod}}^i = H(Z_i^0 | C_i). \quad (4)$$

So  $\sigma_{\text{mod}}^i$ , a *global* quantity, is given by the entropy of the *local* state at the beginning of the update, conditioned on the island occupied at the start of iteration  $i$ . This result holds regardless of the distribution of input words or the complexity of the DFA. Combining Eqs. (3) and (4) gives

$$\sigma_{\rho, q_{\mu}}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) = \sum_{c_i} p(c_i) H(p(z_i^0 | c_i) || q_{\mu}(z_i^0 | c_i)), \quad (5)$$

where  $H(p(z_i^0 | c_i) || q_{\mu}(z_i^0 | c_i))$  is the cross entropy between  $q_{\mu}(z_i^0 | c_i)$  and  $p(z_i^0 | c_i)$ ,  $-\sum_{z_i^0 \in c_i} p(z_i^0 | c_i) \ln q_{\mu}(z_i^0 | c_i)$ .

*Advantages of a uniform  $q_{\mu}(z_i^0 | c_i)$ .* As noted in Ref. [27], in which a similar result to Eq. 3 was derived in the absence of distinct islands,  $\sigma_{\text{local}}^i$  penalizes an overconfident prior distribution  $q_{\mu}(z_i^0 | c_i)$ . In particular, if  $q_{\mu}(z_i^0 | c_i) = 0$  for a given state but  $p(z_i^0 | c_i) \neq 0$ , Eq. 5 predicts  $\sigma_{\text{local}}^i \rightarrow \infty$ . Ref. 27 suggests, therefore, that a uniform prior distribution may be optimal; we now prove three important properties of a  $q_{\mu}(z_i^0 | c_i)$  that is uniform for each  $c_i$ . First, for uniform  $q_{\mu}(z_i^0 | c_i) = 1/L_{c_i}$ , with  $L_c$  the size of island  $c$ , Eq. 5 simplifies to

$$\sigma_{\rho, q_{\mu}}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) = \langle \ln L_{c_i} \rangle \leq \ln L_{c_{\text{max}}}. \quad (6)$$

Here,  $L_{c_{\text{max}}}$  is the size of the largest island defined by  $\rho$ . Eq. 6 indicates a finite upper bound to EP for LPDFA employing a uniform prior distribution  $q_{\mu}(z_i^0 | c_i) = 1/L_{c_i}$ . This limiting cost is related to the size of the largest island, rather than the local state space  $R \times \Lambda$ .

Secondly, for any protocol, the worst case EP is at least as large as  $\ln L_{c_{\text{max}}}$ . A uniform prior distribution  $q_{\mu}(z_i^0 | c_i) = 1/L_{c_i}$  therefore minimizes the worst case entropy production. To verify this claim, consider the input distribution  $p(z_i^0) = \delta_{z_i^0, z_{\text{min}}}$ , where  $z_{\text{min}}$  is a state that minimizes  $q_{\mu}(z_i^0 | c_i)$  within the largest island. For such a distribution, Eq. 6 reduces to  $\sigma_{\rho, q_{\mu}}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) = -\ln q_{\mu}(z_{\text{min}} | c_{\text{max}}) \geq \ln L_{c_{\text{max}}}$ , where the final inequality follows from  $q_{\mu}(z_{\text{min}} | c_{\text{max}}) \leq 1/L_{c_{\text{max}}}$ .

Finally, the uniform prior distribution  $q_{\mu}(z_i^0 | c_i) = 1/L_{c_i}$  minimizes predicted average EP if the designer

is maximally uncertain about  $p(z_i^0, \vec{\lambda}_{j \neq i})$ . The designer may not know that  $p_i(z_i^0|c_i)$  is the input distribution at iteration  $i$  – either because  $p(\vec{\lambda})$  is unknown, or because the DFA’s dynamics on  $p(\vec{\lambda})$  have not been calculated. Thus the choice of protocol  $\mu(t)$ , and hence  $q_\mu(z_i^0|c_i)$ , is performed under uncertainty over not just the input state, but also the distribution from which that state is drawn. Let the designer’s belief about the distributions  $p(c_i)$  and  $p(z_i^0|c_i)$  can be represented by a distribution  $\pi(u, v)$  over an (arbitrary) discrete set of possible distributions indexed by  $u, v$ :  $p_u(c_i), p_v(z_i^0|c_i)$ . The designer’s best estimate of the expected EP is then (Appendix D)

$$\hat{\sigma}_{\rho, q_\mu}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) = H(Z_i^0|C_i, U, V) + I(Z_i^0, V|C_i, U) + \sum_u \pi(u) \sum_{c_i} p_u(c_i) D(\hat{p}(z_i^0|c_i, u) || q_\mu(z_i^0|c_i)). \quad (7)$$

Here,  $H(Z_i^0|C_i, U, V)$  and  $I(Z_i^0, V|C_i, U)$  are defined with respect to the estimated joint distribution,  $p(u, v, z_i^0, c_i) = \pi(u)\pi(v|u)p_u(c_i)p_v(z_i^0|c_i)$ , and  $\hat{p}(z_i^0|c_i, v) = \sum_u \pi(u|v)p_u(z_i^0|c_i)$  is the designer’s estimate for the probability distribution within an island, having averaged over the uncertainty quantified by  $\pi(v|u)$ . All three terms in Eq. 7 are strictly positive. The first is just  $\sigma_{\text{mod}}^i$  averaged over  $U$  and  $V$ . The third is the local mismatch cost between  $\hat{p}(z_i^0|c_i, u)$  and the prior distribution  $q_\mu(z_i^0|c_i)$ . However, even if  $q_\mu(z_i^0|c_i)$  matches the average estimated distribution within an island,  $\hat{p}(z_i^0|c_i, u) = q_\mu(z_i^0|c_i)$ , the best estimate of  $\sigma_{\text{local}}$  is not zero. The second term,  $I(V; Z_i^0|C_i, U)$ , quantifies how much uncertainty in  $V$  is actually manifest in an uncertainty in the input distribution. Even if  $q_\mu(z_i^0|c_i) = \hat{p}(z_i^0|c_i, u)$ , the designer expects positive EP due to variability about this average.

$H(Z_i^0|C_i, U, V)$  and  $I(V; Z_i^0|C_i, U)$  are protocol-independent and cannot be reduced by the designer of the DFA.  $D(\hat{p}(z_i^0|c_i, u) || q_\mu(z_i^0|c_i))$ , however, can be minimized by varying  $q_\mu(z_i^0|c_i)$ . Given maximal uncertainty, the designer’s best estimate will be uniform:  $\hat{p}(z_i^0|c_i, u) = 1/L_{c_i}$ . In this case, a uniform  $q_\mu(z_i^0|c_i) = 1/L_{c_i}$  minimizes estimated average EP.

The above results apply to LPDFA, but do not consider the actual computation performed. The results for  $\sigma_{\text{local}}^i$  – including the optimality of a uniform protocol – apply to any deterministic process; the LPDFA’s restrictions simply justify why  $q_{\mu_i}(z_i^0|c_i)$  cannot be tuned to  $p(z_i^0|c_i)$  at each  $i$ . The results for  $\sigma_{\text{mod}}^i$  are more specific, relying on a solitary process involving a single symbol  $\Lambda_i$  from an unchanging input “word”, and a device whose state after the update is unambiguously specified by  $\Lambda_{i \leq j}$ . However our results do not directly relate  $\sigma_{\text{mod}}^i$  to the computation. We now explore how the EP is related to  $\rho$ , and then its relation to the language accepted by the DFA.

*Nonzero EP is common in non-invertible LPDFA.* The EP in Eq. 5 is positive iff  $q_\mu(z_i^0|c_i) \neq 1$  for any  $z_i^0, c_i$  for which  $p(z_i^0|c_i) \neq 0$  and  $p(c_i) \neq 0$ . This condition for non-zero EP is met whenever an island  $c_i$  with  $p(c_i) > 0$  has at least two elements  $z_0$  with  $p(z_i^0|c_i) > 0$ . There are

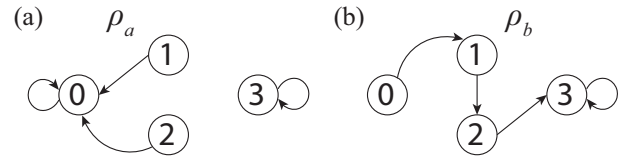


FIG. 2. Decomposition of the DFA in Fig. 1 into networks of transitions for each input symbol,  $\rho_\Lambda$ . (a) Network for  $\Lambda = a$ , where the state  $R = 0$  is a conflict state. (b) Network for  $\Lambda = b$ , where the state  $R = 3$  is a conflict state.

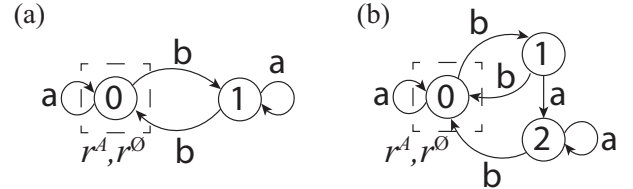


FIG. 3. Two DFA that accept words with an even number of  $bs$  built from  $\{\Lambda\} = \{a, b\}$ . (a) The minimal DFA for this language; it is invertible. (b) A larger DFA that accepts the same language but is non-invertible; state 0 is a conflict state for  $\rho_b$  and state 2 is a conflict state for  $\rho_a$ .

two ways this EP can be avoided. One is if all islands have a single element, i.e., the local map of the LPDFA is invertible [31]. The second is if the distribution of input words  $p(\vec{\lambda})$  is such that for every island  $c_i$  with at least two elements, all but one of those elements always have  $p(z_i^0|c_i) = 0$ . However, in that case,  $q_\mu(z_i^0|c_i)$  would have to be finely-tuned to this expectation – a strategy with a high cost if it is wrong, as discussed previously.

When is  $\rho$  non-invertible? Since  $\rho$  preserves the input symbol  $\vec{\lambda}_i$ , it can only be non-invertible if it maps two distinct computational states to the same state for the same symbol  $\Lambda$ . We label states with more than one incoming transition for a given  $\Lambda$  as *conflict states*; conflict states for the DFA in Fig. 1 are shown in Fig. 2 by illustrating transition graphs for each value of  $\Lambda$ .

*The minimal DFA for a given language does not generally minimize or maximize EP.* Informally, the minimal DFA for a given language is the DFA with just enough memory to sort parsed substrings into equivalence classes, so that the previously processed information can be used to complete the computation [23, 24, 32] (for a more formal discussion, see Appendix E). Perhaps surprisingly, minimal LPDFA do not in general either maximise or minimise EP. To illustrate this fact, first consider the two DFA in Fig. 3, which both have  $\Lambda = \{a, b\}$  and accept the language of all words with an even number of  $bs$ . Fig. 3 (a) is the minimal DFA for this language. It is invertible, and so has zero EP. The DFA in Fig. 3(b) accepts the same language. However, it is non-invertible, and so  $\hat{\sigma}_{\rho, q_\mu}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) > 0$  in general [33]. So the minimal LPDFA has less mismatch cost.

Now consider the two DFA in Fig. 4. Both accept any word constructed from  $\{\Lambda\} = \{a, b\}$  that contains no  $b$

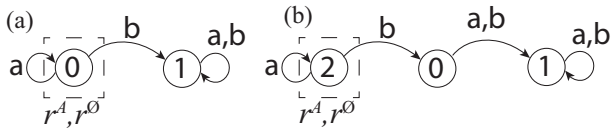


FIG. 4. Two DFA that accept words built from an alphabet  $\{\Lambda\} = \{a, b\}$  that contain no  $bs$ . (a) The minimal DFA that accepts this language. (b) An alternative, larger DFA.

symbols, and Fig. 4(a) is the minimal DFA for this language. Neither DFA is invertible, so EP is non-zero for both in general. However, for a given input word, the non-minimal LPDFA in Fig. 4(b) delays entropy production by a single iteration relative to Fig. 4(a). As outlined in Appendix F, it is possible to use this delay to ensure that the overall EP for the larger LPDFA is always less than or equal to the EP for the minimal LPDFA, for any choice of  $q_\mu(z_i^0|c_i)$  for the minimal LPDFA.

*Languages are divided into costly and low-cost classes by the structure of their minimal DFA.* The DFA in Fig. 4(b) can be extended by adding more states, delaying the iteration when EP is generated. However, a finite number of additional states cannot prevent EP for arbitrary length inputs, and DFA are *necessarily* finite. Indeed, as shown in Appendix G, if a minimal DFA is non-invertible, any DFA that accepts the same language

must also be non-invertible. One cannot eliminate conflict states without disrupting the sorting of strings into equivalence classes in memory. Thus if the minimal DFA for a regular language  $L$  is non-invertible, recognising that language is inherently costly. By contrast, if the minimal DFA that accepts  $L$  is invertible, recognising that language is fundamentally low-cost.

DFA are the simplest machine in the Chomsky hierarchy. The constraints of locality and periodicity would also apply naturally to other machines in the hierarchy, such as push-down automata or Turing Machines. Variants of the results concerning  $\sigma_{\text{mod}}$  and  $\sigma_{\text{local}}$  presented here are therefore likely apply throughout the hierarchy. However, there will also be important differences between our results for DFA and analogous results for other computational machines. For example, the overwriting of input and/or memory which more powerful machines can do will affect  $\sigma_{\text{mod}}$  in ways not considered in this paper. Moreover, devices such as Turing machines and push-down automata have access to an infinite memory. DFA, by definition, do not – indeed, it is this restriction that divides regular languages into low- and high-cost. Unlike Turing machines, it is impossible to convert non-invertible DFA into invertible DFA.

*Acknowledgements* — TEO was supported by a Royal Society University Research Fellowship, and DHW thanks the Santa Fe Institute for support.

- 
- [1] L. Szilard, *Behav. Sci.* **9**, 301 (1964).
  - [2] R. Landauer, *IBM J. Res. Dev.* **5**, 183 (1961).
  - [3] C. H. Bennett, *Int. J. Theor. Phys.* **21**, 905 (1982).
  - [4] U. Seifert, *Rep. Prog. Phys.* **75**, 126001 (2012).
  - [5] J. M. Parrondo, J. M. Horowitz, and T. Sagawa, *Nat. Phys.* **11**, 131 (2015).
  - [6] D. H. Wolpert, *J. Phys. A* **52**, 193001 (2019).
  - [7] D. H. Wolpert, A. Kolchinsky, and J. A. Owen, *Nat. Commun.* **10**, 1727 (2019).
  - [8] D. H. Wolpert and A. Kolchinsky, *New J. Phys.* **22**, 063047 (2020).
  - [9] A. Kolchinsky and D. H. Wolpert, *Phys. Rev. E* **104**, 054107 (2021).
  - [10] A. Kolchinsky and D. H. Wolpert, *J. Stat. Mech: Theory Exp.* **2017**, 083202 (2017).
  - [11] P. M. Riechers and M. Gu, *Phys. Rev. E* **103**, 042145 (2021).
  - [12] A. B. Boyd, D. D. Mandal, and J. P. Crutchfield, *Phys. Rev. X* **8**, 031036 (2018).
  - [13] D. H. Wolpert, *Phys. Rev. Lett.* **125**, 200602 (2020).
  - [14] R. A. Brittain, N. S. Jones, and T. E. Ouldridge, *arXiv:2102.03388* (2021).
  - [15] A. Kolchinsky and D. H. Wolpert, *Phys. Rev. Res.* **2**, 033312 (2020).
  - [16] P. Strasberg, J. Cerrillo, G. Schaller, and T. Brandes, *Phys. Rev E* **92**, 042104 (2015).
  - [17] D. Mandal and C. Jarzynski, *Proc. Natl. Acad. Sci. U.S.A.* **109**, 11641 (2012).
  - [18] A. B. Boyd, D. Mandal, and J. P. Crutchfield, *New J. Phys.* **18**, 023049 (2016).
  - [19] R. A. Brittain, N. S. Jones, and T. E. Ouldridge, *New J. Phys.* **21**, 063022 (2019).
  - [20] C. Y. Gao and D. T. Limmer, *Phys. Rev. Research* **3**, 033169 (2021).
  - [21] N. Freitas, J.-C. Delvenne, and M. Esposito, *Phys. Rev. X* **11**, 031064 (2021).
  - [22] A. Kolchinsky and D. H. Wolpert, *Phys. Rev. X* **11**, 041024 (2021).
  - [23] J. E. Hopcroft and J. D. Ullman, *Introduction to automata theory, languages, and computation* (Addison-Wesley, 1979).
  - [24] C. Moore, *arXiv:1907.12713* (2019).
  - [25] T. M. Cover and J. A. Thomas, *Elements of Information Theory* (Wiley-Interscience, 2006).
  - [26] T. E. Ouldridge, *Nat. Comput.* **17**, 3 (2018).
  - [27] P. M. Riechers and M. Gu, *Phys. Rev. A* **104**, 012214 (2021).
  - [28] J. A. Owen, A. Kolchinsky, and D. H. Wolpert, *New J. Phys.* **21**, 013022 (2019).
  - [29] G. Kardeş and D. H. Wolpert, *arXiv:2206.01165* (2022).
  - [30] A variant of this modularity mismatch cost for DFA was derived in Ref. [34], for DFA operating in steady state.
  - [31] This observation was made for  $\sigma_{\text{mod}}$  alone in Ref. [34].
  - [32] A. Nerode, *Proc. Amer. Math. Soc.* **9**, 541 (1958).
  - [33] For example, EP is positive if the sequences  $(\Lambda_{i-2}, \Lambda_{i-1}, \Lambda_i) = (a \text{ or } b, b, a)$  and  $(\Lambda_{i-2}, \Lambda_{i-1}, \Lambda_i) = (b, a, a)$  both have non-zero probability.
  - [34] N. Ganesh and N. G. Anderson, *Phys. Lett. A* **377**, 3266 (2013).

### Appendix A: The prior distribution for a given protocol

Formally,  $q_\mu(x)$  is constructed as

$$q_\mu(x) = \sum_c q_\mu(c) q_\mu^c(x) \quad (\text{A1})$$

where  $c$  indicates an island of states that are mapped to the same output by  $P$ ,  $q_\mu^c(x) = q_\mu(x)/q_\mu(c)$  for  $x \in c$  and  $q_\mu^c(x) = 0$  otherwise, and  $q_\mu(c) = \sum_{x \in c} q_\mu(x)$ .  $q_\mu(x)$  is optimal in the sense that each  $q_\mu^c(x)$  is the probability distribution that minimizes the entropy production under  $\mu(t)$  for distributions with support restricted to  $c$ :

$$q_\mu^c \in \arg \min_{s: \text{sup}(s) \subseteq c} \sigma_\mu(s). \quad (\text{A2})$$

This distribution has been called the *prior* for the process  $p$ , due to its role in Bayesian retrodiction of the initial state of the process from the final state [6, 15].

Note that in Eq. A1, the distribution over islands,  $q_\mu(c)$ , is arbitrary. Any distribution  $q_\mu(x)$  that is a sum over the optimal set of distributions  $\{q_\mu^c(x)\}$  could be used with the same results. In practice, the existence of many possible  $q_\mu(x)$  does not affect our analysis; we shall simply use a single reference  $q_\mu(x)$  with  $q_\mu(c) \neq 0$  for all  $c$  as the ‘‘optimal’’ distribution for  $\mu(t)$ .

### Appendix B: Simplification of $\sigma_{\text{local}}^i$ for an LPDFA

We first explicitly write the divergences as a sum over the islands and then a sum over states within islands:

$$\begin{aligned} \sigma_{\text{local}}^i &= D(p(z_i^0) || q_\mu(z_i^0)) - D(p(z_i^f) || q_\mu(z_i^f)) \\ &= \sum_{z_i^0} p(z_i^0) \ln \frac{p(z_i^0)}{q_\mu(z_i^0)} - \sum_{z_i^f} p(z_i^f) \ln \frac{p(z_i^f)}{q_\mu(z_i^f)} \\ &= \sum_{c_i} \sum_{z_i^0 \in c_i} p(z_i^0 | c_i) p(c_i) \ln \frac{p(z_i^0 | c_i) p(c_i)}{q_\mu(z_i^0 | c_i) q_\mu(c_i)} \\ &\quad - \sum_{c_i} \sum_{z_i^f \in c_i} p(z_i^f | c_i) p(c_i) \ln \frac{p(z_i^f | c_i) p(c_i)}{q_\mu(z_i^f | c_i) q_\mu(c_i)} \\ &= \sum_{c_i} p(c_i) \sum_{z_i^0 \in c_i} p(z_i^0 | c_i) \ln \frac{p(z_i^0 | c_i)}{q_\mu(z_i^0 | c_i)} \\ &\quad + \sum_{c_i} p(c_i) \ln \frac{p(c_i)}{q_\mu(c_i)} \\ &\quad - \sum_{c_i} \sum_{z_i^f \in c_i} p(z_i^f | c_i) p(c_i) \ln \frac{p(z_i^f | c_i) p(c_i)}{q_\mu(z_i^f | c_i) q_\mu(c_i)}. \end{aligned} \quad (\text{B1})$$

Since the update deterministically collapses all probability within an island to a kronecker delta,  $p(z_i^f | c_i) =$

$q(z_i^f | c_i)$ . Thus the final two terms in Eq. B1 cancel and we obtain

$$\sigma_{\text{local}}^i = \sum_{c_i} p(c_i) D(p(z_i^0 | c_i) || q_\mu(z_i^0 | c_i)). \quad (\text{B2})$$

### Appendix C: Simplification of $\sigma_{\text{mod}}^i$ for an LPDFA

It is helpful to separate the contributions from  $\vec{\Lambda}_{i < j}$  and  $\vec{\Lambda}_{i > j}$  in the mutual information terms appearing in Eq. 2. Using the chain rule for mutual information, we obtain

$$\begin{aligned} \sigma_{\text{mod}}^i &= I(Z_i^0; \vec{\Lambda}_{i < j}, \vec{\Lambda}_{i > j}) - I(Z_i^f; \vec{\Lambda}_{i < j}, \vec{\Lambda}_{i > j}) \\ &= I(Z_i^0; \vec{\Lambda}_{i < j}) + I(Z_i^0; \vec{\Lambda}_{i > j} | \Lambda_{i < j}^*) \\ &\quad - I(Z_i^f; \vec{\Lambda}_{i < j}) - I(Z_i^f; \vec{\Lambda}_{i > j} | \vec{\Lambda}_{i < j}), \end{aligned} \quad (\text{C1})$$

Next, if we express the local state  $Z_i$  in terms of the DFA’s state and current input symbol, apply the chain rule again and cancel terms, we get

$$\begin{aligned} \sigma_{\text{mod}}^i &= I(R_{i-1}, \vec{\Lambda}_i; \vec{\Lambda}_{i < j}) + I(R_{i-1}, \vec{\Lambda}_i; \vec{\Lambda}_{i > j} | \vec{\Lambda}_{i < j}) \\ &\quad - I(R_i, \vec{\Lambda}_i; \vec{\Lambda}_{i < j}) - I(R_i, \vec{\Lambda}_i; \vec{\Lambda}_{i > j} | \vec{\Lambda}_{i < j}) \\ &= I(R_{i-1}, \vec{\Lambda}_i; \vec{\Lambda}_{i < j}) + I(R_{i-1}; \vec{\Lambda}_{i > j} | \vec{\Lambda}_{i \leq j}) \\ &\quad - I(R_i, \vec{\Lambda}_i; \vec{\Lambda}_{i < j}) - I(R_i; \vec{\Lambda}_{i > j} | \vec{\Lambda}_{i \leq j}). \end{aligned} \quad (\text{C2})$$

Due to the deterministic and sequential operation of a DFA, both  $R_i$  and  $R_{i-1}$  are unambiguously determined by the first  $i$  symbols in the input word,  $\vec{\Lambda}_{i \leq j}$ . As a result, both conditional information terms in the final line of Eq. C2 are zero. Applying the chain rule for mutual information twice to the remaining terms, and simplifying, we obtain

$$\begin{aligned} \sigma_{\text{mod}}^i &= I(R_{i-1}; \vec{\Lambda}_{i < j} | \vec{\Lambda}_i) - I(R_i; \vec{\Lambda}_{i < j} | \vec{\Lambda}_i) \\ &= I(R_{i-1}; \vec{\Lambda}_{i \leq j}) - I(R_{i-1}; \vec{\Lambda}_i) \\ &\quad - I(R_i; \vec{\Lambda}_{i \leq j}) + I(R_i; \vec{\Lambda}_i). \end{aligned} \quad (\text{C3})$$

Since the first  $i$  symbols in the input word,  $\vec{\Lambda}_{i \leq j}$ , unambiguously specify both  $R_i$  and  $R_{i-1}$ ,  $I(R_{i-1}; \vec{\Lambda}_{i \leq j}) = H(R_{i-1})$  and  $I(R_i; \vec{\Lambda}_{i \leq j}) = H(R_i)$ . Thus, using the definition of the conditional entropy and mutual information

$$\begin{aligned} \sigma_{\text{mod}}^i &= H(R_{i-1} | \vec{\Lambda}_i) - H(R_i | \vec{\Lambda}_i) \\ &= H(Z_i^0) - H(Z_i^f) \\ &= H(Z_i^0 | C_i) - H(Z_i^f | C_i) = H(Z_i^0 | C_i), \end{aligned} \quad (\text{C4})$$

with the last equality following since the deterministic collapse of all inputs to a single output with an island ensures  $H(Z_i^f | C_i) = 0$ .

### Appendix D: Best estimate at entropy production for an uncertain input distribution

The designer's best estimate at the entropy production is obtained by averaging Eq. 5 over  $\pi(u)$  and  $\pi(v|u)$ :

$$\begin{aligned} & \hat{\sigma}_{\rho, q_\mu}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) \\ &= \sum_{u, c_i, v} \pi(u) p_u(c_i) \pi(v|u) H(p_v(z_i^0|c_i) || q_\mu(z_i^0|c_i)) \end{aligned} \quad (\text{D1})$$

Expanding the cross entropy yields

$$\begin{aligned} & \hat{\sigma}_{\rho, q_\mu}^i(p(z_i^0)) \\ &= - \sum_u \pi(u) \sum_{c_i} p_u(c_i) \sum_v \pi(v|u) \sum_{z_i^0 \in c_i} p_v(z_i^0|c_i) \ln q_\mu(z_i^0|c_i) \\ &= \sum_u \pi(u) \sum_{c_i} p_u(c_i) \\ & \quad \sum_{z_i^0 \in c_i} \sum_v \pi(v|u) p_v(z_i^0|c_i) \ln \frac{\sum_v \pi(v|u) p_v(z_i^0|c_i)}{q_\mu(z_i^0|c_i)} \\ & - \sum_u \pi(u) \sum_{c_i} p_u(c_i) \\ & \quad \sum_{z_i^0 \in c_i} \sum_v \pi(v|u) p_v(z_i^0|c_i) \ln \sum_v \pi(v|u) p_v(z_i^0|c_i) \\ &= \sum_u \pi(u) \sum_{c_i} p_u(c_i) D(\hat{p}(z_i^0|c_i, u) || q_\mu(z_i^0|c_i)) \\ & - \sum_u \pi(u) \sum_v \pi(v|u) \sum_{c_i} p_u(c_i) \sum_{z_i^0 \in c_i} p_v(z_i^0|c_i) \ln p_v(z_i^0|c_i) \\ & \quad - \sum_u \pi(u) \sum_{c_i} p_u(c_i) \sum_{z_i^0 \in c_i} \hat{p}(z_i^0|c_i) \ln \hat{p}(z_i^0|c_i) \\ & + \sum_u \pi(u) \sum_v \pi(v|u) \sum_{c_i} p_u(c_i) \sum_{z_i^0 \in c_i} p_v(z_i^0|c_i) \ln p_v(z_i^0|c_i) \\ &= H(Z_i^0 | C_i, U, V) \\ & + \sum_u \pi(u) \sum_{c_i} p_u(c_i) D(\hat{p}(z_i^0|c_i, u) || q_\mu(z_i^0|c_i)) \\ & + I(Z_i^0, V | C_i, U). \end{aligned} \quad (\text{D2})$$

Here,  $H(Z_i^0 | C_i, U, V)$  and  $I(Z_i^0, V | C_i, U)$  are defined with respect to the joint distribution estimated by the designer,  $p(u, v, z_i^0, c_i) = \pi(u) \pi(v|u) p_u(c_i) p_v(z_i^0|c_i)$ , and  $\hat{p}(z_i^0|c_i, v) = \sum_u \pi(v|u) p_u(c_i) p_v(z_i^0|c_i)$  is the designer's estimate for the probability distribution within an island, having averaged over the uncertainty quantified by  $\pi(v|u)$ .

### Appendix E: Minimal DFA and the Myhill-Nerode theorem

Define two words  $\vec{\lambda}$  and  $\vec{\mu}$  to be *equivalent* with respect to language  $L$  iff  $\vec{\lambda}\vec{v} \in L \iff \vec{\mu}\vec{v} \in L$  for any string of input symbols  $\vec{v}$ , where  $\vec{\lambda}\vec{v}$  represents a concatenation

of  $\vec{v}$  after  $\vec{\lambda}$ . The Myhill-Nerode theorem states that the number of states of the minimal DFA for  $L$  is the number of equivalence classes of this equivalence relation [23, 24, 32].

### Appendix F: Proof that minimal DFA are not necessarily more thermodynamically efficient than larger DFA

We claim that, for any distribution of inputs and choice of iterated protocol for the LPDFA in Fig. 4 (a), it is possible to choose a protocol for the LPDFA in Fig. 4 (b) that results in EP that is less than or equal to the EP of the LPDFA in Fig. 4 (a). To prove this claim, note that the EP at iteration  $i$  for the minimal DFA in Fig. 4 (a) is given by considering only the island defined by  $(\Lambda_i, \{R_{i-1}\}) = (b, \{0, 1\})$ . Thus

$$\begin{aligned} \sigma_{\rho, q_\mu}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) &= p_i(b, 0) \ln q_\mu(b, 0|b, 0 \text{ or } 1) \\ & \quad + p_i(b, 1) \ln q_\mu(b, 1|b, 0 \text{ or } 1). \end{aligned} \quad (\text{F1})$$

For the larger LPDFA in Fig. 4 (b), the EP at iteration  $i$  is entirely due to the two islands defined by  $(\Lambda_i, \{R_{i-1}\}) = (b, \{0, 1\})$  and  $(\Lambda_i, \{R_{i-1}\}) = (a, \{0, 1\})$ . Thus

$$\begin{aligned} \sigma_{\rho', q'_\mu}^i(p'(z_i^0, \vec{\lambda}_{j \neq i})) &= p'_i(b, 0) \ln q'_\mu(b, 0|b, 0 \text{ or } 1) \\ & \quad + p'_i(b, 1) \ln q'_\mu(b, 1|b, 0 \text{ or } 1) \\ & \quad + p'_i(a, 0) \ln q'_\mu(a, 0|a, 0 \text{ or } 1) \\ & \quad + p'_i(a, 1) \ln q'_\mu(a, 1|a, 0 \text{ or } 1), \end{aligned} \quad (\text{F2})$$

with primed quantities referring to the larger DFA for clarity. Given the well-defined starting state of the LPDFA, it is possible to say that none of these states are occupied at the first step:  $p'_1(b, 0) = p'_1(a, 0) = p'_1(b, 1) = p'_1(a, 1) = 0$ . Moreover, assuming the same distribution of input words to both devices, the related structure of both devices implies  $p_i(b, 0) = p'_{i+1}(b, 0) + p'_{i+1}(a, 0)$  and  $p_i(b, 1) = p'_{i+1}(b, 1) + p'_{i+1}(a, 1)$ . If we then chose protocols for the larger DFA so that  $q'_\mu(b, 0|b, 0 \text{ or } 1) = q'_\mu(a, 0|a, 0 \text{ or } 1) = q_\mu(b, 0|b, 0 \text{ or } 1)$  and  $q'_\mu(b, 1|b, 0 \text{ or } 1) = q'_\mu(a, 1|a, 0 \text{ or } 1) = q_\mu(b, 1|b, 0 \text{ or } 1)$ , we obtain

$$\sigma_{\rho', q'_\mu}^i(p'(z_i^0, \vec{\lambda}_{j \neq i})) \quad (\text{F3})$$

$$\begin{aligned} &= (p'_i(b, 0) + p'_i(a, 1)) \ln q_\mu(b, 0|b, 0 \text{ or } 1) \\ & \quad + (p'_i(a, 1) + p'_i(b, 1)) \ln q_\mu(b, 1|b, 0 \text{ or } 1) \\ &= \sigma_{\rho, q_\mu}^{i-1}(p(z_{i-1}^0, \vec{\lambda}_{j \neq i-1})) \end{aligned} \quad (\text{F4})$$

for  $i > 1$ , and  $\sigma_{\rho', q'_\mu}^i(p'(z_i^0, \vec{\lambda}_{j \neq i})) = 0$  for  $i = 1$ . As a result, for any finite number of iterations  $N$ ,  $\sum_{i=1}^N \sigma_{\rho, q_\mu}^i(p(z_i^0, \vec{\lambda}_{j \neq i})) - \sum_{i=1}^N \sigma_{\rho', q'_\mu}^i(p'(z_i^0, \vec{\lambda}_{j \neq i})) = \sigma_{\rho, q_\mu}^i(p(z_N^0, \vec{\lambda}_{j \neq N})) \geq 0$ .

### Appendix G

We claim that if a minimal DFA is non-invertible, any DFA that accepts the same language must also be non-invertible. To prove this claim, recall that a non-invertible DFA has at least one “conflict state” to which multiple input computational states are mapped by the same input symbol under  $\rho$  (see Fig. 2). We consider the network  $\rho_\Lambda$ , defined by the mapping between computational states for an input symbol  $\Lambda$  corresponding to such a conflict state in a minimal DFA  $D_L$  that accepts the language  $L$ . If  $D_L$  has  $M$  computational states, there are exactly  $M$  directed edges in  $\rho_\Lambda$ . Thus the existence of a conflict state with more than one inward edge implies at least one state with zero inward edges. The existence of such a state  $r^\dagger$  in  $\rho_\Lambda$  implies that there can be no transitions into the equivalence class represented by  $r^\dagger$  due to the symbol  $\Lambda$ .

The states in any other DFA  $D'_L$  that accepts  $L$  can be partitioned into non-overlapping sets, each of which corresponds to an equivalence class of  $L$  (one of the states of  $D_L$ ) [23, 24]. The transitions between these non-overlapping sets must exactly match the transitions defined by  $\rho$  in  $D_L$ , otherwise  $D'_L$  would fail to sort words into equivalence classes of  $L$ . Therefore, if  $r^\dagger$  has no inward edges in the network  $\rho_\Lambda$  defined by  $D_L$ , none of the states in the set corresponding to the equivalence class represented by  $r^\dagger$  can have inward edges in the network  $\rho'_\Lambda$  defined by  $D'_L$ . The existence of at least one state in the network  $\rho'_\Lambda$  with zero inward edges implies the existence of at least one conflict state with two or more inward edges in  $\rho'_\Lambda$ , since the total number of edges is equal to the total number of states. Therefore any  $D'_L$  that accepts the same language as a non-invertible minimal DFA  $D_L$  must exhibit conflict states, and must also be non-invertible.