

Dropout Feature Ranking for Deep Learning Models

Chun-Hao Chang^{1,2,3*}, Ladislav Rampasek^{1,2,3} and Anna Goldenberg^{1,2,3,*}

¹Computer Science, University of Toronto, Toronto, Canada,

²Vector Institute, Toronto, Canada,

³Sickkids Hospital, Toronto, Canada.

*To whom correspondence should be addressed.

Abstract

Deep neural networks (DNNs) achieve state-of-the-art results in a variety of domains. Unfortunately, DNNs are notorious for their non-interpretability, and thus limit their applicability in hypothesis-driven domains such as biology and healthcare. Moreover, in the resource-constraint setting, it is critical to design tests relying on fewer more informative features leading to high accuracy performance within reasonable budget. We aim to close this gap by proposing a new general feature ranking method for deep learning. We show that our simple yet effective method performs on par or compares favorably to eight strawman, classical and deep-learning feature ranking methods in two simulations and five very different datasets on tasks ranging from classification to regression, in both static and time series scenarios. We also illustrate the use of our method on a drug response dataset and show that it identifies genes relevant to the drug-response.

1 Introduction

Deep neural networks (DNNs) have started to come out as top performers in biology and healthcare including genomics (Xiong *et al.*, 2015), medical imaging (Esteva *et al.*, 2017), EEG (Rajpurkar *et al.*, 2017) and EHR (Futoma *et al.*, 2017). However, DNNs are black-box models and notorious for their non-interpretability. In the fields of biology and healthcare, to derive hypotheses that could be experimentally verified, it is paramount to provide information about which biological or clinical features are driving the prediction. The desired data may be very expensive to collect, thus it is also important to generate experimental designs that will collect the most effective data leading to the highest accuracy within reasonable budget. Therefore, there is a strong need for feature ranking for deep learning methods to advance their use in biology and healthcare. We aim to close this gap by proposing a new general feature ranking method for deep learning.

In this work we propose to rank features by variational dropout (Gal *et al.*, 2017). Dropout is an effective technique commonly used to regularize neural networks by randomly removing a subset of hidden node values and setting them to 0. In this work we use the Dropout concept on the input feature layer and optimize the corresponding feature-wise dropout rate. Since each feature is removed stochastically, our method creates a similar effect to feature bagging (Ho, 1995) and manages to rank correlated features better than other non-bagging methods such as LASSO. We compare our method to Random Forest (RF), LASSO, ElasticNet, Marginal ranking and several techniques to derive importance

in DNN such as Deep Feature Selection and various heuristics. We first test it on 2 simulation datasets and shows that our methods can rank features correctly in the non-linear feature interactions especially among the important features. Then we test it on 4 real-world datasets and show that our method has higher performance under the same number of features in the deep neural network. Then we test it on a multivariate clinical time-series dataset and show that our method also rivals or outperforms other methods in recurrent neural network setting. Finally, we test our method on a real-world drug response prediction problem using a previously proposed Variational Autoencoder (VAE) (Kingma and Welling, 2013). In this proof-of-concept application, we show that our method identifies genes relevant to the drug-response.

2 Related Work

Many previously proposed approaches to interpret DNNs focus on interpreting a decision (such as assigning a particular classification label in an image) for a specific example at hand (e.g. (Simonyan *et al.*, 2013; Zeiler and Fergus, 2014; Ribeiro *et al.*, 2016; Zhou *et al.*, 2016; Selvaraju *et al.*, 2016; Shrikumar *et al.*, 2017; Zintgraf *et al.*, 2017; Fong and Vedaldi, 2017; Dabkowski and Gal, 2017)). In this case, a method would aim to figure out which parts of a given image make the classifier think that this particular image should be classified as a dog. These methods are unfortunately not easy to use for the purpose of feature selection or ranking, where the importance of the feature should be gleaned across the whole dataset.

Several works have mentioned using variational dropout to achieve better performance (Gal *et al.*, 2017) Kingma *et al.* (2015), have a Bayes interpretation of dropout (Maeda, 2014), or compress the model architecture (Molchanov *et al.*, 2017). These works focus on tuning the dropout rate to automatically get the best performance, but do not consider applying it to the feature ranking problems.

Li *et al.* (2016) proposed Deep Feature Selection (Deep FS). Deep FS adds another hidden layer to the network with one connection per input node to this hidden layer (of the same size as input) and uses an ℓ_1 penalty on this layer. The weights between these layers are initialized to 1 but since they are not constrained to $[0, 1]$, they can become large positive and negative values. Thus, this additional layer can amplify a particular input and will need to be balanced within the original network architecture. Additionally, using ℓ_1 penalty prevents Deep FS from selecting correlated features, important in many biological and health applications.

Finally, several works also targeted interpreting features in a clinical setting. Che *et al.* (2015) uses Gradient-Boosted Trees to mimic a recurrent neural network on a healthcare dataset to achieve comparable performance. Nezhad *et al.* (2016) interprets the clinical features by autoencoder and random forest. Suresh *et al.* (2017) use Recurrent Neural Network to predict the clinical dataset and use the ranking heuristics called 'Mean' in our settings. These approaches rely on additional decision tree architecture to learn the features, or use heuristics which have a weaker ranking performance in our experiments.

3 Methods

3.1 Variational Dropout

Dropout (Srivastava *et al.*, 2014) is one of the most effective and widely used regularization techniques for neural networks. The mechanism is to inject a multiplicative Bernoulli noise for each hidden unit within a neural network. Specifically, during forward pass, for each hidden unit k in layer j a dropout mask $z_{jk} \sim \text{Bern}(z|\theta_{jk})$ is sampled. The original hidden node value h_{jk} is then multiplied by this mask $h'_{jk} = h_{jk}z_{jk}$, which stochastically sets the hidden node value to h_{jk} or 0.

Variational dropout (Maeda, 2014) optimizes the dropout rate θ as a parameter instead of it being a fixed hyperparameter. For a neural network $f(\mathbf{x})$, given a mini-batch of size M (sampled from training set of N samples) and a dropout mask \mathbf{z} , the loss objective function that follows from the variational interpretation of dropout can be written as:

$$L(\theta) = -\frac{1}{M} \sum_{i=1}^M \log p(\mathbf{y}_i | f(\mathbf{x}_i, \mathbf{z}_i)) + \frac{1}{N} KL(q_\theta(\mathbf{z}) || p(\mathbf{z})). \quad (1)$$

Here, $\mathbf{z}_i \sim q_\theta(\mathbf{z})$, where $q_\theta(\mathbf{z})$ is the variational mask distribution and $p(\mathbf{z})$ is a prior distribution.

3.2 Feature Ranking Using Variational Dropout

Figure 1 shows our approach. To analyze which features are important for a given pre-trained model \mathcal{M} to correctly predict its target variable y , we introduce Dropout Feature Ranking (Dropout FR) method. In our method we add variational dropout regularization to the input layer of \mathcal{M} . To achieve minimum loss, the Dropout FR model should learn small dropout rate for features that are important for correct target prediction by the analyzed model \mathcal{M} , while increasing the dropout rate for the rest of unimportant features. Specifically, given D features, we set a variational

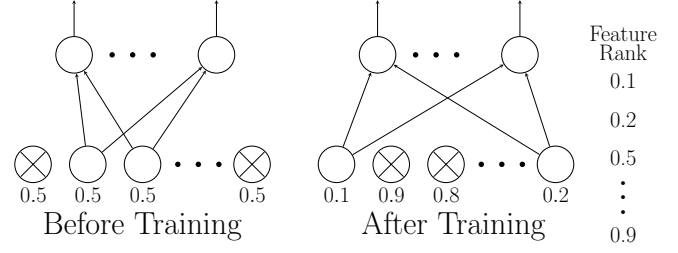


Fig. 1: Dropout feature ranking diagram. Before training (Left), the dropout rate for each feature is initialized to 0.5. After training (Right), each feature gets a different dropout rate. We then rank all features based on the magnitude of the dropout rate - the lower the magnitude, the higher the rank.

mask distribution $q_\theta(\mathbf{z}) = \prod_{j=1}^D q(z_j|\theta_j) = \prod_{j=1}^D \text{Bern}(z_j|\theta_j)$ as a fully factorized distribution. This gives us a feature-wise dropout rate θ_j where magnitude indicates the importance of feature j .

Instead of having a $KL(q_\theta(\mathbf{z}) || p(\mathbf{z}))$ in the equation 1 to regularize the dropout distribution $q_\theta(\mathbf{z})$, we directly penalize the number of existing features (features not dropped-out). This avoids the need to set the prior dropout rate $p(\mathbf{z})$ and is aligned with the ℓ_0 penalty for linear regression (Murphy, 2012). Our loss function can thus be written as:

$$L(\theta) = -\frac{1}{M} \sum_{i=1}^M \log p_{\mathcal{M}}(\mathbf{y}_i | f(\mathbf{x}_i \odot \mathbf{z}_i)) + \frac{\lambda}{M} \sum_{i=1}^M \sum_{j=1}^D z_{ij} \quad (2)$$

where $\mathbf{z}_i \sim q_\theta(\mathbf{z})$ and λ is determined by cross validation.

Concrete relaxation To optimize $L(\theta)$ w.r.t. the parameters θ , we need to backpropagate through discrete variable \mathbf{z} . We adopt the same approach as in Gal *et al.* (2017) to optimize our dropout rate. Specifically, instead of sampling the discrete Bernoulli variable, we sample from Concrete distribution (Jang *et al.*, 2016; Maddison *et al.*, 2016) with some temperature t which produces value between 0 and 1. This distribution places most of the mass in 0 and 1 to approximate the discrete distribution. The concrete relaxation \tilde{z} for Bernoulli distribution $\text{Bern}(z|\theta)$ is:

$$\tilde{z} = \text{sigmoid}\left(\frac{1}{t}(\log \theta - \log(1 - \theta) + \log u - \log(1 - u))\right)$$

where $u \sim \text{Uniform}(0, 1)$. We fix t as 0.1 and find it works well in all our experiments. Compared to traditional REINFORCE estimator (Williams, 1992), this concrete distribution has lower variance and has better performance (data not shown), so we apply it in all our experiments.

Annealing We adopt the annealing tricks to avoid the model being penalized heavy before it fully optimizes. Specifically, we increase λ linearly from 0 to its specified value in the first few epochs during optimization. This is similar to the KL annealing tricks (Bowman *et al.*, 2015) in the VAE.

Relation to reinforcement learning Our method can be seen as a policy gradient based method (Sutton *et al.*, 2000) (one of the reinforcement learning techniques) applied to feature selection setting. From this perspective, our policy is the factorized Bernoulli distribution, and the reward consists of the log probability of targets and the number of features

used. We optimize the policy that outputs the best feature combination in this large feature spaces with 2^P combinations where P is the total number of features. To get the feature-wise explanation, we adopt the factorized Bernoulli distribution to gain per-feature importance value as our ranking.

3.3 Training details of neural networks

We list all the hyperparameters of our experiments (No Interaction, Interaction, Support2, MiniBooNE, Online News, YearPredictionMSD, and Physionet) in table 1. For all the feed-forward neural network, we add dropout and batch normalization in every hidden layer, and use learning rate decay and early stopping to train the classifier. For recurrent neural network, we apply dropout and batch normalization in the output. We do the grid search and cross validation to select the λ . We add a small ℓ_2 penalty to reduce overfitting. We use Adam (Kingma and Ba, 2014) to optimize all the experiments. All the hyperparameters are selected by hands without much tuning.

4 Results

First, we test and compare our dropout feature ranking method (Dropout FR) in 2 simulation settings. Second, we test 2 classification and 2 regression real-world datasets using the feed-forward neural network. We then compare our approach using a clinical time series dataset by interpreting a recurrent neural network. Finally, we apply our approach to a drug-response task to understand which genes contribute to drug response in a variational autoencoder (VAE) prediction model.

4.1 Compared methods

We compare our approach to a variety of strawman methods as well as approaches commonly used for feature ranking. LASSO uses an ℓ_1 penalty while Elastic Net uses a mix of ℓ_1 and ℓ_2 penalty (we pick $\alpha = 0.5$ to balance between ℓ_1 and ℓ_2), in which the feature importance is derived from the order each feature goes to 0 as the penalty increases. Random Forest derives its feature ranking by the average decrease of impurity across different trees (we use 200 trees for all experiments). Marginal ranking refers to the univariate feature analysis that ignores the interaction between features. We use t-test probability as the ranking criteria in the binary classification task, and use Pearson correlation coefficient in the regression task. Random ranking means that we randomly assign ranks to different features, serving as a baseline in the real-world dataset evaluation in the section 4.3 and 4.4.

Deep FS (Li *et al.*, 2016) was proposed specifically for interpreting deep learning models. It adds another hidden layer to the network with one connection per input node to this hidden layer (of the same size as input) and uses an ℓ_1 penalty on this layer. After the optimization, the magnitude of the connection weight is used as a proxy of the importance of each variable. Note that to correctly evaluate importance of each feature and to ultimately rank features, in theory the method should examine the order with which weights drop to 0 as the ℓ_1 penalty increases. However, this would require hundreds of manual settings of the ℓ_1 penalty hyperparameter, which is not scalable, so we follow the authors and use the connection weight instead. We pick the ℓ_1 coefficient λ also by cross validation.

Finally, we use two heuristics to rank features in a DNN. We call the first approach ‘Mean’ method: we replace one feature at a time

with the mean of the feature and rank feature importance based on the corresponding increase in the training loss. Our second method is called ‘Shuffle’: for each feature we permute its values across the samples and evaluate importance by the increase of the training loss.

4.2 Simulation

We simulate two datasets to show that multi-layer neural network can capture the non-linear interactions. First, we simulate a dataset without any feature interactions (called ‘No Interaction’). We sample 40 features $x_{d \in \{1, \dots, 40\}} \sim N(0, 1)$, while only top 20 features are informative of target y . These top 20 features have decreasing importance with increasing Bernoulli noise $z_{d \in \{1, \dots, 20\}} \sim \text{Bern}(1 - 0.05 \cdot (d - 1))$ that stochastically sets each feature to 0. We set our target $y = \sum_{d=1}^{20} x_d z_d$. Thus, among the informative features, the most important feature is the 1-st and the least important feature is the 20-th. And the ground truth ranking is decreasing from 1st feature to 20-th feature with the noisy features (21th - 40th) as the least important. We then calculate the Spearman coefficient to the ground truth as our performance metric.

To compare the effect of second order interaction, we simulate another dataset with second order feature interactions (called ‘Interaction’). Namely, we use the product of feature pairs instead of each individual feature to affect the target y . Specifically, we set the target $y = \sum_{d=1, 3, \dots, 19} x_d \cdot x_{(d+1)} \cdot z_d$, where target y depends on the product of feature pair x_d and $x_{(d+1)}$. Thus, among the informative features, the most important feature pair is 1-st and 2-nd features, with decreasing importance of 19-th and 20-th feature pair. The least important features are still the noisy features (21th - 40th).

Training Details We simulate 10,000 samples for both datasets to generate enough samples for the neural network to perform reasonably well. We train a feed-forward neural network with 2 hidden layers (exact architecture shown in section 3.3), then rank features by our Dropout FR, Mean, Shuffle and Deep FS. We train random forest with 200 trees since we find increasing number of trees does not improve. We use 5-fold cross validation for all our experiments.

Result In Table 2, we show the Spearman coefficients for these two datasets when comparing full features (Top 40), only the informative features (Top 20) and the top 5 most informative features (Top 5). In the No Interaction dataset, we find all methods perform great when comparing full features except Elastic Net and LASSO. However, we find these 2 methods perform well when only considering the top 20 informative features. It shows that these methods can not distinguish noisy from true features, but are able to rank the strengths of informative features. In the Interaction dataset, we find Elastic Net, LASSO and Marginal method perform much worse, showing these simple linear layer and single-feature statistical tests can not capture second order interaction effects. We find deep learning based methods (Dropout FR, Mean, Shuffle) except Deep FS perform the best across all the settings. Random Forest (RF) is able to distinguish noisy features from important features (see Top 40). However, we find it performs much worse when only considering the top 5 features, showing that it can not correctly rank the very top and most important features, failing to capture complicated feature interactions.

4.3 Evaluation in the Real-World datasets

Evaluation Criteria To understand which feature ranking is the best in the real-world datasets, we evaluate each feature ranking by its test set

Table 1. Neural Network hyperparameters for each dataset

	No Interaction	Interaction	Support2	MiniBooNE	Online News	YearPredictionMSD	Physionet
<i>Architecture</i>	MLP	MLP	MLP	MLP	MLP	MLP	GRU
<i>Loss</i>	MSE	MSE	CE loss	CE loss	MSE	MSE	CE loss
<i>Input layer</i>	40	40	42	50	59	90	37
<i>Hidden layers</i>	40-20	40-20	170-170	150-100-50-25	80-80-80	200-100-80-40-20	64
<i>Dropout</i>	Every hidden layer with 0.5 dropout rate						input(0.3) output(0.5)
<i>BatchNorm</i>	After every hidden layer						output
<i>Learning rate</i>	0.001	0.001	0.001	0.001	0.001	5.00E-04	1.00E-03
<i>L2 penalty</i>	1.00E-05	1.00E-05	1.00E-04	1.00E-04	1.00E-05	1.00E-05	1.00E-06
<i>Patience</i>	3	3	5.00E+00	2	4.00E+00	2	2
<i>Lookahead</i>	10	10	12	6	9	5	5
<i>Epochs</i>	100	100	600	100	100	100	100
Dropout feature ranking parameters							
<i>Annealing</i>	30	30	30	30	30	30	30
λ	0.1	1	0.01	0.1	0.01	1	0.001
<i>learning rate</i>	0.001	0.001	0.002	0.002	0.002	0.002	0.01
<i>Epochs</i>	200	200	400	150	200	100	300

Table 2. Comparisons of different ranking methods in 2 simulations (No Interaction, Interaction).

	No Interactiton			Interactiton		
Criteria	Top 40	Top 20	Top 5	Top 40	Top 20	Top 5
Dropout FR	0.933 \pm 0.004	0.998 \pm 0.002	0.920 \pm 0.084	0.909 \pm 0.016	0.990 \pm 0.004	0.949 \pm 0.000
Mean	0.928 \pm 0.012	0.998 \pm 0.001	0.860 \pm 0.055	0.910 \pm 0.016	0.990 \pm 0.002	0.949 \pm 0.000
Shuffle	0.931 \pm 0.006	0.997 \pm 0.001	0.820 \pm 0.045	0.900 \pm 0.021	0.988 \pm 0.003	0.949 \pm 0.000
Deep FS	0.902 \pm 0.015	0.979 \pm 0.012	0.780 \pm 0.130	0.892 \pm 0.022	0.958 \pm 0.005	0.453 \pm 0.265
RF	0.921 \pm 0.016	0.996 \pm 0.002	0.860 \pm 0.055	0.904 \pm 0.013	0.983 \pm 0.012	0.885 \pm 0.141
Elastic Net	0.229 \pm 0.275	0.997 \pm 0.001	0.860 \pm 0.055	-0.073 \pm 0.138	-0.130 \pm 0.142	0.190 \pm 0.387
LASSO	0.101 \pm 0.136	0.997 \pm 0.001	0.860 \pm 0.055	-0.073 \pm 0.138	-0.129 \pm 0.142	0.190 \pm 0.387
Marginal	0.902 \pm 0.014	0.995 \pm 0.001	0.860 \pm 0.055	-0.041 \pm 0.101	-0.100 \pm 0.131	0.105 \pm 0.376

performance of top N features. A better feature ranking should reach higher performance by using same amounts of features. We evaluate the feature ranking with two settings. We call the first setting **'zero-out'**: after taking top N features, we set the rest of the features to 0 and evaluate the test performance using the already trained neural network: this represents how well we interpret a given classifier. The second setting is called **'retrain'**: we retrain neural network using the top N features. It represents in general which features are important under this neural network architecture.

In this experiment, we evaluate our ranking approaches on 2 classification tasks (clinical dataset Support2¹, UCI MiniBooNE datasets), and 2 UCI regression tasks (Online News Popularity (Fernandes *et al.*, 2015), YearPredictionMSD). Here we describe each dataset. Support2 is a multivariate clinical dataset which aims to predict in-hospital death by patient's demographics, clinical assessments and lab tests. It consists of 9,105 samples and 47 features with 2,360 positive mortality labels. MiniBooNE aims to predict effective particles in distinguish electron neutrinos (signal) from muon neutrinos (background). It consists of 130,065 samples and 50 features with 36,499 positive

labels. Online News Popularity dataset predicts the sharing times of articles in the website Mashable by article topics, word compositions and timestamps. It consists of 39,797 samples and 61 features, and the goal is to predict the number of times this article is shared. YearPredictionMSD is a task to predict the published year of songs that is published from 19 to 20 century by various sound features. It consists of 515,345 samples and 90 song features.

We preprocess all the continuous features by clipping the values of outliers to the outlier threshold defined by the interquartile ranges (IQR) method. Then we normalize them to 0 mean and unit variance. We also remove the outliers and normalize the target variable in Online News Popularity dataset. For categorical variable, we do the one-hot encoding. We do 5-fold cross validation with 10 percent training set as the validation set in all our experiments.

We show each dataset summary statistics and classifiers' performance in Table ???. We select datasets that have a relatively large number of instances, the scenario where neural networks commonly outperform their competitors. With the exception of the largest dataset in this experiment (YearPredictionMSD), neural network performance is relatively close to the performance of random forest. RF even outperforms NN on the Support2, the smallest dataset. As expected, neural network performance gets better as the datasets get larger.

¹ <http://biostat.mc.vanderbilt.edu/wiki/Main/DataSets>

In Figure 2, we compare our ranking methods with all other methods mentioned in section 4.1. In the ‘zero-out’ setting (first row), our method compares favorably in all the 4 datasets we tested, with significant difference in the larger dataset YearPredictionMSD. We note that we get slightly inferior performance to that of random forest when only the top 1 or 2 features are used in the MiniBooNE dataset. We also observe similar phenomenon compared to Shuffle method in the YearPredictionMSD dataset. However, the overall performance on these and other datasets, when only the top 1 or 2 features are used, is much worse compared to the performance with 5 or more features, indicating that 1 or 2 features are not sufficient to model any of these datasets. Our method has significantly higher performance when the number of features for the same and other dataset is 5 or higher. We deduce that Dropout FR selects better combinations of features (since it gets lower loss as the number of features gets larger) at the cost of the performance just given the top few features.

In the ‘retrain’ setting (second row), we only compare the first 3 datasets due to the time it takes to retrain models for the YearPredictionMSD dataset. In this setting, we find that our method rivals or outperforms other methods. This demonstrates that Dropout FR method can retrieve better feature combinations suited to the neural network architecture than many other approaches in the wide variety of datasets.

In both settings, we find that marginal ranking (green) performs much better in Support2 and News Popularity dataset and much worse in more complicated datasets, MiniBooNE and YearPredictionMSD. It might also be the reason why Dropout FR performs relatively close to other baselines in these 2 simpler datasets since using marginally important features is sufficient to explain the outcome. However, as datasets get bigger and more complicated, our method achieves significantly better results than other baselines as seen in MiniBooNE (only RF is close) and YearPredictionMSD dataset. Note that these comparisons also help us to infer the complexity of the datasets, thus it maybe beneficial to gain more insights into the data by always evaluating the performance of the strawmen methods alongside Dropout FR.

4.3.1 Stability

In this experiment, we show that our algorithm is robust to random initialization of the neural network. Figure 3 shows 5 different runs with different random seeds in the Support2 dataset setting $\lambda = 0.01$. We show that they all converge to similar dropout rate for each feature after optimization (shown by complete overlap of the performances corresponding to 5 different seeds on the graph).




Fig. 3: The keep probability ($1 - p_{dropout}$) of 47 features in the Support2 dataset for 5 different random seeds. (5 different colors) when $\lambda = 0.1$.

4.3.2 Regularization Coefficient Effect

In Figure 4, we examine the effect of different regularization coefficient on the final dropout rate in our algorithm. We note that when we have strong regularization (high λ), most of the features get pruned and have high dropout rate (low keep probability). On the other hand, when the regularization is too weak, every instance has the dropout rate close to 0. It is crucial to select proper λ that preserves the important features while pruning the noisy features.

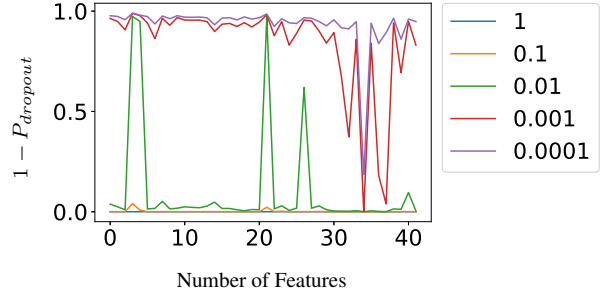


Fig. 4: The keep probability of 47 features in the Support2 dataset for different regularization coefficient λ .

4.4 Predicting in-hospital mortality

In this experiment, we evaluate the performance of our method using a multivariate time-series clinical dataset to determine the importance of clinical covariates in predicting in-hospital mortality. This dataset, from PhysioNet 2012 Challenge (Goldberger *et al.*, 2000), is a publicly available collection of multivariate clinical time series with 8000 intensive care unit (ICU) patients. It contains 37 patient measurements within the first 48 hours in the ICU. The goal is to predict the in-hospital mortality as a binary classification problem. We use the only publicly available *Training Set A* subset which contains 4,000 patient measurements with 554 patients having the positive mortality labels.

We follow the preprocessing of Lipton *et al.* (2016) work. First, we use binary features indicating whether or not a feature was measured at a given time point. If a feature was not measured, we set the binary variable to 1 and if it was measured, we set it to 0. Concatinating these reverse-indicator variables with the original 37 features results in 74 features in total. Second, we normalize each feature to zero mean and unit variance except for the binary features. Finally, we bin the input features into 1-hour intervals, take average of multiple measurements within 1-hour time window, and impute missing values with 0. These lead to a time-series with 48 time points and 74 features. We split the dataset randomly into 80%, 10%, and 10% as training, validation and test set, respectively, and repeat the procedure 40 times.

We follow the RNN architecture used in Che *et al.* (2016) to predict the mortality. We use 10-fold cross validation to select λ . For random forest, we use 1,000 trees and sum the feature importance across all the time points (since in RF each time point is considered independently for each of the features), including original feature and its corresponding reverse-indicator features.

First, we compare the neural network performance with respect to other commonly-used classifiers on the PhysioNet dataset and show that RNN is better in test set AUPR and AUROC in Table 4.

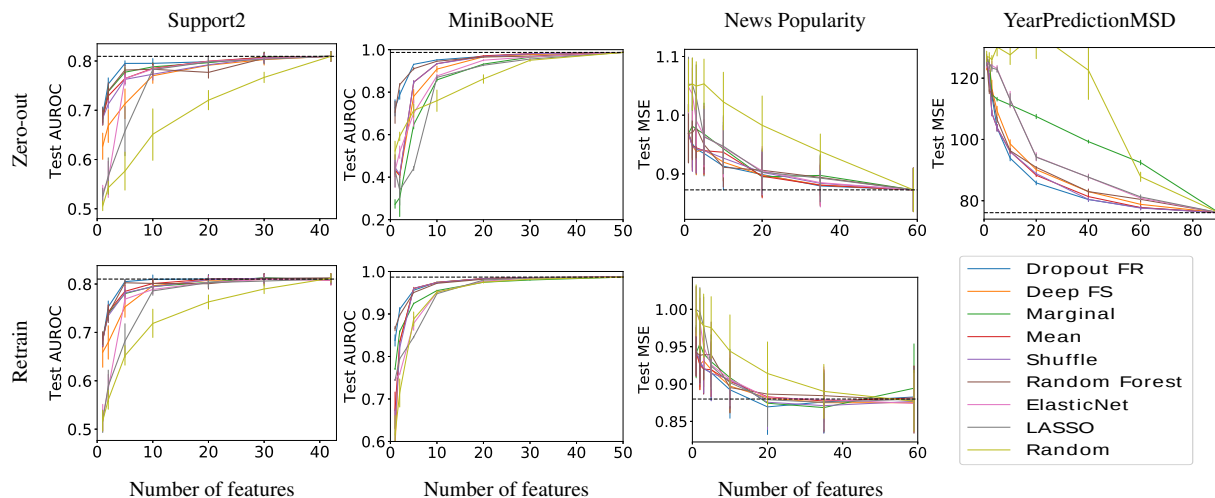


Fig. 2: Comparison of methods on 4 datasets with 2 evaluation settings (zero-out, retrain).

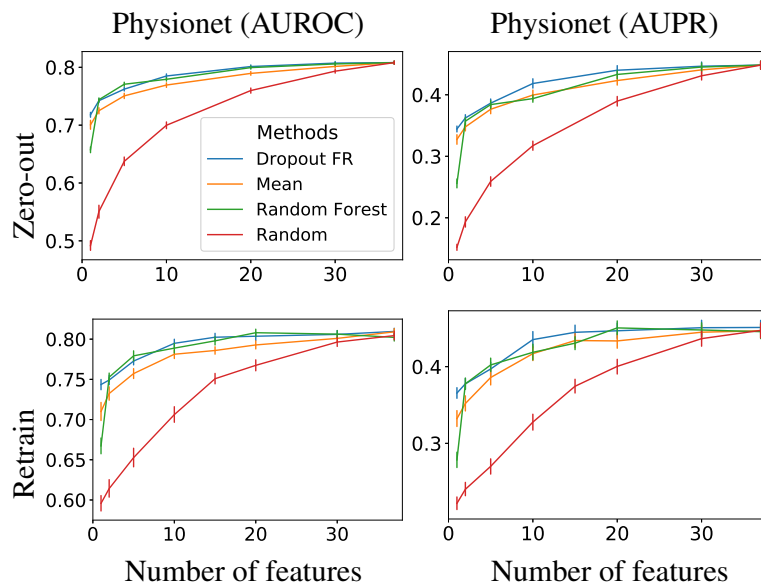


Fig. 5: Comparison of methods on Physionet datasets with both AUROC and AUPR.

In Figure 5, we compare Dropout FR, Mean, RF ranking method and Random ranking in the zero-out and retrain settings with both AUROC and AUPR. We find that Dropout FR performs overall better than Random Forest with significant difference in using 1 feature across all settings we evaluate. We also find that Dropout FR performs significantly better than Mean method across all settings. Overall, we show that our method performs well in the recurrent neural network architecture, capturing the feature importances in the time-series datasets.

In Table 5, we show the top 10 features selected by RF and Dropout FR. Overall these two approaches rank features somewhat differently, though many of the features in the two lists are the same. We find the reason for the inferior RF performance observed in Figure 5 when only 1 feature is used is the different ranking of ‘Urine’ and ‘GCS’ features (RF selects ‘GCS’ as second). The table also demonstrates that feature

importance does not simply follow the frequency of the features in the dataset for either of the methods.

4.5 Drug Response Prediction

We apply our method to a real-world drug response dataset to find which genes determine drug response using the semi-supervised variational autoencoder (SSVAE) (Kingma *et al.*, 2014) model applied to this task by Rampasek *et al.* (2017), who kindly shares the dataset and code with us. The SSVAE takes gene expression of 903 preselected genes as input and performs a binary classification to find whether the given cell line responds to the drug.

In Table 6, we examined genes contributing to the response of bortezomib, a drug commonly used in multiple myeloma patients. We choose this drug since the model performs the best in this drug and it is

Table 4. Test set performance of different methods in the Physionet

Method	AUPR	AUROC
SVM-linear	0.317 \pm 0.063	0.709 \pm 0.030
SVM-RBF	0.428 \pm 0.070	0.790 \pm 0.024
RF	0.415 \pm 0.062	0.796 \pm 0.023
RNN	0.448 \pm 0.063	0.808 \pm 0.026

widely investigated in biological research literature. The gene that was ranked the highest by our algorithm (with lowest dropout probability), *NR1H2*, was previously found to be indicative of Multiple Myeloma (MM) non-response to anti- agents such as bortezomib (Agarwal *et al.*, 2014). The second ranked gene, *BLVRA*, is known to be amplified in cells sensitive to anti-MM treatment, such as bortezomib (Soriano *et al.*, 2016). Interestingly, *BLVRA* was also ranked second by RF (and not ranked highly by t-test). The gene ranked first by RF is *FOSL1* which was not directly found to be linked to response by bortezomib, but is tangentially related through osteoclast process (*FOSL1* helps with differentiation into bone cells and there is a secondary effect of bortezomib to prevent bone loss during inflammation processes). Overall, we found that ranking of RF follows rather closely ranking by t-test. Dropout FR ranking was significantly different, capturing the importance of the ranking for the SSVAE classification.

5 Discussion

In this work we proposed a new general approach for understanding the importance of features in deep learning. This simple approach has been previously shown to be very powerful for regularizing DNNs and preventing them from overfitting, but thus far has never been used on the input layer or applied to the task of feature ranking, i.e. to understand the performance of DNNs. We believe that variational dropout works well because it acts similarly to feature bagging (Ho, 1995), subsetting the features during training. It allows to decouple correlated variables in certain instances and optimizes the corresponding feature-wise dropout rate. This may also be the reason for the good performance by random forest which we have observed in our experiments and also the reason for poor performance of ℓ_1 used in LASSO and Deep FS.

In our simulation experiment, we showed that deep learning based methods (Dropout FR, Zero, and Shuffle) capture the second-order interactions well. For other methods, we find that Random Forest performs worse when considering the order of more important features, showing it is not able to capture the correct ranking among important interacting features. Other methods such as Marginal, LASSO and Elastic Net perform much worse in our simulation, indicating simple univariate testing or linear layer is not sufficient to capture complicated nonlinear effects across both simulated and real datasets.

Further, we tested our approach in 4 feed-forward networks, a recurrent neural network and a semi-supervised variational autoencoder showing that Dropout FR is applicable to various deep learning architectures and in most scenarios performs better than other commonly-used baselines and in other scenarios it performs as well as some of the best alternatives. In particular, our experiments in the feed-forward neural networks show that our method outperform other methods significantly in the MiniBooNE (ranking the top 5 features) and YearPredictionMSD (ranking top 20 features) datasets. Although we find our approach is not the best performer for some small numbers of features, we consider it

Table 5. Top 10 features selected from RF rank and Dropout FR in Physionet

	RF rank	Present	RNN rank	Present
1	Urine	1.87%	GCS	0.86%
2	GCS	0.86%	Urine	1.87%
3	HR	2.43%	BUN	0.20%
4	SysABP	1.46%	MechVent	0.41%
5	Temp	1.00%	Temp	1.00%
6	NISysABP	1.14%	HR	2.43%
7	NIMAP	1.12%	Lactate	0.11%
8	Weight	1.43%	Weight	1.43%
9	NIDiasABP	1.14%	NIDiasABP	1.14%
10	MAP	1.45%	SysABP	1.46%

Table 6. Top 10 genes selected from RF rank and Dropout FR in drug response. We also list the t-test pvalue for each gene.

	RF rank	Pvalue	NN rank	Pvalue
1	<i>FOSL1</i>	1.48e-07	<i>NR1H2</i>	2.26E-05
2	<i>BLVRA</i>	1.30e-01	<i>BLVRA</i>	1.30E-01
3	<i>TRAM2</i>	1.18e-10	<i>PIK3CA</i>	6.14E-02
4	<i>CD44</i>	1.21e-07	<i>ATP6V1D</i>	4.34E-01
5	<i>DRAP1</i>	1.30e-06	<i>USP20</i>	8.47E-02
6	<i>FKBP4</i>	4.99e-04	<i>TRAM2</i>	1.18E-10
7	<i>UBE2L6</i>	2.77e-06	<i>CD58</i>	2.20E-05
8	<i>PLEKHM1</i>	8.83e-04	<i>DHX8</i>	3.95E-02
9	<i>SERPINE1</i>	8.34e-05	<i>PPP1R13B</i>	5.40E-03
10	<i>BAX</i>	3.05e-05	<i>CASP10</i>	6.07E-03

reasonable since it is not a greedy approach and thus might optimize the ranking that sacrifices the performance of fewer features in exchange for larger performance gain for a bigger combination of features. In addition, in the time-series setting (Physionet), our approach outperforms other methods, including Random Forest when only using the top one feature. We see the same phenomenon in simulation that Random Forest is not good at ranking the top-ranked features, which is important for experimental design. Overall, we found it useful to compare multiple strawmen, such as marginal ranking, to gain further insights into the complexity of the data.

6 Conclusion

We propose a new general feature ranking method for deep learning to interpret the feature importance. When it is impossible to measure all the features under various constraints, such as limited time and undue physical or emotional burden on the patient, it is paramount to design the system that collects the right subsets of features leading to highest performance. Our method can be used to design diagnostic standard procedure that measures least number of clinical tests with the highest or comparable predictive power. In conclusion, we provide a new and effective method that addresses the resource-constraint setting which is widely seen in the healthcare industry, and an effective solution to the common need in biology to interpret the predictive system especially such as deep learning, commonly thought of as a complex black box.

References

- Agarwal, J. R., Wang, Q., Tanno, T., Rasheed, Z., Merchant, A., Ghosh, N., Borrello, I., Huff, C. A., Parhami, F., and Matsui, W. (2014). Activation of liver x receptors inhibits hedgehog signaling, clonogenic growth, and self-renewal in multiple myeloma. *Molecular cancer therapeutics*, **13**(7), 1873–1881.
- Bowman, S. R., Vilnis, L., Vinyals, O., Dai, A. M., Jozefowicz, R., and Bengio, S. (2015). Generating sentences from a continuous space. *arXiv preprint arXiv:1511.06349*.
- Che, Z., Purushotham, S., Khemani, R., and Liu, Y. (2015). Distilling knowledge from deep networks with applications to healthcare domain. *arXiv preprint arXiv:1512.03542*.
- Che, Z., Purushotham, S., Cho, K., Sontag, D., and Liu, Y. (2016). Recurrent neural networks for multivariate time series with missing values. *arXiv preprint arXiv:1606.01865*.
- Dabkowski, P. and Gal, Y. (2017). Real time image saliency for black box classifiers. *arXiv preprint arXiv:1705.07857*.
- Esteva, A., Kuprel, B., Novoa, R. A., Ko, J., Swetter, S. M., Blau, H. M., and Thrun, S. (2017). Dermatologist-level classification of skin cancer with deep neural networks. *Nature*, **542**(7639), 115–118.
- Fernandes, K., Vinagre, P., and Cortez, P. (2015). A proactive intelligent decision support system for predicting the popularity of online news. In *Portuguese Conference on Artificial Intelligence*, pages 535–546. Springer.
- Fong, R. and Vedaldi, A. (2017). Interpretable explanations of black boxes by meaningful perturbation. *arXiv preprint arXiv:1704.03296*.
- Futoma, J., Hariharan, S., Sendak, M., Brajer, N., Clement, M., Bedoya, A., O'Brien, C., and Heller, K. (2017). An improved multi-output gaussian process rnn with real-time validation for early sepsis detection. *arXiv preprint arXiv:1708.05894*.
- Gal, Y., Hron, J., and Kendall, A. (2017). Concrete Dropout. *arXiv:1705.07832 [stat]*.
- Goldberger, A. L., Amaral, L. A., Glass, L., Hausdorff, J. M., Ivanov, P. C., Mark, R. G., Mietus, J. E., Moody, G. B., Peng, C.-K., and Stanley, H. E. (2000). Physiobank, physiotoolkit, and physionet. *Circulation*, **101**(23), e215–e220.
- Ho, T. K. (1995). Random decision forests. In *Document Analysis and Recognition, 1995., Proceedings of the Third International Conference on*, volume 1, pages 278–282. IEEE.
- Jang, E., Gu, S., and Poole, B. (2016). Categorical reparameterization with gumbel-softmax. *arXiv preprint arXiv:1611.01144*.
- Kingma, D. P. and Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Kingma, D. P. and Welling, M. (2013). Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Kingma, D. P., Mohamed, S., Rezende, D. J., and Welling, M. (2014). Semi-supervised learning with deep generative models. In *Advances in Neural Information Processing Systems*, pages 3581–3589.
- Kingma, D. P., Salimans, T., and Welling, M. (2015). Variational dropout and the local reparameterization trick. In *Advances in Neural Information Processing Systems*, pages 2575–2583.
- Li, Y., Chen, C.-Y., and Wasserman, W. W. (2016). Deep feature selection: theory and application to identify enhancers and promoters. *Journal of Computational Biology*, **23**(5), 322–336.
- Lipton, Z. C., Kale, D. C., and Wetzel, R. (2016). Modeling missing data in clinical time series with rnns. *arXiv preprint arXiv:1606.04130*.
- Maddison, C. J., Mnih, A., and Teh, Y. W. (2016). The concrete distribution: A continuous relaxation of discrete random variables. *arXiv preprint arXiv:1611.00712*.
- Maeda, S.-i. (2014). A bayesian encourages dropout. *arXiv preprint arXiv:1412.7003*.
- Molchanov, D., Ashukha, A., and Vetrov, D. (2017). Variational dropout sparsifies deep neural networks. *arXiv preprint arXiv:1701.05369*.
- Murphy, K. P. (2012). *Machine learning: a probabilistic perspective*.
- Nezhad, M. Z., Zhu, D., Li, X., Yang, K., and Levy, P. (2016). Safs: A deep feature selection approach for precision medicine. In *Bioinformatics and Biomedicine (BIBM), 2016 IEEE International Conference on*, pages 501–506. IEEE.
- Rajpurkar, P., Hannun, A. Y., Haghighpanahi, M., Bourn, C., and Ng, A. Y. (2017). Cardiologist-level arrhythmia detection with convolutional neural networks. *arXiv preprint arXiv:1707.01836*.
- Rampasek, L., Hidru, D., Smirnov, P., Haibe-Kains, B., and Goldenberg, A. (2017). Dr.VAE: Drug Response Variational Autoencoder. *arXiv:1706.08203 [stat]*.
- Ribeiro, M. T., Singh, S., and Guestrin, C. (2016). "Why Should I Trust You?": Explaining the Predictions of Any Classifier.
- Selvaraju, R. R., Das, A., Vedantam, R., Cogswell, M., Parikh, D., and Batra, D. (2016). Grad-cam: Why did you say that? *arXiv preprint arXiv:1611.07450*.
- Shrikumar, A., Greenside, P., and Kundaje, A. (2017). Learning important features through propagating activation differences. *arXiv preprint arXiv:1704.02685*.
- Simonyan, K., Vedaldi, A., and Zisserman, A. (2013). Deep inside convolutional networks: Visualising image classification models and saliency maps. *arXiv preprint arXiv:1312.6034*.
- Soriano, G., Besse, L., Li, N., Kraus, M., Besse, A., Meeuwenoord, N., Bader, J., Everts, B., den Dulk, H., Overkleeft, H., et al. (2016). Proteasome inhibitor-adapted myeloma cells are largely independent from proteasome activity and show complex proteomic changes, in particular in redox and energy metabolism. *Leukemia*, **30**(11), 2198.
- Srivastava, N., Hinton, G. E., Krizhevsky, A., Sutskever, I., and Salakhutdinov, R. (2014). Dropout: a simple way to prevent neural networks from overfitting. *Journal of machine learning research*, **15**(1), 1929–1958.
- Suresh, H., Hunt, N., Johnson, A., Celi, L. A., Szolovits, P., and Ghassemi, M. (2017). Clinical intervention prediction and understanding using deep networks. *arXiv preprint arXiv:1705.08498*.
- Sutton, R. S., McAllester, D. A., Singh, S. P., and Mansour, Y. (2000). Policy gradient methods for reinforcement learning with function approximation. In *Advances in neural information processing systems*, pages 1057–1063.
- Williams, R. J. (1992). Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine learning*, **8**(3-4), 229–256.
- Xiong, H. Y., Alipanahi, B., Lee, L. J., Bretschneider, H., Merico, D., Yuen, R. K., Hua, Y., Gueroussov, S., Najafabadi, H. S., Hughes, T. R., et al. (2015). The human splicing code reveals new insights into the genetic determinants of disease. *Science*, **347**(6218), 1254806.
- Zeiler, M. D. and Fergus, R. (2014). Visualizing and understanding convolutional networks. In *European conference on computer vision*, pages 818–833. Springer.
- Zhou, B., Khosla, A., Lapedriza, A., Oliva, A., and Torralba, A. (2016). Learning deep features for discriminative localization. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 2921–2929.
- Zintgraf, L. M., Cohen, T. S., Adel, T., and Welling, M. (2017). Visualizing deep neural network decisions: Prediction difference analysis. *arXiv preprint arXiv:1702.04595*.