

Unstable flux flow due to heated electrons in  $Y-Ba-Cu-O$  films

Mikhail N. Kunchur

Department of Physics and Astronomy  
University of South Carolina, Columbia, SC 29208  
(Dated: A accepted August 5, 2002)

A flux instability occurs in superconductors at low temperatures, where  $ee$  scattering is more rapid than  $ep$ , whereby the dissipation significantly elevates the electronic temperature while maintaining a thermal-like distribution function. The reduction in condensate and rise in resistivity produce a non-monotonic current-voltage response. In contrast to the Larkin-Ovchinnikov instability where the vortex shrinks, in this scenario the vortex expands and the quasiparticle population rises. Measurements in  $Y_1Ba_2Cu_3O_{7-x}$  agree quantitatively with the distinct predictions of this mechanism.

PACS numbers: 74.60.Ge, 74.72.Bk, 71.10.Ca, 71.38.-k, 72.10.Di, 72.15.Lh, 73.50.Fq

Keywords: Flux, fluxon, vortex, superconductivity, critical, current, instability, unstable, YBCO

In a type II superconductor, magnetic fields between the lower critical value  $H_{c1}$  and upper critical field  $H_{c2}$  introduce flux vortices containing a quantum of flux  $\phi_0 = h/2e$ . Here we have superconducting films in a perpendicular applied flux density  $B$ , with a transport electric current density  $j$  in the plane of the film, which exerts a Lorentz driving force  $F_L = j \phi_0$ . The vortex motion generates an electric field  $E = vB$  and is opposed by a viscous drag  $\eta v$  ( $\eta$  is the coefficient of viscosity and  $v$  the vortex velocity), so that in steady state  $j \phi_0 = \eta v$  and the response is Ohmic. Larkin and Ovchinnikov (1986) have shown that a dirty superconductor at low temperatures has a free-flux-flow resistivity related to the normal-state value  $\rho_n$  by [1]

$$\rho_f = \rho_n \left( 1 - 0.9B/H_{c2}(T) \right) \quad (1)$$

Approximately the same result, without the precise 0.9 prefactor, can be obtained by considering the Ohmic dissipation in the core and temporal changes in the order parameter leading to irreversible entropy transfer [2]; the result is also valid for d-wave superconductors that are not superclean [3]. Eq. 1 is equivalent to  $\rho_f H_{c2} = \rho_n$ . At low levels of  $j$  and  $E$ , in the assumed dirty limit  $1/\lambda = E_F/kT_c$  ( $\lambda$  is the mean free path and  $E_F$  is the Fermi energy),  $\eta$  is a constant that is proportional to the order parameter and inversely proportional to the size  $\xi^2$  (where  $\xi$  is the coherence length) of the vortex [4]. (The Hall effect and transverse component of  $E$  are negligible for this discussion, as is vortex pinning because of the large driving forces [5].)

At high electric fields and dissipation levels sufficient to alter the electronic distribution function and/or the electronic temperature,  $j(E)$  becomes non-linear and can develop an unstable region ( $dj/dE < 0$ ) above some critical vortex velocity  $v_c$ . For the regime near  $T_c$ , such an instability has been predicted by Larkin and Ovchinnikov (LO) [6], and has been experimentally well established [7, 8, 9, 10]. At high temperatures, the electron-phonon ( $ep$ ) scattering time  $\tau_{ep}$  can be shorter than the electron-electron ( $ee$ ) scattering time  $\tau_{ee}$ , preventing internal equilib-

ibration of the electronic system and producing a peculiar non-thermal distribution function. Since the order parameter is especially sensitive to the distribution function when close to  $T_c$ , even moderate values of  $E$  can sufficiently distort (via the Eliashberg mechanism [11]) causing a shrinkage of the vortex core and a removal of quasiparticles from its vicinity. This is the gist of the LO behavior [6, 7]. As LO themselves emphasize, the effect is most favorable close to  $T_c$  for superconductors with a full gap and, as shown by Bezuglyj and Shklovskij [12], is dominant for  $B < B_T$  (with  $B_T \approx 0.1$  T for our low- $T$  regime). One of the predictions of the standard LO effect is a  $v$  that is  $B$  independent. This has been confirmed in  $Y_1Ba_2Cu_3O_{7-x}$  in the high- $T$  range [9, 10].

This work investigates the opposite regime of  $T < T_c$  and  $B > B_T$ , where  $\eta$  is not sensitive to small changes in the distribution function. Furthermore because  $\tau_{ee} < \tau_{ep}$  as  $T \rightarrow 0$ , the distribution function remains thermal-like and the electronic system suffers mainly a temperature shift with respect to the lattice [6, 12, 13, 14]. Then instead of the standard LO picture described earlier, we consider a more transparent scenario where the main effect of the dissipation is to raise the electronic temperature, create additional quasiparticles, and diminish  $\eta$ . The vortex expands rather than shrinks, and the viscous drag is reduced because of a softening of gradients of the vortex profile rather than a removal of quasiparticles. This sequence of events is almost opposite to the standard LO picture and represents a new type of unstable regime prevalent at  $T < T_c$ . All experimental measurables can be calculated without ambiguity, and the predicted field dependencies and full  $j(E)$  curves fit the experimental results without any adjustable parameters.

Previously some deviations from LO behavior at intermediate temperatures [such as a  $B$ -dependent  $v_c$ ] were treated through modifications to the LO effect, such as an intervortex spacing  $l$  that exceeds the energy-relaxation length  $l$  [15] or by inclusion of thermal effects [12, 13]. Those treatments do not apply to the present  $T < T_c$  regime where  $l \approx D_{ep} \approx 100\{1000 \text{ nm}$  is larger than



gap together with a BCS temperature dependence as discussed above) we obtain the following d-wave generalization of the  $n_j$  relationship [?]:  $(\epsilon_0)^2 = f(n_q/n)$ , where  $n = 2.7 \times 10^{21} \text{ cm}^{-3}$  is the carrier concentration and  $f(x) = 1 - 0.4386x + 1539x^2 + 40381x^3 - 345217x^4$  (despite the appearance of successively increasing coefficients in  $f(x)$ , the terms rapidly converge because  $x = n_q/n \ll 1$ ,  $k_B T = E_F \approx 0.01$ ). Combining this with the earlier  $j_E = (T^0/n_q)(T^0)$ ,  $j_0 = v = j_0 B = E$ ,  $H_{c2,0} = n$ , and  $\dots$ , we get a convenient closed form for the non-linear  $j(E)$  characteristic:

$$j = \frac{H_{c2}(T_0)}{B} \frac{E^2}{f(x)} \quad (5)$$

with  $x = n_q/n = 0.0245$ ,  $E^2 = E^2$ , and  $E = 0.0245 n(T_0) B n_0 = H_{c2}(T_0)$  is the value of  $E$  at the instability peak. We now turn to the experimental details and results.

The samples are c-axis oriented epitaxial films of  $\text{Y}_1\text{Ba}_2\text{Cu}_3\text{O}_7$  on (100)  $\text{LaAlO}_3$  substrates with  $T_c$ 's around 90 K and of thickness  $t \approx 90 \text{ nm}$ . Electron-beam lithography was used to pattern bridges of widths  $w \approx 20 \text{ }\mu\text{m}$  and lengths  $l \approx 300 \text{ }\mu\text{m}$ . Altogether ten samples were studied at 12 temperatures (1.6, 2.2, 6, 7, 8, 10, 20, 27, 35, 42, 50, 80 K) and at 13 flux densities (0.1, 0.2, 0.5, 1, 1.5, 2, 10, 11, 13, 13.5, 13.8, 14, 15.8 T). The electrical transport measurements were made with a pulsed constant current source, preamplifier circuitry, and a digital storage oscilloscope. The pulse rise times are about 100 ns with a duty cycle of about 1 ppm, which for the narrowest bridges result in effective thermal resistances of order  $1 \text{ nK cm}^3/\text{W}$ . Note that the  $j$  values in the experiment are an order of magnitude lower than the depairing current density [20] and the applied flux densities exceed the self field of the current by at least two orders of magnitude. Further details about the experimental techniques are discussed elsewhere [21].

Fig. 2(a) shows a typical set of experimental  $j(E)$  curves. The last stable datapoint ( $j, E$ ) of each curve is at the tail of each arrow. The slightest further increase of  $j > j_c$  causes a drastic vertical jump in  $E$  as shown by the arrows (the voltage pulse jumps on the scale of the oscilloscope up to the compliance limit of the current source). The jumps show only a small hysteresis  $< 3\%$  of  $j$ . (As expected for a current-biased measurement, the break occurs slightly before the slope has become quite vertical [12].) Fig. 2(b) shows the same data plotted as the R.H.S. of Eq. 5 vs  $j - j_0$ , the excess current density over the depinning value. The data scale well and tend toward homogeneous linearity. Note that the collapse implies an excellent proportionality between  $j$  and  $B$  over the entire range.

Fig. 3 shows experimentally measured  $B$  dependencies of  $v$  and  $\rho^*$  for  $T_0 = 1.6 \text{ K}$ , demonstrating excellent agreement with Eq. 3 (the other dependencies  $E \propto B$  and

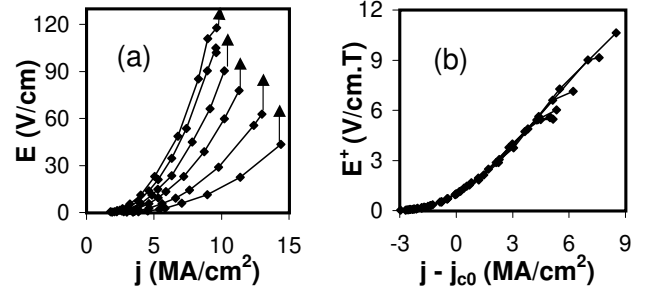


FIG. 2: Experimental current-voltage characteristics. (a) Raw values of  $E$  versus  $j$  at  $T = 20 \text{ K}$  and applied  $B$  values of (from lowest to highest curve) 3, 5, 8, 11, 13.8, and 15.8 T. The last symbol on each curve is right at the instability. Slightest further increase of  $j$  (entering the forbidden negative-sloped portion of the theoretical curves of Fig. 1) causes  $E$  to make discontinuous vertical jumps (arrows). (b) The same data plotted as  $E^+ = (E - B) / f(0.0245 E^2 = E^2)$  (as per Eq. 5) versus  $j - j_0$ , where the critical depinning current density  $j_0$  is defined at  $E^+ = 1 \text{ V/cm.T}$  (the scaling is not affected by the choice of criterion).

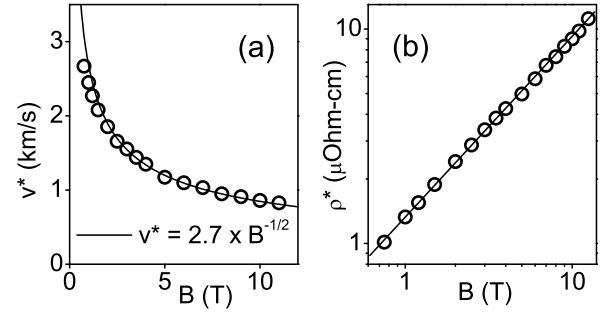


FIG. 3: Variation of critical parameters with flux density. The measurements were made at  $T = 1.6 \text{ K}$ . (a) The critical velocity shows a  $v \propto B^{-1/2}$  trend (solid line is a  $1 = B^{-1/2}$  fit). (b) The critical resistivity is proportional to the flux density (straight line is a guide to the eye).

$j \propto B$  follow from  $j_0 \propto B$  and  $v \propto B^{-1/2}$ ). The  $v \propto B^{-1/2}$  dependence was found to be ubiquitous for all of our low- $T$  measurements in ten samples (spanning 1.6 K  $< T < 50 \text{ K}$  and 0.5 T  $< B < 15.8 \text{ T}$ ) and has also been seen by Xiao et al. [10] at intermediate temperatures (at the lower end of their  $T \approx 60\text{--}90 \text{ K}$  range of study). Note that the excellent linearity between  $v$  and  $B$  demonstrates the independence of  $v$  on  $B$  in this regime; then the resistivity is simply proportional to the number of vortices and hence  $B$ .

The final step in the analysis is to extract  $\rho$  from the data. Inverting Eq. 4 evaluated at the instability (i.e., at  $T^0 = T$ ), we get  $\frac{n(T_0)B}{H_{c2}(T)E^2} \int_{T_0}^T \rho(T) dT$ ; the  $T(T_0)$  function comes from the model itself (Fig. 1(b)).  $\rho$  calculated in this way is shown by the circles in Fig. 4. If the data are analyzed in the LO frame-

work (  $D [4 (3)]^2 B^2 = (E_F^2)$  ) a markedly longer is obtained shown by the squares. For comparison the arrow shows the theoretical  $T \rightarrow 0$  limiting value estimated from spontaneous emission of phonons. (Emission of non-equilibrium phonons dominates scattering by thermal phonons below a cross-over temperature  $T_x = m v_F c_s / k_B \approx 43$  K producing an essentially  $T$ -independent scattering rate (since  $kT \ll E_F$ ) of  $\tau_{ep} = (3 m c_s^2) / (2 C^2 m k_F) \approx 8.4 \times 10^{-11}$ , where  $C \approx 6 \times 10^{13}$  ergs is the coupling between electron energy and crystal dilation,  $c_s = 4$  km/s is the sound velocity, and  $m = 6$  g/cm<sup>3</sup> is the mass density [22]; for further discussion see, for example, Kittel [23].)

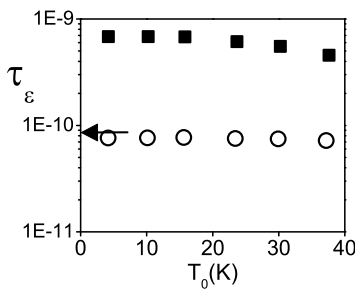


FIG. 4: The energy relaxation time extracted from the measured data using the present low-temperature instability model (circles) and from LO theory (squares). The leftward arrow represents the theoretical  $T \rightarrow 0$  limiting value of  $\tau_{ep}$  from phonon emission (please see text).

In conclusion, we investigated the low-temperature regime of flux motion driven far beyond free flux flow, and observed an instability under all conditions of fields, and temperatures from  $T_c/2$  down to essentially  $T \rightarrow 0$ . The nature of this low-temperature instability seems to be well described by a model where the electron gas is heated above the phonon temperature leading to the generation of quasiparticles and loss in viscosity as the vortex core expands and  $\eta$  is reduced. This scenario is different from the standard LO picture (dominant mainly near  $T_c$ ) where the vortex shrinks and quasiparticles leave its vicinity. Because the present effect prevails even at temperatures well below  $T_c$  (where most superconductive devices operate) it becomes an important consideration in the design of applications where the superconductor operates in the dissipative regime [24], since the instability triggers an abrupt rise in dissipation at  $j$  values much below the depairing current density. Detailed predictions of the model, including field dependencies of critical parameters and shapes of  $j(E)$  curves were experimentally verified, and the effect provides an estimate of the  $T \rightarrow 0$  time scale for energy exchange between quasiparticles and phonons.

The author gratefully acknowledges useful discussions and other assistance from J. M. Knight, B. I. Ivlev, M.

Geller, D. K. Christen, J. M. Phillips, R. P. Huebener, N. Schopohl, J. B. Lattar, and V. G. Eschenbein. This work was supported by the U. S. Department of Energy through grant number DE-FG 02-99ER 45763.

URL: <http://www.physics.sc.edu/kunchur>; Electronic address: [kunchur@sc.edu](mailto:kunchur@sc.edu)

- [1] A. I. Larkin and Yu. N. Ovchinnikov, in *Nonequilibrium Superconductivity*, D. N. Langenberg and A. I. Larkin, eds. (Elsevier, Amsterdam, 1986), Ch. 11.
- [2] J. Bardeen and M. J. Stephen, *Phys. Rev.* **140**, A1197 (1965); M. Tinkham, *Phys. Rev. Lett.* **13**, 804 (1964); and J. R. Clem, *Phys. Rev. Lett.* **20**, 735 (1968).
- [3] N. B. Kopnin and G. E. Volovik, *Phys. Rev. Lett.* **79**, 1377 (1997).
- [4] A physically intuitive discussion can be found in Michael Tinkham, *Introduction to Superconductivity*, 2nd Edition (McGraw Hill, New York, 1996).
- [5] M. N. Kunchur, D. K. Christen, and J. M. Phillips, *Phys. Rev. Lett.* **70**, 998 (1993).
- [6] A. I. Larkin and Yu. N. Ovchinnikov, *Zh. Eksp. Teor. Fiz.* **68**, 1915 (1975) [*Sov. Phys. JETP* **41**, 960 (1976)].
- [7] W. Klein, R. P. Huebener, S. Gauss, and J. Parisi, *J. Low Temp. Phys.* **61**, 413 (1985).
- [8] L. E. Musienko, I. M. Dmitrenko, and V. G. Volotskaya, *Pisma Zh. Eksp. Teor. Fiz.* **31**, 603 (1980) [*JETP Lett.* **31**, 567 (1980)]; and A. V. Samoilov et al., *Phys. Rev. Lett.* **75**, 4118 (1995).
- [9] S. G. Odettinger et al., *Phys. Rev. Lett.* **73**, 1691 (1994).
- [10] Z. L. Xiao et al., *Phys. Rev. B* **53**, 15265 (1996).
- [11] G. M. Eliashberg, *JETP Lett.* **11**, 114 (1970) [*Sov. Phys. JETP* **34**, 668 (1972)]; and B. I. Ivlev, S. G. Lisitsyn, and G. M. Eliashberg, *J. Low Temp. Phys.* **10**, 449 (1973).
- [12] A. I. Bezuglyj and V. A. Shklovskij, *Physica C* **202**, 234 (1992).
- [13] A. I. Bezuglyj, *Physica C* **323**, 122 (1999).
- [14] V. G. Voltskaya, et al., *Sov. J. Low Temp. Phys.* **18**, 683 (1993).
- [15] S. G. Odettinger et al., *Physica C* **251**, 285 (1995).
- [16] H. Nakagawa, N. Miura, and Y. Enomoto, *J. Phys.: Condens. Matter* **10**, 11571 (1998).
- [17] N. R. Werthamer, E. Helfand, and P. C. Hohenberg, *Phys. Rev.* **147**, 295 (1966).
- [18] W. Lanping et al., *Phys. Rev. B* **40**, 10954 (1989); and R. T. Collins et al., *Phys. Rev. Lett.* **59**, 704 (1987).
- [19] C. Poole, H. A. Farach, and R. J. Creswick, *Superconductivity* (Academic Press, San Diego, 1995).
- [20] M. N. Kunchur, D. K. Christen, C. E. Klabunde, and J. M. Phillips, *Phys. Rev. Lett.* **72**, 752 (1994).
- [21] M. N. Kunchur, *Mod. Phys. Lett. B* **9**, 399 (1995).
- [22] NIST Web HTS Database, <http://www.ceramics.nist.gov/srd/hts/htsquery.htm>
- [23] C. Kittel, *Introduction to Solid State Physics*, seventh edition, (John Wiley and Sons, New York, 1996), appendix J.
- [24] The author has an ongoing project (funded by Lockheed Martin, Inc.) to explore the high-dissipation regime for the operation of pulsed superconductive magnets for fusion energy devices.