

Resonant propagation of vortices in corner junctions with triplet pairing symmetry

N. Stefanakis

CNRS - CRTBT, 25 Avenue des Martyrs BP 166-38042 Grenoble cedex 9, France

(March 22, 2024)

Abstract

We present the numerical solutions for the $I-V$ characteristics, and describe the motion of vortices in a frustrated Josephson junction made of an unconventional triplet superconductor and an s -wave superconductor. In the inline geometry, and long length limit the moving integer vortex interacts with the bound fractional vortex but is not able to change its position or polarity. We observe different modes of multi-vortex propagation. In the small length limit the moving vortex is a combination of the stable solutions that exist in the static case and additional steps are introduced in the $I-V$ diagram.

74.50.+r, 74.20.Rp, 74.60.Jg, 85.25.Hv

I. INTRODUCTION

The order parameter symmetry in the recently discovered superconductor Sr_2RuO_4 [1] is an active area of current work. The Knight shift shows no change when passing through the superconducting state and this indicates that the pairing state is triplet [2]. The magnetic field is spontaneously induced as shown by ^1SR experiment, and this is a clear indication that the time-reversal symmetry is broken [3]. Inelastic-neutron-scattering measurements on single crystals of Sr_2RuO_4 show that the pairing state is highly anisotropic [4]. Also specific heat measurements support the scenario of line nodes within the gap as in high- T_c cuprate superconductors [5].

In Josephson junctions made of unconventional d-wave superconductors, the Josephson critical current can be negative depending on the orientation angles of the crystallographic axes with respect to the junction interface. A negative critical current can be thought of as a phase shift of π at the junction interface. A half uxon (anti uxon) is trapped at a 0 junction. Its existence is confirmed experimentally by measurements of the critical current versus the magnetic flux in corner junctions or corner SQUID where a dip appears in the critical current for magnetic field equal to zero [7]. The half magnetic flux quantum, ($\frac{1}{2}\Phi_0$ uxon) has been directly observed using a scanning superconducting quantum interference device microscope in tricrystal frustrated junctions in superconducting $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ [6].

The static properties of one dimensional frustrated Josephson junctions between singlet and triplet superconductors have been presented for different nodal and nodeless pairing states [8]. The critical current and the spontaneous flux show a characteristic modulation with the junction orientation, which can be tested by experiment.

The Josephson junction between s-wave superconductors supports modes of resonant propagation of uxons [9]. In the plot of the current-voltage (I - V) characteristics these modes appear as near-constant voltage branches known as zero field steps (ZFS) [10,11]. They occur in the absence of any external field. The ZFS appear at integer multiples of $V_1 = hc_s/2eL$, where c_s is the velocity of the electromagnetic waves in the junction, and L

is the junction length. The moving soliton is accompanied by a voltage pulse which can be detected at the junction's edges.

In Josephson junctions made of unconventional d-wave superconductors the bound half-uxon (-anti uxon) reverses its sign and emits an integer uxon (anti uxon) when biased by an external current [12{14]. In this work we study the dynamic properties of a frustrated junction, between singlet and triplet superconductors and calculate the $I-V$ characteristics. For the triplet superconductor Sr_2RuO_4 we shall assume two possible pairing states of two dimensional order parameter, breaking the time reversal symmetry. The first one is the nodeless p-wave order parameter with E_u symmetry [15]. The other one is the f-wave state proposed by Hasegawa et al., having B_{1g} E_u symmetry [16].

We study both the long and short length junction limit. In the long length junction limit, the external current cannot move the fractional uxon (anti uxon) ff (faf) which is confined at $x = 0$ and the ZES exist at integer values of the dc voltage V_1 . In the short length junction limit, additional modes in the $I-V$ diagram are introduced at half integer values of the dc voltage V_1 and this can be used to distinguish the possible pairing states in the junction.

In the following we present the theoretical model for the corner junction in Sec. II. We present the results for the large junction limit in Sec. III. The case of the shorter junction is presented in Sec. IV and finish with the conclusions.

II. CORNER JUNCTION MODEL

We consider the junction shown in Fig. 1(a) between a triplet superconductor A with a two component order parameter and an s-wave superconductor B. The Ginzburg - Landau (GL) equations for isotropic p-wave superconductors have been derived microscopically based on Gor'kov's theory [17]. This derivation is closely compared to the GL free energy for the superconducting state composed of two degenerate components. Applying the boundary conditions at $y = 0$ and $y = W$ where W is the width of the interface we derive the following

current phase relation [8]

$$J(\varphi) = J_c \sin(\varphi + \varphi_c); \quad (1)$$

where φ is defined as the relative phase difference between the two superconductors and φ_c is the intrinsic phase difference. J_c is the Josephson critical current density. For the type of junction that we consider where the insulator has a definite thickness and it is not a point contact as in the case treated by Barash et al. [18], the Josephson effect is strongly directional dependent and the possibility for the tunneling of the Cooper pairs becomes maximum when the trajectory of the Cooper pair is vertical to the interface. So the total momentum of the order parameter functional depends only on the orientation of the interface. This dependence enters the current phase relation via the J_c , and φ_c . We consider a corner Josephson junction between the superconductor A and the superconductor B as seen in Fig. 1(b). The orientation of the a and b crystallographic axes are at right angles with the junction edges. We map the two segments of this junction each of length $l=2$ into a one dimensional axis. The characteristic phases φ_{c1} , φ_{c2} for the two segments, for the pairing states that we consider can be seen in table I. The superconducting phase difference across the junction is then the solution of the sine-Gordon equation

$$\frac{d^2}{dx^2} - \frac{d^2}{dt^2} = J(\varphi) + \frac{d}{dt}; \quad (2)$$

where γ is the damping constant which depends on the temperature. The inline boundary condition reads

$$\frac{d}{dx} \varphi|_{x=0;l} = \frac{I}{2}; \quad (3)$$

where I is the inline bias current. The length x is normalized in units of the Josephson penetration depth given by

$$J = \frac{v}{8ed} \frac{hc^2}{J_c}; \quad (4)$$

where d is the sum of the penetration depths in two superconductors plus the thickness of the insulator layer. The time t is in units of the inverse of the Josephson plasma frequency

$$\Phi_0^{-1} = \frac{1}{\Phi_0} = \frac{1}{2\pi\hbar c} \quad (5)$$

We can classify the different solutions obtained from Eq. 2 with their magnetic flux content, in units of the flux quantum Φ_0

$$\Phi = \frac{1}{2} (\Phi_R - \Phi_L); \quad (6)$$

where $\Phi_{L(R)}$ is the value of the phase at the left (right) edge of the junction.

III. LARGE JUNCTION LIMIT

A 4th order Runge Kutta method with fixed time step $\Delta t = 0.01$, was used for the integration of the equations of motion. The number of grid points is $N = 1000$, and the junction length is $l = 20$. The damping coefficient $\gamma = 0.01$ is used in all the calculations. The $I-V$ characteristics for the first and second ZFS (corresponding to one and two vortices moving into the junction) are seen in Fig. 2 (a) for the E_u and in Fig. 2 (b) for the $B_{1g} - E_u$ pairing state. For the first ZFS two different modes of vortex propagation exist, corresponding to the presence of bound fractional vortex or anti vortex respectively at the junction center. For the E_u case, due to the difference in the flux content of the bound solutions, the ff has smaller critical current than the faf . This is opposite to the $B_{1g} - E_u$ case. In the B_{1g} wave case the $I-V$ curves for the first ZFS, for the ff and faf mode have equal critical currents [14].

For the E_u case, the external current cannot move the faf with $\Phi = 0.75$ which is pinned at $x = 0$ (see Fig. 3(a)). By applying the external current it emits an integer anti vortex (AF) which moves to the right and converts to an ff with $\Phi = 0.25$. The AF hits the right boundary and transforms into a vortex (F) which moves to the left. When the F reaches the center drags the ff with it for a while and forms a vortex with $\Phi = 1.25$ which then breaks into a ff and a F moving to the left. The vortex hits the left boundary transforms into an anti vortex which moves to the center where it meets the oscillating ff and interacts with it forming a faf and the period has been completed. A full period of

motion back and forth takes time $t = 40$, and since the overall phase advance is 4π , in the relativistic limit where $u = 1$ reached at high currents, the dc voltage across the junction will be $V = 0.314$.

We may also have the situation where the fff with $\mu = 0.25$ exists at the junction center as seen in Fig. 3(b). By applying an external current it emits an integer uxon which moves to the left and converts to a faf with $\mu = 0.75$. The F hits the left boundary and transforms to an AF which moves to the right. When the AF reaches the center it meets the oscillating faf and forms a large anti uxon with $\mu = 1.75$ which then splits into a faf with $\mu = 0.75$ and an integer anti uxon moving to the right. The anti uxon hits the right boundary, transforms into a uxon which moves to the center where it meets the oscillating faf, interacts with it forming a fff and the period has been completed. For the $B_{1g} - E_u$ pairing state the fff has magnetic ux $\mu = 0.75$ while the faf has magnetic ux $\mu = 0.25$ and an integer uxon or anti uxon propagates into the junction and interacts with the trapped uxon or anti uxon.

The different character of the various uxon solutions can also be seen from the plot of the instantaneous voltage ϕ_t at the center of the junction for the various uxon configurations. That plot is seen in Fig. 4 for the solutions regarding the first ZFS for the E_u state. During the time of one period three peaks appear in this plot by the time the uxon (anti uxon) passes through the junction center. Note that the characteristic oscillations of ϕ_t between the peaks are due to the oscillation of the bound solution about the junction center. These oscillations become more distinguishable in the faf case due to its larger uxon content. Note also the difference in height between successive peaks in the ϕ_t vs t diagram. This difference becomes more pronounced in the faf case due to its larger ux content. The plot of ϕ_t at the edges shows two peaks during the time of one period at time instants which differ by half a period. So for the first ZFS the ϕ_t vs t plot can be used to probe the existence of fff or faf at the junction center. For the $B_{1g} - E_u$ pairing state (not presented in the figure) the fff has larger ux and the difference in the peak heights and the inter-peak oscillations become more distinguishable in the fff case.

For the second ZFS we found four two-uxon configurations with distinct $I-V$ curves. Depending on the distance between the two vortices which is kept constant we can categorize the solutions as seen in Fig. 5. So compared to the case of conventional s-wave superconductors [11] junction we observe several curves for the second ZFS depending on the relative distance between the uxons and this may be used to probe the presence of intrinsic magnetic ux.

IV. SHORTER JUNCTION LIMIT

We now consider the case where the junction is of relative short length $l=2$. We plot in Fig. 6 the $I-V$ characteristics for the ZFS. We see that additional steps appear at half integer values of the dc voltage V_1 besides the ones that exist at integer values. In Fig. 7(a) we present $\langle x \rangle$, for the first ZFS, for one period ($T=4$) at various instances in time, which are separated by $\Delta t=0.2$. For the E_u case, for $t=0$ a faf with $\phi=0.75$ exists at the junction center. By applying the external current it converts to a fff with $\phi=0.25$ and a faf with $\phi=0.75$. The faf drags the fff with it forming a combination of fractional uxon-anti uxon (fff-faf), with negative magnetic ux $\phi=0.5$ which moves to the right. It hits the right boundary and the fractional anti uxon with $\phi=0.75$ goes to a fractional uxon with $\phi=1.25$, while the fractional uxon with $\phi=0.25$ goes to a fractional anti uxon with $\phi=0.75$, forming again a combination of fractional uxon-anti uxon (fff-faf) with total ux $\phi=0.5$, which moves to the left. Although the total ux is half integer the moving uxon to the right direction has different structure than the combination that moves to the left and this explains the asymmetry between successive peaks in the $\langle x \rangle$ diagram seen in Fig. 8(a). The fff-faf hits the left boundary transforms into an fff-faf with $\phi=0.5$ which moves to the center where the period is completed. A full period of motion back and forth takes time $t=4$, and since the overall phase advance is 2π , in the relativistic limit where $u=1$ reached at high currents, the dc voltage across the junction will be $V=\phi=2$. This is indeed the value obtained from the numerical simulation

as seen in Fig. 6 for the solution labeled as 1=2. Note that this value is half than the case where a full uxon moves into the junction.

In Fig. 7(c) we present $\phi(x)$, for the case where a bound combination of two fractional vortices with total magnetic flux $\Phi = 1.5$ is propagating into the junction. In a junction of length $l = 2$ the propagating uxon accomplishes an overall phase advance of 6π in a full period $T = 4$. Thus the dc voltage across the junction will be $V = 3\pi/2$. The ZFS seen in Fig. 6 corresponds to a solution labeled as 3=2. Note the the structure of the uxon moving in the forward and backward direction is not the same and the successive peaks in the ϕ_t vs t at the center of the junction do not have equal heights as seen in Fig. 8(c).

In Fig. 7(d) we present $\phi(x)$, for the case where the moving combination corresponds to magnetic flux equal to 2. Thus the dc voltage across the junction will be $V = 2\pi$. The corresponding ZFS is labeled as 2 in Fig. 6. Due to symmetry the ϕ_t vs t at the center of the junction will have the same height for the forward and backward direction as seen in Fig. 8(d).

For the $B_{1g} - E_u$ state for the first ZFS, by increasing the bias current, the faf with $\Phi = 0.25$ is transformed into a ff with $\Phi = 0.75$ and a faf with $\Phi = 1.25$ forming a fractional uxon with total $\Phi = 0.5$ that moves to the right. The reflected uxons has $\Phi = 0.5$ but differently to the E_u case it is composed by a ff with $\Phi = 0.25$ and a faf with $\Phi = 0.75$. This difference can be seen in the ϕ_t vs t diagram at the center which is displaced in time by half a period compared to the E_u case. However the resulting $I - V$ are similar to the E_u case.

V. CONCLUSIONS

We analyzed the dynamics of uxons moving in a frustrated Josephson junction with triplet pairing symmetry, and calculated the $I - V$ characteristics. The external current cannot move the ff (faf) which is con ned at $x = 0$. However the external current is able to reorient the ff (faf) and emit an integer uxon (anti uxon). For the first ZFS we found

two distinct curves with different critical currents, which correspond to the case where the moving fluxon or antifluxon interacts with a bound fractional fluxon and antifluxon respectively. The critical currents are different for the E_u and the $B_{1g} - E_u$ pairing states and this can be used to distinguish the pairing symmetry. When there are more than one integer vortices moving in the junction, there is a possibility of different modes of fluxon propagation which correspond to different critical currents.

In the small junction limit, due to the presence of the internal flux, the moving integer or half integer vortices will have internal structure that is formed from the combinations of the static solutions. The different modes in the $I - V$ diagram exist both at integer and half integer values of the dc voltage. However the $I - V$ is similar for the E_u and $B_{1g} - E_u$ and therefore it can not be used to distinguish between the two pairing states.

VI. ACKNOWLEDGEMENTS

Part of this work was done at the Department of Physics, University of Crete, Greece.

REFERENCES

- [1] Y . M aeno, H . Hashim oto, K . Yoshida, S . N ishizaki, T . Fujita, G .J. Bednorz and F . Lichtenberg, *Nature* 372, 532 (1994).
- [2] K . Ishida, H . M ukuda, Y . K itaoka, K . A sayam a, Z .Q . M ao, Y . M ori, and Y . M aeno, *Nature* 396, 658 (1998).
- [3] G . M . Luke, Y . Fukam oto, K . M . K ojim a, M . L . Larkin, J . M errin, B . N achum i, Y .J . U em ura, Y . M aeno, Z .Q . M ao, Y . M ori, H . N akam ura, and M . Sigris, *Nature* 394, 558 (1998).
- [4] F . Servant, B . Fak, S . R aym ond, J .P . B rison, P . Lejay, and J . F louquet, *Phys. Rev. B* 65, 184511 (2002).
- [5] S . N ishizaki, Y . M aeno, and Z . M ao, *J. Phys. Soc. Jpn.* 69, 572 (2000).
- [6] C . C . T suei, J .R . K irtley, C . C . Chi, Lock See Yu-Jahnes, A . G up, T . Shaw , J .Z . Sun, and M . B . K etchen, *Phys. Rev. Lett.* 73, 593 (1994).
- [7] D . A . W ollm an, D . J . Van Harlingen, J . G iapintzakis, and D . M . G insberg, *Phys. Rev. Lett.* 74, 797 (1995).
- [8] N . Stefanakis, *Phys. Rev. B* 65, 064533 (2002).
- [9] T . A . Fulton and R . C . D ynes, *Soild State Commum .* 12, 57 (1973).
- [10] J .T . Chen, T . F . F innegan and D . N . Langenberg, *Physica* 55, 413 (1971).
- [11] P . S . Lom dahl, O . H . Soerensen, and P . L . Christiansen, *Phys. Rev. B* 25, 5737 (1982).
- [12] A . B K uklov, V . S . Boyko, and J . M alinsky, *Phys. Rev. B* 51, 11 965 (1995).
- [13] T . K ato and M . Im ada, *J. Phys. Soc. Jpn.* 66, 1445 (1997).
- [14] N . Stefanakis, Unpublished.
- [15] T . M . R ice and M . Sigris, *J. Phys.: C ondens. M atter* 7, L643 (1995).

TABLE I. We present the characteristic phases $\phi_1; \phi_2$ for the various pairing symmetries. $\phi_1; \phi_2$ is the extra phase difference in the two edges of the corner junction due to the different orientations, of the a-axis of the crystal lattice.

Pairing state	ϕ_1	ϕ_2
E_u	0	$\pi/2$
$B_{1g} \quad E_u$	0	$\pi/2$

[16] Y. Hasegawa, K. Machida, and M. Ozaki, J. Phys. Soc. Jpn. 69, 336 (2000).

[17] J.-X. Zhu, C. S. Ting, J. L. Shen, and Z. D. Wang, Phys. Rev. B 56, 14093 (1997).

[18] Yu. S. Barash, A. M. Bobkov, and M. Fogelström Phys. Rev. B 64, 214503 (2001).

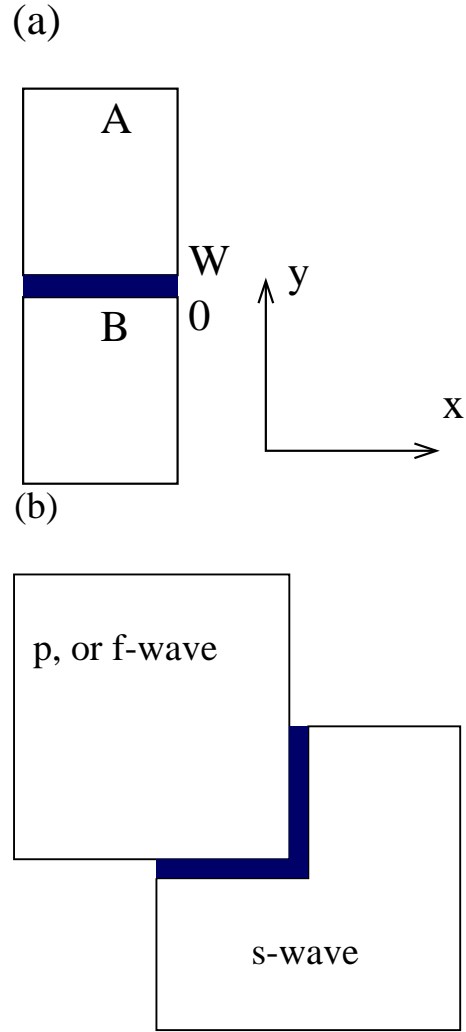


FIG .1. (a) View of the junction between a two component triplet superconductor A and a singlet superconductor B . The shaded region marks the interface which extends from $y = 0$ to $y = W$. (b) The corner junction geometry.

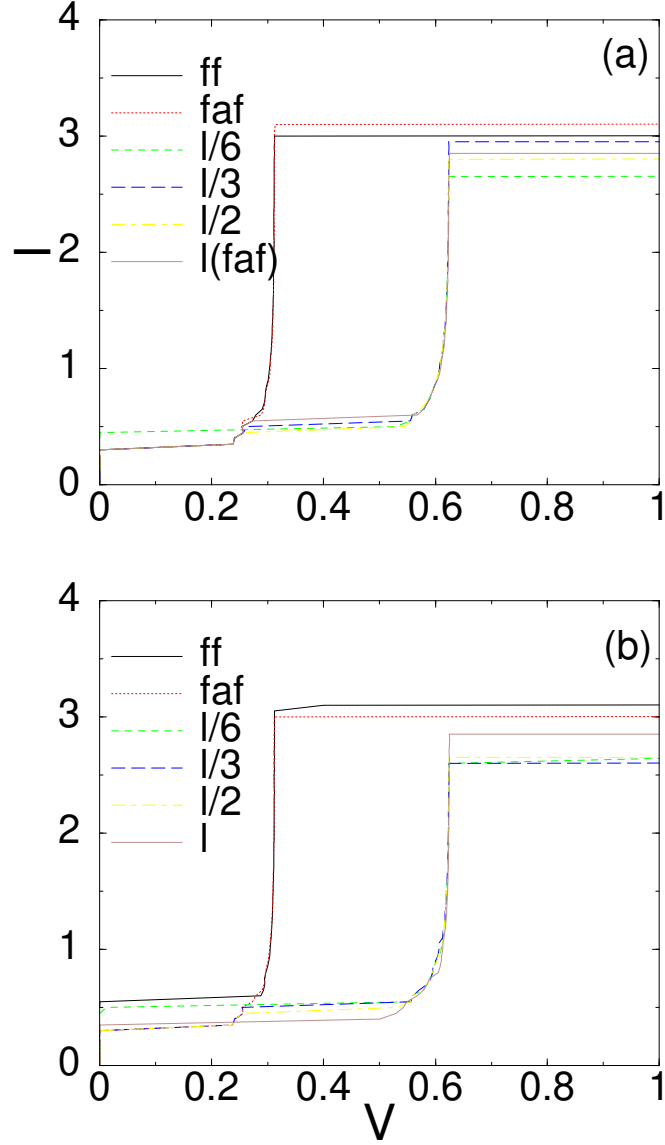


FIG. 2. $I - V$ characteristics for the inline geometry, for the first and second ZFS, for the E_u pairing symmetry. The solutions for the first ZFS are the ff , faf corresponding to a bound uxon or anti uxon in the junction's center. For the second ZFS the solutions are labeled by their relative distance $l=x$, where $l=20$ is the junctions length and $x = 1;2;3;6$ respectively.

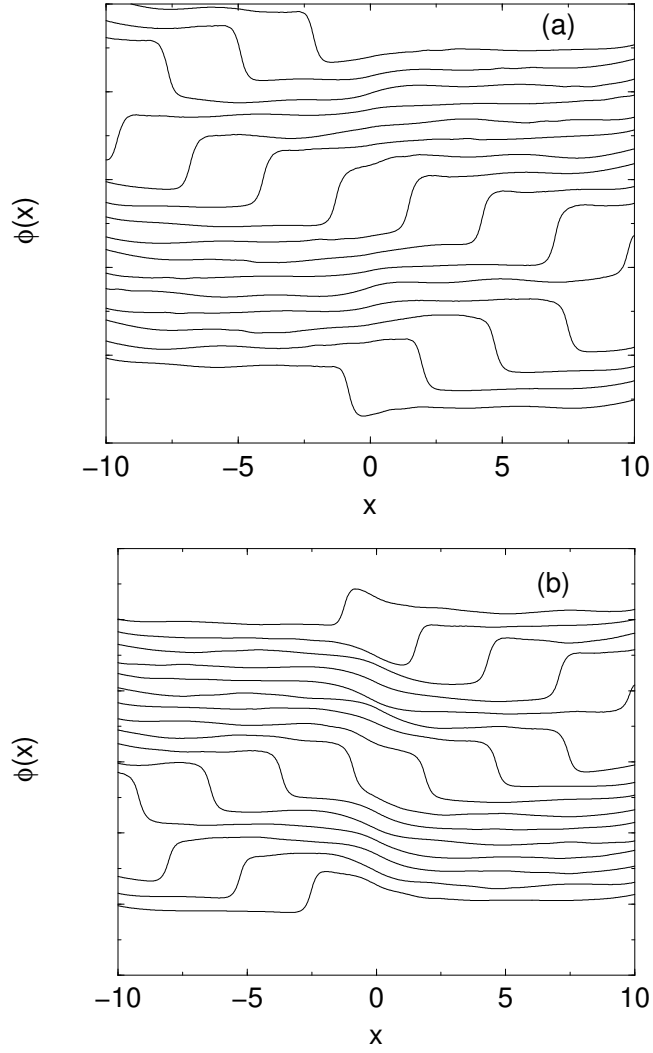


FIG. 3. Phase $\phi(x)$ vs x for the solutions in the first ZFS, at various instants, during one period separated by $\Delta t = 2\pi$. The curves are shifted by 0.5 to avoid overlapping. $l = 20$, $I = 1.6$, $\epsilon = 0.01$: (a) ff, (b) faf. The pairing symmetry is E_u .

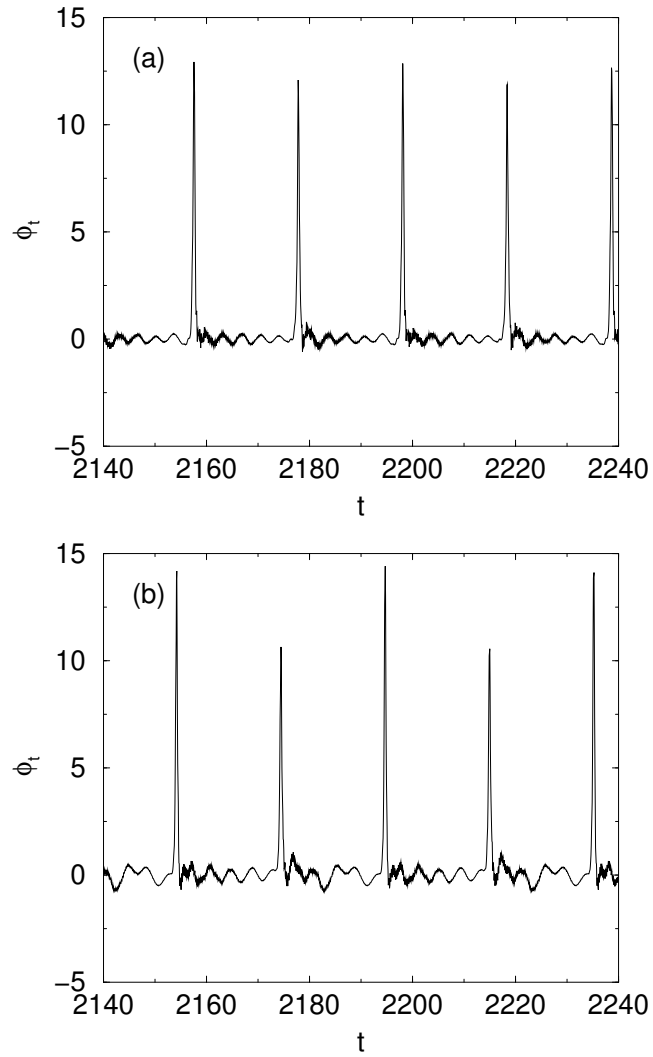


FIG. 4. Instantaneous voltage in the middle of the junction ($x = 0$) versus time t , for the solutions in the first ZFS. $l = 20$, $\alpha = 0.01$, $I = 1.6$: (a) ff , (b) faf . The pairing symmetry is E_u .

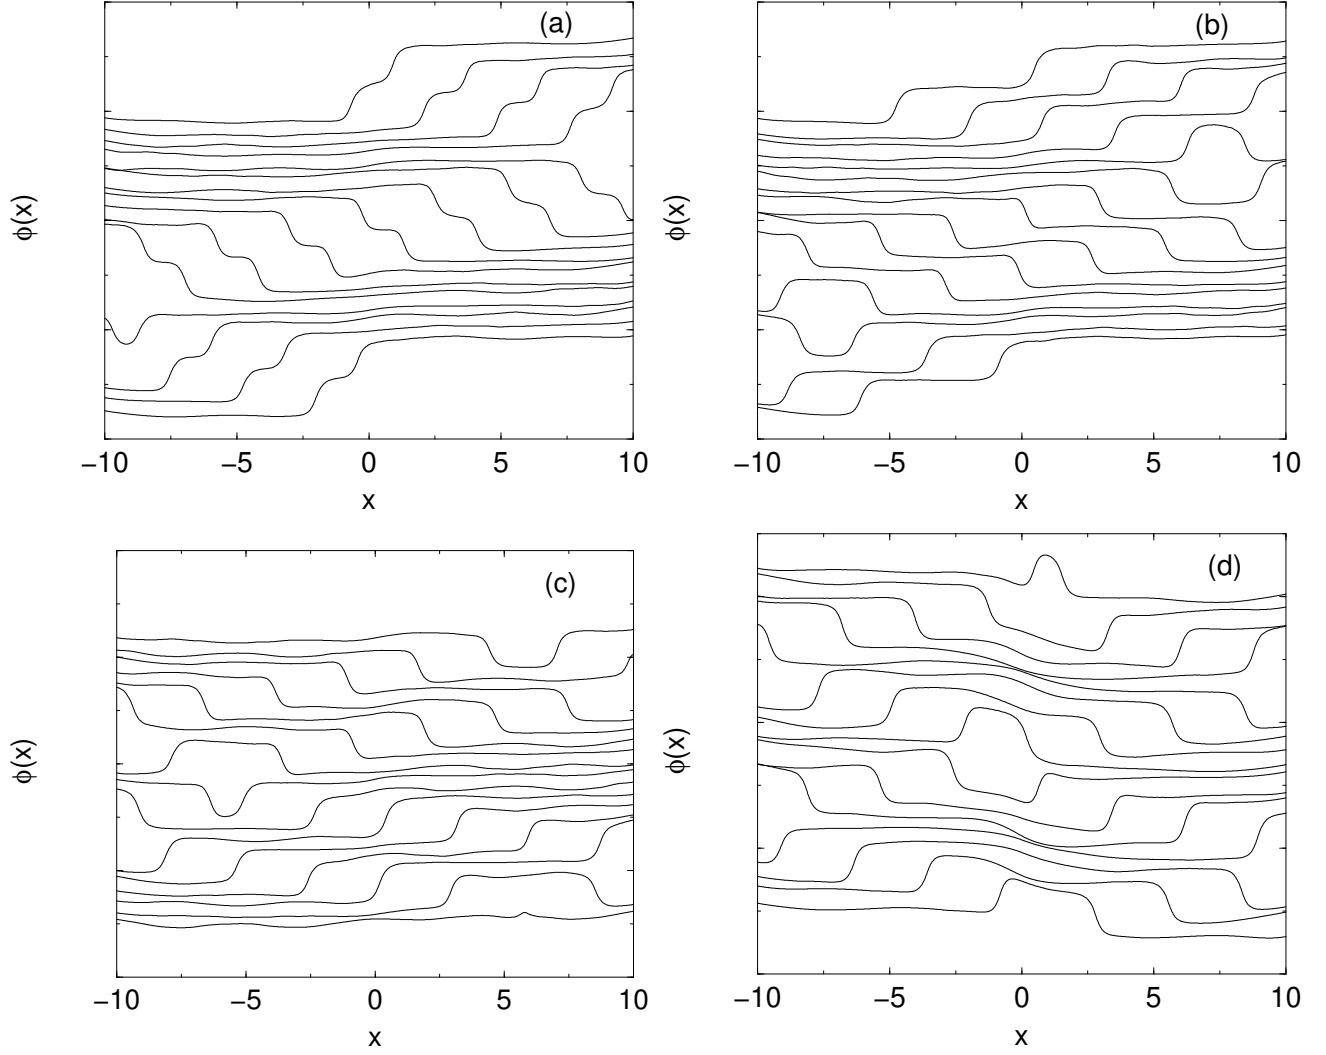


FIG .5. Phase $\phi(x)$ vs x , for the solutions in the second ZFS, at various instants separated by $\Delta t = 2\pi$. The curves are shifted by 0.5 to avoid overlapping. $l = 20$, $\epsilon = 0.01$: (a) $l=6$, $I = 1.6$, (b) $l=3$, $I = 1.6$, (c) $l=2$, $I = 1.6$, (d) $l=1$, $I = 1.6$. The pairing symmetry is E_u .

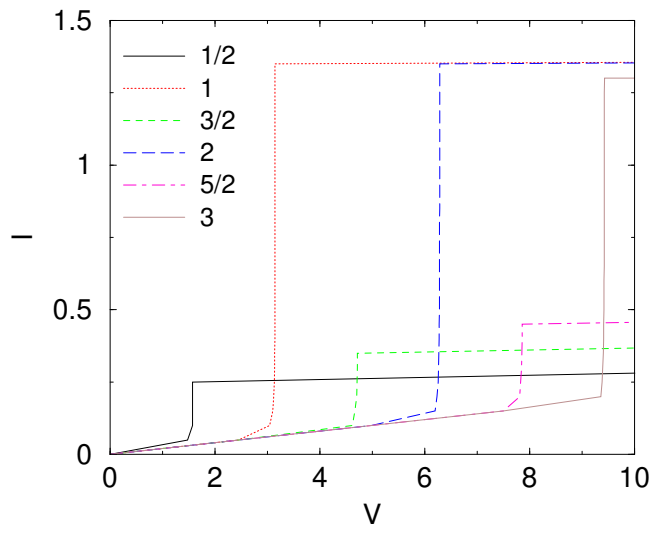


FIG .6. I - V characteristics for the inline geometry, for the E_u pairing state, $l=2$.

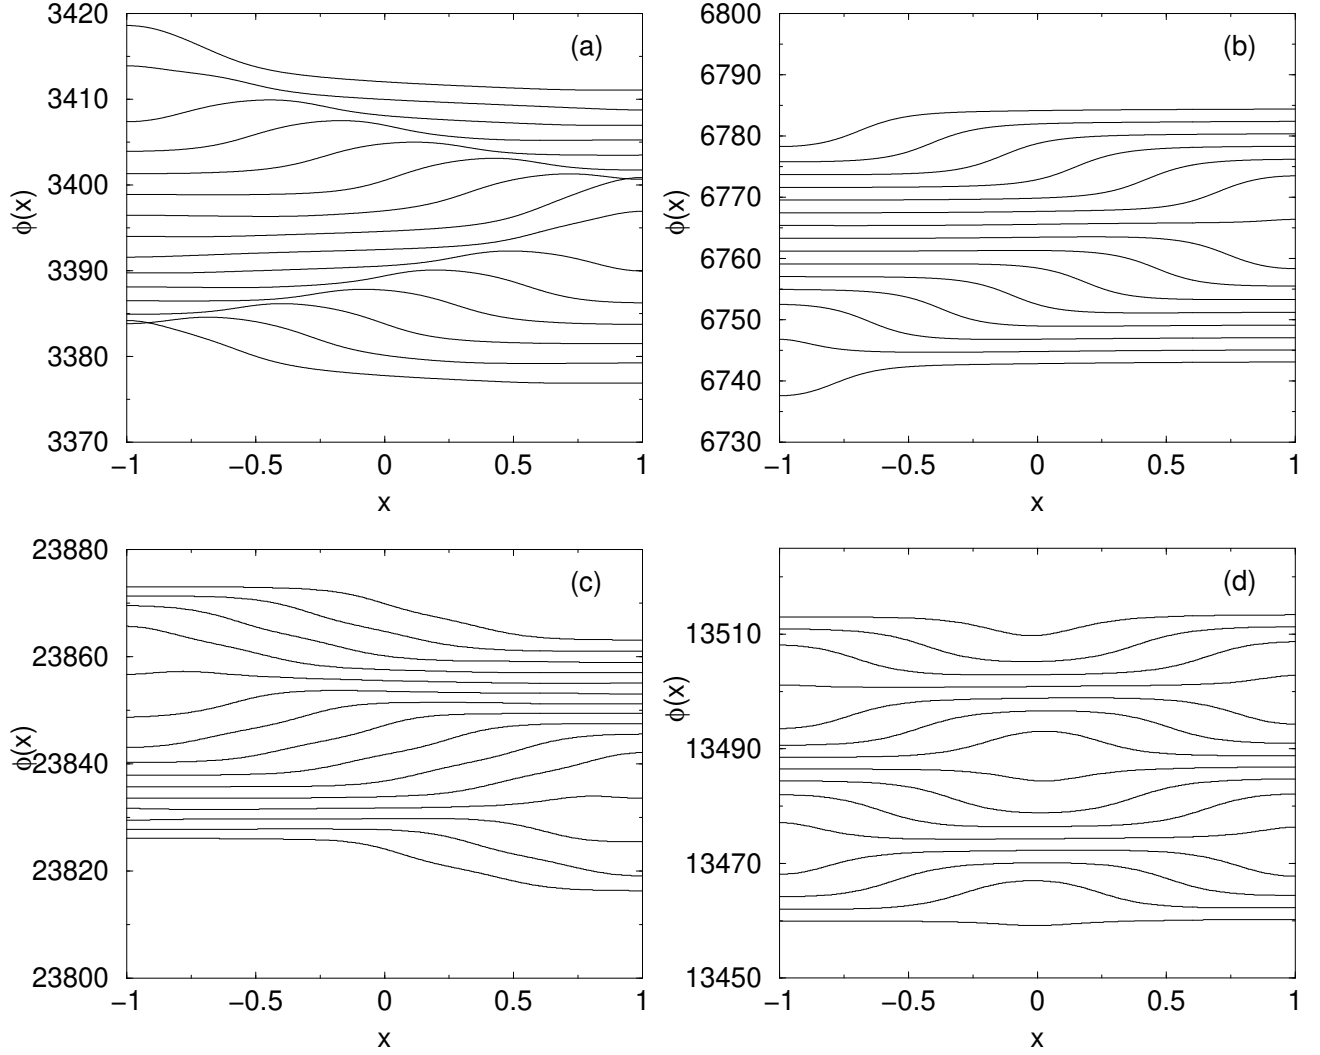


FIG .7. Phase $\phi(x)$ vs x for the solutions, at various instants, during one period separated by $\Delta t = 0.2$. The pairing state is E_u . The curves are shifted by 0.5 to avoid overlapping. $l = 2$, $I = 0.25$, $\epsilon = 0.01$.

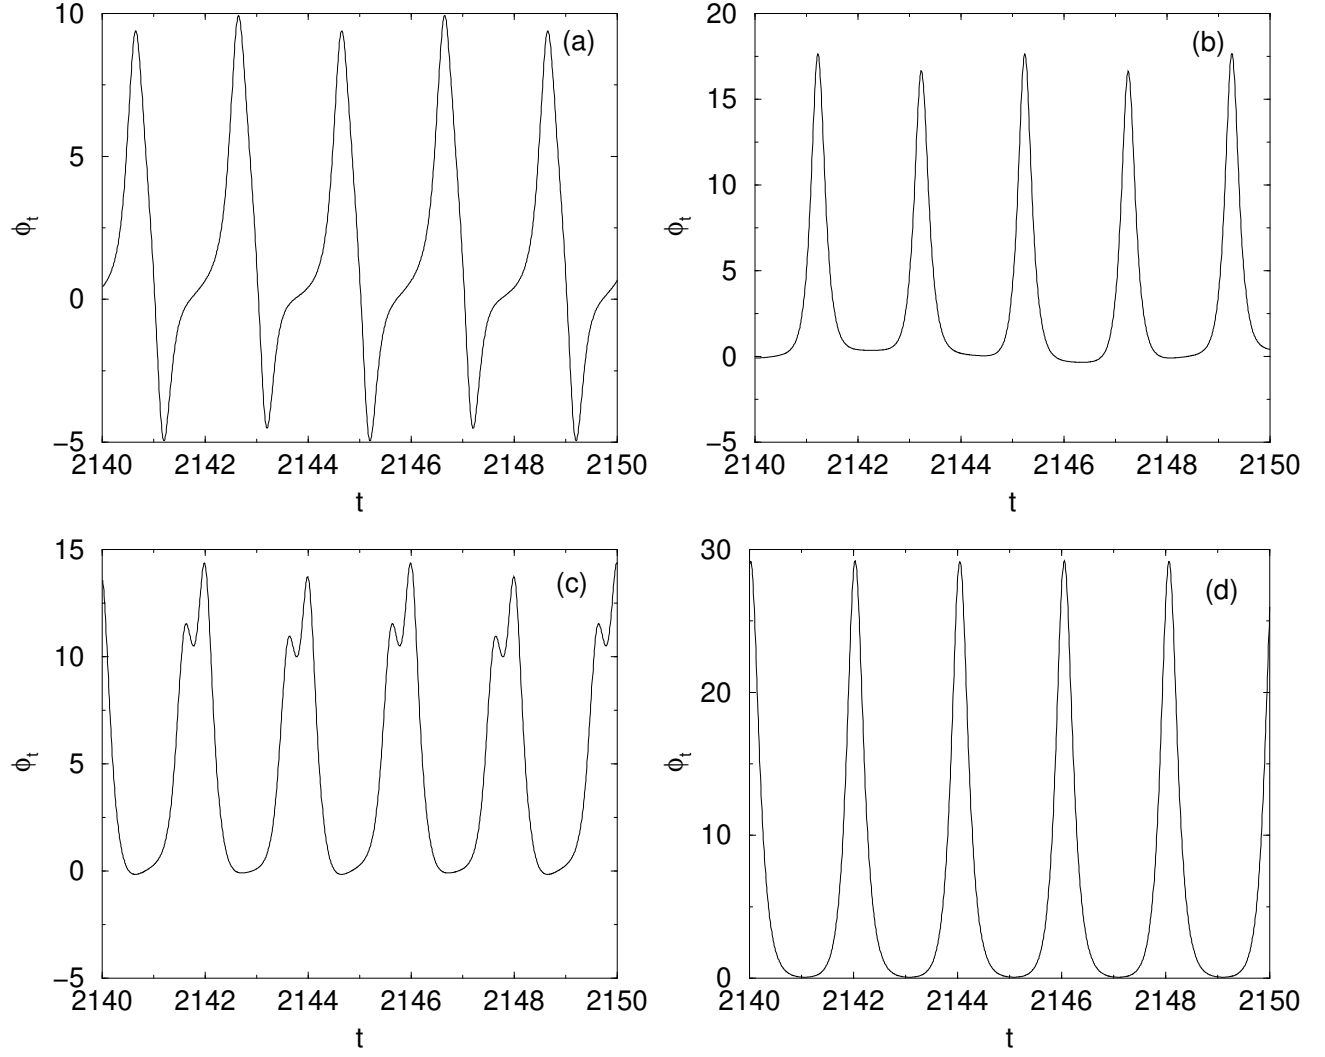


FIG .8. Instantaneous voltage in the middle of the junction ($x = 0$) vs time t , for the various solutions. The pairing state is $E_u . l = 2$, $\alpha = 0.01$, $I = 0.25$.