

Nonlinear microwave response of MgB₂

T. Dahm*

*Institut für Theoretische Physik, Universität Tübingen,
Auf der Morgenstelle 14, D-72076 Tübingen, Germany*

D. J. Scalapino[†]

Department of Physics, University of California, Santa Barbara, California 93106-9530, U.S.A.

(Dated: January 10, 2022)

We calculate the intrinsic nonlinear microwave response of the two gap superconductor MgB₂ in the clean and dirty limits. Due to the small value of the π band gap, the nonlinear response at low temperatures is larger than for a single gap Bardeen-Cooper-Schrieffer (BCS) s -wave superconductor with a transition temperature of 40 K. Comparing this result with the intrinsic nonlinear d -wave response of YBa₂Cu₃O₇ (YBCO) we find a comparable response at temperatures around 20 K. Due to its two gap nature, impurity scattering in MgB₂ can be used to reduce the nonlinear response if the scattering rate in the π band is made larger than the one in the σ band.

PACS numbers: 74.25.Nf, 74.70.Ad, 84.40.Dc

High- T_c cuprate thin films are being used for constructing microstrip resonators and filters in the microwave regime. One of the limiting factors is their nonlinear response leading to undesirable harmonic generation and intermodulation. While this nonlinear response is often associated with weak links, there is an intrinsic nonlinearity which sets a lower limit on what can be achieved. This has previously been discussed for the cuprates where the d -wave nature of the gap leads to an increase in the intrinsic nonlinear response at low temperatures [1, 2]. The recent discovery of s -wave superconductivity in MgB₂ with a comparatively high critical temperature of $T_c = 40$ K and progress in thin film preparation has led to the possibility of making high Q MgB₂ microstrip structures operating at 20 to 30 K. This raises the question of how the nonlinearity of MgB₂ compares with that of the cuprate superconductors [3, 4].

Here, we study the intrinsic nonlinear microwave response of MgB₂. By now it is well established that MgB₂ is a superconductor with two different superconducting gaps associated with different parts of the Fermi surface: a small gap (~ 2 meV) on the π band and a large gap (~ 7 meV) on the σ band [5, 6]. In a superconductor the intrinsic nonlinear response arises from the backflow of excited quasiparticles at finite temperatures. The total current density \vec{j} can be written as $\vec{j} = ne\vec{v}_s - \vec{j}_{qp}$ where \vec{v}_s is the superfluid velocity and \vec{j}_{qp} the quasiparticle backflow. For a two band system like MgB₂ the quasiparticle backflow consists of two contributions, one from each band with $\vec{j}_{qp} = \vec{j}_{qp,\sigma} + \vec{j}_{qp,\pi}$. In the clean limit these are given by

$$\vec{j}_{qp,\alpha} = -2eN_\alpha(0) \int_{-\infty}^{\infty} d\epsilon \left\langle \vec{v}_{F,\alpha} f \left(\sqrt{\epsilon^2 + \Delta_\alpha^2(T)} + m\vec{v}_{F,\alpha} \cdot \vec{v}_s \right) \right\rangle_{FS,\alpha} \quad (1)$$

Here, $\alpha = \pi, \sigma$ denotes the two bands in MgB₂, $\vec{v}_{F,\alpha}$

the Fermi velocity in each band, $\Delta_\alpha(T)$ the gaps, f the Fermi function, $N_\alpha(0)$ the partial densities of states, and $\langle \dots \rangle_{FS,\alpha}$ a Fermi surface average over band α . The term $m\vec{v}_{F,\alpha} \cdot \vec{v}_s$ describes the Doppler shift in energy of the quasiparticles with respect to the superflow.

In MgB₂ the Fermi surfaces of the two bands have significantly different topologies. In order to perform the Fermi surface averages in (1) we use the band structure based model from [7], in which the σ band is modeled as a distorted cylinder and the π band as a half torus. For the temperature dependence of the two gaps we are using the parameterization of Choi *et. al* [6] $\Delta_\sigma(T) = \Delta_\sigma(0)\sqrt{1 - (T/T_c)^{2.9}}$ and $\Delta_\pi(T) = \Delta_\pi(0)\sqrt{1 - (T/T_c)^{1.8}}$ with $\Delta_\sigma(0) = 6.8$ meV and $\Delta_\pi(0) = 1.8$ meV. This was found to provide a reasonable fit to the anisotropic Eliashberg calculations of [6].

For currents flowing in the Boron plane, we expand Eq. (1) up to third order in the current density. This gives the leading j^2 nonlinear change of the superfluid density [2, 8]

$$n_s(T, j) = n_{s0}(T) \left[1 - \frac{j^2}{j_{c,\pi}^2} \left(b_\pi(T) + \frac{j_{c,\pi}^2}{j_{c,\sigma}^2} b_\sigma(T) \right) \right] \quad (2)$$

Here, the pair-breaking current densities of the two bands are given by $j_{c,\alpha} = eN_\alpha(0)v_{F,\alpha}\Delta_\alpha(0)$. As discussed in [2, 8] the nonlinear coefficients $b_\alpha(T)$ determine the strength of the nonlinear response as a function of temperature and are given by

$$b_\alpha(T) = -\frac{g_\alpha}{4} \Delta_\alpha^2(0) \left(\frac{n_\alpha}{n_{s0}(T)} \right)^3 \int_0^\infty d\epsilon \frac{d^3 f}{dE^3} \left(\sqrt{\epsilon^2 + \Delta_\alpha^2(T)} \right) \quad (3)$$

Here, g_α is a geometrical Fermi surface factor with $g_\pi = 3.36$ and $g_\sigma = 1$. The linear part of the superfluid

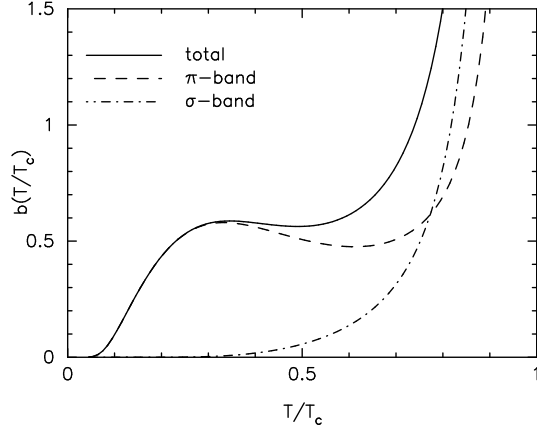


FIG. 1: Temperature dependence of the total nonlinear coefficient $b(T)$ for MgB_2 (solid line). The two contributions from the π band and the σ band are shown as the dashed and dashed-dotted line, respectively.

density $n_{s0}(T)$ is given by

$$\frac{n_{s0}(T)}{n} = \sum_{\alpha=\pi,\sigma} \frac{n_{\alpha}}{n} \left(1 + 2 \int_0^{\infty} d\epsilon \frac{df}{dE} \left(\sqrt{\epsilon^2 + \Delta_{\alpha}^2(T)} \right) \right) \quad (4)$$

where n_{α} is the electron density of the α band. Using the known Fermi velocities and densities of states in MgB_2 , we find for the relative electron densities $n_{\pi}/n = 0.692$ and $n_{\sigma}/n = 0.308$ and the pair-breaking current densities $j_{c,\pi} = 3.32 \cdot 10^8 \text{ A/cm}^2$ and $j_{c,\sigma} = 4.87 \cdot 10^8 \text{ A/cm}^2$. Interestingly, these values turn out to be close to the estimate of the pair-breaking current density of about $3 \cdot 10^8 \text{ A/cm}^2$ in YBCO, consistent with recent experiments [4]. In Fig. 1 we show the temperature dependence of the total nonlinear coefficient $b(T) = b_{\pi}(T) + \frac{j_{c,\pi}^2}{j_{c,\sigma}^2} b_{\sigma}(T)$ (solid line) along with the contributions from the π band (dashed) and the σ band (dashed-dotted). Due to its smaller gap, the π band contribution dominates at low temperatures and leads to structure around $0.3T_c$. It is only at temperatures above about $0.75T_c$ that the contribution from the σ band becomes significant. The total nonlinear coefficient possesses a plateau-like region between 0.3 and $0.7T_c$ in which a reduction of the temperature does not improve the nonlinear response.

In Fig. 2 we compare the nonlinear coefficient for MgB_2 (solid line) with the intrinsic response for a d -wave superconductor with $T_c = 93 \text{ K}$ (YBCO, dashed line) and a hypothetical BCS single gap superconductor with $T_c = 40 \text{ K}$ (dashed-dotted line) assuming for simplicity that the pair-breaking current densities are the same. For a d -wave superconductor $b(T)$ increases at low temperature because of the gap nodes [1, 2]. For this reason the nonlinear coefficient in MgB_2 becomes smaller than the one for YBCO at about 27 K . However, due to the presence of the small gap the nonlinear response in MgB_2 is

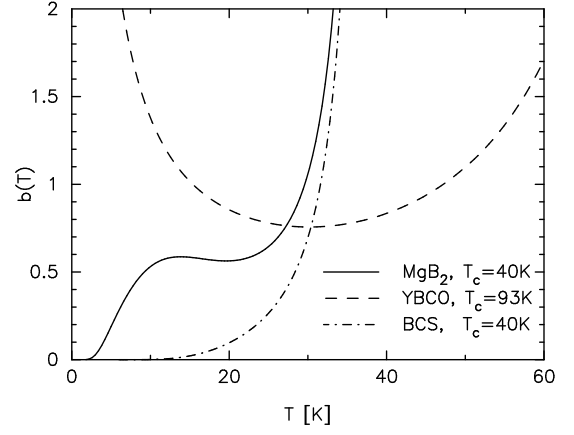


FIG. 2: Temperature dependence of the intrinsic nonlinear coefficient $b(T)$ for MgB_2 , for a d -wave superconductor with $T_c = 93 \text{ K}$ (YBCO, dashed line), and a hypothetical BCS single gap superconductor with $T_c = 40 \text{ K}$ (dashed-dotted line).

not as small as one would have expected for a single gap s -wave superconductor (dashed-dotted line).

The foregoing analysis has been made in the clean limit without any impurity scattering. However, in most current MgB_2 films, the scattering rate as judged from the residual resistivity is larger than the two gaps [9]. For this reason, in the following we also want to discuss the dirty limit. In a two band superconductor there are in principle three different scattering rates: the two intraband scattering rates Γ_{π} and Γ_{σ} and an interband scattering rate $\Gamma_{\pi\sigma}$. It has been shown that because of the different parity of the local orbitals making up the π and σ bands, the interband scattering rate is much smaller than the intraband scattering rates [10]. Thus, in the following we will neglect $\Gamma_{\pi\sigma}$ and keep only the intraband scattering rates. In the dirty limit the current densities \vec{j}_{α} in the two bands are then given by [1]

$$\vec{j}_{\alpha} = -ieN_{\alpha}(0)\pi T \sum_{n=-\infty}^{\infty} \left\langle \vec{v}_{F,\alpha} \frac{\tilde{\omega}_{n,\alpha} - im\vec{v}_{F,\alpha} \cdot \vec{v}_s}{\sqrt{(\tilde{\omega}_{n,\alpha} - im\vec{v}_{F,\alpha} \cdot \vec{v}_s)^2 + \tilde{\Delta}_{\alpha}^2}} \right\rangle_{FS,\alpha} \quad (5)$$

where the renormalized Matsubara frequencies $\tilde{\omega}_{n,\alpha}$ and gaps $\tilde{\Delta}_{\alpha}$ are given by

$$\tilde{\omega}_{n,\alpha} = \Gamma_{\alpha} \frac{\omega_n}{\sqrt{\omega_n^2 + \Delta_{\alpha}^2}} \quad \text{and} \quad \tilde{\Delta}_{\alpha} = \Gamma_{\alpha} \frac{\Delta_{\alpha}}{\sqrt{\omega_n^2 + \Delta_{\alpha}^2}} \quad (6)$$

Expanding this expression up to third order in \vec{v}_s the sums over Matsubara frequencies can be done analyti-

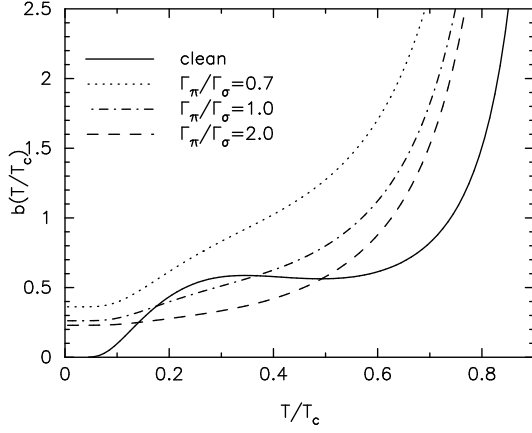


FIG. 3: Temperature dependence of $b(T)$ in the clean (solid line) and dirty limit. In the dirty limit $b(T)$ depends on the relative scattering rates in the two bands of MgB_2 . Results are shown for $\Gamma_\pi/\Gamma_\sigma = 0.7$ (dotted), 1 (dashed-dotted), and 2 (dashed).

cally and we find

$$b_\alpha(T) = g_\alpha \frac{3\pi}{128} \frac{n_\alpha^3}{n_{s0}^3(T)} \frac{\Delta_\alpha^2(0)\Delta_\alpha(T)}{\Gamma_\alpha^3} \left(5 \frac{\Delta_\alpha(T)}{T} \text{sech}^2 \frac{\Delta_\alpha(T)}{2T} + 6 \tanh \frac{\Delta_\alpha(T)}{2T} \right) \quad (7)$$

with

$$n_{s0}(T) = \sum_{\alpha=\pi,\sigma} n_\alpha \frac{\pi \Delta_\alpha(T)}{4\Gamma_\alpha} \tanh \frac{\Delta_\alpha(T)}{2T} \quad (8)$$

In the dirty limit the total nonlinear response coefficient $b(T) = b_\pi(T) + \frac{j_{c,\pi}^2}{j_{c,\sigma}^2} b_\sigma(T)$ only depends on the relative ratio of the two scattering rates Γ_π/Γ_σ . In Fig. 3 we show its temperature dependence for $\Gamma_\pi/\Gamma_\sigma = 0.7, 1$, and 2 along with the clean limit result. As can be seen, the nonlinear response depends on the relative scattering rates in the two bands. In certain cases the coefficient b can even become smaller than in the clean limit.

In order to have more insight into this unexpected behavior, in Fig. 4 we plot b at a fixed temperature, $T = 0.5T_c$, as a function of the ratio Γ_π/Γ_σ on a double logarithmic scale. We find that b can vary by a factor of order 100 at this temperature. Qualitatively we can understand this behavior as follows: the current density is dominated by the band with the smaller scattering rate, because this band provides the highest conducting channel. If the π band scattering rate is smaller, the total response is dominated by the small gap leading to a larger nonlinear response at finite temperature. If, however, the σ band scattering rate is smaller, the nonlinear response is dominated by the large gap giving a smaller nonlinear response.

This analysis tells us that optimization of material properties in MgB_2 should aim at a higher scattering

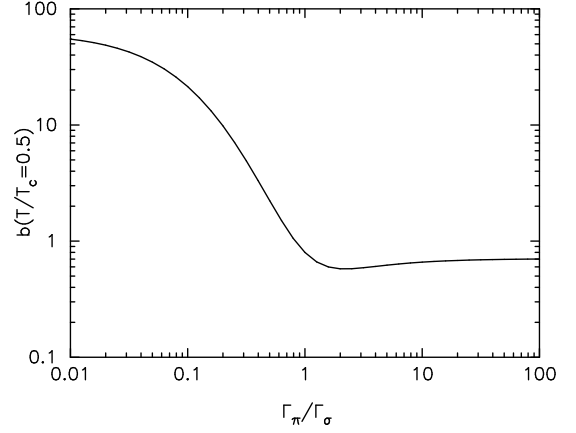


FIG. 4: Dependence of b on ratio Γ_π/Γ_σ at a fixed temperature of $T = 0.5T_c$. For $\Gamma_\pi \gg \Gamma_\sigma$ the nonlinear response is dominated by the σ band, while for $\Gamma_\pi \ll \Gamma_\sigma$ the π band dominates.

rate in the π band in order to suppress the contribution of the small gap relative to that of the large gap in the σ band. This could be achieved by substitutional doping at the Mg site, for example with Aluminum [10]. Our analysis also shows that clean MgB_2 does not necessarily provide the lowest nonlinear response.

As has been shown in [2] the intermodulation power emitted by a microstrip resonator also depends on the penetration depth of the material. A shorter penetration depth leads to an increased current density at the edges of the resonator, which increases the intermodulation power. According to Refs. [2] and [8] the intermodulation power P_{IMD} scales like

$$P_{\text{IMD}} \propto (\Delta\mathcal{L})^2 b^2(T) \quad (9)$$

where $\Delta\mathcal{L}$ is a nonlinear coefficient depending on both the geometry of the resonator and the penetration depth. According to band structure calculations, the clean limit zero temperature (London) penetration depth in MgB_2 is expected to be near $\lambda_L(0) = 40 \text{ nm}$ [11]. Actual values vary between 60 and 200 nm depending on film quality [9, 11]. Comparing MgB_2 with the intrinsic d -wave response of YBCO at a temperature of 20 K, we take $\lambda(T = 20\text{K}) \approx 100 \text{ nm}$ for MgB_2 and $\lambda(T = 20\text{K}) \approx 160 \text{ nm}$ for YBCO. Assuming a typical film thickness of $t = 400 \text{ nm}$ we find for the microstrip geometry considered in Ref. [2] $\Delta\mathcal{L}(t/\lambda = 4) = 0.173$ (MgB_2) and $\Delta\mathcal{L}(t/\lambda = 2.5) = 0.124$ (YBCO). Taking $b(T = 20\text{K}) = 0.563$ for MgB_2 and $b(T = 20\text{K}) = 0.855$ for YBCO from Fig. 2 and using Eq. (9) this means that the intermodulation power in YBCO at this temperature would be larger by only a factor of 1.2, i.e. a comparable nonlinear response for both materials. However, due to their ceramic nature, weak links play a much larger role in the high- T_c cuprates than in MgB_2 . For this reason we expect that the intrinsic nonlinear response will be much easier to

achieve in MgB_2 films compared with cuprate films.

We would like to thank R. B. Hammond, M. I. Salkola, and B. A. Willemsen for valuable discussions. T. D. acknowledges the hospitality of the UCSB Physics Department.

* Electronic address: thomas.dahm@uni-tuebingen.de

† Electronic address: djs@vulcan2.physics.ucsb.edu

- [1] D. Xu, S. K. Yip, and J. A. Sauls, Phys. Rev. B **51**, 16233 (1995).
- [2] T. Dahm and D. J. Scalapino, Appl. Phys. Lett. **69**, 4248 (1996).
- [3] G. Lamura, A. J. Purnell, L. F. Cohen, A. Andreone, F. Chiarella, E. Di Gennaro, R. Vaglio, L. Hao, and J. Gallop, Appl. Phys. Lett. **82**, 4525 (2003).
- [4] J. C. Booth, K. T. Leong, S. Y. Lee, J. H. Lee, B. Oh, H. N. Lee, and S. H. Moon, Supercond. Sci. Technol. **16**, 1518 (2003).
- [5] A. Y. Liu, I. I. Mazin, and J. Kortus, Phys. Rev. Lett. **87**, 087005 (2001).
- [6] H. J. Choi, D. Roundy, H. Sun, M. L. Cohen, and S. G. Louie, Nature (London) **418**, 758 (2002).
- [7] T. Dahm and N. Schopohl, Phys. Rev. Lett. **91**, 017001 (2003).
- [8] T. Dahm and D. J. Scalapino, J. Appl. Phys. **81**, 2002 (1996).
- [9] B. B. Jin, T. Dahm, C. Iniotakis, A. I. Gubin, Eun-Mi Choi, Hyun Jung Kim, Sung-Ik Lee, W. N. Kang, S. F. Wang, Y. L. Zhou, A. V. Pogrebnyakov, J. M. Redwing, X. X. Xi, and N. Klein, cond-mat/0403755.
- [10] I. I. Mazin, O. K. Andersen, O. Jepsen, O. V. Dolgov, J. Kortus, A. A. Golubov, A. B. Kuz'menko, and D. van der Marel, Phys. Rev. Lett. **89**, 107002 (2002).
- [11] A. A. Golubov, A. Brinkman, O. V. Dolgov, J. Kortus, O. Jepsen, Phys. Rev. B **66**, 054524 (2002).