

Macroscopic Aharonov–Bohm Effect in Type-I Superconductors

CATRIN ELLENBERGER, FLORIAN GEBHARD, WOLFGANG BESTGEN

Fachbereich Physik, Philipps–Universität Marburg, D–35032 Marburg, Germany

PACS. 73.23.-b – Electronic transport in mesoscopic systems.

PACS. 74.25.Sv – Critical currents.

PACS. 74.25.0p – Mixed states, critical fields, and surface sheaths.

PACS. 74.40.+k – Fluctuations (noise, chaos, nonequilibrium superconductivity, localization, etc.).

Abstract. – In type-I superconducting cylinders bulk superconductivity is destroyed above the first critical current. Below the second critical current the ‘type-I mixed state’ displays fluctuation superconductivity which contributes to the total current. A magnetic flux on the axis of the cylinder can change the second critical current by as much as 50 percent so that half a flux quantum can switch the cylinder from normal conduction to superconductivity: the Aharonov–Bohm effect manifests itself in macroscopically large resistance changes of the cylinder.

Introduction. – The superconducting condensate can be used as a ‘quantum amplifier’. For example, microscopic effects such as quantum interference of electron waves become macroscopically measurable as flux quantization. In this work the macroscopic condensate is used to make the Aharonov–Bohm effect prominent on macroscopic scales.

Consider a wire of radius R with a current J parallel to the wire axis. The superconductivity of a type-I superconductor breaks down when the current exceeds the Silsbee current J_{c1} . The Silsbee current is determined from the condition that the magnetic field at the surface of the wire is equal to the upper critical field H_c , $J_{c1} = c_0 R H_c / 2$, where c_0 is the speed of light. For $J > J_{c1}$, the so-called intermediate state forms in the wire with alternating normal and superconducting domains [1]. The diameter of the superconducting domains d shrinks and finally the intermediate state collapses when d becomes of the order of the coherence length ξ . However, superconductivity still remains in the form of small temporal fluctuations. In this ‘mixed state’ for type-I superconductors, superconducting fluctuations and electrical and magnetic fields co-exist. The mixed state was first predicted by L.D. Landau in 1938 [2] as a surface state for hollow superconducting cylinders. Its existence was later verified experimentally by I.L. Landau and Yu.V. Sharvin [3]. As later shown by Andreev and Bestgen [4] the fluctuation induced superconductivity is destroyed when the thickness of the fluctuation layer becomes smaller than the coherence length ξ , and superconductivity is ultimately destroyed at the second critical current J_{c2} which was first calculated by Andreev [5]. An externally applied magnetic field H_a parallel to the wire axis contributes to the suppression of the superconducting phase and reduces J_{c1} and J_{c2} accordingly [6, 7].

In this work we investigate the stability of the mixed state in type-I superconductors for a hollow cylinder of inner radius $R_i \ll R$ in a magnetic field H_a with an additional magnetic flux line of strength Φ_a on the cylinder axis. We show that the Aharonov–Bohm effect leads to strong oscillations of the second critical current $J_{c2}(\Phi_a)$ as a function of Φ_a/Φ_0 where $\Phi_0 = hc_0/(2e)$ is the flux quantum. The effect is particularly marked for the ‘one-dimensional’ mixed state for which $R_i \ll \xi$. In this case, $J_{c2}(\Phi_a)$ can vary by almost 50 percent. If the applied current through the wire is fixed at some value $J_{c1} < J_{c2}(\Phi_0/2) < J < J_{c2}(0)$, the modulation of Φ between integer flux quanta will lead to a periodic onset and breakdown of the superconducting current J_s as a function of Φ . The resistance Ω at applied voltage V becomes

$$\Omega = \frac{V}{J} = \frac{V}{J_n + J_s^z} \approx \Omega_n \left(1 - \frac{J_s^z}{J}\right). \quad (1)$$

Therefore, the Aharonov–Bohm effect leads to periodic fluctuations in the resistance of type-I superconductors in the mixed state.

Model and superconducting current. – In the mixed state with $J \simeq J_{c2}$, the dynamics of the superconducting fluctuations at the inner cylinder surface is described by the time-dependent, linear Ginzburg–Landau equations with Langevin forces. In dimensionless cylindrical coordinates ρ, ϕ, z they read [7–9]

$$\frac{\partial \Psi}{\partial t} - \Psi + \mathcal{L} \Psi = f(\rho, \varphi, z, t), \quad (2)$$

with the differential operator

$$\mathcal{L} = -\frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial}{\partial \rho} \right) - \left(\frac{1}{\rho} \frac{\partial}{\partial \rho} - \frac{i\gamma}{2} \rho - \frac{i\delta}{\rho} \right)^2 - \left(\frac{\partial}{\partial z} + \frac{i\beta}{2} \rho^2 + i\epsilon t \right)^2 \quad (3)$$

and the Gaussian fluctuations

$$\langle f(\rho, \varphi, z, t) f^*(\rho', \varphi', z', t') \rangle = \frac{1}{\rho} \delta(\rho - \rho') \delta(\varphi - \varphi') \delta(z - z') \delta(t - t') \quad (4)$$

The dimensionless parameters ϵ, β, γ and δ are given by

$$\begin{aligned} \epsilon &= \frac{2e\xi}{\hbar\nu} E, & \gamma &= \frac{2eH_a\xi^2}{\hbar c_0} = \frac{H_a}{H_{c2}}, \\ \beta &= \frac{4e\xi^3 J}{\hbar c_0^2 R^2}, & \delta &= \frac{e\Phi_a}{\hbar c_0 \pi} = \frac{\Phi_a}{\Phi_0}. \end{aligned} \quad (5)$$

$\xi = \xi(T)$ is the coherence length, $\nu = 8k_B(T_c - T)/(\pi\hbar)$ is the relaxation frequency, and e and m are the electron charge and mass, respectively. E is the electrical field which drives the total current $J = J_n + J_s^z$ in z -direction. For type-I superconductors was shown in [4] that $\epsilon \ll 1$. Using the linearized Ginzburg–Landau equations implies that $J_s^z \ll J$.

The general expression for the total longitudinal fluctuation current is calculated along the lines of [4, 9] and gives the result

$$J_s^z = \frac{2eTk_B}{\pi\epsilon\hbar} \sum_{nm} \int_{-\infty}^{\infty} dk \frac{\partial \lambda_{nmk}}{\partial k} F_{nm}(k), \quad (6)$$

with

$$F_{nm}(k) = \int_0^\infty d\tau \exp \left[\frac{2}{\epsilon} \left(\tau - \int_{k-\tau}^k \lambda_{nmk'} dk' \right) \right]. \quad (7)$$

λ_{nmk} is the lowest eigenvalue of \mathcal{L} as a function of $k = k_z + \epsilon t$ where k_z is the wavenumber vector in z -direction. The spectrum λ_{nmk} can be obtained with the help of a variational method, which starts from the ansatz $R_{n=0,mk} \sim \rho^{|m|} e^{-\alpha \rho^2}$ for the radial part of ψ . We may restrict ourselves to the dominant contribution, $n = 0$ [10]; α is a variational parameter which determines the radial extension of the superconducting region [4, 9]. From the variation principle we then find for $\lambda_{m,k_m} = \lambda_{0,m,k}^{\text{opt}}$

$$\lambda_{mk_m} = -(m - \delta) \gamma + 4\alpha (|m - \delta| + 1) - \frac{\beta^2}{16\alpha^2} (|m - \delta| + 1), \quad (8)$$

with

$$2 - \frac{\gamma^2 + 4k_m\beta}{8\alpha^2} - \frac{\beta^2 (|m - \delta| + 2)}{8\alpha^3} = 0, \quad (9)$$

$$k_m = \frac{-\beta (|m - \delta| + 1)}{4\alpha}. \quad (10)$$

The critical current can be evaluated analytically in the vicinity of the critical curve [8] but for our further analysis explicit expressions for J_s^z are not required. We merely state that the experimental parameters can be tuned in such a way that the fluctuation current is several percent of the total current, i.e., the resistance fluctuations according to (1) should be measurable.

Second critical current. – In our theory, the critical current $J_{c2}(H_a, \Phi_a)$ above which the superconducting fluctuations vanish is determined by the condition

$$\min_m [\lambda_{m,k_m}(\beta, \gamma, \delta)] = 1. \quad (11)$$

If the minimum over all λ_{m,k_m} was noticeably smaller than unity the corresponding supercurrent would become so large that the use of a linearized Ginzburg–Landau equations would not have been justified. If the minimum over all λ_{m,k_m} was substantially larger than unity J_s^z would be tiny. Our theory applies to the transition region where the supercurrent is small but measurable.

Solving (11) for J_{c2} leads to the second critical current as a function of the external magnetic field and applied flux in the interior of the cylinder. In SI units we find:

$$\begin{aligned} J_{c2} \left(\frac{H_a}{H_{c2}} \frac{\Phi}{\Phi_0} \right) &= \beta_{c2} \frac{c_0^2 R^2 \hbar}{4e\xi^3} \\ &= \frac{c_0^2 R^2 \hbar}{e\xi^3} \left[A^3 \left(1 + \sqrt{1 - \left(\frac{H_a}{H_{c2}} \right)^2 \frac{1}{48A^2}} \right)^3 \right. \\ &\quad \left. - \left(\frac{H_a}{H_{c2}} \right)^2 \frac{A}{16} \left(1 + \sqrt{1 - \left(\frac{H_a}{H_{c2}} \right)^2 \frac{1}{48A^2}} \right) \right]^{1/2}, \end{aligned} \quad (12)$$

where

$$A = \frac{1 + (m - \delta) \gamma}{6 (|m - \delta| + 1)}. \quad (13)$$

For a given flux δ , m in (13) is the integer which gives the minimal J_{c2} [8]. Figure 1 gives a three-dimensional plot of J_{c2} as a function of γ (external field) and δ (central flux).

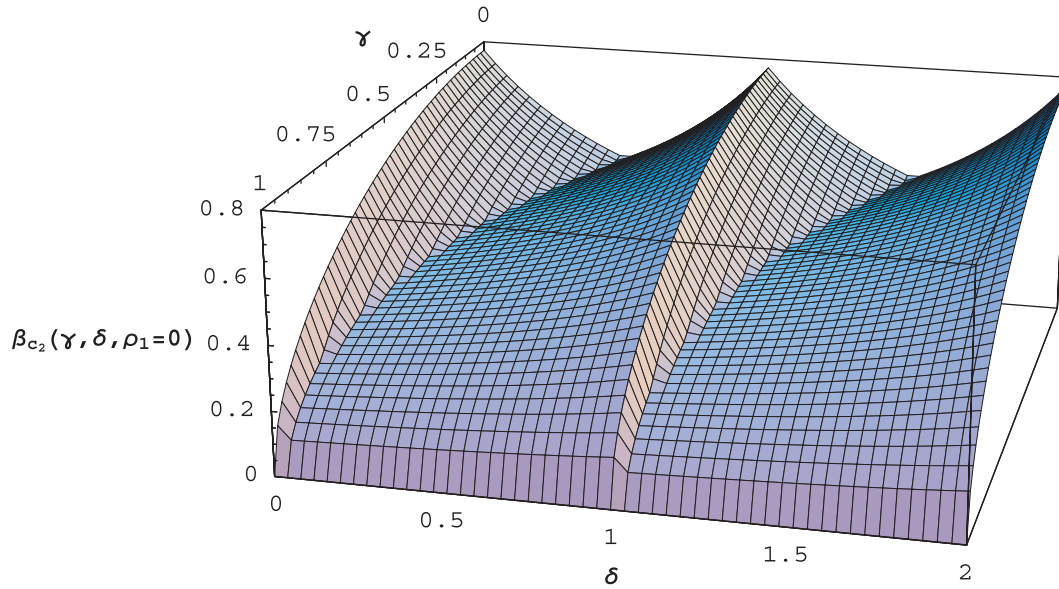


Figure 1 – The normalized second critical current $\beta_{c2}(\gamma, \delta)$ for $R_i \ll \xi$.

The second critical current can be almost halved by the application of a suitable vector potential even if no magnetic field is present. This is a macroscopic realization of the Aharonov-Bohm effect.

Conclusions. – In this work we have studied the supercurrent in a hollow cylinder of type-I superconducting material in the presence of an external magnetic field and a flux line on the cylinder axis. We have shown that the second critical current, above which fluctuation superconductivity breaks down, periodically changes as a function of the applied flux, by as much as 50 percent in the absence of an external field. These Aharonov-Bohm oscillations lead to a periodic change of the resistance of the cylinder, see (1). The latter are measurable because the currents due to the superconducting fluctuations are sizable, of the order of a few percent of the total current. Therefore, a suitably tuned experiment with type-I superconducting cylinders should be able to verify the Aharonov-Bohm effect by macroscopic resistance measurement.

* * *

We thank F. Rothen and M. Paech for useful discussions.

References

- [1] LONDON F., *Superfluids I*. (Wiley, New York) 1950.
- [2] LANDAU L.D., private communication with D. Shoenberg; see: D. Shoenberg *Superconductivity*. Cambridge: Cambridge University Press, 1938; page 59.

- [3] LANDAU I.L. and SHARVIN YU.V., *Pis'ma Zh. Eksp. Teor. Fiz.*, **10** (1969) 192 and *JETP Lett.*, **10** (1969) 121.
- [4] ANDREEV A.F. and BESTGEN W., *Zh. Eksp. Teor. Fiz.*, **10** (1973) 453 and *Sov. Phys. JETP*, **37** (1973) 942.
- [5] ANDREEV A.F., *Pis'ma Zh. Eksp. Teor. Fiz.*, **10** (1969) 453 and *JETP Lett.*, **10** (1969) 291.
- [6] BESTGEN W., *Zh. Eksp. Teor. Fiz.*, **76** (1979) 566 and *Sov. Phys. JETP*, **49** (1979) 285.
- [7] BESTGEN W., *Sol. State Commun.*, **36** (1980) 441.
- [8] ELLENBERGER C., *Ph.D. Thesis, Marburg* 2001.
- [9] BESTGEN W., *Z. Phys.*, **269** (1974) 73.
- [10] BESTGEN W. and ROTHEN F., *Low. T. Phys.*, **77** (1989) 257.