

Degree Distribution of Delaunay Triangulations

Gang Mei^{a,*}, Nengxiong Xu^a, Salvatore Cuomo^b

^a*School of Engineering and Technology, China University of Geosciences (Beijing), 100083, Beijing, China*

^b*Department of Mathematics and Applications “R. Caccioppoli”, University of Naples Federico II, Naples, Italy*

Abstract

Delaunay triangulation can be considered as a type of complex networks. For complex networks, the degree distribution is one of the most important inherent characteristics. In this paper, we first consider the two- and three-dimensional Delaunay Triangulations (DTs) as a type of complex networks, and term it as DT networks. Then we statistically investigate the degree distribution of DT networks. We find that the degree distribution of DT networks well follows the Gaussian distribution in most cases, which differs from the Poisson distribution and the Power-Law distribution for the well-known Small-World networks and Scale-Free networks.

Keywords: Complex Networks, Delaunay Triangulation, Vertex Degree, Degree Distribution, Gaussian Distribution

1. Introduction

Quite recently, an exciting application of the Artificial Intelligence (AI) [1] is that: scientists have used Deep Learning algorithms [2] to recreate the complex neural codes that the place cells and grid cells in the brain use to navigate through space [3]. The grid cells discovered by May-Britt Moser and Edvard Moser [4] are

*Corresponding author

Email address: gang.mei@cugb.edu.cn (Gang Mei)

capable of providing a strikingly periodic representation of self-location and navigation in the space [5], which spatially distributes as the hexagonal lattices. An interesting phenomenon is that: if considering each grid cell as a distinct point and then creating a triangulation for those scattered points, then a nice triangulation can be generated since each point has six neighboring points and triangles. In a triangulation (more precisely, a triangular mesh in this case), the quality of each triangle could be very high when each point has six neighboring points and triangles since the triangles could be close to the *Regular Triangles*. In other words, when each point in a triangulation has the degree of six, a very high-quality triangulation can be generated.

When using a triangulation to represent the spatial connection of the grid cells, a network (or so-called complex network) could be achieved. In the network of grid cells, the degree of each vertex is in general six. That is, the grid cell network represented with a triangulation is a 6-regular network with uniform degree distribution. However, for other complex networks such as the biological networks or the social networks, most of them are not regular networks but the so-called Small-World networks [6] or the Scale-Free networks [7]. The degree distributions of the Small-World networks and the Scale-Free networks are not uniform, but generally follow the Poisson distribution and the Power-Law distribution, respectively.

Inspired by representing the grid cells with triangulations, we consider a specific category of the triangulations, i.e., the Delaunay Triangulation (DT) [8], as a type of complex networks. We term this network as the *DT network*. More specifically, we consider the two-dimensional DT (i.e., the triangular mesh) and the three-dimensional DT (i.e., the tetrahedral mesh) as a specific type of complex networks; and we ignore those higher-dimensional DTs. Furthermore, we are quite interested in statistically investigating the degree distribution of the DT networks. To the best of the authors' knowledge, there is no previous work specifically focusing on this

problem.

Our work in this paper can be summarized as follows. First, we consider the two- and three-dimensional DTs as a specific type of complex networks that is termed as the DT network. Second, we statistically investigate the degree distribution of the DT network, and find that the degree distribution follows a *Gaussian* function, while in contrast the degree distributions of two well-known networks, i.e., the Small-World networks [6] and the Scale-Free networks [7] follow a *Poisson* function and a *Power-Law* function, respectively.

2. Method

2.1. Considering Delaunay Triangulations as A Type of Complex Networks

In mathematics, for a set P of points in the d -dimensional Euclidean space, a Delaunay Triangulation [8] is a triangulation $DT(P)$ such that no point in P is inside the circum-hypersphere of any d -simplex in $DT(P)$. It is known [8] that there exists a unique Delaunay triangulation for P if P is a set of points in general position. For a set of two-dimensional points P , the $DT(P)$ is a triangulation such that no point in P is inside the circumcircle of any triangle in $DT(P)$. For a set of three-dimensional points P , the $DT(P)$ is a triangulation such that no point in P is inside the circumscribing sphere of any tetrahedron in $DT(P)$.

In the context of network theory, a complex network is a graph (network) with non-trivial topological features. In this paper, we consider the two- and three-dimensional DTs [8], i.e., the Delaunay triangular meshes and the Delaunay tetrahedral meshes, as a specific type of complex networks. More precisely, we consider that: each vertex in a DT represents a cell, a person, or even a device in a complex network, while each edge in a DT represents the link or connection between vertices; see Figure 1.

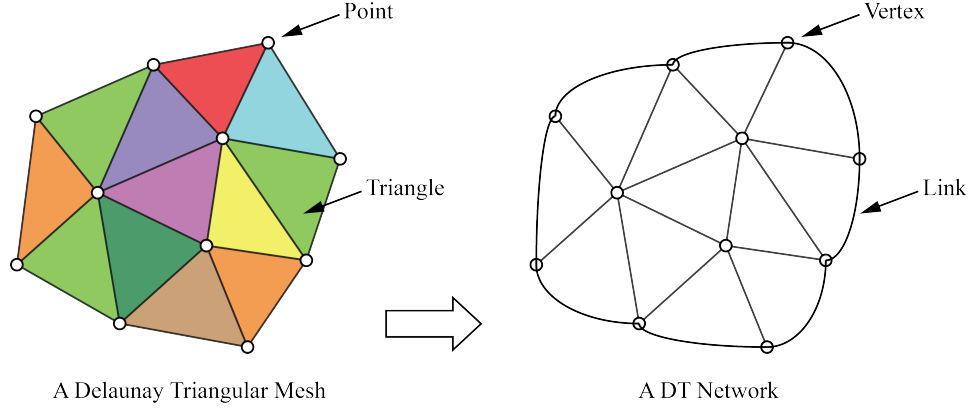


Figure 1: Consideration of a DT as a complex network

2.2. Investigating the Degree Distribution of DT Networks

In this paper, we are interested in statistically investigating the degree distribution of two- and three-dimensional DT networks. The DT networks are in fact the Delaunay triangular meshes in two-dimensions and the Delaunay tetrahedral meshes in three-dimensions. To statistically examine the degree distribution of DT networks, we first create five groups of triangular meshes and tetrahedral meshes based on sets of scattered points. Each set of scattered points are randomly generated, and then are used to create the triangular or tetrahedral meshes using the two famous Delaunay mesh generators, Triangle [9] or TetGen [10].

For each DT network, we first obtain the vertex degree (i.e., the number of neighboring vertices) for each vertex, and then count the degrees of all vertices to obtain the discrete frequency of vertex degree. The frequency of vertex degree is represented in percentage. Finally, the frequency of vertex degree is fitted to a Gaussian function (Eq.(1)):

$$y = ae^{-\frac{(x-b)^2}{2c^2}} + y_0, \quad (1)$$

where, the parameters a , b , c , and y_0 are arbitrary real numbers.. The graph of a

Gaussian is a characteristic "bell curve" shape. The parameter a is the height of the curve's peak; b (the mean) is the position of the center of the peak; c (the standard deviation) controls the width of the "bell"; and y_0 is the offset.

After fitted the frequency of vertex degrees to the Gaussian model, we use the R-Square (R^2) and Adjusted R-Square (Adj. R^2) to evaluate the Goodness of Fit.

3. Results and Discussion

3.1. Degree Distribution of Two-dimensional DT Networks


We first determine five different sizes of sets of scattered points (i.e., 100, 1000, 10000, 100000, and 1000000). For each size, we repeatedly create five two-dimensional Delaunay triangulations. And there are totally 25 Delaunay triangular meshes. For all of the 25 meshes, we calculate the vertex degrees, count the frequency of vertex degree, and fit the frequency of vertex degree to the Gaussian Model (Eq. (1)). We employ the R-Square (R^2) and Adjusted R-Square (Adj. R^2) to measure the Goodness of fit. Details of the fitted Gaussian Models are listed in Table 1. For each size, we also plot one of the fitted Gaussian Models (see Figure 2).

The results presented in Table 1 and Figure 2 indicate that:


- (1) the degree distribution of two-dimensional DT network well follows the Gaussian Distribution in most cases;
- (2) with the increase of the number of vertices in DT networks, the fitting of the frequency of vertex degree to a Gaussian model becomes better.

3.2. Degree Distribution of Three-dimensional DT Networks


As the same as the investigation of the degree distribution of two-dimensional DT networks, for the three-dimensional ones, we also determine five different sizes

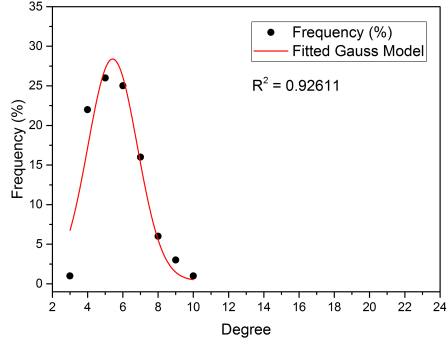


(a) A DT network with 100 vertices

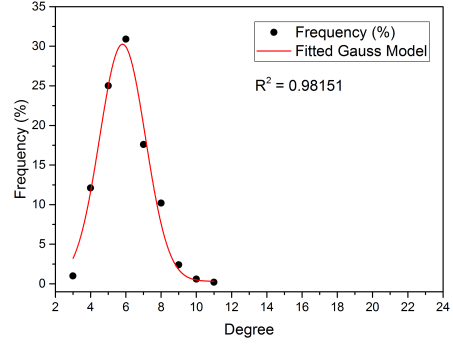


(b) A DT network with 1000 vertices

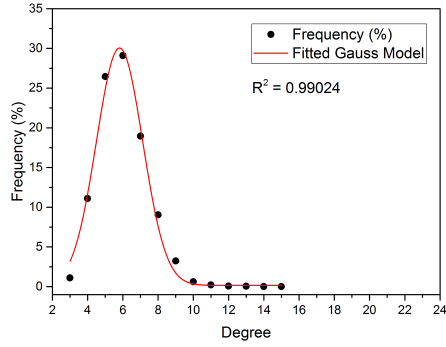

(c) A DT network with 10,000 vertices

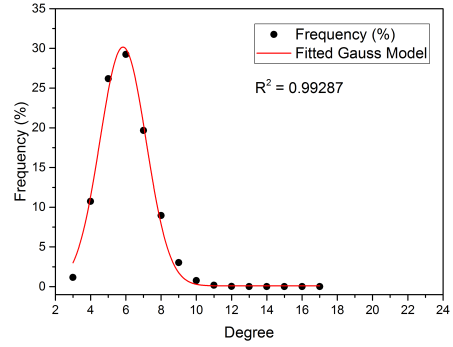


(d) A DT network with 100,000 vertices

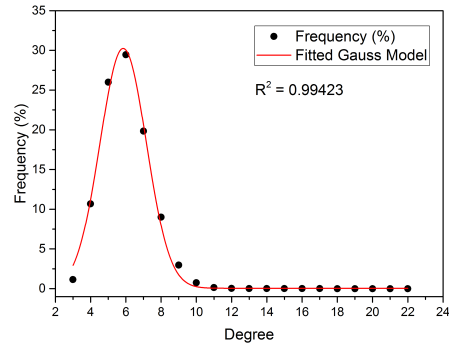


(e) A DT network with 1,000,000 vertices


Figure 2: Fitted Gaussian models for five different sizes of two-dimensional DT networks

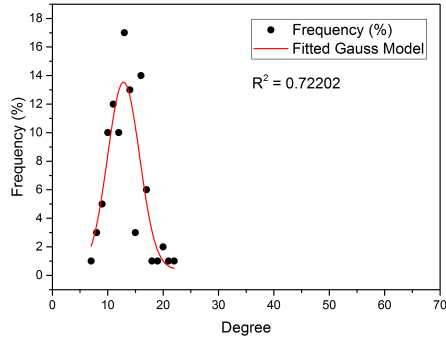


(a) A DT network with 100 vertices

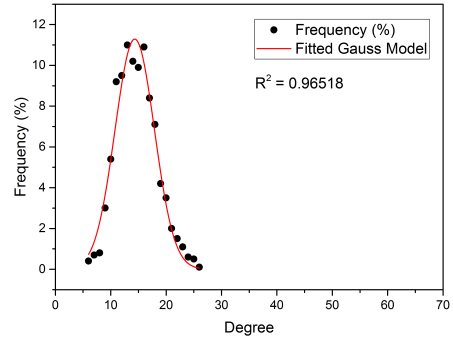


(b) A DT network with 1000 vertices

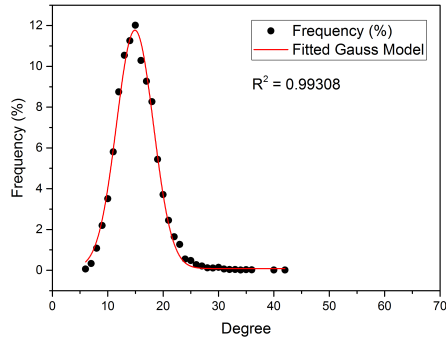

(c) A DT network with 10,000 vertices

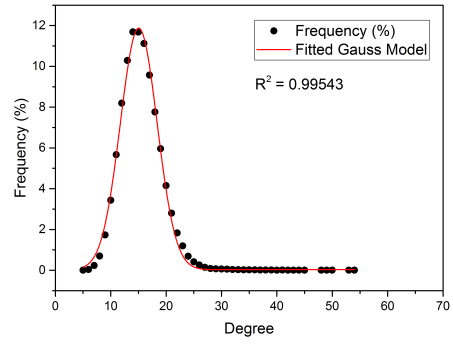

(d) A DT network with 100,000 vertices

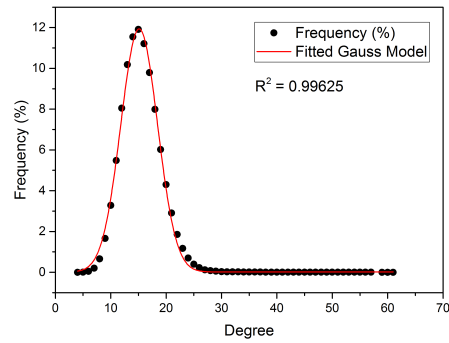

(e) A DT network with 1,000,000 vertices

Figure 3: Fitted Gaussian models for five different sizes of three-dimensional DT networks

of sets of scattered points. For each size, we repeatedly create the Delaunay tetrahedral meshes five times. We calculate the frequency of vertex degree, and then fit the frequency of vertex degree to the Gaussian function (Eq. (1)). Details of the fitted Gaussian Models are listed in Table 2. For each size, we also plot one of the fitted Gaussian Models (see Figure 3).

The results presented in Table 2 and Figure 3 indicate that:

- (1) the degree distribution of three-dimensional DT networks also well follows the Gaussian Distribution except for the very small size of DTs (see Figure 3(a));
- (2) with the increase of the number of vertices in DT networks, the frequency of vertex degree becomes more and more fitted to a Gaussian function. This is the same as that for the two-dimensional DT networks.

4. Conclusion

In this paper, we first considered the two- and three-dimensional DTs as a type of complex networks, i.e., the DT network; and then we investigated the degree distribution of the DT networks. It has been found that the degree distribution of the DT networks well follows the Gaussian distribution in most cases. This is different from the Power-Law degree distributions in the Scale-Free networks and the Poisson degree distribution in the Small-World networks.

In real-world applications, perhaps there are few complex systems can be exactly represented by the DT network. However, it is possible that in some cases scientists may try to use the DT network to approximately represent the quite complex biological network in the brain, and reveal the structural correlations of the biological networks [11, 12, 13].

Table 1: Details of the fitted Gaussian models for five different sizes of two-dimensional DT networks

Num. of Vertices	Parameters of the Fitted Gauss Model				Goodness of Fit		Figure
	a	b	c	y_0	R^2	Adj. R^2	
10^2	28.00545	5.41927	1.40459	0.38407	0.92611	0.87069	Figure 2(a)
	29.68097	5.44527	1.27589	0.74051	0.93000	0.87750	
	34.52490	5.98086	0.87684	4.03527	0.96943	0.92357	
	34.08906	5.50212	0.98915	1.94301	0.97739	0.96043	
	25.83382	5.41456	1.34654	1.75594	0.99149	0.98510	
10^3	29.93515	5.81252	1.30081	0.31490	0.98151	0.97041	Figure 2(b)
	29.93834	5.72799	1.20473	0.98548	0.98386	0.97579	
	29.76963	5.76064	1.27671	0.51488	0.98669	0.98004	
	29.16937	5.80171	1.35679	0.15905	0.98987	0.98379	
	29.90300	5.84234	1.29982	0.29798	0.99680	0.99519	
10^4	29.88082	5.81242	1.31279	0.16539	0.99024	0.98699	Figure 2(c)
	29.93680	5.82429	1.30700	0.19757	0.99281	0.99011	
	30.25405	5.82634	1.29838	0.11202	0.99342	0.99145	
	30.38152	5.83662	1.28568	0.22451	0.99420	0.99172	
	29.89607	5.84881	1.31856	0.12675	0.99494	0.99326	
10^5	30.06407	5.83894	1.31350	0.09805	0.99287	0.99093	Figure 2(d)
	30.16499	5.84439	1.30954	0.09481	0.99375	0.99205	
	30.19954	5.84569	1.30756	0.09675	0.99415	0.99255	
	30.07007	5.84758	1.31579	0.07981	0.99420	0.99275	
	30.13382	5.84836	1.31393	0.07511	0.99428	0.99285	
10^6	30.18968	5.84948	1.31402	0.05053	0.99423	0.99315	Figure 2(e)
	30.08914	5.84862	1.31909	0.04873	0.99424	0.99316	
	30.18773	5.85070	1.31355	0.05832	0.99427	0.99305	
	30.21144	5.84841	1.31170	0.05835	0.99427	0.99313	
	30.23149	5.84921	1.31112	0.05422	0.99432	0.99326	

Table 2: Details of the fitted Gaussian models for five different sizes of three-dimensional DT networks

Num. of Vertices	Parameters of the Fitted Gauss Model				Goodness of Fit		Figure
	a	b	c	y_0	R^2	Adj. R^2	
10^2	13.12919	12.86086	2.88146	0.40405	0.72202	0.65253	Figure 3(a)
	14.08050	11.59738	1.88705	2.22933	0.79719	0.74188	
	13.46764	12.53566	2.87983	0.52913	0.82998	0.77331	
	13.12995	12.38275	2.85504	0.46392	0.83969	0.79597	
	11.77248	11.92589	3.00907	1.35579	0.91722	0.89239	
10^3	11.28722	14.33136	3.55809	0.00020	0.96518	0.95904	Figure 3(b)
	11.64593	14.11783	3.05218	0.46269	0.96882	0.96414	
	12.10603	14.39760	3.14854	0.19478	0.97574	0.97210	
	11.34799	14.36068	3.42533	0.13816	0.97641	0.97248	
	11.16427	14.30988	3.36066	0.28659	0.98464	0.98234	
10^4	11.68965	14.90960	3.32630	0.08346	0.99308	0.99236	Figure 3(c)
	11.56788	14.88169	3.39803	0.05132	0.99342	0.99276	
	11.47522	14.86408	3.42240	0.04812	0.99346	0.99287	
	11.69194	14.83496	3.31919	0.08442	0.99356	0.99293	
	11.63035	14.79683	3.32669	0.09591	0.99378	0.99316	
10^5	11.84302	15.05391	3.32420	0.03019	0.99543	0.99510	Figure 3(d)
	11.83560	15.05495	3.32932	0.02664	0.99577	0.99547	
	11.86178	15.06382	3.32584	0.02517	0.99583	0.99554	
	11.85270	15.05600	3.32674	0.02680	0.99602	0.99574	
	11.86734	15.05052	3.31587	0.03080	0.99603	0.99574	
10^6	11.92144	15.13136	3.32073	0.01385	0.99625	0.99604	Figure 3(e)
	11.93135	15.13290	3.31960	0.01300	0.99628	0.99607	
	11.92786	15.13621	3.31965	0.01348	0.99638	0.99617	
	11.92595	15.13733	3.31972	0.01397	0.99639	0.99619	
	11.92224	15.13856	3.32184	0.01250	0.99647	0.99628	

Acknowledgments

This work was supported by the Natural Science Foundation of China (Grant Numbers 11602235 and 41772326).

References

- [1] Savelli, F. and J.J. Knierim, *AI mimics brain codes for navigation*. Nature, 2018. **557**(7705): p. 313-314.
- [2] LeCun, Y., Y. Bengio, and G. Hinton, *Deep learning*. Nature, 2015. **521**: p. 436.
- [3] Banino, A., et al., *Vector-based navigation using grid-like representations in artificial agents*. Nature, 2018.
- [4] Hafting, T., et al., *Microstructure of a spatial map in the entorhinal cortex*. Nature, 2005. **436**: p. 801.
- [5] Doeller, C.F., C. Barry, and N. Burgess, *Evidence for grid cells in a human memory network*. Nature, 2010. **463**: p. 657.
- [6] Watts, D.J. and S.H. Strogatz, *Collective dynamics of 'small-world' networks*. Nature, 1998. **393**(6684): p. 440-442.
- [7] Barabasi, A.L. and R. Albert, *Emergence of scaling in random networks*. Science, 1999. **286**(5439): p. 509-512.
- [8] Delaunay, B., *Sur la sphre vide*. Bulletin de l'Acadmie des Sciences de l'URSS, Classe des sciences mathmatiques et naturelles, 1934. **6**: p. 793–800.

- [9] Shewchuk, J.R., *Delaunay refinement algorithms for triangular mesh generation*. Computational Geometry-Theory and Applications, 2002. **22**(1-3): p. 21-74.
- [10] Si, H., *TetGen, a Delaunay-Based Quality Tetrahedral Mesh Generator*. Acm Transactions on Mathematical Software, 2015. **41**(2).
- [11] Rubinov, M. and O. Sporns, *Complex network measures of brain connectivity: Uses and interpretations*. NeuroImage, 2010. **52**(3): p. 1059-1069.
- [12] Bullmore, E. and O. Sporns, *Complex brain networks: graph theoretical analysis of structural and functional systems*. Nature Reviews Neuroscience, 2009. **10**: p. 186.
- [13] Avena-Koenigsberger, A., B. Misic, and O. Sporns, *Communication dynamics in complex brain networks*. Nature Reviews Neuroscience, 2018. **19**(1): p. 17-33.