

Dynamics of localized spins coupled to the conduction electrons with charge/spin currents

Masaru Onda^{1;3} and Naoto Nagaosa^{1;2;3y}

¹Correlated Electron Research Center (CERC),
National Institute of Advanced Industrial Science and Technology (AIST),
Tsukuba Central 4, Tsukuba 305-8562, Japan

²Department of Applied Physics, University of Tokyo,
Bunkyo-ku, Tokyo 113-8656, Japan

³CREST, Japan Science and Technology Corporation (JST),
Saitama, 332-0012, Japan

The effects of the charge/spin currents of conduction electrons on the dynamics of the localized spins are studied in terms of the perturbation in the exchange coupling J_K between them. The equations of motion for the localized spins are derived exactly up to $O(J_K^2)$, and the equations for the two-spin system is solved numerically. It is found that the dynamics depends sensitively upon the relative magnitude of the charge and spin currents, i.e., it shows steady state, periodic motion, and even chaotic behavior. Extension to the multi-spin system and its implications including possible "spin current detector" are also discussed.

PACS numbers: 72.25.-b, 72.25.Hg, 73.23.-b, 85.75.-d

The interplay between the current and spins is the subject of recent intensive studies [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14]. The giant magnetoresistive effect (GMR) [1], the spin valve effect [2], the current-driven domain wall motion [3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13], and the colossal magnetoresistance (CMR) [14] are the representative phenomena due to the interaction between the spin state and the charge dynamics. Especially the charge current in the ferromagnetic system is necessarily spin polarized, and the spin torque associated with it drives the nontrivial phenomena [3, 4, 5]. On the other hand, the pure spin current without the charge current is highlighted in the studies of spintronics (such as spin Hall effect [15, 16] and quantum spin pumping (such as spin battery [17])). Spin current is present even in the insulating magnets. In the latter case, the electric polarization is induced by the spin current associated with the non-collinear spin configuration, offering a new mechanism of the magnetoelectric effect [18].

However, the direct observation of the spin current is difficult because it does not appear in the Maxwell equations. One possible way is to measure the electric field or voltage drop accompanied by the spin current due to the Aharonov-Casher effect [19, 20]. However, the magnitude of the voltage drop is estimated to be very small. Therefore a more sensitive method to detect the spin current is desirable, which we propose below.

In this paper, we study the dynamics of the local spins weakly coupled to the conduction electrons with charge/spin currents. The equation of motion for the localized spins are derived up to the second order in the Kondo coupling J_K between the conduction electron spins and localized spins. This equation of motion is solved numerically and variety of dynamics is found in-

cluding the steady state, periodic motion, and even the chaotic motion in the phase diagram of charge current j^c and spin current j^s . It is not unrealistic to control both of them by several methods proposed [15, 17] in addition to the conventional spin-polarized current injection from the ferromagnets. It is also noted that the polarization of the spin current component is controllable only in the case of weak J_K . In the strong coupling case, the spin of the conduction electron is forced to be parallel to the localized spin at each site, and we cannot arbitrarily manipulate its direction.

Model and equation of motion { We start with the double-exchange model of continuum version treated in the closed time-path Green's function (CTPGF) formalism [21], which is recently applied to the spin dynamics in a Josephson junction. (We shall take the units in which $\hbar = c = 1$.)

$$Z[S(r;t)] = \text{Tr}[T_p \exp(iS)]; \quad (1)$$

$$S = S_{WZN} + S_{\text{ext}} + \int_p dt \int dr ic^y(r;t) \theta_c(r;t) \quad \#$$

$$H_0 + \frac{v_{uc} J_K}{2} S(r;t) \quad (r;t); \quad (2)$$

$$\int_p dt = \int_1 dt_+ \int_1 dt \quad (3)$$

where $Z[S(r;t)]$ is the partition function in the CTPGF formalism, T_p is the time-ordering with respect to the closed time-path, S_{WZN} is the Wess-Zumino-Novikov (WZN) term describing the Berry phase of the localized spins, H_0 is the Hamiltonian for free electrons. For simplicity, we consider H_0 of the quadratic dispersion and isotropic effective mass m . S_{ext} repre-

rents. $F_{sc}^{(1)}(r)$ -term has a different symmetry from that of the original term and leads to a spin-anisotropic damping/pumping.

Dynamics of two-spin system { Now we consider the dynamics of the two-spin system in detail. For the numerical study, we normalize the charge/spin currents as

$$J^n = \frac{2}{e_F} \hbar j^c i_{J_K=0}; \quad J^s = \frac{2}{2e_s F} \hbar j^s i_{J_K=0}; \quad (10)$$

where $F = 2 = k_F$, and, take the forms of them as $J^n = J^n j_0$ and $J^s = J^s n_s j_0$, where j_0 and n_s are the unit vectors representing the directions of the charge/spin-current flow and the spin-current polarization, respectively. The unit of charge current, $2e_F = \frac{2}{F}$, is estimated as 10^8 A cm^{-2} for a semiconductor with $n_e = 10^{18} \text{ cm}^{-3}$ and $F = 1 \text{ m eV}$, and as $10^{10} \text{ A cm}^{-2}$ for a metal with $n_e = 10^{21} \text{ cm}^{-3}$ and $F = 1 \text{ eV}$. The unit of time, $1 = (\frac{2}{F})$, is estimated as $10^{-1} (1 \text{ m eV} / F) \text{ ps}$ for $F = 0.05$. We put the two spins along j_0 which is set to be the x-direction. n_s is set to be the z-direction.

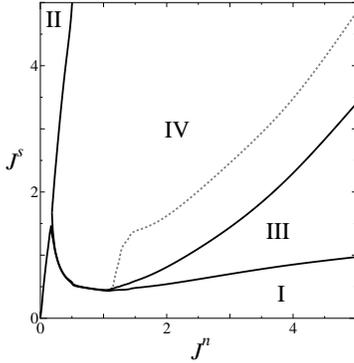


FIG. 1: Phase diagram of the dynamics of the two-spin system in the plane of charge current J^n and spin current J^s .

Fig. 1 show the "phase diagram" for the dynamics of the two-spin system with $k_F r = 1.0$ and $\alpha = 0.05$. Figs. 2-4 show examples of motions in the regions II-IV respectively. The black line represent the inner product of the two spins $S_1 \cdot S_2$. The solid lines of green and orange are the z-components of upstream and downstream spins respectively, i.e., S_1^z and S_2^z . The dashed lines of green and orange are the x-components of upstream and downstream spins respectively, i.e., S_1^x and S_2^x .

In region I, the two spins reach the final static collinear configuration with the easy-axis anisotropy in the direction of n_s . In the special case of $J^s = 0$, i.e., the pure charge current, the static collinear configuration is realized with no spin anisotropy. This region contains the cases with any amount of the weakly spin-polarized charge current and a small amount of the perfectly spin-polarized charge current. In region II and III, the spins show the periodic motions in which the angle between the two spins and the z-component of each spin takes a

constant value. The weakly-charged spin current belongs to region II, which is our main concern. An example of this case is given in Fig. 2, where the lines for S_1^z (green solid) and S_2^z (orange solid) are almost overlapped. When $j^n j$ is sufficiently smaller than $j^s j$ the angle θ_{12} between the two spins is a increasing (decreasing) function of $j^s j$ ($j^n j$). The z-component of a spin is a increasing (decreasing) function of $j^n j$ ($j^s j$). The frequency of motion increases with both of $j^n j$ and $j^s j$. In the case with $J^n = 0$, i.e., the pure spin current, the static coplanar configuration with the hard-axis parallel (or the easy-plane perpendicular) to n_s is realized and the angle between the two spins, θ_{12} , is determined by the magnitude of J^s as $\tan \theta_{12} = \frac{F_{sc}^{(0)}(r_{12})}{F_0^{(0)}(r_{12})} j$. Fig. 3 shows another type of a simple motion which occurs in region III. In region IV observed the chaotic or complicated motion in which both the angle between the two spins and the z-component of each spin are changing in motion and do not reach a steady state. This region contains the cases with a large amount of the strongly spin-polarized charge current and a large amount of the strongly charged spin current. Although we observe various types of motions in this region, any sharp boundaries between them are not identified at least in the present simulation. We shall not undertake their precise classification. However, a relatively clear change can be observed around the dotted line in Fig. 1. Under the dotted line in this region, the upstream spin slowly precesses around n_s with a cycloidal trajectory and the downstream spin quickly precesses around the upstream spin. Deep in the region IV above the dotted line, the motion becomes chaotic as shown in Fig. 4. Note that a large amount of strongly spin-polarized charge current leads to this class of motion, where the strong coupling theories (for $\alpha > 1$) [5, 26, 27] predict the instability of the ferromagnetic order. Some remarks are in order here. First the dynamics highly depends on the initial condition in the vicinity of the boundary between the regions II and IV. Secondly there is a very narrow region between the regions I and IV, while the regions I and IV appear to touch each other. In this narrow region, we observe the motions similar to those in the regions II and III. Thus, the regions II and III may be connected through this region.

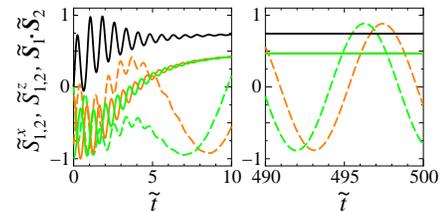


FIG. 2: Example of the motion in the region II. $J^n = 0.1$ and $J^s = 2.0$. For the meaning of each curves, see the text.

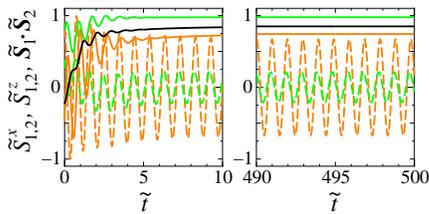


FIG. 3: Example of the motion in the region III. $J^n = 2.0$ and $J^s = 0.6$.

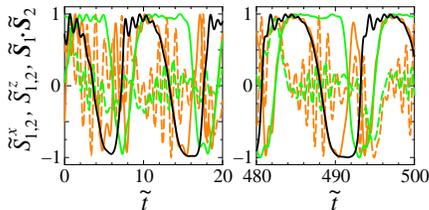


FIG. 4: Example of the motion in the region IV. $J^n = 1.0$ and $J^s = 1.0$.

Discussion{ The above consideration on the case of pure spin current can be easily generalized to the one-dimensional periodic array of spins along the direction of j_0 . The equilibrium interaction $F_0^{(0)}(a_0)$ between the nearest neighbor spins with the separation a_0 is assumed to be ferromagnetic. Even in the case with $J^s \neq 0$ but $J^n = 0$, we can construct an energy functional E_e which should be minimized for the spin configuration of a steady state.

$$E_e = \sum_{i < j} \sum_{\alpha} F_0^{(\alpha)}(r_{ij}) S_i^{\alpha} S_j^{\alpha} + \sum_{i,j} F_{sc}^{(0),z}(r_{ij}) S_i^z S_j^z : \quad (11)$$

This suggests that even the dissipative transport spin current works on the localized spins in the same way as the equilibrium spin current does, while it is not the case for the charge current. In equilibrium, i.e., $J^n = J^s = 0$, the spins align ferromagnetically, and the direction of alignment is arbitrary because there is no spin anisotropy in our model. When J^s is introduced, the spins feel Dzyaloshinsky-Moriya-like interaction in addition to the ferromagnetic one. For simplicity, we shall take into account only the nearest neighbor interaction and set n_s to be in the positive z -direction. Then, the variational energy including the lowest energy state is given by $E_q = F_0^{(0)}(a_0) \cos(qa_0) + F_{sc}^{(0),z}(a_0) \sin(qa_0)$. The lowest energy state is realized by the real-space configuration $S_i = S [\cos(q_0 r_i + \phi_0); \sin(q_0 r_i + \phi_0); 0]$ where $\tan(q_0 a_0) = F_{sc}^{(0),z}(a_0) / F_0^{(0)}(a_0)$ and ϕ_0 is an arbitrary constant. The spins are expected to show the helical order and the hard-axis anisotropy (parallel to n_s is introduced by the pure spin current. The pitch angle, $q_0 a_0$, of

the helix increases with the magnitude of J^s , because $F_{sc}^{(0)}(a_0) / F_0^{(0)}(a_0)$. Hence this helical order is realized in the steady state with the pure spin current, this might be utilized as the spin current detector. In other cases than discussed above, we must consider the dynamical equations of motion directly. However, the previous study of the two-spin system gives us the following insights. When the small amount of J^n is introduced to the pure spin current, the spins arise from the coplanar helical order in the easy plane and show the periodic motion around n_s as in the motion of the two spins in the region II. In the case with a small amount of the weakly spin-polarized current which belongs to the region I, the spins align ferromagnetically as in equilibrium, but in this case the easy-axis anisotropy parallel to n_s is introduced by the spin-polarized current. However, for a large amount of the strongly spin-polarized charge current belonging to the region IV, the instability of ferromagnetic order would be observed. The details of the dynamical motion of multi-spin system will be reported elsewhere.

In conclusion, we have derived the equations of motion of localized spins weakly coupled to the conduction electrons with charge/spin currents. The dynamics of localized spins are affected significantly by these charge and spin currents of conduction electrons, and the dynamics of the two-spin system has been studied in depth by numerical calculation. The phase diagram for the dynamics in the plan of charge and spin currents are divided into 4 regions, where the steady state, periodic motion, and even chaotic motion are observed.

The authors thank S. E. Barnes, M. M. Tse, J. Ieda, H. Imamura, S. Takahashi, G. E. W. Bauer, A. V. Balatsky, and G. Tatara for fruitful discussions. This work is financially supported by NAREG Grant, Grant-in-Aids from the Ministry of Education, Culture, Sports, Science and Technology of Japan.

Electronic address: monoda@aist.go.jp

Electronic address: nagaosa@appi.t.u-tokyo.ac.jp

- [1] M. N. Babich et al., Phys. Rev. Lett. 61, 2472 (1988).
- [2] B. Dieny et al., J. Appl. Phys. 69, 4774 (1991).
- [3] J. C. Slonkowski, J. Magn. Mater. 159, L1 (1996).
- [4] L. Berger, Phys. Rev. B 54, 9353 (1996).
- [5] Ya. B. Bazaliy, B. A. Jones, and S.-C. Zhang, Phys. Rev. B 57, R3213 (1998).
- [6] J. J. Versluijs, M. A. Bari, and J. M. D. Coey, Phys. Rev. Lett. 87, 026601 (2001).
- [7] D. A. Allwood et al., Science 296, 2003 (2002).
- [8] M. Yamaguchi et al., Nature 428, 539 (2004).
- [9] A. Yamaguchi et al., Phys. Rev. Lett. 92, 077205 (2004).
- [10] S. Zhang, P. M. Levy, and A. Fert, Phys. Rev. Lett. 88, 236601 (2002).
- [11] G. Tatara and H. Kohno, Phys. Rev. Lett. 92, 086601 (2004).
- [12] S. Zhang, and Z. Li, Phys. Rev. Lett. 93, 127204 (2004).

- [13] S. E. Barnes and S. M. Aekawa, cond-m at/0410035.
- [14] For a review see Y. Tokura and N. Nagaosa, *Science* 288, 462 (2000).
- [15] S. Murakami, N. Nagaosa, and S.-C. Zhang, *Science* 301, 1348 (2003).
- [16] J. Sinova et al., *Phys. Rev. Lett.* 92, 126603 (2004).
- [17] Y. Tserkovnyak et al., cond-m at/0409242.
- [18] H. Katsura, N. Nagaosa, and A. V. Balatsky, *Phys. Rev. Lett.* 95, 057205 (2005).
- [19] S. Takahashi and S. M. Aekawa, *Phys. Rev. Lett.* 88, 116601 (2002).
- [20] P. Zhang et al., cond-m at/0503505.
- [21] K.-C. Chou et al., *Phys. Rep.* 118, 1 (1985).
- [22] J.-X. Zhu et al., *Phys. Rev. Lett.* 92, 107001 (2004).
- [23] M. Onda and N. Nagaosa, in preparation.
- [24] S. E. Barnes, *J. Phys. F* 4, 1535 (1974).
- [25] Y. Rikitake and H. Imamura, cond-m at/0408375.
- [26] J. Fernandez-Rossier et al., *Phys. Rev. B* 69, 174412 (2004).
- [27] J. Shibata, G. Tatara, and H. Kohno, *Phys. Rev. Lett.* 94, 076601 (2005).