

On representation power of neural network-based graph embedding and beyond

Akifumi Okuno^{1 2} Hidetoshi Shimodaira^{1 2}

Abstract

We consider the representation power of siamese-style similarity functions used in neural network-based graph embedding. The inner product similarity (IPS) with feature vectors computed via neural networks is commonly used for representing the strength of association between two nodes. However, only a little work has been done on the representation capability of IPS. A very recent work shed light on the nature of IPS and reveals that IPS has the capability of approximating any positive definite (PD) similarities. However, a simple example demonstrates the fundamental limitation of IPS to approximate non-PD similarities. We then propose a novel model named Shifted IPS (SIPS) that approximates any Conditionally PD (CPD) similarities arbitrary well. CPD is a generalization of PD with many examples such as negative Poincaré distance and negative Wasserstein distance, thus SIPS has a potential impact to significantly improve the applicability of graph embedding without taking great care in configuring the similarity function. Our numerical experiments demonstrate the SIPS's superiority over IPS. In theory, we further extend SIPS beyond CPD by considering the inner product in Minkowski space so that it approximates more general similarities.

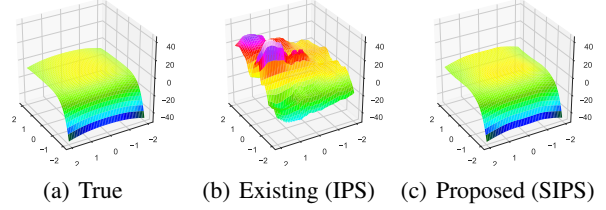


Figure 1. (a) For $f_*(\mathbf{x}) = (x_1, \cos x_2, \exp(-x_3), \sin(x_4 - x_5)) \in \mathbb{R}^4$ w.r.t. $\mathbf{x} \in \mathbb{R}^5$, the negative squared distance (NSD) similarity $-\|f_*(se_1) - f_*(te_2)\|_2^2$ is plotted on (s, t) -plane along with two orthogonal directions $e_1, e_2 \in \mathbb{R}^5$. This NSD is approximated by the two similarity models: (b) Existing model (IPS) $\langle f_\psi(se_1), f_\psi(te_2) \rangle$, and (c) Proposed model (SIPS) $\langle f_\psi(se_1), f_\psi(te_2) \rangle + u_\xi(se_1) + u_\xi(te_2)$, where $f_\psi : \mathbb{R}^5 \rightarrow \mathbb{R}^{10}$ and $u_\xi : \mathbb{R}^5 \rightarrow \mathbb{R}$ are two-layer neural networks with 1,000 hidden units and ReLU activations. The proposed model (SIPS) approximates the NSD better than the existing model (IPS).

1. Introduction

Graph embedding (GE) of relational data, such as texts, images, and videos, etc., now plays an indispensable role in machine learning. To name but a few, words and contexts in a corpus constitute relational data, and their vector rep-

¹Graduate School of Informatics, Kyoto University, Kyoto, Japan ²RIKEN Center for Advanced Intelligence Project (AIP), Tokyo, Japan. Correspondence to: Akifumi Okuno <okuno@sys.i.kyoto-u.ac.jp>.

Presented at the ICML 2018 workshop on Theoretical Foundations and Applications of Deep Generative Models, Stockholm, Sweden, 2018. Copyright 2018 by the author(s).

resentations obtained by skip-gram model (Mikolov et al., 2013a) and GloVe (Pennington et al., 2014) are often used in natural language processing. More classically, a similarity graph is first constructed from data vectors, and nodes are embedded to a lower dimensional space where connected nodes are closer to each other (Cai et al., 2018).

Embedding is often designed so that the inner product between two vector representations in Euclidean space expresses their similarity. In addition to its interpretability, the inner product similarity has the following two desirable properties: (1) The vector representations are suitable for downstream tasks as feature vectors because machine learning methods are often based on inner products (e.g., kernel methods). (2) Simple vector arithmetic in the embedded space may represent similarity arithmetic such as the “linguistic regularities” of word vectors (Mikolov et al., 2013b). The latter property comes from the distributive law of inner product $\langle \mathbf{a} + \mathbf{b}, \mathbf{c} \rangle = \langle \mathbf{a}, \mathbf{c} \rangle + \langle \mathbf{b}, \mathbf{c} \rangle$, which decomposes the similarity of $\mathbf{a} + \mathbf{b}$ and \mathbf{c} into the sum of the two similarities. For seeking the word vector $\mathbf{y}' = \mathbf{y}_{\text{queen}}$, we maximize $\langle \mathbf{y}_{\text{king}} - \mathbf{y}_{\text{man}} + \mathbf{y}_{\text{woman}}, \mathbf{y}' \rangle = \langle \mathbf{y}_{\text{king}}, \mathbf{y}' \rangle - \langle \mathbf{y}_{\text{man}}, \mathbf{y}' \rangle + \langle \mathbf{y}_{\text{woman}}, \mathbf{y}' \rangle$ in Eq. (3) of Levy and Goldberg (2014). Thus solving analogy questions with

vector arithmetic is mathematically equivalent to seeking a word which is similar to king and woman but is different from man.

While classical GE has been quite successful, it considers simply the graph structure, where data vectors (pre-obtained attributes such as color-histograms of images), if any, are used only through the similarity graph. To fully utilize data vectors, neural networks (NNs) are incorporated into GE so that data vectors are converted to new vector representations (Kipf and Welling, 2016; Zhanga et al., 2017; Hamilton et al., 2017; Dai et al., 2018), which reduces to the classical GE by taking 1-hot vectors as the data vectors. While these methods consider 1-view setting, multi-view setting is considered in Probabilistic Multi-view Graph Embedding (Okuno et al., 2018, PMvGE), which generalizes existing multivariate analysis methods (e.g., PCA and CCA) and NN-extensions (Andrew et al., 2013, DCCA) as well as graph embedding methods such as Locality Preserving Projections (He and Niyogi, 2004; Yan et al., 2007, LPP), Cross-view Graph Embedding (Huang et al., 2012, CvGE), and Cross-Domain Matching Correlation Analysis (Shimodaira, 2016, CDMCA). In these methods, the inner product of two vector representations obtained via NNs represents the strength of association between the corresponding two data vectors. The vector representations and the inner products are referred to as *feature vectors* and *Inner Product Similarities (IPS)*, respectively, in this paper.

IPS is considered to be highly expressive for representing the association between data vectors due to the Universal Approximation Theorem (Funahashi, 1989; Cybenko, 1989; Yarotsky, 2017; Telgarsky, 2017, UAT), which proves that NNs having many hidden units approximate arbitrary continuous functions within any given accuracy. However, since IPS considers the inner product of two vector-valued NNs, the UAT is not directly applicable to the whole network with the constraints at the final layer, thus its representation capability is yet to be clarified. For that reason, Okuno et al. (2018) incorporates UAT into Mercer’s theorem (Minh et al., 2006) and proves that IPS approximates any similarity based on Positive Definite (PD) kernels arbitrary well. This result shows not only the validity but also the fundamental limitation of IPS, meaning that the PD-ness of the kernels is required for IPS to approximate.

To overcome the limitation, similarities based on specific kernels other than inner products have received considerable attention in recent years. One example is Poincaré embedding (Nickel and Kiela, 2017) which is an NN-based GE using Poincaré distance for embedding vectors in hyperbolic space instead of Euclidean space. Hyperbolic space is especially compatible with computing feature vectors of tree-structured relational data (Sarkar, 2011). Similarly, Gaussian embedding (Vilnis and McCallum, 2015; Bojchevski

and Günnemann, 2018) is proposed to learn features based on Kullback-Leibler divergence. While these methods efficiently compute reasonable low-dimensional feature vectors by virtue of specific kernels, their theoretical differences from IPS is not well understood.

In order to provide theoretical insights on these methods, in this paper, we first point out that some specific kernels used in above methods are not PD by referring to existing studies. To deal with such non-PD kernels, we consider Conditionally PD (CPD) kernels (Berg et al., 1984; Schölkopf, 2001) which include PD kernels as special cases. We then propose a novel model named *Shifted IPS (SIPS)* that approximates similarities based on CPD kernels within any given accuracy. We show an illustrative example in Figure 1. Interestingly, negative Poincaré distance is already proved to be CPD (Faurat and Harzallah, 1974) and it is not PD. So, similarities based on this kernel can be approximated by SIPS but not by IPS.

Our contribution in this paper is summarized as follows:

- (1) We review existing studies on IPS. Although IPS approximates similarities based on PD kernels arbitrary well, we point out the fundamental limitation of IPS to approximate similarities based on CPD kernels.
- (2) We propose a novel model named Shifted IPS (SIPS) and prove that SIPS approximates similarities based on CPD kernels within any given accuracy. A simpler version of SIPS as well as a further extended model beyond CPD is also discussed.
- (3) We perform a numerical experiment to compare SIPS with IPS.

The remaining of this paper is organized as follows. In Section 2, we introduce Inner Product Similarity (IPS) model, which is commonly used in NN-based GE. In Section 3, we review the previous study on IPS for approximating PD kernels. In Section 4, we show the fundamental limitation of IPS, and then we propose a novel model named SIPS, so that it approximates any similarities based on CPD kernels arbitrary well. In Section 5, we conduct a numerical experiment to compare SIPS with IPS. In Section 6, we conclude this paper. In Appendix A, we also mention a further extended model based on the inner product in Minkowski space for more general similarities beyond CPD.

2. Background: Generative model for NN-based feature learning

We consider an undirected graph consisting of n nodes $\{v_i\}_{i=1}^n$ and link weights $\{w_{ij}\}_{i,j=1}^n \subset \mathbb{R}_{\geq 0}$ satisfying $w_{ij} = w_{ji}$ and $w_{ii} = 0$, where w_{ij} represents the strength

of association between v_i and v_j . The data vector representing the attributes (or side-information) at v_i is denoted as $\mathbf{x}_i \in \mathbb{R}^p$. If we have no attributes, we use 1-hot vectors in \mathbb{R}^n instead. We assume that $\{w_{ij}\}_{i,j=1}^n, \{\mathbf{x}_i\}_{i=1}^n$ are obtained as observations.

We consider a simple random graph model for the generative model of random variables $\{w_{ij}\}_{i,j=1}^n$ given data vectors $\{\mathbf{x}_i\}_{i=1}^n$. The conditional distribution of w_{ij} is specified by a *similarity function* $h(\mathbf{x}_i, \mathbf{x}_j)$ of the two data vectors. Typically, Bernoulli distribution $P(w_{ij} = 1 | \mathbf{x}_i, \mathbf{x}_j) = \sigma(h(\mathbf{x}_i, \mathbf{x}_j))$ with sigmoid function $\sigma(x) := (1 + \exp(-x))^{-1}$, and Poisson distribution $\text{Po}(\exp(h(\mathbf{x}_i, \mathbf{x}_j)))$ are used to model the conditional probability. These models are in fact specifying the conditional expectation $E(w_{ij} | \mathbf{x}_i, \mathbf{x}_j)$ by $\sigma(h(\mathbf{x}_i, \mathbf{x}_j))$ and $\exp(h(\mathbf{x}_i, \mathbf{x}_j))$, respectively, and they correspond to logistic regression and Poisson regression in the context of generalized linear models.

We model the similarity function as

$$h(\mathbf{x}_i, \mathbf{x}_j) := g(f(\mathbf{x}_i), f(\mathbf{x}_j)), \quad (1)$$

where $f : \mathbb{R}^p \rightarrow \mathbb{R}^K$ is a continuous map and $g : \mathbb{R}^{K \times K} \rightarrow \mathbb{R}$ is a symmetric continuous function, which is defined later in Definition 3.1. By using a neural network $\mathbf{y} = f_\psi(\mathbf{x})$ with parameter ψ , we consider the model $h(\mathbf{x}_i, \mathbf{x}_j) = g(f_\psi(\mathbf{x}_i), f_\psi(\mathbf{x}_j))$, which is called siamese network (Bromley et al., 1994) in neural network literature. The original form of siamese network uses the cosine similarity for g , but we can specify other types of similarity function. By specifying the inner product $g(\mathbf{y}, \mathbf{y}') = \langle \mathbf{y}, \mathbf{y}' \rangle$, the similarity function (1) becomes

$$h(\mathbf{x}_i, \mathbf{x}_j) = \langle f_\psi(\mathbf{x}_i), f_\psi(\mathbf{x}_j) \rangle. \quad (2)$$

We call (2) as Inner Product Similarity (IPS) model. IPS commonly appears in a broad range of methods, such as DeepWalk (Perozzi et al., 2014), LINE (Tang et al., 2015), node2vec (Grover and Leskovec, 2016), Variational Graph AutoEncoder (Kipf and Welling, 2016), and GraphSAGE (Hamilton et al., 2017). Multi-view extensions (Okuno et al., 2018) are easily obtained by preparing different f for each view and restricting loss terms in objective only to specific pairs; for example, the skip-gram model considers a bipartite graph of two-views with the conditional distribution of contexts given a word.

3. Previous study: PD similarities

In order to prove the approximation capability of IPS given in eq. (2), Okuno et al. (2018) incorporates Universal Approximation Theorem of NN (Funahashi, 1989; Cybenko, 1989; Yarotsky, 2017; Telgarsky, 2017) into Mercer's theorem (Minh et al., 2006). To show the result in Theorem 3.1, we first define a kernel and its positive-definiteness.

Definition 3.1 For some set \mathcal{Y} , a symmetric continuous function $g : \mathcal{Y}^2 \rightarrow \mathbb{R}$ is called a *kernel* on \mathcal{Y}^2 .

Definition 3.2 A kernel g on \mathcal{Y}^2 is said to be *Positive Definite (PD)* if satisfying $\sum_{i=1}^n \sum_{j=1}^n c_i c_j g(\mathbf{y}_i, \mathbf{y}_j) \geq 0$ for arbitrary $c_1, c_2, \dots, c_n \in \mathbb{R}, \mathbf{y}_1, \mathbf{y}_2, \dots, \mathbf{y}_n \in \mathcal{Y}$.

For instance, cosine similarity $g(\mathbf{y}, \mathbf{y}') := \langle \frac{\mathbf{y}}{\|\mathbf{y}\|_2}, \frac{\mathbf{y}'}{\|\mathbf{y}'\|_2} \rangle$ is a PD kernel on $(\mathbb{R}^p \setminus \{0\})^2$. Its PD-ness immediately follows from $\sum_{i=1}^n \sum_{j=1}^n c_i c_j g(\mathbf{y}_i, \mathbf{y}_j) = \|\sum_{i=1}^n c_i \frac{\mathbf{y}_i}{\|\mathbf{y}_i\|_2}\|_2^2 \geq 0$ for arbitrary $\{\mathbf{y}_i\}_{i=1}^n \subset \mathbb{R}^p$ and $\{\mathbf{y}_i\}_{i=1}^n \subset \mathcal{Y}$. Also polynomial kernel, Gaussian kernel, and Laplacian kernel are PD (Berg et al., 1984). By utilizing these kernels, we define a similarity of data vectors.

Definition 3.3 A function $h(\mathbf{x}, \mathbf{x}') := g(f(\mathbf{x}), f(\mathbf{x}'))$ with a kernel $g : \mathcal{Y}^2 \rightarrow \mathbb{R}$ and a continuous map $f : \mathcal{X} \rightarrow \mathcal{Y}$ is called a *similarity* on \mathcal{X}^2 .

For a PD kernel g , the similarity h is also a PD kernel on \mathcal{X}^2 , since $\sum_{i=1}^n \sum_{j=1}^n c_i c_j h(\mathbf{x}_i, \mathbf{x}_j) = \sum_{i=1}^n \sum_{j=1}^n c_i c_j g(f(\mathbf{x}_i), f(\mathbf{x}_j)) \geq 0$.

Briefly speaking, a similarity h is used for measuring how similar two data vectors are, while a kernel is used to compare feature vectors. Regarding PD similarities, the following Theorem 3.1 shows that IPS approximates any PD similarities arbitrary well if the number of hidden units and output dimension are sufficiently large.

Theorem 3.1 (Okuno et al. (2018) Theorem 5.1 ($D = 1$)) Let $f_* : [-M, M]^p \rightarrow \mathcal{Y}$ be a continuous function and $g_* : \mathcal{Y}^2 \rightarrow \mathbb{R}$ be a PD kernel for some closed set $\mathcal{Y} \subset \mathbb{R}^{K^*}$ and some $K^*, M > 0$. $\sigma(\cdot)$ is ReLU or activation function which is non-constant, continuous, bounded, and monotonically-increasing. Then, for arbitrary $\varepsilon > 0$, by specifying sufficiently large $K \in \mathbb{N}, T = T(K) \in \mathbb{N}$, there exist $\mathbf{A} \in \mathbb{R}^{K \times p}, \mathbf{B} \in \mathbb{R}^{T \times p}, \mathbf{c} \in \mathbb{R}^T$ such that

$$\left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle \right| < \varepsilon$$

for all $(\mathbf{x}, \mathbf{x}') \in [-M, M]^{2p}$, where $f_\psi(\mathbf{x}) = \mathbf{A}\sigma(\mathbf{B}\mathbf{x} + \mathbf{c})$ is a two-layer neural network with T hidden units and K outputs and $\sigma(\mathbf{x})$ is element-wise $\sigma(\cdot)$ function.

The proof of Theorem 3.1 is based on the expansion $g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) = \sum_{k=1}^\infty \lambda_k \tilde{\eta}_k(f_*(\mathbf{x})) \tilde{\eta}_k(f_*(\mathbf{x}'))$, where $\tilde{\eta}_1, \tilde{\eta}_2, \dots$ are eigenfunctions of g_* whose eigenvalues are $\lambda_1 \geq \lambda_2 \geq \dots \geq 0$. This expansion (a.k.a. Mercer's theorem) indicates with a vector-valued function $\boldsymbol{\eta}_K(\mathbf{x}) := (\lambda_1^{1/2} \tilde{\eta}_1(f_*(\mathbf{x})), \dots, \lambda_K^{1/2} \tilde{\eta}_K(f_*(\mathbf{x})))$ that

$$\langle \boldsymbol{\eta}_K(\mathbf{x}), \boldsymbol{\eta}_K(\mathbf{x}') \rangle \rightarrow g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')), \quad K \rightarrow \infty,$$

for all \mathbf{x}, \mathbf{x}' . Considering a vector-valued NN $f_\psi : \mathbb{R}^p \rightarrow \mathbb{R}^K$ that approximates $\boldsymbol{\eta}_K$, the IPS $\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle \approx$

$\langle \eta_K(\mathbf{x}), \eta_K(\mathbf{x}') \rangle$ converges to $g_*(f_*(\mathbf{x}), f_*(\mathbf{x}'))$ as $K \rightarrow \infty$, thus proving the assertion.

Unlike Mercer’s theorem indicating only the existence of the feature map η_K , Theorem 3.1 shows that it can be implemented as a neural network f_ψ so that the IPS $\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle$ eventually approximates the PD similarity $g_*(f_*(\mathbf{x}), f_*(\mathbf{x}'))$ arbitrary well.

4. CPD similarities

Theorem 3.1 shows that IPS approximates any PD similarities arbitrary well. However, similarities in general are not always PD. To deal with non-PD similarities, we consider a class of similarities based on Conditionally PD (CPD) kernels (Berg et al., 1984; Schölkopf, 2001) which include PD kernels as special cases. We then extend IPS to approximate CPD similarities. Since we know that IPS has nice properties such as “linguistic regularities” of feature vector \mathbf{y} , our consideration will be focused on similarity models with kernels based on inner product. In fact, according to the UAT applied to the whole $h(\mathbf{x}, \mathbf{x}')$, a NN of the form $f_\psi(\mathbf{x}, \mathbf{x}')$ approximates any similarities arbitrary well, but we do *not* attempt such an approach *without* kernels based on inner product.

The remaining of this section is organized as follows. In Section 4.1, we point out the fundamental limitation of IPS to approximate a non-PD similarity. In Section 4.2, we define CPD kernels with some examples. In Section 4.3, we propose a novel model named Shifted IPS (SIPS), by extending the IPS model. In Section 4.4, we give interpretations of SIPS and its simpler variant C-SIPS. In Section 4.5, we prove that SIPS approximates CPD similarities arbitrary well.

4.1. Fundamental limitation of IPS

Let us consider the negative squared distance (NSD) $g(\mathbf{y}, \mathbf{y}') = -\|\mathbf{y} - \mathbf{y}'\|_2^2$ and the identity map $f(\mathbf{x}) = \mathbf{x}$. Then the similarity function

$$h(\mathbf{x}, \mathbf{x}') = g(f(\mathbf{x}), f(\mathbf{x}')) = -\|\mathbf{x} - \mathbf{x}'\|_2^2$$

defined on $\mathbb{R}^p \times \mathbb{R}^p$ is not PD but CPD, which is defined later in Section 4.2. Regarding the NSD similarity, Proposition 4.1 shows a strictly positive lower bound of approximation error for IPS.

Proposition 4.1 Let $\Phi(p, K)$ denote the set of all continuous maps from \mathbb{R}^p to \mathbb{R}^K . For all $M > 0, p, K \in \mathbb{N}$, we have

$$\inf_{\phi \in \Phi(p, K)} \frac{1}{(2M)^{2p}} \int_{[-M, M]^p} \int_{[-M, M]^p} \left| -\|\mathbf{x} - \mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle \right| d\mathbf{x} d\mathbf{x}' \geq \frac{2pM^2}{3}.$$

The proof is in Supplement B.1.

Since $\Phi(p, K)$ represents the set of arbitrary continuous maps including neural networks, Proposition 4.1 indicates that IPS does not approximate NSD similarity arbitrary well, even if NN has a huge amount of hidden units with sufficiently large output dimension.

4.2. CPD kernels and similarities

Here, we introduce similarities based on Conditionally PD (CPD) kernels (Berg et al., 1984; Schölkopf, 2001) to consider non-PD similarities which IPS does not approximate arbitrary well. We first define CPD kernels.

Definition 4.1 A kernel g on \mathcal{Y}^2 is called *Conditionally PD (CPD)* if satisfying $\sum_{i=1}^n \sum_{j=1}^n c_i c_j g(\mathbf{y}_i, \mathbf{y}_j) \geq 0$ for arbitrary $c_1, c_2, \dots, c_n \in \mathbb{R}, \mathbf{y}_1, \mathbf{y}_2, \dots, \mathbf{y}_n \in \mathcal{Y}$ with the constraint $\sum_{i=1}^n c_i = 0$.

The difference between the definitions of CPD and PD kernels is whether it imposes the constraint $\sum_{i=1}^n c_i = 0$ or not. According to these definitions, CPD kernels include PD kernels as special cases. For a CPD kernel g , the similarity h is also a CPD kernel on \mathcal{X}^2 .

A simple example of CPD kernel is $g(\mathbf{y}, \mathbf{y}') = -\|\mathbf{y} - \mathbf{y}'\|_2^\alpha$ for $0 < \alpha \leq 2$ defined on $\mathbb{R}^K \times \mathbb{R}^K$. Other examples are $-(\sin(y - y'))^2$ and $-\mathbf{1}_{(0, \infty)}(y + y')$ on $\mathbb{R} \times \mathbb{R}$. CPD-ness is a well-established concept with interesting properties (Berg et al., 1984): For any function $u(\cdot)$, $g(\mathbf{y}, \mathbf{y}') = u(\mathbf{y}) + u(\mathbf{y}')$ is CPD. Constants are CPD. The sum of two CPD kernels is also CPD. For CPD kernels g with $g(\mathbf{y}, \mathbf{y}') \leq 0$, CPD-ness holds for $-(-g)^\alpha$ ($\alpha \in (0, 1]$) and $-\log(1 - g)$.

Example 4.1 (Poincaré distance) Let $B^K := \{\mathbf{y} \in \mathbb{R}^K \mid \|\mathbf{y}\|_2 < 1\}$ be a K -dimensional open unit ball and define a distance between $\mathbf{y}, \mathbf{y}' \in B^K$ as

$$d_{\text{Poincaré}}(\mathbf{y}, \mathbf{y}') := \cosh^{-1} \left(1 + 2 \frac{\|\mathbf{y} - \mathbf{y}'\|_2^2}{(1 - \|\mathbf{y}\|_2^2)(1 - \|\mathbf{y}'\|_2^2)} \right),$$

where $\cosh^{-1}(z) = \log(z + \sqrt{z^2 - 1})$. Considering the setting of Section 2 with 1-hot data vectors, Poincaré embedding (Nickel and Kiela, 2017) learns parameters \mathbf{y}_i , $i = 1, \dots, n$, by fitting $\sigma(-d_{\text{Poincaré}}(\mathbf{y}_i, \mathbf{y}_j))$ to the observed $w_{ij} \in \{0, 1\}$.

Interestingly, negative Poincaré distance is proved to be CPD in Faraut and Harzallah (1974, Corollary 7.4).

Proposition 4.2 $-d_{\text{Poincaré}}$ is CPD on $B^K \times B^K$.

It is strictly CPD in the sense that $-d_{\text{Poincaré}}$ is not PD. A counter-example of PD-ness is, for example, $n = 2, K = 2, c_1 = c_2 = 1, \mathbf{y}_1 = (1/2, 1/2), \mathbf{y}_2 = (0, 0) \in B^2$.

Another interesting example of CPD kernels is negative Wasserstein distance.

Example 4.2 (Wasserstein distance) For $q \in (0, \infty)$, let Z be a metric space endowed with a metric d_Z , which we call as “ground distance”. Let \mathcal{Y} be the space of all measures μ on Z satisfying $\int_Z d_Z(z, z_0) d\mu(z) < \infty$ for all $z_0 \in Z$. The q -Wasserstein distance between y, y' is defined as

$$d_W^{(q)}(y, y') := \left(\inf_{\pi \in \Pi(y, y')} \iint_{Z \times Z} d_Z(z, z')^q d\pi(z, z') \right)^{1/q}.$$

Here, $\Pi(y, y')$ is the set of joint probability measures on $Z \times Z$ having marginals y, y' . Wasserstein distance is used for a broad range of methods, such as Generative Adversarial Networks (Arjovsky et al., 2017) and AutoEncoder (Tolstikhin et al., 2018).

With some assumptions, negative Wasserstein distance is proved to be CPD.

Proposition 4.3 $-d_W^{(1)}$ is CPD on \mathcal{Y}^2 if $-d_Z$ is CPD on Z^2 . $-d_W^{(2)}$ is CPD on \mathcal{Y}^2 if Z is a subset of \mathbb{R} .

$-d_W^{(1)}$ is known as the negative earth mover’s distance, and its CPD-ness is discussed in Gardner et al. (2017). The CPD-ness of $-d_W^{(2)}$ is shown in Kolouri et al. (2016, Corollary 1).

Therefore negative Poincaré distance and negative Wasserstein distance are CPD kernels. In the following section, we propose a novel model that approximates any CPD similarities arbitrary well.

4.3. Proposed models

For extending IPS model given in eq. (2), we propose a novel model

$$h(x_i, x_j) = \langle f_\psi(x_i), f_\psi(x_j) \rangle + u_\xi(x_i) + u_\xi(x_j), \quad (3)$$

where $f_\psi : \mathbb{R}^p \rightarrow \mathbb{R}^K$ and $u_\xi : \mathbb{R}^p \rightarrow \mathbb{R}$ are neural networks whose parameter matrices are ψ and ξ , respectively. We call (3) as Shifted IPS (SIPS) model, because the inner product $\langle f_\psi(x_i), f_\psi(x_j) \rangle$ is shifted by the offset $u_\xi(x_i) + u_\xi(x_j)$. Later, we show in Theorem 4.1 that SIPS approximates any CPD kernels arbitrary well.

We also consider a special case of SIPS. By assuming $u_\xi(x) = -\gamma/2$ for all x , SIPS reduces to

$$h(x_i, x_j) = \langle f_\psi(x_i), f_\psi(x_j) \rangle - \gamma, \quad (4)$$

where $\gamma \geq 0$ is a parameter to be estimated. We call (4) as Constantly-Shifted IPS (C-SIPS) model.

If we have no attributes, we use 1-hot vectors for x_i in \mathbb{R}^n instead, and $f_\psi(x_i) = y_i \in \mathbb{R}^K$, $u_\xi(x_i) = u_i \in \mathbb{R}$

are model parameters. Then SIPS reduces to the matrix decomposition model with biases

$$h(x_i, x_j) = \langle y_i, y_j \rangle + u_i + u_j. \quad (5)$$

This model is widely used for recommender systems (Koren et al., 2009) and word vectors (Pennington et al., 2014), and SIPS is considered as its generalization.

4.4. Interpretation of SIPS and C-SIPS

Here we illustrate the interpretation of the proposed models by returning back to the setting in Section 2. We consider a simple generative model of independent Poisson distribution with mean parameter $E(w_{ij}) = \exp(h(x_i, x_j))$. Then SIPS gives a generative model

$$w_{ij} \stackrel{\text{indep.}}{\sim} \text{Po} \left(\beta(x_i) \beta(x_j) \exp(\langle f_\psi(x_i), f_\psi(x_j) \rangle) \right), \quad (6)$$

where $\beta(x) := \exp(u_\psi(x)) > 0$. Since $\beta(x)$ can be regarded as the “importance weight” of data vector x , SIPS naturally incorporates the weight function $\beta(x)$ to probabilistic models used in a broad range of existing methods. Similarly, C-SIPS gives a generative model

$$w_{ij} \stackrel{\text{indep.}}{\sim} \text{Po} \left(\alpha \exp(\langle f_\psi(x_i), f_\psi(x_j) \rangle) \right), \quad (7)$$

where $\alpha := \exp(-\gamma) > 0$ regulates the sparseness of $\{w_{ij}\}$. The generative model (7) is already proposed as 1-view PMvGE (Okuno et al., 2018).

It was shown in Supplement C of Okuno et al. (2018) that PMvGE (based on C-SIPS) approximates CDMCA when w_{ij} is replaced by δ_{ij} in the constraint (8) therein, and this result can be extended so that PMvGE with SIPS approximates the original CDMCA using w_{ij} in the constraint.

4.5. Representation theorems

Theorem 4.1 below shows that SIPS given in eq. (3) approximates any CPD similarities arbitrary well and thus it overcomes the fundamental limitation of IPS. Theorem 4.2 proves that C-SIPS given in eq. (4) also approximates CPD similarities in a weaker sense.

Theorem 4.1 (Representation theorem for SIPS) Let $f_* : [-M, M]^p \rightarrow \mathcal{Y}$ be a continuous function and $g_* : \mathcal{Y}^2 \rightarrow \mathbb{R}$ be a CPD kernel for some closed set $\mathcal{Y} \subset \mathbb{R}^{K^*}$ and some $K^*, M > 0$. $\sigma(\cdot)$ is ReLU or activation function which is non-constant, continuous, bounded, and monotonically-increasing. Then, for arbitrary $\varepsilon > 0$, by specifying sufficiently large $K \in \mathbb{N}, T = T(K), T' \in \mathbb{N}$, there exist $A \in \mathbb{R}^{K \times T}, B \in \mathbb{R}^{T \times p}, c \in \mathbb{R}^T, e \in$

$\mathbb{R}^{T'}$, $\mathbf{F} \in \mathbb{R}^{T' \times p}$, $\mathbf{o} \in \mathbb{R}^{T'}$ such that

$$\left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - (\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle + u_\xi(\mathbf{x}) + u_\xi(\mathbf{x}')) \right| < \varepsilon$$

for all $(\mathbf{x}, \mathbf{x}') \in [-M, M]^{2p}$, where $f_\psi(\mathbf{x}) = \mathbf{A}\sigma(\mathbf{B}\mathbf{x} + \mathbf{c}) \in \mathbb{R}^K$ and $u_\xi(\mathbf{x}) = \langle \mathbf{e}, \sigma(\mathbf{F}\mathbf{x} + \mathbf{o}) \rangle \in \mathbb{R}$ are two-layer neural networks with T and T' hidden units, respectively, and $\sigma(\cdot)$ is element-wise $\sigma(\cdot)$ function.

The proof stands on Lemma 2.1 in Berg et al. (1984), which indicates the equivalence between CPD-ness of $g_*(\mathbf{y}, \mathbf{y}')$ and PD-ness of $g_0(\mathbf{y}, \mathbf{y}') := g_*(\mathbf{y}, \mathbf{y}') - g_*(\mathbf{y}, \mathbf{y}_0) - g_*(\mathbf{y}_0, \mathbf{y}') + g_*(\mathbf{y}_0, \mathbf{y}_0)$ with fixed $\mathbf{y}_0 \in \mathcal{Y}$. Here, we consider a NN $f_\psi(\mathbf{x})$ such that $\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle$ approximates $g_0(f_*(\mathbf{x}), f_*(\mathbf{x}'))$. Such a NN f_ψ is guaranteed to exist, due to Theorem 3.1 and the PD-ness of g_0 . By considering another NN $u_\xi(\mathbf{x})$ that approximates $g_*(f_*(\mathbf{x}), \mathbf{y}_0) - \frac{1}{2}g_*(\mathbf{y}_0, \mathbf{y}_0)$, we have $g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) = g_0(f_*(\mathbf{x}), f_*(\mathbf{x}')) + g_*(f_*(\mathbf{x}), \mathbf{y}_0) + g_*(\mathbf{y}_0, f_*(\mathbf{x}')) - g_*(\mathbf{y}_0, \mathbf{y}_0) \approx \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle + u_\xi(\mathbf{x}) + u_\xi(\mathbf{x}')$, thus proving the assertion. The detailed proof is in Supplement B.2.

Theorem 4.2 (Representation theorem for C-SIPS)

Symbols and assumptions are the same as those of Theorem 4.1 but \mathcal{Y} is a compact set. For arbitrary $\varepsilon > 0$, by specifying sufficiently large $K \in \mathbb{N}$, $T = T(K) \in \mathbb{N}$, $r > 0$, there exist $\mathbf{A} \in \mathbb{R}^{K \times T}$, $\mathbf{B} \in \mathbb{R}^{T \times p}$, $\mathbf{c} \in \mathbb{R}^T$, $\gamma = O(r^2)$ such that

$$\left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - (\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle - \gamma) \right| < \varepsilon + O(r^{-2})$$

for all $(\mathbf{x}, \mathbf{x}') \in [-M, M]^{2p}$, where $f_\psi(\mathbf{x}) = \mathbf{A}\sigma(\mathbf{B}\mathbf{x} + \mathbf{c}) \in \mathbb{R}^K$ is a two-layer neural network with T hidden units.

The proof is in Supplement B.3.

For reducing the approximation error of order $O(r^{-2})$ of C-SIPS in Theorem 4.2, we will have a large r . Then large $\gamma = O(r^2)$ value leads to unstable computation of NN as shown in Section 5. Conversely, a small r increases the upper bound of the approximation error. Thus, if available, we prefer SIPS in terms of both computational stability and small approximation error.

5. Numerical experiment

In this section, we conduct a numerical experiment on synthetic data to compare existing model (IPS), our novel model (SIPS), and its simpler variant (C-SIPS). The experiment settings are explained in Section 5.1, and the results are shown in Section 5.2.

5.1. Settings

Kernels: Three types of kernels are considered as $g_*(\mathbf{y}, \mathbf{y}')$ for generating simulation data: (i) cosine similarity $\langle \frac{\mathbf{y}}{\|\mathbf{y}\|_2}, \frac{\mathbf{y}'}{\|\mathbf{y}'\|_2} \rangle$, (ii) negative squared distance $-\|\mathbf{y} - \mathbf{y}'\|_2^2$, (iii) negative Poincaré distance $-d_{\text{Poincaré}}(\mathbf{y}, \mathbf{y}')$ defined in Example 4.1. These kernels are PD, CPD, and CPD, in this order.

Synthetic data: For kernels (i) and (ii), data vectors $\{\mathbf{x}_i\} \subset \mathbb{R}^p$ are generated independently by uniform distribution over $[-2, 2]^p$ with $p = 5$. Feature vectors of dimensions $K^* = 4$ are computed by a continuous map $f_*(\mathbf{x}) := (x_1, \cos x_2, \exp(-x_3), \sin(x_4 - x_5)) \in \mathbb{R}^4$, and similarity values are given as

$$h_{ij}^* := g_*(f_*(\mathbf{x}_i), f_*(\mathbf{x}_j)) \quad (8)$$

for all $1 \leq i, j \leq n$. For kernel (iii), data vectors $\{\mathbf{x}_i\} \subset \mathbb{R}^p$ are generated by $\mathbf{x}_i := r_i \tilde{\mathbf{x}}_i / \|\tilde{\mathbf{x}}_i\|_2$ with $\tilde{\mathbf{x}}_i \stackrel{\text{i.i.d.}}{\sim} N_p(\mathbf{0}, \mathbf{I})$, $r_i \stackrel{\text{i.i.d.}}{\sim} B(5, 1)$, so that $\|\mathbf{x}_i\|_2 < 1$. $B(\alpha, \beta)$ is the beta distribution with parameters $\alpha, \beta > 0$, and $N_p(\mathbf{0}, \mathbf{I})$ represents the p -variate standard normal distribution. Feature vectors of dimensions $K^* = p = 5$ are computed by the identity map $f_*(\mathbf{x}) = \mathbf{x}$, and similarity values $\{h_{ij}^*\}$ are given as (8). In order to simplify the experiment just for illustrating the differences of similarity models, we do not generate $\{w_{ij}\}$ and treat $\{h_{ij}^*\}$ as observed samples. For each setting (i)-(iii), we generate $n = 1,000$ training samples and $n = 3,000$ test samples.

NN architecture: Three models are considered for similarity function: (i) IPS (existing) defined in eq. (2), (ii) SIPS (proposed) defined in eq. (3), (iii) C-SIPS (the simpler variant of SIPS) defined in eq. (4). For each model, $f_\psi : \mathbb{R}^p \rightarrow \mathbb{R}^K$, $u_\xi : \mathbb{R}^p \rightarrow \mathbb{R}$ are two-layer NNs with T hidden units and ReLU activations. We denote T as “#units”.

Training: For training the three similarity models, we minimize the mean squared error between h_{ij}^* and $h(\mathbf{x}_i, \mathbf{x}_j)$. The loss functions are ℓ^2 -regularized with a coefficient 0.01, and they are minimized by 10,000 iterations of full-batch gradient descent. The learning rate is starting from 0.001 and attenuated by 1/10 for every 100 iterations.

Evaluation: Neural networks are trained with 1,000 samples, and they are evaluated by the Mean Squared Prediction Error (MSPE) with respect to 3,000 test samples. We compute the average and the standard deviation of 5 runs for each setting.

5.2. Result

In the following plots, black, blue, and red lines represent the MSPE of IPS (Existing), SIPS (Proposed), and its simpler variant C-SIPS, respectively.

Table 1 shows the MSPE for the cosine similarity. Error bar shows the standard deviation ($=1\sigma$). In accordance with the theory, all of IPS, SIPS, and C-SIPS show the good approximation performance since cosine similarity is PD. Interestingly, output dimension $K = 3$ is sufficient to approximate the function $g_*(f_*(x), f_*(x'))$ regardless of the number of hidden units.

Table 2 shows the MSPE for the negative squared distance (NSD). In accordance with the theory, NSD is well approximated by SIPS but not by IPS due to its CPD-ness. The approximation error of SIPS with $m = 1,000$ becomes almost zero at $K = 4$ as expected from $K^* = 4$. In theory, C-SIPS can approximate CPD kernels, but it does not perform well in this setting. Since C-SIPS requires the parameter γ to be very large for minimizing the approximation error, its computation becomes unstable in some cases.

Table 3 shows the MSPE for $-d_{\text{Poincaré}}$. In accordance with the theory, the generated similarity values are well approximated by both SIPS and C-SIPS, but not by IPS due to the CPD-ness. The approximation error of SIPS and C-SIPS with $m \geq 100$ becomes almost zero at $K = 5$ as expected from $K^* = 5$. However, the standard deviation of MSPE for C-SIPS is large with $T = 10$.

Table 1. Cosine similarity: $\langle \frac{\mathbf{y}}{\|\mathbf{y}\|_2}, \frac{\mathbf{y}'}{\|\mathbf{y}'\|_2} \rangle$

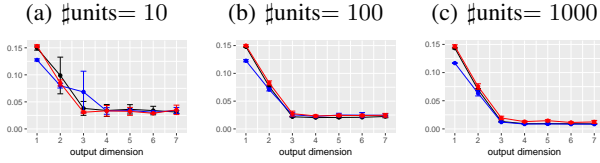


Table 2. Negative squared distance: $-\|\mathbf{y} - \mathbf{y}'\|_2^2$


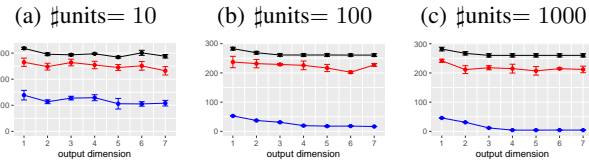


Table 3. Negative Poincaré distance: $-d_{\text{Poincaré}}(\mathbf{y}, \mathbf{y}')$

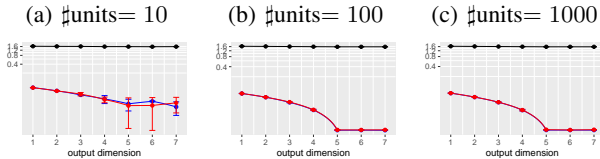

6. Conclusion

In this paper, we have considered the representation power of inner-product similarity (IPS), Shifted IPS (SIPS), and

Constantly-SIPS (C-SIPS). We have first pointed out the fundamental limitation of IPS to approximate non-PD similarities. To deal with such non-PD similarities, we have considered similarities based on CPD kernels, which include PD kernels as special cases, and we have proposed a novel model named SIPS by extending IPS. Then we proved that SIPS is capable of approximating any CPD similarities arbitrary well. Since negative Poincaré distance and negative Wasserstein distance are CPD, the similarities based on these distances can be approximated by SIPS. We have performed numerical experiments to show the superiority of SIPS over IPS.

A. Further extension beyond CPD: General similarities

CPD includes a broad range of kernels, yet there exists a variety of non-CPD kernels. One example is Epanechnikov kernel $g(\mathbf{y}, \mathbf{y}') := (1 - \|\mathbf{y} - \mathbf{y}'\|_2^2) \mathbf{1}(\|\mathbf{y} - \mathbf{y}'\|_2 \leq 1)$ defined on $\mathbb{R}^p \times \mathbb{R}^p$. To approximate similarities based on such non-CPD kernels, we propose an inner-product based model that has a high representation capability. Although this model is not always easy to compute due to the excessive degrees of freedom, the model is, in theory, shown to be capable of approximating more general kernels that are considered in Ong et al. (2004).

A.1. Proposed model

Let us consider a similarity $h(\mathbf{x}, \mathbf{x}') = g_*(f_*(\mathbf{x}), f_*(\mathbf{x}'))$ with any kernel $g_* : \mathbb{R}^{2K^*} \rightarrow \mathbb{R}$ and a continuous map $f_* : \mathbb{R}^p \rightarrow \mathbb{R}^{K^*}$. To approximate it, we consider a similarity model

$$h(\mathbf{x}_i, \mathbf{x}_j) = \langle f_\psi(\mathbf{x}_i), f_\psi(\mathbf{x}_j) \rangle - \langle r_\zeta(\mathbf{x}_i), r_\zeta(\mathbf{x}_j) \rangle, \quad (9)$$

where $f_\psi : \mathbb{R}^p \rightarrow \mathbb{R}^{K_+}$ and $r_\zeta : \mathbb{R}^p \rightarrow \mathbb{R}^{K_-}$ are neural networks whose parameters are ψ and ζ , respectively. Since the kernel $g(\mathbf{y}, \mathbf{y}') = \langle \mathbf{y}_+, \mathbf{y}'_+ \rangle - \langle \mathbf{y}_-, \mathbf{y}'_- \rangle$ with respect to $\mathbf{y} = (\mathbf{y}_+, \mathbf{y}_-) \in \mathbb{R}^{K_+ + K_-}$ is known as the inner product in Minkowski space (Naber, 2012), we call (9) as Minkowski IPS (MIPS) model.

By replacing $f_\psi(\mathbf{x})$ and $r_\zeta(\mathbf{x})$ with $(f_\psi(\mathbf{x})^\top, u_\xi(\mathbf{x}), 1)^\top$ and $u_\xi(\mathbf{x}) - 1 \in \mathbb{R}$, respectively, MIPS reduces to SIPS defined in eq. (3), meaning that MIPS includes SIPS as a special case. Therefore, MIPS approximates any CPD similarities arbitrary well. Further, we prove that MIPS approximates more general similarities arbitrary well.

A.2. Representation theorem

Theorem A.1 (Representation theorem for MIPS)

Symbols and assumptions are the same as those of Theorem 4.1 but g_* is a general kernel, which is only required to be dominated by some PD kernels g (i.e., $g - g_*$

is PD). For arbitrary $\varepsilon > 0$, by specifying sufficiently large $K_+, K_- \in \mathbb{N}, T_+ = T_+(K_+), T_- = T_-(K_-) \in \mathbb{N}$, there exist $\mathbf{A} \in \mathbb{R}^{K_+ \times T_+}, \mathbf{B} \in \mathbb{R}^{T_+ \times p}, \mathbf{c} \in \mathbb{R}^{T_+}, \mathbf{E} \in \mathbb{R}^{K_- \times T_-}, \mathbf{F} \in \mathbb{R}^{T_- \times p}, \mathbf{o} \in \mathbb{R}^{T_-}$ such that

$$\left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - (\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle - \langle r_\zeta(\mathbf{x}), r_\zeta(\mathbf{x}') \rangle) \right| < \varepsilon$$

for all $(\mathbf{x}, \mathbf{x}') \in [-M, M]^{2p}$, where $f_\psi(\mathbf{x}) = \mathbf{A}\sigma(\mathbf{B}\mathbf{x} + \mathbf{c}) \in \mathbb{R}^{K_+}$ and $r_\zeta(\mathbf{x}) = \mathbf{E}\sigma(\mathbf{F}\mathbf{x} + \mathbf{o}) \in \mathbb{R}^{K_-}$ are two-layer neural networks with T_+ and T_- hidden units, respectively, and $\sigma(\mathbf{x})$ is element-wise $\sigma(\cdot)$ function.

In theorem A.1, the kernel g_* is only required to be dominated by some PD kernels, thus g_* is not limited to CPD. Our proof for Theorem A.1 is based on Ong et al. (2004, Proposition 7). This proposition indicates that the kernel g_* dominated by some PD kernels is decomposed as the difference of two PD kernels g_+, g_- by considering Krein space consisting of two Hilbert spaces. Therefore, we have $g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) = g_+(f_*(\mathbf{x}), f_*(\mathbf{x}')) - g_-(f_*(\mathbf{x}), f_*(\mathbf{x}'))$. Because of the PD-ness of g_+ and g_- , Theorem 3.1 guarantees the existence of NNs f_ψ, r_ζ such that $\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle$ and $\langle r_\zeta(\mathbf{x}), r_\zeta(\mathbf{x}') \rangle$, respectively, approximate $g_+(f_*(\mathbf{x}), f_*(\mathbf{x}'))$ and $g_-(f_*(\mathbf{x}), f_*(\mathbf{x}'))$ arbitrary well. Thus proving the theorem. This idea for the proof is also interpreted as a generalized Mercer's theorem for Krein space (there is a similar attempt in Chen et al. (2008)) by applying Mercer's theorem to the two Hilbert spaces of Ong et al. (2004, Proposition 7).

A.3. Deep Gaussian embedding

To show another example of non-CPD kernels, Deep Gaussian embedding (Bojchevski and Günnemann, 2018) is reviewed below.

Example A.1 (Deep Gaussian embedding) Let \mathcal{Y} be a set of distributions over a set $\mathcal{Z} \subset \mathbb{R}^q$. Kullback-Leibler divergence (Kullback and Leibler, 1951) between two distributions $\mathbf{y}, \mathbf{y}' \in \mathcal{Y}$ is defined by

$$d_{\text{KL}}(\mathbf{y}, \mathbf{y}') := \int_{\mathcal{Z}} y(\mathbf{z}) \log \frac{y(\mathbf{z})}{y'(\mathbf{z})} d\mathbf{z},$$

where $y(\mathbf{z})$ is the probability density function corresponding to the distribution $\mathbf{y} \in \mathcal{Y}$.

With the same setting in Section 2, Deep Gaussian embedding (Bojchevski and Günnemann, 2018), which incorporates neural networks into Gaussian embedding (Vilnis and McCallum, 2015), learns two neural networks $\mu : \mathbb{R}^p \rightarrow \mathbb{R}^q, \Sigma : \mathbb{R}^p \rightarrow \mathbb{R}_+^{q \times q}$ so that the function $\sigma(-d_{\text{KL}}(\mathcal{N}_q(\mu(\mathbf{x}_i), \Sigma(\mathbf{x}_i)), \mathcal{N}_q(\mu(\mathbf{x}_j), \Sigma(\mathbf{x}_j))))$ approximates $E(w_{ij} | \mathbf{x}_i, \mathbf{x}_j)$. $\mathbb{R}_+^{q \times q}$ is a set of all $q \times q$ positive definite matrices and $\mathcal{N}_q(\mu, \Sigma)$ represents the q -variate normal

distribution with mean μ and variance-covariance matrix Σ .

Unlike typical graph embedding methods, deep Gaussian embedding maps data vectors to distributions as

$$\mathbb{R}^p \ni \mathbf{x} \mapsto \mathbf{y} := \mathcal{N}_q(\mu(\mathbf{x}), \Sigma(\mathbf{x})) \in \mathcal{Y},$$

where \mathbf{y} is also interpreted as a vector of dimension $K = q + q(q+1)/2$ by considering the number of parameters in μ and Σ . Our concern is to clarify if d_{KL} is CPD. However, in the first place, d_{KL} is not a kernel since it is not symmetric. In order to make it symmetric, Kullback-Leibler divergence may be replaced with Jeffrey's divergence (Kullback and Leibler, 1951)

$$d_{\text{Jeff}}(\mathbf{y}, \mathbf{y}') := d_{\text{KL}}(\mathbf{y}, \mathbf{y}') + d_{\text{KL}}(\mathbf{y}', \mathbf{y}).$$

Although $-d_{\text{Jeff}}$ is a kernel, it is not CPD as shown in Proposition A.1.

Proposition A.1 $-d_{\text{Jeff}}$ is not CPD on $\tilde{\mathcal{P}}_K^2$, where $\tilde{\mathcal{P}}_K$ represents the set of all K -variate normal distributions.

A counterexample of CPD-ness is, $n = 3, q = 2, c_1 = -2/5, c_2 = -3/5, c_3 = 1, \mathbf{y}_i = \mathcal{N}_2(\mu_i, \Sigma_i) \in \mathcal{Y} (i = 1, 2, 3), \mu_1 = (2, 1)^\top, \mu_2 = (-1, 1)^\top, \mu_3 = (1, 2)^\top, \Sigma_1 = \text{diag}(1/10, 1), \Sigma_2 = \text{diag}(1/2, 1), \Sigma_3 = \text{diag}(1, 1)$.

We are yet studying the nature of deep Gaussian embedding. However, as Proposition A.1 shows, negative Jeffrey's divergence used in the embedding is already proved to be non-CPD; SIPS cannot approximate it. MIPS model is required for approximating such non-CPD kernels. Thus we are currently trying to reveal to what extent MIPS applies, by classifying whether each of non-CPD kernels including negative Jeffrey's divergence satisfies the assumption on the kernel g_* in Theorem A.1.

Acknowledgement

We would like to thank Tetsuya Hada for helpful discussions. This work was partially supported by JSPS KAKENHI grant 16H02789 to HS and 17J03623 to AO.

References

- Andrew, G., Arora, R., Bilmes, J., and Livescu, K. (2013). Deep Canonical Correlation Analysis. In *Proceedings of the International Conference on Machine Learning (ICML)*, pages 1247–1255.
- Arjovsky, M., Chintala, S., and Bottou, L. (2017). Wasserstein GAN. *arXiv preprint arXiv:1701.07875*.

- Berg, C., Christensen, J., and Ressel, P. (1984). *Harmonic Analysis on Semigroups: Theory of Positive Definite and Related Functions*. Graduate Texts in Mathematics. Springer New York.
- Bojchevski, A. and Günnemann, S. (2018). Deep gaussian embedding of attributed graphs: Unsupervised inductive learning via ranking. In *Proceedings of the International Conference on Learning Representations (ICLR)*.
- Bromley, J., Guyon, I., LeCun, Y., Säckinger, E., and Shah, R. (1994). Signature verification using a "siamese" time delay neural network. In *Advances in neural information processing systems*, pages 737–744.
- Cai, H., Zheng, V. W., and Chang, K. (2018). A comprehensive survey of graph embedding: problems, techniques and applications. *IEEE Transactions on Knowledge and Data Engineering*.
- Chen, D.-G., Wang, H.-Y., and Tsang, E. C. (2008). Generalized Mercer theorem and its application to feature space related to indefinite kernels. In *Proceedings of the International Conference on Machine Learning and Cybernetics (ICMLC)*, volume 2, pages 774–777. IEEE.
- Cybenko, G. (1989). Approximation by Superpositions of a Sigmoidal Function. *Mathematics of Control, Signals, and Systems (MCSS)*, 2(4):303–314.
- Dai, Q., Li, Q., Tang, J., and Wang, D. (2018). Adversarial Network Embedding. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*.
- Faraut, J. and Harzallah, K. (1974). Distances hilbertiennes invariantes sur un espace homogène. In *Annales de l'institut Fourier*, volume 24, pages 171–217. Association des Annales de l'Institut Fourier.
- Funahashi, K.-I. (1989). On the approximate realization of continuous mappings by neural networks. *Neural Networks*, 2(3):183–192.
- Gardner, A., Duncan, C. A., Kanno, J., and Selmic, R. R. (2017). On the Definiteness of Earth Mover's Distance and Its Relation to Set Intersection. *IEEE Transactions on Cybernetics*.
- Grover, A. and Leskovec, J. (2016). node2vec: Scalable Feature Learning for Networks. In *Proceedings of the ACM International Conference on Knowledge Discovery and Data Mining (SIGKDD)*, pages 855–864. ACM.
- Hamilton, W. L., Ying, Z., and Leskovec, J. (2017). Inductive Representation Learning on Large Graphs. *Advances in Neural Information Processing Systems (NIPS)*, pages 1025–1035.
- He, X. and Niyogi, P. (2004). Locality Preserving Projections. In *Advances in Neural Information Processing Systems (NIPS)*, pages 153–160.
- Huang, Z., Shan, S., Zhang, H., Lao, S., and Chen, X. (2012). Cross-view Graph Embedding. In *Proceedings of the Asian Conference on Computer Vision (ACCV)*, pages 770–781.
- Kipf, T. N. and Welling, M. (2016). Variational Graph Auto-Encoders. *NIPS Workshop*.
- Kolouri, S., Zou, Y., and Rohde, G. K. (2016). Sliced Wasserstein kernels for probability distributions. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5258–5267.
- Koren, Y., Bell, R., and Volinsky, C. (2009). Matrix factorization techniques for recommender systems. *Computer*, (8):30–37.
- Kullback, S. and Leibler, R. A. (1951). On information and sufficiency. *The annals of mathematical statistics*, 22(1):79–86.
- Levy, O. and Goldberg, Y. (2014). Linguistic regularities in sparse and explicit word representations. In *Proceedings of the eighteenth conference on computational natural language learning*, pages 171–180.
- Mikolov, T., Sutskever, I., Chen, K., Corrado, G. S., and Dean, J. (2013a). Distributed Representations of Words and Phrases and their Compositionality. In *Advances in Neural Information Processing Systems (NIPS)*, pages 3111–3119.
- Mikolov, T., Yih, W.-t., and Zweig, G. (2013b). Linguistic regularities in continuous space word representations. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 746–751.
- Minh, H. Q., Niyogi, P., and Yao, Y. (2006). Mercer's Theorem, Feature Maps, and Smoothing. In *International Conference on Computational Learning Theory (COLT)*, pages 154–168. Springer.
- Naber, G. L. (2012). *The geometry of Minkowski spacetime: An introduction to the mathematics of the special theory of relativity*, volume 92. Springer Science & Business Media.
- Nickel, M. and Kiela, D. (2017). Poincaré embeddings for learning hierarchical representations. In *Advances in Neural Information Processing Systems (NIPS)*, pages 6341–6350.

- Okuno, A., Hada, T., and Shimodaira, H. (2018). A probabilistic framework for multi-view feature learning with many-to-many associations via neural networks. In *Proceedings of the International Conference on Machine Learning (ICML)*, pages 3885–3894.
- Ong, C. S., Mary, X., Canu, S., and Smola, A. J. (2004). Learning with non-positive kernels. In *Proceedings of the International Conference on Machine Learning (ICML)*, page 81. ACM.
- Pennington, J., Socher, R., and Manning, C. (2014). GloVe: Global Vectors for Word Representation. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1532–1543.
- Perozzi, B., Al-Rfou, R., and Skiena, S. (2014). DeepWalk: Online Learning of Social Representations. In *Proceedings of the ACM International Conference on Knowledge Discovery and Data mining (SIGKDD)*, pages 701–710. ACM.
- Sarkar, R. (2011). Low Distortion Delaunay Embedding of Trees in Hyperbolic Plane. In *International Symposium on Graph Drawing*, pages 355–366. Springer.
- Schölkopf, B. (2001). The kernel trick for distances. In *Advances in Neural Information Processing Systems (NIPS)*, pages 301–307.
- Shimodaira, H. (2016). Cross-validation of matching correlation analysis by resampling matching weights. *Neural Networks*, 75:126–140.
- Tang, J., Qu, M., Wang, M., Zhang, M., Yan, J., and Mei, Q. (2015). LINE: Large-scale Information Network Embedding. In *Proceedings of the International Conference on World Wide Web (WWW)*, pages 1067–1077.
- Telgarsky, M. (2017). Neural networks and rational functions. In *Proceedings of the International Conference on Machine Learning (ICML)*.
- Tolstikhin, I., Bousquet, O., Gelly, S., and Schoelkopf, B. (2018). Wasserstein Auto-Encoders. In *Proceedings of the International Conference on Representation Learning (ICLR)*.
- Vilnis, L. and McCallum, A. (2015). Word representations via gaussian embedding. In *Proceedings of the International Conference on Learning Representations (ICLR)*.
- Yan, S., Xu, D., Zhang, B., Zhang, H.-J., Yang, Q., and Lin, S. (2007). Graph Embedding and Extensions: A General Framework for Dimensionality Reduction. *IEEE transactions on Pattern Analysis and Machine Intelligence (PAMI)*, 29(1):40–51.
- Yarotsky, D. (2017). Error bounds for approximations with deep ReLU networks. *Neural Networks*, 94:103–114.
- Zhanga, D., Yinb, J., Zhuc, X., and Zhanga, C. (2017). User profile preserving social network embedding. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*.

Supplementary Material:

On a representation power of neural-network based graph embedding and beyond

B. Proofs

B.1. Proof of Proposition 4.1

With $v = (2M)^{2p}$ and $\int = \int_{[-M, M]^p}$, a lower-bound of $\frac{1}{v} \iint | -\|\mathbf{x} - \mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle | d\mathbf{x} d\mathbf{x}'$ is derived as

$$\begin{aligned} \frac{1}{v} \iint \left| -\|\mathbf{x} - \mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle \right| d\mathbf{x} d\mathbf{x}' &\geq \left| \frac{1}{v} \iint (-\|\mathbf{x} - \mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle) d\mathbf{x} d\mathbf{x}' \right| \\ &= \left| \frac{1}{v} \iint (2\langle \mathbf{x}, \mathbf{x}' \rangle - \|\mathbf{x}\|_2^2 - \|\mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle) d\mathbf{x} d\mathbf{x}' \right| \\ &= \left| \frac{1}{v} \left(2 \left\| \int \mathbf{x} d\mathbf{x} \right\|_2^2 - 2 \int d\mathbf{x} \int \|\mathbf{x}\|_2^2 d\mathbf{x} - \left\| \int \phi(\mathbf{x}) d\mathbf{x} \right\|_2^2 \right) \right|. \end{aligned}$$

The terms in the last formula are computed as $\int \mathbf{x} d\mathbf{x} = \mathbf{0}$, $\int d\mathbf{x} = (2M)^p$,

$$\int \|\mathbf{x}\|_2^2 d\mathbf{x} = \sum_{i=1}^p \int x_i^2 d\mathbf{x} = (2M)^{p-1} \sum_{i=1}^p \int_{-M}^M x_i^2 dx_i = (2M)^{p-1} \frac{2pM^3}{3} = (2M)^p \frac{pM^2}{3}.$$

Considering $\left\| \int \phi(\mathbf{x}) d\mathbf{x} \right\|_2^2 \geq 0$, we have

$$\frac{1}{v} \iint \left| -\|\mathbf{x} - \mathbf{x}'\|_2^2 - \langle \phi(\mathbf{x}), \phi(\mathbf{x}') \rangle \right| d\mathbf{x} d\mathbf{x}' \geq \frac{2}{v} \int d\mathbf{x} \int \|\mathbf{x}\|_2^2 d\mathbf{x} = \frac{2pM^2}{3}.$$

□

B.2. Proof of Theorem 4.1

Since $g_* : \mathcal{Y}^2 \rightarrow \mathbb{R}$ is a conditionally positive definite kernel on a compact set, Lemma 2.1 of [Berg et al. \(1984\)](#) indicates that

$$g_0(\mathbf{y}_*, \mathbf{y}'_*) := g_*(\mathbf{y}_*, \mathbf{y}'_*) - g_*(\mathbf{y}_*, \mathbf{y}_0) - g_*(\mathbf{y}_0, \mathbf{y}'_*) + g_*(\mathbf{y}_0, \mathbf{y}_0)$$

is positive definite for arbitrary $\mathbf{y}_0 \in \mathcal{Y}$. We fix \mathbf{y}_0 in the argument below. According to [Okuno et al. \(2018\)](#) Theorem 5.1 (Theorem 3.1 in this paper), we can specify a neural network $f_\psi(\mathbf{x})$ such that

$$\sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| g_0(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle \right| < \varepsilon_1$$

for any ε_1 . Next, let us consider a continuous function $r(\mathbf{x}) := g_*(f_*(\mathbf{x}), \mathbf{y}_0) - \frac{1}{2}g_*(\mathbf{y}_0, \mathbf{y}_0)$. It follows from the universal approximation theorem ([Cybenko, 1989](#); [Telgarsky, 2017](#)) that for any $\varepsilon_2 > 0$, there exists $T' \in \mathbb{N}$ such that

$$\sup_{\mathbf{x} \in [-M, M]^p} |r(\mathbf{x}) - u_{\xi}(\mathbf{x})| < \varepsilon_2.$$

Therefore, we have

$$\begin{aligned}
 & \sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \{\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle + u_\xi(\mathbf{x}) + u_\xi(\mathbf{x}')\} \right| \\
 &= \sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| (g_0(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle) \right. \\
 & \quad \left. + (r(\mathbf{x}) - u_\xi(\mathbf{x})) + (r(\mathbf{x}') - u_\xi(\mathbf{x}')) \right| \\
 &\leq \sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| (g_0(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle) \right| \\
 & \quad + \sup_{\mathbf{x} \in [-M, M]^p} |r(\mathbf{x}) - u_\xi(\mathbf{x})| + \sup_{\mathbf{x}' \in [-M, M]^p} |r(\mathbf{x}') - u_\xi(\mathbf{x}')| \\
 &< \varepsilon_1 + 2\varepsilon_2.
 \end{aligned}$$

By letting $\varepsilon_1 = \varepsilon/2, \varepsilon_2 = \varepsilon/4$, the last formula becomes smaller than ε , thus proving

$$\sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \{\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle + u_\xi(\mathbf{x}) + u_\xi(\mathbf{x}')\} \right| < \varepsilon.$$

□

B.3. Proof of Theorem 4.2

With fixed $\mathbf{y}_0 \in \mathcal{Y}$, it follows from [Berg et al. \(1984\)](#) Lemma 2.1 and CPD-ness of the kernel g_* that

$$g_0(\mathbf{y}, \mathbf{y}') := g_*(\mathbf{y}, \mathbf{y}') - g_*(\mathbf{y}, \mathbf{y}_0) - g_*(\mathbf{y}_0, \mathbf{y}') + g_*(\mathbf{y}_0, \mathbf{y}_0)$$

is PD. Since \mathcal{Y} is compact, we have $\sup_{\mathbf{y} \in \mathcal{Y}} |g_*(\mathbf{y}, \mathbf{y}_0)| = a^2$ is bounded. Let us take a sufficiently large $r > a$ and define $\tau(\mathbf{y}) := \sqrt{r^2 + g_*(\mathbf{y}, \mathbf{y}_0)}$. We consider a new kernel

$$g_1(\mathbf{y}, \mathbf{y}') := g_0(\mathbf{y}, \mathbf{y}') + 2\tau(\mathbf{y})\tau(\mathbf{y}').$$

Since both $g_0(\mathbf{y}, \mathbf{y}')$ and $\tau(\mathbf{y})\tau(\mathbf{y}')$ are PD, $g_1(\mathbf{y}, \mathbf{y}')$ is also PD. Applying Taylor's expansion $\sqrt{1+x} = 1 + x/2 + O(x^2)$, we have

$$\begin{aligned}
 \tau(\mathbf{y})\tau(\mathbf{y}') &= \sqrt{r^2 + g_*(\mathbf{y}, \mathbf{y}_0)} \sqrt{r^2 + g_*(\mathbf{y}', \mathbf{y}_0)} \\
 &= r^2 \sqrt{1 + g_*(\mathbf{y}, \mathbf{y}_0)/r^2} \sqrt{1 + g_*(\mathbf{y}', \mathbf{y}_0)/r^2} \\
 &= r^2 (1 + g_*(\mathbf{y}, \mathbf{y}_0)/2r^2 + O(r^{-4})) (1 + g_*(\mathbf{y}', \mathbf{y}_0)/2r^2 + O(r^{-4})) \\
 &= r^2 + \frac{1}{2}(g_*(\mathbf{y}, \mathbf{y}_0) + g_*(\mathbf{y}', \mathbf{y}_0)) + O(r^{-2}),
 \end{aligned}$$

thus proving

$$g_1(\mathbf{y}, \mathbf{y}') = g_0(\mathbf{y}, \mathbf{y}') + 2\tau(\mathbf{y})\tau(\mathbf{y}') = g_*(\mathbf{y}, \mathbf{y}') + g_*(\mathbf{y}_0, \mathbf{y}_0) + 2r^2 + O(r^{-2}).$$

Let us define $\gamma := g_*(\mathbf{y}_0, \mathbf{y}_0) + 2r^2 = O(r^2)$. Considering the PD-ness of $g_1(\mathbf{y}, \mathbf{y}') = g_*(\mathbf{y}, \mathbf{y}') + \gamma + O(r^{-2})$, we have

$$\begin{aligned}
 & \sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| g_*(f_*(\mathbf{x}), f_*(\mathbf{x}')) - (\langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle - \gamma) \right| \\
 &= \sup_{\mathbf{x}, \mathbf{x}' \in [-M, M]^p} \left| g_1(f_*(\mathbf{x}), f_*(\mathbf{x}')) - \langle f_\psi(\mathbf{x}), f_\psi(\mathbf{x}') \rangle \right| + O(r^{-2}) \\
 &\leq \varepsilon + O(r^{-2}).
 \end{aligned}$$

□

References

- Berg, C., Christensen, J., and Ressel, P. (1984). *Harmonic Analysis on Semigroups: Theory of Positive Definite and Related Functions*. Graduate Texts in Mathematics. Springer New York.
- Cybenko, G. (1989). Approximation by Superpositions of a Sigmoidal Function. *Mathematics of Control, Signals, and Systems (MCSS)*, 2(4):303–314.
- Okuno, A., Hada, T., and Shimodaira, H. (2018). A probabilistic framework for multi-view feature learning with many-to-many associations via neural networks. In *Proceedings of the International Conference on Machine Learning (ICML)*, pages 3885–3894.
- Ong, C. S., Mary, X., Canu, S., and Smola, A. J. (2004). Learning with non-positive kernels. In *Proceedings of the International Conference on Machine Learning (ICML)*, page 81. ACM.
- Telgarsky, M. (2017). Neural networks and rational functions. In *Proceedings of the International Conference on Machine Learning (ICML)*.