

The role of intermediate layers in the c axis conductivity of layered superconductors

W. A. Atkinson

Department of Physics, Indiana University, Swain Hall W. 117, Bloomington IN 47405

W. C. Wu, and J. P. Carbotte

Department of Physics and Astronomy, McMaster University, Hamilton, Ontario, Canada L8S 4M1
(January 13, 2022)

A simplified model of c axis transport in the high T_c superconductors is presented. Expressions are found for the c axis optical conductivity, the d.c. resistivity, and the c axis penetration depth. Within the framework of this model, the pseudogap in the optical conductivity arises naturally as a result of the layered band structure of the high T_c materials. We discuss the occurrence of the pseudogap in terms of three parameters: a band gap ϵ_{ps} , a temperature dependent scattering rate (T) , and the strength of the interlayer coupling t_z . We are also able to find analytic expressions for the d.c. conductivity and the low temperature penetration depth in terms of these three parameters. This work is an attempt to present a simple, unified picture of c axis properties in the high T_c cuprates.

74.25.Nf, 74.25.Jb, 74.72.-h

Recently, a study was made [1] of the effect of band structure in YBCO on the real part of the c axis optical conductivity $\sigma_c(\omega)$. It was found that interband transitions between the plane and chain derived bands make a large contribution to the c axis conductivity, while having almost no effect on the in-plane conductivities. The interband term results in a c axis conductivity which is qualitatively different from the in-plane conductivity, and which seems to explain many of the features seen in experiments.

In Ref. [1], the YBCO crystal is treated as a system of two-dimensional plane, and one-dimensional chain layers, coupled through a hopping matrix element t_z . While the model is grossly oversimplified, it is still too complicated for anything more than a numerical treatment, making it difficult to understand explicitly the role of the various model parameters.

In this work, a much simpler model is presented for which it is possible to find analytical expressions for the optical conductivity, the d.c. resistivity and the low-temperature penetration depth. We will identify three important parameters which influence the qualitative structure of the conductivity: t_z is the strength of the coupling between the layers, ϵ_{ps} is the minimum energy difference between the bands and (T) is a temperature dependent scattering rate.

Let us first address the issue of when one can expect interband transitions to be important. Consider a system made up of two types of layer, stacked in alternating fashion along the c axis. Let the dispersions for the isolated layers be $\epsilon_1(k_x, k_y)$ and $\epsilon_2(k_x, k_y)$. The layers are coupled via single electron hopping, with a matrix element t_z . It is assumed that the first layer, with dispersion ϵ_1 represents a CuO_2 layer. The second layer, with dispersion ϵ_2 , is the "intermediate layer". In the case of YBCO, the intermediate layer is the CuO chain layer. In other materials, the choice of intermediate layer is not clear and, in fact, there will generally be several intermediate layers. Even in the simple case of LSCO,

an electron must find some path through two intermediate LaO layers when travelling between adjacent CuO_2 planes.

The Hamiltonian has the form

$$H = \sum_k \left(c_{1k}^\dagger c_{2k}^\dagger h(k) c_{2k} c_{1k} \right);$$

where

$$h(k) = \frac{\epsilon_1(k_x, k_y) - \epsilon_2(k_x, k_y)}{2} + t_z \cos(k_z d);$$

$t_z \cos(k_z d)$, d is the unit cell length along the c axis, and c_{ik}^\dagger creates an electron in the sublattice i with three dimensional momentum k . When the layers are coupled by t_z , they hybridize and form two bands with energies: $\epsilon_{\pm} = (\epsilon_1 + \epsilon_2)/2 \pm \sqrt{(\epsilon_1 - \epsilon_2)^2/4 + t_z^2 \cos^2(k_z d)}$, given by the eigenvalues of $h(k)$.

The first necessary condition is that the layers be weakly coupled in the sense that $t_z^2 \ll (\epsilon_1 - \epsilon_2)^2$ throughout most of the Brillouin zone. In this case the Fermi velocity along the c axis is $v_z(k) = \partial \epsilon_{\pm}(k)/\partial k_z$. $t(k_z) = j_1 - j_2$, which is of order t_z^2 . In the usual expression for the c axis conductivity, where one neglects interband transitions,

$$\sigma_{zz}(\omega) = e^2 \sum_k \frac{d^3 k}{4\pi^2} \frac{v_z(k)^2}{2} \frac{\partial f}{\partial \epsilon}; \quad (1)$$

where $f(\epsilon)$ is the Fermi function and $\epsilon_{\pm} = \epsilon_1 = \epsilon_2$ is the scattering rate. This expression is of order t_z^4 . [2]

On the other hand, it is possible to show [1] that the matrix element for an interband transition is $T_z \partial \epsilon(k_z)/\partial k_z$. A simple estimate of the interband conductivity from Fermi's golden rule is:

$$\sigma_{\text{Inter}} = e^2 \sum_k \frac{d^3 k}{4\pi^2} T_z^2 \frac{f(\epsilon_+) - f(\epsilon_-)}{\epsilon_+ - \epsilon_-} (\epsilon_+ + \epsilon_-);$$

which is obviously of order t_2^2 .

It is a general feature of these models, then, that one expects a crossover from D-rude-like (intraband dominated) to non-D-rude-like (interband dominated) conductivity along the c axis as the strength of the interlayer coupling is weakened.

In order to proceed farther we choose $\epsilon_1 = k_k^2 = 2m$ and $\epsilon_2 = \epsilon_{ps}$, where $k_k^2 = k_x^2 + k_y^2$ and ϵ_{ps} is constant. For our crude calculation, we have taken ϵ_2 to be a δ band (which therefore has no Fermi surface!). The basic features of the c axis conductivity are relatively insensitive to the choice of ϵ_2 . The scattering rate, (T) , can be found by fitting the in-plane resistivity. For purposes of illustration, it is reasonable to take $(T) = 1 = 2 = T$.

We can now calculate the conductivity to linear order in the applied field (see, e.g. [1]). In the limit of weakly coupled layers ($t_2 \ll \epsilon_{ps}$), the real part of the optical conductivity is:

$$\sigma_c(\omega) = e^2 N_k dt_2^2 \left[\frac{4t_2^2}{2\epsilon_{ps}} \frac{2}{\omega^2 + 4\epsilon_{ps}^2} + \frac{1}{\omega} \tan^{-1} \frac{\omega}{\epsilon_{ps}} + \tan^{-1} \frac{\omega + \epsilon_{ps}}{\epsilon_{ps}} \right] \quad (2)$$

where $\theta(x)$ is the step function. In order to derive this equation, we have made the approximation that the temperature dependence of the conductivity is due mostly to the temperature dependence of T . Thermal excitations do not change the conductivity in a qualitative fashion. Equation (2) is plotted in Fig. (1) for several different temperatures.

The first term in (2) is the intraband conductivity and it has the usual D-rude form. The second term is the interband conductivity. True to our earlier assertion, we notice that the D-rude term scales as $t_2^2 = \frac{2}{\epsilon_{ps}}$ relative to the interband term.

The interband conductivity has a number of features worth mentioning. The first is that there is a threshold frequency $\omega = \epsilon_{ps}$ for interband transitions. ϵ_{ps} is the minimum energy for an interband transition between a filled and an empty state. This threshold is smeared by electron scattering, and the gap in the optical conductivity disappears at temperatures where $(T) \gg \epsilon_{ps}$. This kind of behaviour is seen in optical conductivity experiments, [3] and it is tempting to identify ϵ_{ps} with the pseudogap seen there. If this is the case, then the relationship between the "optical pseudogap" and the pseudogap which opens in the Fermi surface [4] becomes clouded. One expects that changes in the Fermi surface will affect the interband transitions. However, whether or not the threshold energy (and therefore the optical pseudogap) is affected will depend on the specifics of the band structure. For this reason, we draw a distinction

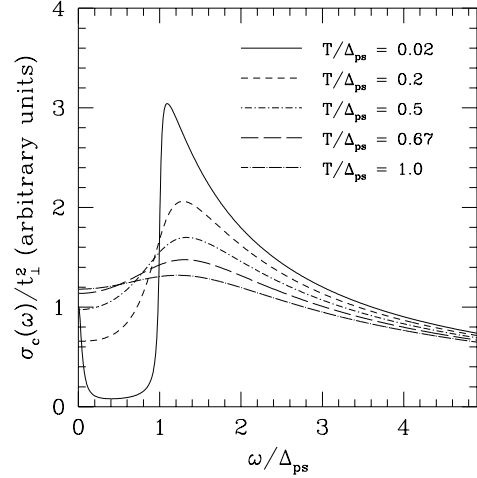


FIG. 1. The real part of the optical conductivity $\sigma_c(\omega)$ is shown for a range of temperatures. The interplane coupling is $t_2 = \epsilon_{ps} = 0.1$. The in-plane conductivity is given by the usual D-rude expression, with corrections of order $t_2^2 = \frac{2}{\epsilon_{ps}}$.

between the optical pseudogap and the pseudogap seen in other experiments.

While the band structure we have chosen here is too simple to describe systems in which there is no optical pseudogap, we are at least able to cite the conditions under which we expect the gap to disappear. First, if the scattering rate (T) is always larger than the minimum interband excitation energy, no pseudogap will be seen. A second possibility is that the minimum excitation energy between the two bands may vanish at some k -point. Such would be the case in YBCO, for example, if the chain and plane Fermi surfaces were to cross [1].

Another point worth noting is that the interband conductivity extends over a broad range of frequencies, and is cut off by the band edge at $\omega = \epsilon_{ps}$. With the current model, the conductivity falls as ω^{-1} . The frequency dependence is model specific, however, and it has been found that in a model YBCO system, the conductivity can be quite flat. In optimally doped YBCO, interband transitions between the plane and chain bands allow us to reconcile the broad c axis spectrum (which seems to imply a large scattering rate) with the relatively low value of the resistivity.

The pseudogap also has an effect on the shape of the d.c. conductivity. Taking the $\omega = 0$ limit of (2) gives

$$\sigma_c(\omega = 0) = e^2 N_k dt_2^2 \left[\frac{4t_2^2}{2\epsilon_{ps}} \frac{1}{2} + \frac{2}{\epsilon_{ps} + 2} \right] \quad (3)$$

which is plotted in Fig. 2. The first and second terms are again the intraband and interband conductivities respectively. If we consider the d.c. resistivity due to the interband transitions alone, then

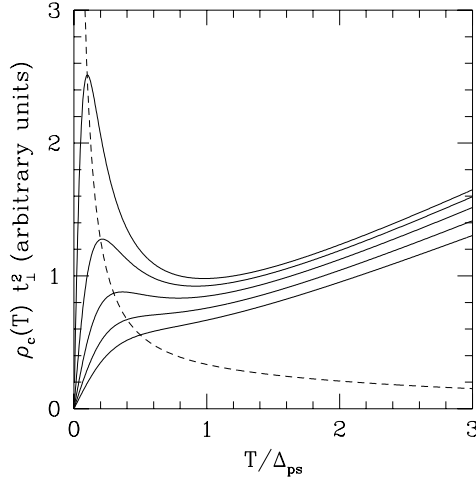


FIG. 2. The normalised d.c. resistivity $\rho_c(T) t_2^2$ is plotted as a function of temperature for a range of interlayer coupling strengths t_2 between $p_s=5$ and p_s (solid curves, from top to bottom). The Druide term in the resistivity is important only to the left of the dashed curve. The in-plane resistivity is given by usual Druide expression and increases linearly with T .

$$\rho_c / \rho_n = \begin{cases} 1 - (T/t_2); & (T) < p_s \\ (T/t_2); & (T) > p_s \end{cases}$$

At very low temperatures, where t_2 is small, the system is short circuited by the Druide conductivity. Therefore, we have the additional low temperature regime,

$$\rho_c / \rho_n = (T/t_2); \quad (T) < t_2$$

Of course, if there is some intrinsic disorder (in the chain layer in YBCO, for example), then (T) may always be greater than t_2 , and the Druide term will never become apparent.

Finally, we wish to examine the penetration depth. In order to discuss the superconducting state, we make two changes to the model. First, we introduce a d wave superconducting gap, $\Delta = \Delta_0 \cos(2\theta)$, in each of the layers. Second, we set the scattering rate to zero. There is good evidence that the scattering rate does in fact drop dramatically below the superconducting transition temperature T_c [5], but the assumption is made primarily to simplify the model.

We have given elsewhere [6] an expression for the penetration depth in a layered superconductor. For this model it is possible to find a simple low temperature expression for the penetration depth:

$$\lambda_c(T)^{-2} = \lambda_c(0)^{-2} + \frac{16 N_k e^2 t_2^2}{c^2} \frac{dT}{p_s} \ln(2) t_2^2 + \frac{3}{2} \frac{(3)}{2} T^2; \quad (4)$$

where ζ is the Riemann zeta function. Again, the first term in the equation is due to the intraband conductivity and the second is due to the interband conductivity. Within a single band model, it is usual to associate a linear temperature dependence with a d wave gap. Here, the very low T behaviour is linear in T , but there is a crossover in behaviour to T^3 when $T \approx t_2$: It is interesting to note that the pseudogap affects both the interband and the intraband terms in the same way, and that it is actually the magnitude of t_2 which determines whether one sees a linear or cubic temperature dependence.

This work was supported by the Natural Sciences and Engineering Research Council, and the Canadian Institute for Advanced Research. One of the authors (W. A.) was supported in part by the Midwest Superconductivity Consortium through D.O.E. grant # DE-FG-02-90ER 45427.

-
- [1] W. A. Atkinson and J. P. Carbotte, Phys. Rev. B 55, 3230 (1997).
 - [2] It is usual to integrate Eq. (1) by parts in k_z , yielding the familiar expression $\chi_{zz}(\omega) = ne^2/m_{zz} = (2\pi i)^{-1}$. This expression contains a factor of only t_2^2 , which is hidden in the effective mass, in apparent contradiction without assertion that χ_{zz} scales as t_2^4 . It must be remembered, however, that for an open Fermi surface, the integration by parts yields an additional term which does not vanish.
 - [3] C. C. Homes, T. Timusk, R. Liang, D. A. Bonn, and W. N. Hardy, Phys. Rev. Lett. 71, 1645 (1993); C. C. Homes, T. Timusk, D. A. Bonn, R. Liang, and W. N. Hardy, Physica C 265 (1995).
 - [4] H. Ding et al, Phys. Rev. Lett. 78, 2628 (1997); Jeffrey M. Harris et al, cond-mat/9705304.
 - [5] D. A. Bonn, P. Dosanjh, R. Liang, and W. N. Hardy, Phys. Rev. Lett. 68, 2390 (1992).
 - [6] W. A. Atkinson and J. P. Carbotte, Phys. Rev. B 55, 14592 (1997).