

Sign Reversals of ac Magnetoelectrical Conductance in Isolated Quantum Dots

Yves Noat¹, Helene Bouchiat¹, Bertrand Reulet¹ and Dominique Mailly²

¹Laboratoire de Physique des Solides, Associé au CNRS, Bât 510, Université Paris(Sud), 91405, Orsay, France.

²C.N.R.S. Laboratoire de Microstructures et de Microélectronique, 196, Avenue Ravaud, 92220, Bagneux, France

We have measured the electromagnetoelectric response of micron-size isolated mesoscopic GaAs/GaAlAs square dots down to temperature $T = 16\text{ mK}$, by coupling them to an electromagnetoelectric micro-resonator. Both dissipative and non dissipative responses exhibit a large magnetic field dependent quantum correction, with a characteristic flux scale which corresponds to a flux quantum in a dot. The real (dissipative) magnetoelectrical conductance changes sign as a function of frequency for low enough density of electrons. The signal observed at frequency below the mean level spacing, corresponds to a negative magnetoelectrical conductance, which is opposite to the weak localization seen in connected systems, and becomes positive at higher frequency. We propose an interpretation of this phenomenon in relation to fundamental properties of energy level spacing statistics in the dots.

There are several ways of measuring the electrical conductance of a metallic sample. The most common one is to drive a current through it and measure the voltage drop between the connected wires. But, it is also possible to measure the conductance without making any connection to the sample. Capacitance and inductance measurements at finite frequency provide such a way. When a metallic sample of typical size a is inserted into a coil, it acquires a magnetic moment $m = I a^2$, where I is the eddy current induced in the sample. This changes the impedance of the coil by a quantity:

$Z(\omega) = i\omega L + \frac{m^2}{L} = V$ where V is the volume of the coil of inductance L and m is the magnetic susceptibility of the sample related to the conductance G_m , the ratio between I and the induced electromotive force by [1]:

$$m(\omega) = i\omega G_m(\omega) a^4 \quad (1)$$

Similarly the admittance change of a capacitance C due to the insertion of a metallic sample reads: $Z^{-1}(\omega) = C + \frac{m^2}{C} = V$ where V is the volume of the capacitor and $\epsilon(\omega)$, the electrical polarisability of the sample, is related to its effective conductance G_e (defined as ratio between polarization current and unscreened voltage drop through the sample), by [2]:

$$\epsilon(\omega) = \frac{G_e(\omega) a^2}{i\omega} \quad (2)$$

In the classical limit at low frequency (such that the size of the sample is much smaller than the skin depth) G_m is real and identical to the Drude conductance $G_D = \frac{e^2}{a}$ within a numerical constant which depends on the geometry of the sample. On the other hand due to screening of the electric field inside the metal [3], and for $\omega \ll \omega_0$, G_e is dominated by its imaginary part: $\text{Im } G_e = \frac{1}{a} \omega_0$. Its real part is equal to:

$$\text{Re } G_e = \left(\frac{\omega_0}{a}\right)^2 = G_D \quad (3)$$

In a mesoscopic sample, which length is smaller than the electronic phase coherence length, it was shown theoretically [4,8] that the conductance strongly depends on

the way it is measured. More precisely, it is very sensitive to the coupling between the mesoscopic sample and the macroscopic classical apparatus. When a sample is connected with wires, (that is to say when the coupling is strong), relative quantum corrections on the conductance are of the order of $1/g$ where $g = G_D = (e^2/h)$ [9]. This result concerning the dissipative components of the conductance are unchanged for unconnected samples provided that the energy level spectrum is continuous [7] i.e. the typical level width is much larger than the mean level spacing. Note however that the quantum corrections of $\text{Re } G_e$ and $\text{Re } G_m$ are opposite in sign. Furthermore $\text{Im } G_m$ is expected to be finite and directly related to persistent currents and more generally orbital magnetism in the sample [4,6,10]. At the same time $\text{Im } G_e$ acquires a magnetic field dependence related to quantum corrections to the electrical polarisability [11].

On the other hand, if the discrete spectrum limit is achieved, quantum coherence of the sample gives rise to giant magnetoelectrical conductance [6,8] whose sign and amplitude are determined by the order relation between the relevant energy scales: $\hbar\omega$; $\hbar\omega_0$; $k_B T$. Preliminary experiments [12] on an array of Aharonov-Bohm rings coupled to a resonator, have shown that the investigation of ac conductance on isolated samples in the discrete spectrum limit is indeed possible.

In this letter, we report the measurement of the electromagnetoelectric response of an array of mesoscopic square dots made from GaAs/GaAlAs 2D electron gas at frequencies both below and above energy level spacing. Sign reversals of magnetoelectrical conductance were observed which can be interpreted in relation to the sensitivity to magnetic field of level spacings distribution in the dot, according to random matrix theory.

As in the previous experiment [12], the mesoscopic samples are coupled to an electromagnetoelectric micro-resonator, made of two Niobium wires ($d = 4\text{ }\mu\text{m}$ spaced, $1\text{ }\mu\text{m}$ width and 20 cm long) deposited in a meandering geometry on a sapphire substrate. The superconducting material is used to reduce losses and therefore get a high

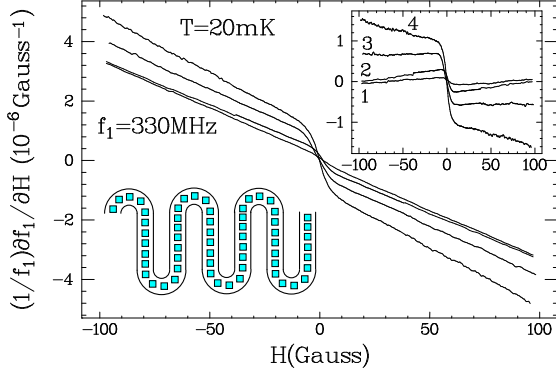


FIG. 1. Field derivative of resonance frequency for the first harmonics of the resonator, the different curves correspond to successive illuminations of the sample. Inset, bottom : schematic picture of the resonator and the square dots. Inset, top : data obtained after subtraction of the empty resonator contribution.

quality factor (80000 without any sample). The resonance conditions are: $L = \frac{n}{2}$, where $n = 1; 2; 3; \dots$ and L is the length of the superconducting wires and the electromagnetic wavelength. The fundamental resonance frequency is of the order of 330 MHz. This experiment allows us to detect extremely small variations of frequency and quality factor: $\frac{f}{f} \approx (Q^{-1}) \approx 10^{-9}$. In the presence of microscopic samples deposited on the top, (with a spacer consisting of a 1 mm thick mylar sheet), the characteristics of the resonator are modified. The dissipation in the samples affects the quality factor, whereas the non-dissipative response affects the resonance frequency:

$$\frac{f}{f} = k N_s \chi'(!); (Q^{-1}) = k N_s \chi''(!) \quad (4)$$

where $\chi(!) = \chi_e(!) + \chi_m(!)$ is the average complex susceptibility of a dot [2], N_s is the number of samples and k is a geometrical coupling coefficient which is of the order of $1/Ld^2$, where d is the distance between the two Niobium wires. The sample studied in this experiment, was an array of 10^5 disconnected square dots etched, using electron beam lithography techniques, in a semiconductor heterojunction GaAs/GaAlAs. The electron concentration of the two dimensional electron gas (2DEG) before etching was $n_e = 3 \cdot 10^{11} \text{ cm}^{-2}$ and elastic mean free path $l_e = 10 \text{ nm}$. This electronic density was strongly depressed in etched samples but could be recovered with illumination. For this purpose an electroluminescent diode was placed next to the resonator, allowing to change gradually the number of electrons in the squares by transient illumination of the samples (between 30s and 2mn). The measurements were always done at least one hour after the illumination was stopped, in order to ensure good stability of the samples. The size of the squares $a = 1.5 \text{ nm}$ was estimated from weak local-

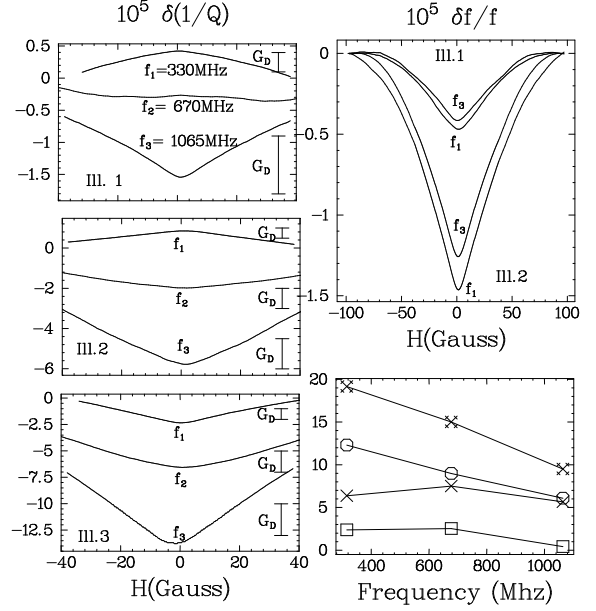


FIG. 2. Field dependence of real and imaginary susceptibilities for several resonance frequencies and illuminations. The amplitude of the signal corresponding to the Druide value G_D is estimated for each illumination assuming that $\chi'(f_1)$ is proportional to G_D and that illumination 4 corresponds to saturation i.e. a density of $6 \cdot 10^{11} \text{ el./cm}^2$. Bottom right: frequency dependence of $\partial f / \partial H$ in units of $10^{-7} \text{ Gauss}^{-1}$.

ization experiments on connected samples made together with the squares. The transport in the samples can thus be considered as ballistic. The mean level spacing in a square $\Delta = 2 \frac{\hbar^2}{m a^2}$, (m is the effective electron mass) is independent of the electronic density. It is of the order of 38mK which corresponds to a frequency of 760 MHz. Resonator and diode are enclosed in a metallic box, protecting from electromagnetic noise, and cooled with a dilution fridge down to 16mK.

We have measured the magnetic field dependence of the resonance frequency and quality factor for several harmonics ($f_1 = 330 \text{ MHz}$, $f_2 = 670 \text{ MHz}$, $f_3 = 1065 \text{ MHz}$) and after successive illuminations. The dc magnetic field was modulated at low frequency ($\sim 30 \text{ Hz}$) with a small coil close to the sample. This allows measurement of derivatives of resonance frequency (see fig.1) and quality factor with respect to magnetic field. The signal of the samples consists in step-like features on the field dependence of $\partial f / \partial H$ and $\partial Q^{-1} / \partial H$ whose width $\sim 10 \text{ Gauss}$ corresponds approximately to half a flux quantum in a square. In the case of $\partial f / \partial H$ the contribution of the empty resonator, linear in magnetic field, has to be sub-

tracted from the signal. After integration, the magnetoconductance $G(H)/G(0) = \chi(H)/\chi(0)$ of the samples can be deduced from these measurements (see Fig. 2). We observe that both real and imaginary components present the striking triangular shape observed in experiments on connected ballistic dots of similar geometries which is believed to be related to the classical integrability of these systems [13].

$\chi'(H)$ and $\chi''(H)$ are found to have very different behaviors as a function of frequency. $\chi'(H)$ is always positive, its amplitude drastically increases with the first successive illuminations which correspond to an increasing number of electrons, and then tends to saturate. For a fixed number of electrons it is nearly independent of frequency [14]. On the other hand $\chi''(H)$ is observed to be negative for the first harmonics and small electronic density and becomes positive with increasing frequency and electronic density. This sign change of the magnetoconductance is the most striking result of our work.

The temperature dependence of the signals were also measured. The temperature decay depicted in Fig. 3 is found to be independent of frequency and nearly identical for χ' and χ'' . It cannot be fitted with an exponential as was the case for the ring experiment. The characteristic temperature scale of this decay slightly increases with the number of electrons in the dots.

In the following we want to compare our results with theoretical predictions on orbital magnetism and polarizability. The orbital susceptibility of ballistic squares has been calculated by several authors, it is found to be paramagnetic in zero field, in agreement with experimental results on the dc magnetization of GaAs/GaAlAs squares [15]. Our results on the other hand indicate unambiguously low field diamagnetism, just like the previous experiment on an ensemble of rings [12]. We note however that the amplitude of $\chi(H)$ measured at saturation correspond to an average orbital susceptibility of the order of the theoretical prediction: $ga^2/6e^2m$ [16]. In the case of an electric coupling, the signal can be related to the average magneto-polarizability of the squares. This quantity has been recently calculated [11], its sign (which corresponds to an increase of polarizability with magnetic field) could explain our experimental results on $\chi(H)$. Nevertheless, according to these predictions, the magneto-polarizability is proportional to $1/g$ and also to the Thomas-Fermi screening length. Thus it should decrease with the number of electrons, which is in complete contradiction with what we measured. So, the understanding of our measurements on $\chi(H)$ deserves further theoretical investigations.

We now consider the dissipative part of the response. The low frequency classical absorption of a metallic grain in an ac electric field has been shown [3,8] to be described by the effective conductance G_e (see expression (3)). This result initially derived for 3D systems can easily be extended to 2D samples provided that the electric

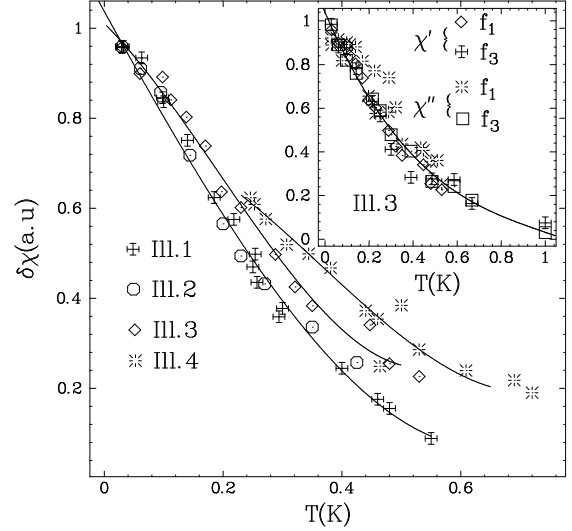


FIG. 3. Rescaled, temperature dependences of χ' for the first harmonics and various number of electrons corresponding to successive illuminations (continuous lines are only guides for the eyes). Inset: temperature dependence of χ' and χ'' for the first and third harmonics.

field lies in their plane. The ratio between "magnetic" losses described by G_m and "electric" losses in the resonator G_e is then simply given by: $r = (Z_0 G_D)^2$, where $Z_0 = \frac{1}{\epsilon_0 c} = 377 \Omega$ is the vacuum impedance. In our case r varies between 8 and 400 depending on the electronic density in the dots. Therefore, we conclude that the dominant contribution to χ'' comes from G_m . Using expression (1) relating G_m to the measured quantity $\chi''(H)$, it is possible to express the magnetoconductance measured for several frequencies and number of electrons in units of G_D as shown in Fig. 2. Note that in most cases the magnetoconductance is of the order of G_D as expected for a discrete level system.

The field dependence of the dissipation of Aharonov-Bohm rings in a time dependent flux has been extensively studied [4-7]. It is straightforward to extend these results to singly connected geometries and estimate expected $G_m(H)$ in our case. Let us recall the existence of two different contributions to $G_m(H)$ in the limit where $\omega \gg T$: G_{off} and G_{di} . G_{off} related to inter-level transitions is expressed in terms of the level spacing distribution function $R(s)$ which obeys universal rules of random matrix theory [17,18]. It corresponds for $H = 0$ to Gaussian Orthogonal Ensemble (GOE) and for sufficiently large field, in order that time reversal symmetry is broken, to Gaussian Unitary Ensemble (GUE).

$$G_{off}(H) = G_D \int_0^Z \frac{(R_{GUE}(s) - R_{GOE}(s))}{(h! s^2 + \frac{1}{2})} ds \quad (5)$$

On the other hand G_{di} is related to the relaxation of

persistent currents which always yields to positive magnetoconductance:

$$G_{di}(H) = G_{di}(GUE) \quad G_{di}(GOE) = G_D \frac{1}{1^2 + \frac{1}{2}} \quad (6)$$

In the limit where $\Gamma \rightarrow 0$ the magneto-conductance is dominated by: $G_{off}(H) = G_D (R_{GUE}(\Gamma) - R_{GOE}(\Gamma))$. The magnetoconductance is negative at $\Gamma < 1$ and changes sign at frequency of the order of Γ as depicted in Fig. 4. We believe that the squares after illumination 1 correspond to this situation. This change of sign is however expected to disappear when Γ increases such as the condition: $G_2 > j G_1 j$ is realized. We suggest that illuminations 3 and 4 correspond to this last situation. The increase of Γ for successive illuminations is necessary to explain our results. It cannot be due to the contribution of electron-electron interactions (whose contribution decreases with increasing electron density [19]) but possibly to the increase of losses in the etched GaAs substrate. We indeed observed a substantial decrease of Q after each illumination. The electromagnetic noise related to these losses is expected to contribute substantially to the level broadening [20,21]. Theory [6,7] also predicts, for canonical ensemble, changes of sign of the magnetoconductance with temperature at $T < T_c$ which we have not observed, possibly because of lack of experimental points in the regime where $T \rightarrow 0$.

In conclusion these results show that ac conductance measurements on isolated samples reveal indeed new physical features. Giant magnetoconductance has been observed. Sign changes on the real part are in agreement with the pioneer predictions of Gorkov and Eliashberg [8] on the sensitivity of the energy spectrum to time reversal breaking by magnetic field. The imaginary part whose amplitude is of the same order of magnitude than the real one is in principle related to the orbital magnetism in the dots. However its sign is not yet understood.

We acknowledge fruitful discussions with B. A. Altshuler, Y. Gefen, B. Schlovskii and P. Walker.

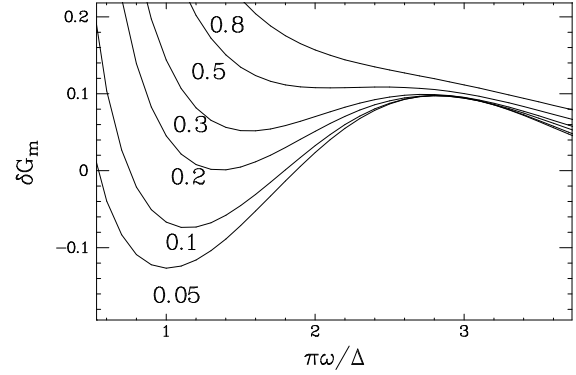


FIG. 4. Calculated frequency dependence of G_m for different values of the ratio $\Gamma = \Gamma_0/\Delta$.

[1] L. Landau and E. Lifshitz, "Electrodynamics of continuous media", Mir publishers, (1969)
[2] Within this notation the magnetization and the electric polarization of a dot read: $m(\Gamma) = m_H(\Gamma)$ and $p(\Gamma) = p_E(\Gamma)$, where H and E are respectively the ac magnetic and electric field.
[3] U. Sivan and Y. Imry, Phys. Rev. B, 35, 6074, (1987)
[4] M. Buttiker, Y. Imry and R. Landauer, Physics Letters 96A, 365, (1983); R. Landauer and M. Buttiker, Phys. Rev. Lett. 54, 2049 (1985).
[5] N. Trivedi and D. A. Browne, Phys. Rev. B 38, 9581, (1988).
[6] B. Reulet and H. Bouchiat, Phys. Rev. B 50, 2259, (1994).

[7] A. Kamenev, B. Reulet, H. Bouchiat and Y. Gefen, Europhys. Lett. 28, 391, (1994).
[8] F. Zhou, B. Spivak, N. Taniguchi and B. L. Altshuler, Phys. Rev. Lett. 77, 1958, (1996).
[9] B. L. Altshuler, A. G. Aronov and B. Z. Spivak, Pis'ma Zh. Eksp. Teor. Fiz. 33, 101 (1981) [JETP Lett. 33, 94 (1981)], D. Y. Sharvin and Y. V. Sharvin, Pis'ma Zh. Eksp. Teor. Fiz. 34, 285 (1981) [JETP Lett. 34, 272 (1981)]
[10] K. B. Efetov, Phys. Rev. Lett. 66, 2794, (1991).
[11] Y. Noat, B. Reulet and H. Bouchiat, Europhys. Lett. 36(9), 701 (1996). Y. Blanter and M. Büttiker (preprint)
[12] B. Reulet, M. Ramini, H. Bouchiat and D. Mailly, Phys. Rev. Lett. 75, 124 (1995).
[13] A. M. Chang, H. U. Baranger, L. N. Pfeiffer and K. W. West, Phys. Rev. Lett. 73, 2111 (1994).
[14] Note that in our experiments the amplitude of the imaginary magnetoconductance is always of the same order of magnitude than the real one. This finding is fundamentally different from results obtained on ac measurements on a connected system where imaginary conductance could only be detected for frequencies larger than the Thouless Energy. J. B. Pieper and J. C. Price, Phys. Rev. Lett. 72, 3586 (1994). J. B. Pieper, J. Price and J. Martinis, Phys. Rev. B, 45, 3857 (1992).
[15] L. Levy, H. Reich, L. Pfeiffer and K. West, Physica B, 189, 204 (1993).
[16] Y. Gefen, D. Braun and G. Montambaux, Phys. Rev. Lett. 73, 154 (1994); J. J. Lin, K. Richter and R. Jalabert, Phys. Rev. Lett. 74, 383 (1995).
[17] M. L. Mehta, Random Matrices and the Statistical Theory of Energy Levels. New York: Academic Press 1967.
[18] L. P. Gorkov, G. M. Eliashberg, Sov. Phys. JETP 21, 940 (1965); B. I. Shklovskii, Pis'ma Zh. Eksp. Teor. Fiz. 36, 287 (1982) [JETP Lett. 36, 352 (1982)].
[19] U. Sivan, Y. Imry and A. G. Aronov, Europhys. Lett. 28, 115 (1994); B. L. Altshuler, Y. Gefen, A. Kamenev and S. L. Levitov, Phys. Rev. Lett. 78, 2803 (1997).
[20] A. Kamenev and Y. Gefen "Correlated Fermions and transport in mesoscopic structures", T. Martin, G. Montambaux and J. T. Thanh Van eds, (1996)
[21] B. Reulet et al. unpublished.