

# Analytic reduction of transition amplitudes in radiative electroweak processes

Seungwon Baek<sup>1</sup>, J. S. Shim<sup>2</sup>, H. S. Song<sup>3</sup>, and Chaehyun Yu<sup>4</sup>\*

Center for Theoretical Physics and Department of Physics,  
Seoul National University, Seoul 151-742, Korea

## Abstract

It is shown that the transition amplitudes of radiative electroweak processes like  $e e^+ \rightarrow e^- e$ ,  $e \rightarrow e^- e$ , and  $e e \rightarrow e e$  can be reduced and factorized into simpler forms in the Standard Model. This method can be used in reducing many calculations of complicated radiative electroweak processes in general.

In our previous work [1], it has been shown that in the Standard Model (SM) the  $e \rightarrow e$  process can be treated mathematically as a special case of the  $e \rightarrow Z^0 e$  process which is described by the transition amplitude

$$M_{e \rightarrow Z^0 e} = \frac{eg_Z}{2} \bar{u}(p_2) \left[ \frac{g_L (k \cdot p_1 + 2p_1 \cdot p_2)}{2k \cdot p_1} + \frac{g_R (k \cdot 2p_2)}{2k \cdot p_2} \right] u(p_1) : \quad (1)$$

Here  $k; p_1$ ; and  $p_2$  are the momenta of photon, incoming electron and the outgoing electron, respectively.  $k$  and  $p_2$  are the wave vectors of the photon and  $Z^0$ , and  $g_Z; g_L$  and  $g_R$  are coupling constants defined by

---

Electronic address: swbaek@phya.snu.ac.kr

<sup>1</sup>Present address: Myongji University, Yongin, Korea. jsshim@whmyongji.ac.kr

<sup>2</sup>Electronic address: hssong@physs.snu.ac.kr

<sup>4</sup>Electronic address: cyu@zoo.snu.ac.kr

$$g_Z = \frac{8m_W^2 G_F}{2 \cos^2 \theta_W} \quad ; \quad g_L = \frac{1}{2} + \sin^2 \theta_W \quad ; \quad g_R = \sin^2 \theta_W \quad ; \quad (2)$$

The  $W W$  coupling is included in the  $e \rightarrow W e$  process, but the transition amplitude of the  $e \rightarrow W e$  process can be changed in the form of Eq. (1) due to the following relation

$$\begin{aligned} & \frac{g_W (k + 2p_1)}{k \cdot p} + \frac{2}{k \cdot Q} [g_W k \cdot k + g_W Q \cdot Q] \\ & = \frac{k \cdot p}{k \cdot Q} \frac{g_W (k + 2p_1)}{k \cdot p} + \frac{g_W (2p_2 \cdot Q)}{k \cdot p} \quad ; \end{aligned} \quad (3)$$

where  $k$  and  $Q$  are the wave vector and momentum of  $W$  and  $p_2$  in Eq. (3) implies the momentum of the outgoing neutrino. Therefore, various results obtained in the  $e \rightarrow Z e$  process can be used in the  $e \rightarrow W e$  process after the coupling constants  $g_R; g_L g_Z$  and mass  $m_Z$  in the former process are replaced by  $0; g_W (k \cdot p = k \cdot Q)$  and  $m_W$  in the latter process.

In the SM, the processes  $e^+ \rightarrow e^- e$ ,  $e \rightarrow e^- e$  and  $e e \rightarrow e e$  can be described by Feynman diagrams in the tree level [2]. They consist of two diagrams related with the  $Z^0$ -mediated process, one diagram with the  $W W$  coupling and two diagrams involving the  $W$  particle as shown in Fig. 1 for the  $e^+ \rightarrow e^- e$  [3]. Two terms in the transition amplitudes involving the  $W$  particle can be changed into the terms corresponding to the first two diagrams by the Fierz transformation, and using the identity of Eq. (3), the  $W W$  term in the transition amplitude can be resolved into the terms of the first two diagrams similarly. This implies that the transition amplitudes of the processes  $e^+ \rightarrow e^- e$ ,  $e \rightarrow e^- e$  and  $e e \rightarrow e e$  can be essentially described by the expression for two diagrams which involve the  $e \rightarrow Z e$  process after proper modification of (1-5) term in the processes. Therefore, we expect that the total transition amplitude can be factorized due to two neutrinos coming from the decay  $Z^0 \rightarrow e^- e$ .

Explicitly the transition amplitude of the process  $e(p_1)e^+(p_2) \rightarrow e(k_1)e^-(k_2)(k)$  can be obtained as follows,

$$\begin{aligned} M_{e^+ e^-} & = \frac{eg_W^2}{8 \cos^2 \theta_W} \frac{1}{(2k_1 \cdot k + m_Z^2)} \\ & \bar{v}(p_2) \frac{g_W (k + 2p_1)}{2k \cdot p} [E_{1L}(1 - \gamma_5) + g_R(1 + \gamma_5)] \\ & + \frac{g_W (2p_2 \cdot Q)}{2k \cdot p} [E_{2L}(1 - \gamma_5) + g_R(1 + \gamma_5)] \\ & + (k_2 \cdot p_1) A_L(1 - \gamma_5) u(p_1) \bar{u}(k_1) (1 - \gamma_5) v(k_2); \end{aligned} \quad (4)$$

where

$$E_{1L} = g_L + \cos^2 \theta_W \frac{(2k_1 \cdot k + m_Z^2) [2p_1 \cdot (k + k) + m_W^2]}{(2p_1 \cdot k + m_W^2) (2p_2 \cdot k + m_W^2)}; \quad (4a)$$

$$E_{2L} = \epsilon_L + \cos^2 \theta_W \frac{(2k_1 \cdot k - m_Z^2) [2p_2 \cdot (k + k) + m_W^2]}{(2p_1 \cdot k + m_W^2) (2p_2 \cdot k + m_W^2)}; \quad (4b)$$

$$A_L = 2 \cos^2 \theta_W \frac{(2k_1 \cdot k - m_Z^2)}{(2p_1 \cdot k + m_W^2) (2p_2 \cdot k + m_W^2)}; \quad (4c)$$

The third term in the square bracket of Eq. (4) is necessary for the transition amplitude to have gauge invariance after the  $\epsilon_L(1 - \gamma_5)$  term is modified.

The transition amplitude  $M_{e^+ e^- e^- e^-}$  for the  $(k)e^+(p_1) \rightarrow e^-(k_1) e^-(k_2)e^-(p_2)$  process can be obtained from Eq. (4) for  $M_{e^+ e^+ e^- e^-}$  by replacing  $k; p_2; v(p_2)$ , and  $\epsilon_L$  by  $k; p_2; u(p_2)$ , and  $\gamma_5$ , respectively. Also the transition amplitude  $M_{e^+ e^- e^+ e^-}$  for the  $e^-(k_2)e^+(p_1) \rightarrow e^-(k_1)e^+(p_2) e^-(k)$  can be obtained similarly from Eq. (4) of  $M_{e^+ e^+ e^- e^-}$  by replacing  $k_2; p_2; v(k_2)$ , and  $v(p_2)$  by  $k_2; p_2; u(k_2)$ , and  $u(p_2)$ , respectively. These processes can be described essentially by Fig. 2 (a)-(c).

One can see that, in the  $e^+ e^- \rightarrow e^- e^-$  process, if the initial energy is about 100 GeV, the contribution from the  $Z^0$ -mediated diagrams of Fig. 1 is dominant and as the incident energy increases, the contribution from other diagrams becomes large. The polarization effect in  $e^+ e^- \rightarrow Z^0 \rightarrow f \bar{f}$  has been considered by us [4] and the method can be applied here.

#### ACKNOWLEDGMENTS

The authors would like to thank S. Y. Choi and S. B. Kim for useful discussion. The work is supported in part by KOSEF through the SRC program and in part by the Korean Ministry of Education through the BSR program, BSR I-97-2418.

## REFERENCES


- [1] J. S. Shim, S. Baek, and H. S. Song, *J. Korean Phys. Soc.* 29, 293 (1996):  
hep-ph/9510242.
- [2] Feynman diagrams for 2 ! 3 particle processes can be seen immediately from ComphEp program, E. Boos, M. Dubinin, V. Ilyin, A. Pukhov, and V. Savrin, Report No. INP MSU 94-36/358, 1994 (hep-ph/9503280).
- [3] E. Ma and J. Okada, *Phys. Rev. Lett.* 41, 287 (1978);  
K. J. F. Gaemers, R. Gastmans and F. M. Renard, *Phys. Rev. D* 19, 1605 (1979);  
G. Barbiellini, B. Richter, and J. Siegrist, *Phys. Lett. B* 106, 414 (1981);  
A. Jacholkowska, J. Kalinowski, and Z. Was, hep-ph/9803375; see references therein.
- [4] J. Choi, H. S. Kim, S. B. Kim, and H. S. Song, *Phys. Rev. D* 38, 40 (1988).

## FIGURE CAPTIONS

Fig. 1, Feynman diagrams for the process  $e^- e^+ \rightarrow e^- e^+$ .


Fig. 2, Reduced Feynman diagrams for (a)  $e^- e^+ \rightarrow e^- e^+$ , (b)  $e^- e^+ \rightarrow e^- e^+$ , (c)  $e^- e^+ \rightarrow e^- e^+$ .

FIGURES

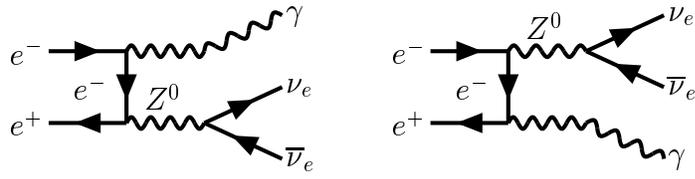


(a)

(b)

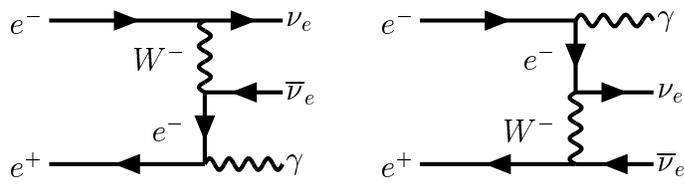


(c)

(d)



(e)

Fig. 1

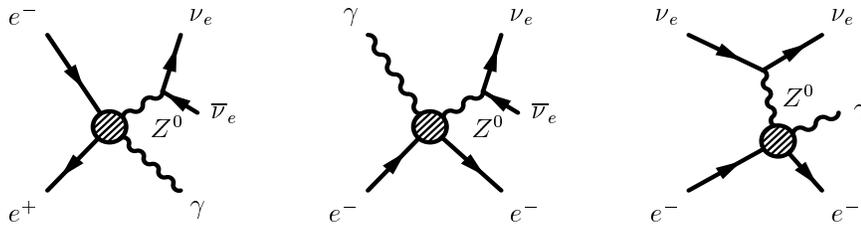

(a)

(b)

(c)

Fig. 2