

Truly Concurrent Process Algebra to Unifying Quantum and Classical Computing

— Yong Wang —

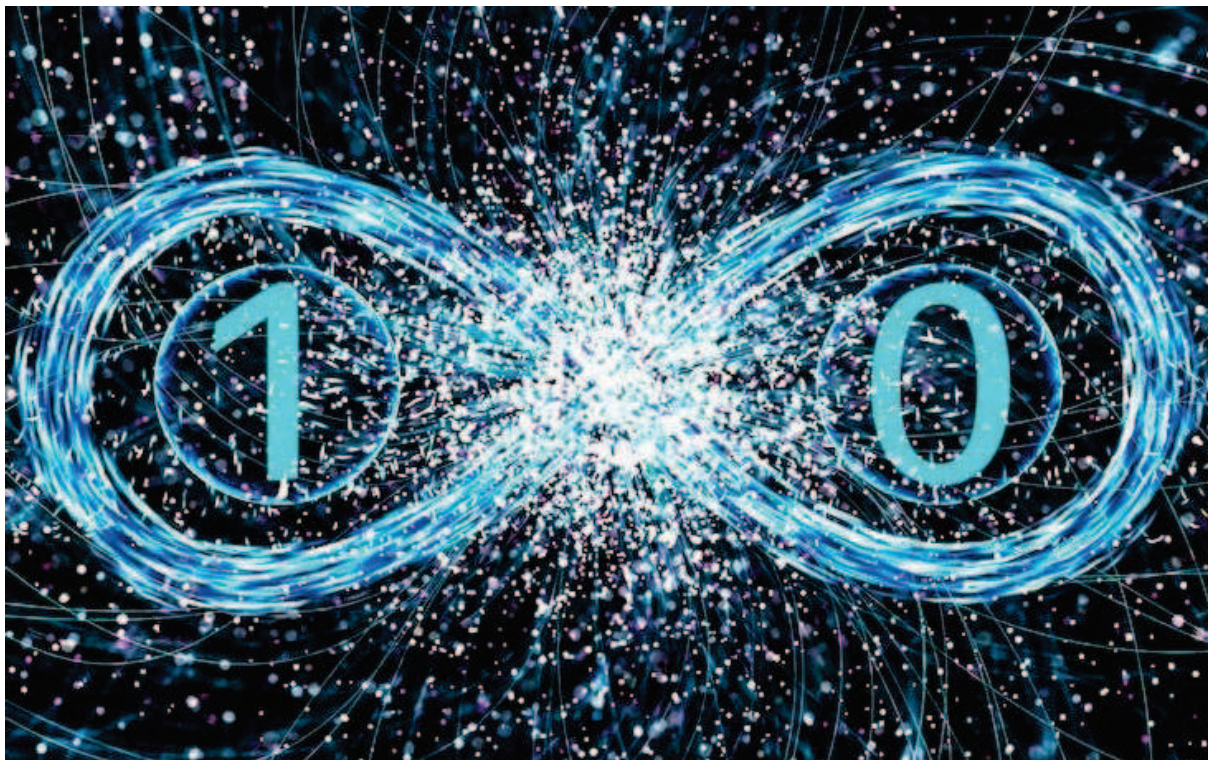

Contents

1	Introduction	1
2	Backgrounds	2
2.1	Operational Semantics	2
2.2	Proof Techniques	3
2.3	Truly Concurrent Process Algebra – APTC	3
2.3.1	Basic Algebra for True Concurrency	3
2.3.2	<i>APTC</i> with Left Parallel Composition	6
2.3.3	Recursion	10
2.3.4	Abstraction	13
2.4	Probabilistic Truly Concurrent Process Algebra – APPTC	17
2.4.1	Basic Algebra for Probabilistic True Concurrency	18
2.4.2	Algebra for Parallelism in Probabilistic True Concurrency	22
2.4.3	Recursion	27
2.4.4	Abstraction	29
2.5	Operational Semantics for Quantum Computing	35
3	APTC for Open Quantum Systems	44
3.1	BATC for Open Quantum Systems	44
3.2	APTC for Open Quantum Systems	46
3.3	Recursion	50
3.4	Abstraction	53
3.5	Quantum Entanglement	58
3.6	Unification of Quantum and Classical Computing for Open Quantum Systems . .	60
4	Applications of qAPTC	61
4.1	Verification of BB84 Protocol	61
4.2	Verification of E91 Protocol	63
4.3	Verification of B92 Protocol	65
4.4	Verification of DPS Protocol	68
4.5	Verification of BBM92 Protocol	70
4.6	Verification of SARG04 Protocol	72
4.7	Verification of COW Protocol	74
4.8	Verification of SSP Protocol	76

4.9	Verification of S09 Protocol	79
4.10	Verification of KMB09 Protocol	81
4.11	Verification of S13 Protocol	83
5	APPTC for Closed Quantum Systems	87
5.1	<i>BAPTC</i> for Closed Quantum Systems	87
5.2	<i>APPTC</i> for Closed Quantum Systems	90
5.3	Recursion	96
5.4	Abstraction	98
5.5	Quantum Measurement	103
5.6	Quantum Entanglement	103
5.7	Unification of Quantum and Classical Computing for Closed Quantum Systems .	106
6	Applications of qAPPTC	107
6.1	Verification of Quantum Teleportation Protocol	107
6.2	Verification of BB84 Protocol	109
6.3	Verification of E91 Protocol	111
6.4	Verification of B92 Protocol	114
6.5	Verification of DPS Protocol	116
6.6	Verification of BBM92 Protocol	118
6.7	Verification of SARG04 Protocol	120
6.8	Verification of COW Protocol	123
6.9	Verification of SSP Protocol	125
6.10	Verification of S09 Protocol	127
6.11	Verification of KMB09 Protocol	130
6.12	Verification of S13 Protocol	132

1 Introduction

Truly concurrent process algebras are generalizations to the traditional process algebras for true concurrency, CTC [6] to CCS [1] [2], APTC [7] to ACP [3], π_{tc} [8] to π calculus [4] [5], APPTC [9] to probabilistic process algebra [10] [11] [12].

In quantum process algebras, there are several well-known work [13] [16] [17] [14] [15] [20] [21] [13] [23], and we ever did some work [26] [27] [28] to unify quantum and classical computing under the framework of ACP [3] and probabilistic process algebra [10].

Now, it is the time to utilize truly concurrent process algebras APTC [7] and APPTC [9] to model quantum computing and unify quantum and classical computing in this book. This book is organized as follows. In chapter 2, we introduce the preliminaries. In chapter 3 and 4, we introduce the utilization of APTC to unify quantum and classical computing and its usage in verification of quantum communication protocols. In chapter 5 and 6, we introduce the utilization of APPTC to unifying quantum and classical computing and its usage in verification of quantum communication protocols.

2 Backgrounds

To make this book self-satisfied, we introduce some preliminaries in this chapter, including some introductions on operational semantics, proof techniques, truly concurrent process algebra [7] [6] [8] which is based on truly concurrent operational semantics, and also probabilistic truly concurrent process algebra and probabilistic truly concurrent operational semantics, and also operational semantics for quantum computing.

2.1 Operational Semantics

The semantics of *ACP* is based on bisimulation/rooted branching bisimulation equivalences, and the modularity of *ACP* relies on the concept of conservative extension, for the conveniences, we introduce some concepts and conclusions on them.

Definition 2.1 (Bisimulation). *A bisimulation relation R is a binary relation on processes such that: (1) if pRq and $p \xrightarrow{a} p'$ then $q \xrightarrow{a} q'$ with $p'Rq'$; (2) if pRq and $q \xrightarrow{a} q'$ then $p \xrightarrow{a} p'$ with $p'Rq'$; (3) if pRq and pP , then qP ; (4) if pRq and qP , then pP . Two processes p and q are bisimilar, denoted by $p \sim_{HM} q$, if there is a bisimulation relation R such that pRq .*

Definition 2.2 (Congruence). *Let Σ be a signature. An equivalence relation R on $\mathcal{T}(\Sigma)$ is a congruence if for each $f \in \Sigma$, if $s_i R t_i$ for $i \in \{1, \dots, ar(f)\}$, then $f(s_1, \dots, s_{ar(f)}) R f(t_1, \dots, t_{ar(f)})$.*

Definition 2.3 (Branching bisimulation). *A branching bisimulation relation R is a binary relation on the collection of processes such that: (1) if pRq and $p \xrightarrow{a} p'$ then either $a \equiv \tau$ and $p'Rq$ or there is a sequence of (zero or more) τ -transitions $q \xrightarrow{\tau} \dots \xrightarrow{\tau} q_0$ such that pRq_0 and $q_0 \xrightarrow{a} q'$ with $p'Rq'$; (2) if pRq and $q \xrightarrow{a} q'$ then either $a \equiv \tau$ and pRq' or there is a sequence of (zero or more) τ -transitions $p \xrightarrow{\tau} \dots \xrightarrow{\tau} p_0$ such that p_0Rq and $p_0 \xrightarrow{a} p'$ with $p'Rq'$; (3) if pRq and pP , then there is a sequence of (zero or more) τ -transitions $q \xrightarrow{\tau} \dots \xrightarrow{\tau} q_0$ such that pRq_0 and q_0P ; (4) if pRq and qP , then there is a sequence of (zero or more) τ -transitions $p \xrightarrow{\tau} \dots \xrightarrow{\tau} p_0$ such that p_0Rq and p_0P . Two processes p and q are branching bisimilar, denoted by $p \approx_{bHM} q$, if there is a branching bisimulation relation R such that pRq .*

Definition 2.4 (Rooted branching bisimulation). *A rooted branching bisimulation relation R is a binary relation on processes such that: (1) if pRq and $p \xrightarrow{a} p'$ then $q \xrightarrow{a} q'$ with $p' \approx_{bHM} q'$; (2) if pRq and $q \xrightarrow{a} q'$ then $p \xrightarrow{a} p'$ with $p' \approx_{bHM} q'$; (3) if pRq and pP , then qP ; (4) if pRq and qP , then pP . Two processes p and q are rooted branching bisimilar, denoted by $p \approx_{rbHM} q$, if there is a rooted branching bisimulation relation R such that pRq .*

Definition 2.5 (Conservative extension). *Let T_0 and T_1 be TSSs (transition system specifications) over signatures Σ_0 and Σ_1 , respectively. The TSS $T_0 \oplus T_1$ is a conservative extension of T_0 if the LTSs (labeled transition systems) generated by T_0 and $T_0 \oplus T_1$ contain exactly the same transitions $t \xrightarrow{a} t'$ and tP with $t \in \mathcal{T}(\Sigma_0)$.*

Definition 2.6 (Source-dependency). *The source-dependent variables in a transition rule of ρ are defined inductively as follows: (1) all variables in the source of ρ are source-dependent; (2) if $t \xrightarrow{a} t'$ is a premise of ρ and all variables in t are source-dependent, then all variables in t' are source-dependent. A transition rule is source-dependent if all its variables are. A TSS is source-dependent if all its rules are.*

Definition 2.7 (Freshness). *Let T_0 and T_1 be TSSs over signatures Σ_0 and Σ_1 , respectively. A term in $\mathbb{T}(T_0 \oplus T_1)$ is said to be fresh if it contains a function symbol from $\Sigma_1 \setminus \Sigma_0$. Similarly, a transition label or predicate symbol in T_1 is fresh if it does not occur in T_0 .*

Theorem 2.8 (Conservative extension). *Let T_0 and T_1 be TSSs over signatures Σ_0 and Σ_1 , respectively, where T_0 and $T_0 \oplus T_1$ are positive after reduction. Under the following conditions, $T_0 \oplus T_1$ is a conservative extension of T_0 . (1) T_0 is source-dependent. (2) For each $\rho \in T_1$, either the source of ρ is fresh, or ρ has a premise of the form $t \xrightarrow{a} t'$ or tP , where $t \in \mathbb{T}(\Sigma_0)$, all variables in t occur in the source of ρ and t' , a or P is fresh.*

2.2 Proof Techniques

In this subsection, we introduce the concepts and conclusions about elimination, which is very important in the proof of completeness theorem.

Definition 2.9 (Elimination property). *Let a process algebra with a defined set of basic terms as a subset of the set of closed terms over the process algebra. Then the process algebra has the elimination to basic terms property if for every closed term s of the algebra, there exists a basic term t of the algebra such that the algebra $\vdash s = t$.*

Definition 2.10 (Strongly normalizing). *A term s_0 is called strongly normalizing if does not an infinite series of reductions beginning in s_0 .*

Definition 2.11. *We write $s >_{lpo} t$ if $s \rightarrow^+ t$ where \rightarrow^+ is the transitive closure of the reduction relation defined by the transition rules of an algebra.*

Theorem 2.12 (Strong normalization). *Let a term rewriting system (TRS) with finitely many rewriting rules and let $>$ be a well-founded ordering on the signature of the corresponding algebra. If $s >_{lpo} t$ for each rewriting rule $s \rightarrow t$ in the TRS, then the term rewriting system is strongly normalizing.*

2.3 Truly Concurrent Process Algebra – APTC

APTC eliminates the differences of structures of transition system, event structure, etc, and discusses their behavioral equivalences. It considers that there are two kinds of causality relations: the chronological order modeled by the sequential composition and the causal order between different parallel branches modeled by the communication merge. It also considers that there exist two kinds of confliction relations: the structural confliction modeled by the alternative composition and the conflictions in different parallel branches which should be eliminated. Based on conservative extension, there are four modules in APTC: BATC (Basic Algebra for True Concurrency), APTC (Algebra for Parallelism in True Concurrency), recursion and abstraction.

2.3.1 Basic Algebra for True Concurrency

BATC has sequential composition \cdot and alternative composition $+$ to capture the chronological ordered causality and the structural confliction. The constants are ranged over A , the set of atomic actions. The algebraic laws on \cdot and $+$ are sound and complete modulo truly concurrent bisimulation equivalences (including pomset bisimulation, step bisimulation, hp-bisimulation and hhp-bisimulation).

Definition 2.13 (Prime event structure with silent event). Let Λ be a fixed set of labels, ranged over a, b, c, \dots and τ . A (Λ -labelled) prime event structure with silent event τ is a tuple $\mathcal{E} = \langle \mathbb{E}, \leq, \# , \lambda \rangle$, where \mathbb{E} is a denumerable set of events, including the silent event τ . Let $\hat{\mathbb{E}} = \mathbb{E} \setminus \{\tau\}$, exactly excluding τ , it is obvious that $\hat{\tau}^* = \epsilon$, where ϵ is the empty event. Let $\lambda : \mathbb{E} \rightarrow \Lambda$ be a labelling function and let $\lambda(\tau) = \tau$. And $\leq, \#$ are binary relations on \mathbb{E} , called causality and conflict respectively, such that:

1. \leq is a partial order and $[e] = \{e' \in \mathbb{E} \mid e' \leq e\}$ is finite for all $e \in \mathbb{E}$. It is easy to see that $e \leq \tau^* \leq e' = e \leq \tau \leq \dots \leq \tau \leq e'$, then $e \leq e'$.
2. $\#$ is irreflexive, symmetric and hereditary with respect to \leq , that is, for all $e, e', e'' \in \mathbb{E}$, if $e \# e' \leq e''$, then $e \# e''$.

Then, the concepts of consistency and concurrency can be drawn from the above definition:

1. $e, e' \in \mathbb{E}$ are consistent, denoted as $e \sim e'$, if $\neg(e \# e')$. A subset $X \subseteq \mathbb{E}$ is called consistent, if $e \sim e'$ for all $e, e' \in X$.
2. $e, e' \in \mathbb{E}$ are concurrent, denoted as $e \parallel e'$, if $\neg(e \leq e'), \neg(e' \leq e)$, and $\neg(e \# e')$.

Definition 2.14 (Configuration). Let \mathcal{E} be a PES. A (finite) configuration in \mathcal{E} is a (finite) consistent subset of events $C \subseteq \mathcal{E}$, closed with respect to causality (i.e. $[C] = C$). The set of finite configurations of \mathcal{E} is denoted by $\mathcal{C}(\mathcal{E})$. We let $\hat{C} = C \setminus \{\tau\}$.

A consistent subset of $X \subseteq \mathbb{E}$ of events can be seen as a pomset. Given $X, Y \subseteq \mathbb{E}$, $\hat{X} \sim \hat{Y}$ if \hat{X} and \hat{Y} are isomorphic as pomsets. In the following of the paper, we say $C_1 \sim C_2$, we mean $\hat{C}_1 \sim \hat{C}_2$.

Definition 2.15 (Pomset transitions and step). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \mathbb{E}$, if $C \cap X = \emptyset$ and $C' = C \cup X \in \mathcal{C}(\mathcal{E})$, then $C \xrightarrow{X} C'$ is called a pomset transition from C to C' . When the events in X are pairwise concurrent, we say that $C \xrightarrow{X} C'$ is a step.

Definition 2.16 (Pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{X_1} C'_1$ then $C_2 \xrightarrow{X_2} C'_2$, with $X_1 \subseteq \mathbb{E}_1, X_2 \subseteq \mathbb{E}_2, X_1 \sim X_2$ and $(C'_1, C'_2) \in R$, and vice-versa. We say that $\mathcal{E}_1, \mathcal{E}_2$ are pomset bisimilar, written $\mathcal{E}_1 \sim_p \mathcal{E}_2$, if there exists a pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$. By replacing pomset transitions with steps, we can get the definition of step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are step bisimilar, we write $\mathcal{E}_1 \sim_s \mathcal{E}_2$.

Definition 2.17 (Posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the posetal product of their configurations, denoted $\mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, is defined as

$$\{(C_1, f, C_2) \mid C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : C_1 \rightarrow C_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ is called a posetal relation. We say that R is downward closed when for any $(C_1, f, C_2), (C'_1, f', C'_2) \in \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, if $(C_1, f, C_2) \subseteq (C'_1, f', C'_2)$ pointwise and $(C'_1, f', C'_2) \in R$, then $(C_1, f, C_2) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}, z \in X_1 \cup \{x_1\}, (1)f[x_1 \mapsto x_2](z) = x_2, \text{ if } z = x_1; (2)f[x_1 \mapsto x_2](z) = f(z), \text{ otherwise. Where } X_1 \subseteq \mathbb{E}_1, X_2 \subseteq \mathbb{E}_2, x_1 \in \mathbb{E}_1, x_2 \in \mathbb{E}_2.$

No.	Axiom
A1	$x + y = y + x$
A2	$(x + y) + z = x + (y + z)$
A3	$x + x = x$
A4	$(x + y) \cdot z = x \cdot z + y \cdot z$
A5	$(x \cdot y) \cdot z = x \cdot (y \cdot z)$

Table 1: Axioms of BATC

$\overline{e \xrightarrow{e} \surd}$			
$\frac{x \xrightarrow{e} \surd}{x + y \xrightarrow{e} \surd}$	$\frac{x \xrightarrow{e} x'}{x + y \xrightarrow{e} x'}$	$\frac{y \xrightarrow{e} \surd}{x + y \xrightarrow{e} \surd}$	$\frac{y \xrightarrow{e} y'}{x + y \xrightarrow{e} y'}$
$\frac{x \xrightarrow{e} \surd}{x \cdot y \xrightarrow{e} y}$		$\frac{x \xrightarrow{e} x'}{x \cdot y \xrightarrow{e} x' \cdot y}$	

Table 2: Transition rules of BATC

Definition 2.18 ((Hereditary) history-preserving bisimulation). *A history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ such that if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{e_1} C'_1$, then $C_2 \xrightarrow{e_2} C'_2$, with $(C'_1, f[e_1 \mapsto e_2], C'_2) \in R$, and vice-versa. $\mathcal{E}_1, \mathcal{E}_2$ are history-preserving (hp-) bisimilar and are written $\mathcal{E}_1 \sim_{hp} \mathcal{E}_2$ if there exists a hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.*

A hereditary history-preserving (hhp-) bisimulation is a downward closed hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are hereditary history-preserving (hhp-) bisimilar and are written $\mathcal{E}_1 \sim_{hhp} \mathcal{E}_2$.

In the following, let $e_1, e_2, e'_1, e'_2 \in \mathbb{E}$, and let variables x, y, z range over the set of terms for true concurrency, p, q, s range over the set of closed terms. The set of axioms of BATC consists of the laws given in Table 1.

Definition 2.19 (Basic terms of BATC). *The set of basic terms of BATC, $\mathcal{B}(\text{BATC})$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(\text{BATC})$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(\text{BATC})$ then $e \cdot t \in \mathcal{B}(\text{BATC})$;
3. if $t, s \in \mathcal{B}(\text{BATC})$ then $t + s \in \mathcal{B}(\text{BATC})$.

Theorem 2.20 (Elimination theorem of BATC). *Let p be a closed BATC term. Then there is a basic BATC term q such that $\text{BATC} \vdash p = q$.*

We give the operational transition rules of operators \cdot and $+$ as Table 2 shows. And the predicate $\xrightarrow{e} \surd$ represents successful termination after execution of the event e .

Theorem 2.21 (Congruence of *BATC* with respect to truly concurrent bisimulation equivalences). *Truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all congruences with respect to *BATC*.*

Theorem 2.22 (Soundness of *BATC* modulo truly concurrent bisimulation equivalences). *The axiomatization of *BATC* is sound modulo truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} . That is,*

1. *let x and y be *BATC* terms. If $BATC \vdash x = y$, then $x \sim_p y$;*
2. *let x and y be *BATC* terms. If $BATC \vdash x = y$, then $x \sim_s y$;*
3. *let x and y be *BATC* terms. If $BATC \vdash x = y$, then $x \sim_{hp} y$;*
4. *let x and y be *BATC* terms. If $BATC \vdash x = y$, then $x \sim_{hhp} y$.*

Theorem 2.23 (Completeness of *BATC* modulo truly concurrent bisimulation equivalences). *The axiomatization of *BATC* is complete modulo truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} . That is,*

1. *let p and q be closed *BATC* terms, if $p \sim_p q$ then $p = q$;*
2. *let p and q be closed *BATC* terms, if $p \sim_s q$ then $p = q$;*
3. *let p and q be closed *BATC* terms, if $p \sim_{hp} q$ then $p = q$;*
4. *let p and q be closed *BATC* terms, if $p \sim_{hhp} q$ then $p = q$.*

Since hhp-bisimilarity is a downward closed hp-bisimilarity and can be downward closed to single atomic event, which implies bisimilarity. As Moller [29] proven, there is not a finite sound and complete axiomatization for parallelism \parallel modulo bisimulation equivalence, so there is not a finite sound and complete axiomatization for parallelism \parallel modulo hhp-bisimulation equivalence either. Inspired by the way of left merge to modeling the full merge for bisimilarity, we introduce a left parallel composition \ll to model the full parallelism \parallel for hhp-bisimilarity.

In the following subsection, we add left parallel composition \ll to the whole theory. Because the resulting theory is similar to the former, we only list the significant differences, and all proofs of the conclusions are left to the reader.

2.3.2 APTC with Left Parallel Composition

We give the transition rules of APTC in Table 3, it is suitable for all truly concurrent behavioral equivalence, including pomset bisimulation, step bisimulation, hp-bisimulation and hhp-bisimulation.

The transition rules of left parallel composition \ll are shown in Table 4. With a little abuse, we extend the causal order relation \leq on \mathbb{E} to include the original partial order (denoted by $<$) and concurrency (denoted by $=$).

$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \parallel y \xrightarrow{\{e_1, e_2\}} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \parallel y \xrightarrow{\{e_1, e_2\}} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y'}{x \parallel y \xrightarrow{\{e_1, e_2\}} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y'}{x \parallel y \xrightarrow{\{e_1, e_2\}} x' \wp y'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \mid y \xrightarrow{\gamma(e_1, e_2)} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \mid y \xrightarrow{\gamma(e_1, e_2)} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y'}{x \mid y \xrightarrow{\gamma(e_1, e_2)} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y'}{x \mid y \xrightarrow{\gamma(e_1, e_2)} x' \wp y'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_2} \sqrt{\quad} \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \sqrt{\quad}}$
$\frac{x \xrightarrow{e_1} x' \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \Theta(x')}$	$\frac{x \xrightarrow{e_2} x' \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \Theta(x')}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_3} \quad (\sharp(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_3} \quad (\sharp(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} x'}$
$\frac{x \xrightarrow{e_3} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_3} x' \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} x'}$
$\frac{x \xrightarrow{e} \sqrt{\quad}}{\partial_H(x) \xrightarrow{e} \sqrt{\quad}} \quad (e \notin H)$	$\frac{x \xrightarrow{e} x'}{\partial_H(x) \xrightarrow{e} \partial_H(x')} \quad (e \notin H)$

Table 3: Transition rules of APTC

$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad} \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad} \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y' \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y' \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} x' \wp y'}$

Table 4: Transition rules of left parallel operator \parallel

The new axioms for parallelism are listed in Table 5.

Definition 2.24 (Basic terms of *APTC* with left parallel composition). *The set of basic terms of *APTC*, $\mathcal{B}(\text{APTC})$, is inductively defined as follows:*

1. $\mathbb{E} \in \mathcal{B}(\text{APTC})$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(\text{APTC})$ then $e \cdot t \in \mathcal{B}(\text{APTC})$;
3. if $t, s \in \mathcal{B}(\text{APTC})$ then $t + s \in \mathcal{B}(\text{APTC})$;
4. if $t, s \in \mathcal{B}(\text{APTC})$ then $t \parallel s \in \mathcal{B}(\text{APTC})$.

Theorem 2.25 (Generalization of the algebra for left parallelism with respect to *BATC*). *The algebra for left parallelism is a generalization of *BATC*.*

Theorem 2.26 (Congruence theorem of *APTC* with left parallel composition). *Truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all congruences with respect to *APTC* with left parallel composition.*

Theorem 2.27 (Elimination theorem of parallelism with left parallel composition). *Let p be a closed *APTC* with left parallel composition term. Then there is a basic *APTC* term q such that $\text{APTC} \vdash p = q$.*

Theorem 2.28 (Soundness of parallelism with left parallel composition modulo truly concurrent bisimulation equivalences). *Let x and y be *APTC* with left parallel composition terms. If $\text{APTC} \vdash x = y$, then*

1. $x \sim_s y$;
2. $x \sim_p y$;
3. $x \sim_{hp} y$;
4. $x \sim_{hhp} y$.

Theorem 2.29 (Completeness of parallelism with left parallel composition modulo truly concurrent bisimulation equivalences). *Let x and y be *APTC* terms.*

1. If $x \sim_s y$, then $\text{APTC} \vdash x = y$;
2. if $x \sim_p y$, then $\text{APTC} \vdash x = y$;
3. if $x \sim_{hp} y$, then $\text{APTC} \vdash x = y$;
4. if $x \sim_{hhp} y$, then $\text{APTC} \vdash x = y$.

The axioms of encapsulation operator are shown in 6.

No.	Axiom
A6	$x + \delta = x$
A7	$\delta \cdot x = \delta$
P1	$x \bowtie y = x \parallel y + x \mid y$
P2	$x \parallel y = y \parallel x$
P3	$(x \parallel y) \parallel z = x \parallel (y \parallel z)$
P4	$x \parallel y = x \parallel y + y \parallel x$
P5	$(e_1 \leq e_2) \quad e_1 \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot y$
P6	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel e_2 = (e_1 \parallel e_2) \cdot x$
P7	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot (x \bowtie y)$
P8	$(x + y) \parallel z = (x \parallel z) + (y \parallel z)$
P9	$\delta \parallel x = \delta$
C10	$e_1 \mid e_2 = \gamma(e_1, e_2)$
C11	$e_1 \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot y$
C12	$(e_1 \cdot x) \mid e_2 = \gamma(e_1, e_2) \cdot x$
C13	$(e_1 \cdot x) \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot (x \bowtie y)$
C14	$(x + y) \mid z = (x \mid z) + (y \mid z)$
C15	$x \mid (y + z) = (x \mid y) + (x \mid z)$
C16	$\delta \mid x = \delta$
C17	$x \mid \delta = \delta$
CE18	$\Theta(e) = e$
CE19	$\Theta(\delta) = \delta$
CE20	$\Theta(x + y) = \Theta(x) \triangleleft y + \Theta(y) \triangleleft x$
CE21	$\Theta(x \cdot y) = \Theta(x) \cdot \Theta(y)$
CE22	$\Theta(x \parallel y) = ((\Theta(x) \triangleleft y) \parallel y) + ((\Theta(y) \triangleleft x) \parallel x)$
CE23	$\Theta(x \mid y) = ((\Theta(x) \triangleleft y) \mid y) + ((\Theta(y) \triangleleft x) \mid x)$
U24	$(\sharp(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
U25	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
U26	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
U27	$e \triangleleft \delta = e$
U28	$\delta \triangleleft e = \delta$
U29	$(x + y) \triangleleft z = (x \triangleleft z) + (y \triangleleft z)$
U30	$(x \cdot y) \triangleleft z = (x \triangleleft z) \cdot (y \triangleleft z)$
U31	$(x \parallel y) \triangleleft z = (x \triangleleft z) \parallel (y \triangleleft z)$
U32	$(x \mid y) \triangleleft z = (x \triangleleft z) \mid (y \triangleleft z)$
U33	$x \triangleleft (y + z) = (x \triangleleft y) \triangleleft z$
U34	$x \triangleleft (y \cdot z) = (x \triangleleft y) \triangleleft z$
U35	$x \triangleleft (y \parallel z) = (x \triangleleft y) \triangleleft z$
U36	$x \triangleleft (y \mid z) = (x \triangleleft y) \triangleleft z$

Table 5: Axioms of parallelism with left parallel composition

No.	Axiom
D1	$e \notin H \quad \partial_H(e) = e$
D2	$e \in H \quad \partial_H(e) = \delta$
D3	$\partial_H(\delta) = \delta$
D4	$\partial_H(x + y) = \partial_H(x) + \partial_H(y)$
D5	$\partial_H(x \cdot y) = \partial_H(x) \cdot \partial_H(y)$
D6	$\partial_H(x \parallel y) = \partial_H(x) \parallel \partial_H(y)$

Table 6: Axioms of encapsulation operator with left parallel composition

Theorem 2.30 (Conservativity of *APTC* with respect to the algebra for parallelism with left parallel composition). *APTC is a conservative extension of the algebra for parallelism with left parallel composition.*

Theorem 2.31 (Congruence theorem of encapsulation operator ∂_H). *Truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all congruences with respect to encapsulation operator ∂_H .*

Theorem 2.32 (Elimination theorem of *APTC*). *Let p be a closed *APTC* term including the encapsulation operator ∂_H . Then there is a basic *APTC* term q such that $APTC \vdash p = q$.*

Theorem 2.33 (Soundness of *APTC* modulo truly concurrent bisimulation equivalences). *Let x and y be *APTC* terms including encapsulation operator ∂_H . If $APTC \vdash x = y$, then*

1. $x \sim_s y$;
2. $x \sim_p y$;
3. $x \sim_{hp} y$;
4. $x \sim_{hhp} y$.

Theorem 2.34 (Completeness of *APTC* modulo truly concurrent bisimulation equivalences). *Let p and q be closed *APTC* terms including encapsulation operator ∂_H ,*

1. *if $p \sim_s q$ then $p = q$;*
2. *if $p \sim_p q$ then $p = q$;*
3. *if $p \sim_{hp} q$ then $p = q$;*
4. *if $p \sim_{hhp} q$ then $p = q$.*

2.3.3 Recursion

Definition 2.35 (Recursive specification). *A recursive specification is a finite set of recursive equations*

$$X_1 = t_1(X_1, \dots, X_n)$$

...

$$X_n = t_n(X_1, \dots, X_n)$$

where the left-hand sides of X_i are called recursion variables, and the right-hand sides $t_i(X_1, \dots, X_n)$ are process terms in *APTC* with possible occurrences of the recursion variables X_1, \dots, X_n .

Definition 2.36 (Solution). Processes p_1, \dots, p_n are a solution for a recursive specification $\{X_i = t_i(X_1, \dots, X_n) \mid i \in \{1, \dots, n\}\}$ (with respect to truly concurrent bisimulation equivalences $\sim_s(\sim_p, \sim_{hp}, \sim_{hhp})$) if $p_i \sim_s(\sim_p, \sim_{hp}, \sim_{hhp})t_i(p_1, \dots, p_n)$ for $i \in \{1, \dots, n\}$.

Definition 2.37 (Guarded recursive specification). A recursive specification

$$X_1 = t_1(X_1, \dots, X_n)$$

...

$$X_n = t_n(X_1, \dots, X_n)$$

is guarded if the right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in *APTC* and replacing recursion variables by the right-hand sides of their recursive equations,

$$(a_{11} \parallel \dots \parallel a_{1i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l1} \parallel \dots \parallel b_{lj_l})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l1}, \dots, b_{lj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

Definition 2.38 (Linear recursive specification). A recursive specification is linear if its recursive equations are of the form

$$(a_{11} \parallel \dots \parallel a_{1i_1})X_1 + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k})X_k + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l1} \parallel \dots \parallel b_{lj_l})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l1}, \dots, b_{lj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

The *RDP* (Recursive Definition Principle) and the *RSP* (Recursive Specification Principle) are shown in Table 8.

Theorem 2.39 (Conservativity of *APTC* with guarded recursion). *APTC* with guarded recursion is a conservative extension of *APTC*.

$$\begin{array}{c}
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} \surd}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} \surd} \\
\\
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} y}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} y}
\end{array}$$

Table 7: Transition rules of guarded recursion

No.	Axiom
<i>RDP</i>	$\langle X_i E \rangle = t_i(\langle X_1 E \rangle, \dots, \langle X_n E \rangle) \quad (i \in \{1, \dots, n\})$
<i>RSP</i>	if $y_i = t_i(y_1, \dots, y_n)$ for $i \in \{1, \dots, n\}$, then $y_i = \langle X_i E \rangle \quad (i \in \{1, \dots, n\})$

Table 8: Recursive definition and specification principle

Theorem 2.40 (Congruence theorem of *APTC* with guarded recursion). *Truly concurrent bisimulation equivalences $\sim_p, \sim_s, \sim_{hp}, \sim_{hhp}$ are all congruences with respect to *APTC* with guarded recursion.*

Theorem 2.41 (Elimination theorem of *APTC* with linear recursion). *Each process term in *APTC* with linear recursion is equal to a process term $\langle X_1|E \rangle$ with E a linear recursive specification.*

The behavior of the solution $\langle X_i|E \rangle$ for the recursion variable X_i in E , where $i \in \{1, \dots, n\}$, is exactly the behavior of their right-hand sides $t_i(X_1, \dots, X_n)$, which is captured by the two transition rules in Table 34.

Theorem 2.42 (Soundness of *APTC* with guarded recursion). *Let x and y be *APTC* with guarded recursion terms. If *APTC* with guarded recursion $\vdash x = y$, then*

1. $x \sim_s y$;
2. $x \sim_p y$;
3. $x \sim_{hp} y$;
4. $x \sim_{hhp} y$.

Theorem 2.43 (Completeness of *APTC* with linear recursion). *Let p and q be closed *APTC* with linear recursion terms, then,*

1. if $p \sim_s q$ then $p = q$;
2. if $p \sim_p q$ then $p = q$;
3. if $p \sim_{hp} q$ then $p = q$;
4. if $p \sim_{hhp} q$ then $p = q$.

2.3.4 Abstraction

Definition 2.44 (Weak pomset transitions and weak step). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \hat{\mathbb{E}}$, if $C \cap X = \emptyset$ and $\hat{C}' = \hat{C} \cup X \in \mathcal{C}(\mathcal{E})$, then $C \xRightarrow{X} C'$ is called a weak pomset transition from C to C' , where we define $\xRightarrow{e} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$. And $\xRightarrow{X} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$, for every $e \in X$. When the events in X are pairwise concurrent, we say that $C \xRightarrow{X} C'$ is a weak step.

Definition 2.45 (Branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A branching pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that:

1. if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{X} C'_1$ then
 - either $X \equiv \tau^*$, and $(C'_1, C_2) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $C_2 \xrightarrow{\tau^*} C_2^0$, such that $(C_1, C_2^0) \in R$ and $C_2^0 \xRightarrow{X} C'_2$ with $(C'_1, C'_2) \in R$;
2. if $(C_1, C_2) \in R$, and $C_2 \xrightarrow{X} C'_2$ then
 - either $X \equiv \tau^*$, and $(C_1, C'_2) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $C_1 \xrightarrow{\tau^*} C_1^0$, such that $(C_1^0, C_2) \in R$ and $C_1^0 \xRightarrow{X} C'_1$ with $(C'_1, C'_2) \in R$;
3. if $(C_1, C_2) \in R$ and $C_1 \downarrow$, then there is a sequence of (zero or more) τ -transitions $C_2 \xrightarrow{\tau^*} C_2^0$ such that $(C_1, C_2^0) \in R$ and $C_2^0 \downarrow$;
4. if $(C_1, C_2) \in R$ and $C_2 \downarrow$, then there is a sequence of (zero or more) τ -transitions $C_1 \xrightarrow{\tau^*} C_1^0$ such that $(C_1^0, C_2) \in R$ and $C_1^0 \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are branching pomset bisimilar, written $\mathcal{E}_1 \approx_{bp} \mathcal{E}_2$, if there exists a branching pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$.

By replacing pomset transitions with steps, we can get the definition of branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are branching step bisimilar, we write $\mathcal{E}_1 \approx_{bs} \mathcal{E}_2$.

Definition 2.46 (Rooted branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A branching pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that:

1. if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{X} C'_1$ then $C_2 \xrightarrow{X} C'_2$ with $C'_1 \approx_{bp} C'_2$;
2. if $(C_1, C_2) \in R$, and $C_2 \xrightarrow{X} C'_2$ then $C_1 \xrightarrow{X} C'_1$ with $C'_1 \approx_{bp} C'_2$;
3. if $(C_1, C_2) \in R$ and $C_1 \downarrow$, then $C_2 \downarrow$;
4. if $(C_1, C_2) \in R$ and $C_2 \downarrow$, then $C_1 \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are rooted branching pomset bisimilar, written $\mathcal{E}_1 \approx_{rbp} \mathcal{E}_2$, if there exists a rooted branching pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$.

By replacing pomset transitions with steps, we can get the definition of rooted branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are rooted branching step bisimilar, we write $\mathcal{E}_1 \approx_{rbs} \mathcal{E}_2$.

Definition 2.47 (Branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. A branching history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ such that:

1. if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{e_1} C'_1$ then
 - either $e_1 \equiv \tau$, and $(C'_1, f[e_1 \mapsto \tau], C_2) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $C_2 \xrightarrow{\tau^*} C_2^0$, such that $(C_1, f, C_2^0) \in R$ and $C_2^0 \xrightarrow{e_2} C'_2$ with $(C'_1, f[e_1 \mapsto e_2], C'_2) \in R$;
2. if $(C_1, f, C_2) \in R$, and $C_2 \xrightarrow{e_2} C'_2$ then
 - either $X \equiv \tau$, and $(C_1, f[e_2 \mapsto \tau], C'_2) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $C_1 \xrightarrow{\tau^*} C_1^0$, such that $(C_1^0, f, C_2) \in R$ and $C_1^0 \xrightarrow{e_1} C'_1$ with $(C'_1, f[e_2 \mapsto e_1], C'_2) \in R$;
3. if $(C_1, f, C_2) \in R$ and $C_1 \downarrow$, then there is a sequence of (zero or more) τ -transitions $C_2 \xrightarrow{\tau^*} C_2^0$ such that $(C_1, f, C_2^0) \in R$ and $C_2^0 \downarrow$;
4. if $(C_1, f, C_2) \in R$ and $C_2 \downarrow$, then there is a sequence of (zero or more) τ -transitions $C_1 \xrightarrow{\tau^*} C_1^0$ such that $(C_1^0, f, C_2) \in R$ and $C_1^0 \downarrow$.

$\mathcal{E}_1, \mathcal{E}_2$ are branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{bhp} \mathcal{E}_2$ if there exists a branching hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.

A branching hereditary history-preserving (hhp-)bisimulation is a downward closed branching hhp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{bhhp} \mathcal{E}_2$.

Definition 2.48 (Rooted branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. A rooted branching history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ such that:

1. if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{e_1} C'_1$, then $C_2 \xrightarrow{e_2} C'_2$ with $C'_1 \approx_{bhp} C'_2$;
2. if $(C_1, f, C_2) \in R$, and $C_2 \xrightarrow{e_2} C'_2$, then $C_1 \xrightarrow{e_1} C'_1$ with $C'_1 \approx_{bhp} C'_2$;
3. if $(C_1, f, C_2) \in R$ and $C_1 \downarrow$, then $C_2 \downarrow$;
4. if $(C_1, f, C_2) \in R$ and $C_2 \downarrow$, then $C_1 \downarrow$.

$$\begin{array}{c}
\overline{\tau \xrightarrow{\tau} \sqrt{}} \\
\frac{x \xrightarrow{e} \sqrt{}}{\tau_I(x) \xrightarrow{e} \sqrt{}} \quad e \notin I \qquad \frac{x \xrightarrow{e} x'}{\tau_I(x) \xrightarrow{e} \tau_I(x')} \quad e \notin I \\
\frac{x \xrightarrow{e} \sqrt{}}{\tau_I(x) \xrightarrow{\tau} \sqrt{}} \quad e \in I \qquad \frac{x \xrightarrow{e} x'}{\tau_I(x) \xrightarrow{\tau} \tau_I(x')} \quad e \in I
\end{array}$$

Table 9: Transition rule of APTC_τ

No.	Axiom
B1	$e \cdot \tau = e$
B2	$e \cdot (\tau \cdot (x + y) + x) = e \cdot (x + y)$
B3	$x \parallel \tau = x$

Table 10: Axioms of silent step

$\mathcal{E}_1, \mathcal{E}_2$ are rooted branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{rbhp} \mathcal{E}_2$ if there exists rooted a branching hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.

A rooted branching hereditary history-preserving (hhp-)bisimulation is a downward closed rooted branching hhp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are rooted branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{rbhhp} \mathcal{E}_2$.

Definition 2.49 (Guarded linear recursive specification). A recursive specification is linear if its recursive equations are of the form

$$(a_{11} \parallel \dots \parallel a_{1i_1})X_1 + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k})X_k + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l1} \parallel \dots \parallel b_{lj_l})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l1}, \dots, b_{lj_l} \in \mathbb{E} \cup \{\tau\}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

A linear recursive specification E is guarded if there does not exist an infinite sequence of τ -transitions $\langle X|E \rangle \xrightarrow{\tau} \langle X'|E \rangle \xrightarrow{\tau} \langle X''|E \rangle \xrightarrow{\tau} \dots$.

The transition rules of τ are shown in Table 9, and axioms of τ are as Table 10 shows.

Theorem 2.50 (Conservativity of APTC with silent step and guarded linear recursion). APTC with silent step and guarded linear recursion is a conservative extension of APTC with linear recursion.

Theorem 2.51 (Congruence theorem of APTC with silent step and guarded linear recursion). Rooted branching truly concurrent bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} , and \approx_{rbhhp} are all congruences with respect to APTC with silent step and guarded linear recursion.

No.	Axiom
TI1	$e \notin I \quad \tau_I(e) = e$
TI2	$e \in I \quad \tau_I(e) = \tau$
TI3	$\tau_I(\delta) = \delta$
TI4	$\tau_I(x + y) = \tau_I(x) + \tau_I(y)$
TI5	$\tau_I(x \cdot y) = \tau_I(x) \cdot \tau_I(y)$
TI6	$\tau_I(x \parallel y) = \tau_I(x) \parallel \tau_I(y)$

Table 11: Axioms of abstraction operator

Theorem 2.52 (Elimination theorem of *APTC* with silent step and guarded linear recursion). *Each process term in *APTC* with silent step and guarded linear recursion is equal to a process term $\langle X_1 | E \rangle$ with E a guarded linear recursive specification.*

Theorem 2.53 (Soundness of *APTC* with silent step and guarded linear recursion). *Let x and y be *APTC* with silent step and guarded linear recursion terms. If *APTC* with silent step and guarded linear recursion $\vdash x = y$, then*

1. $x \approx_{rbs} y$;
2. $x \approx_{rbp} y$;
3. $x \approx_{rbhp} y$;
4. $x \approx_{rbhhp} y$.

Theorem 2.54 (Completeness of *APTC* with silent step and guarded linear recursion). *Let p and q be closed *APTC* with silent step and guarded linear recursion terms, then,*

1. *if $p \approx_{rbs} q$ then $p = q$;*
2. *if $p \approx_{rbp} q$ then $p = q$;*
3. *if $p \approx_{rbhp} q$ then $p = q$;*
4. *if $p \approx_{rbhhp} q$ then $p = q$.*

The transition rules of τ_I are shown in Table 9, and the axioms are shown in Table 11.

Theorem 2.55 (Conservativity of *APTC* _{τ} with guarded linear recursion). **APTC* _{τ} with guarded linear recursion is a conservative extension of *APTC* with silent step and guarded linear recursion.*

Theorem 2.56 (Congruence theorem of *APTC* _{τ} with guarded linear recursion). *Rooted branching truly concurrent bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} are all congruences with respect to *APTC* _{τ} with guarded linear recursion.*

Theorem 2.57 (Soundness of *APTC* _{τ} with guarded linear recursion). *Let x and y be *APTC* _{τ} with guarded linear recursion terms. If *APTC* _{τ} with guarded linear recursion $\vdash x = y$, then*

No.	Axiom
<i>CFAR</i>	<p>If X is in a cluster for I with exits</p> $\{(a_{11} \parallel \dots \parallel a_{1i})Y_1, \dots, (a_{m1} \parallel \dots \parallel a_{mi})Y_m, b_{11} \parallel \dots \parallel b_{1j}, \dots, b_{n1} \parallel \dots \parallel b_{nj}\},$ <p>then $\tau \cdot \tau_I(\langle X E \rangle) =$</p> $\tau \cdot \tau_I((a_{11} \parallel \dots \parallel a_{1i})\langle Y_1 E \rangle + \dots + (a_{m1} \parallel \dots \parallel a_{mi})\langle Y_m E \rangle + b_{11} \parallel \dots \parallel b_{1j} + \dots + b_{n1} \parallel \dots \parallel b_{nj})$

Table 12: Cluster fair abstraction rule

1. $x \approx_{rbs} y;$
2. $x \approx_{rbp} y;$
3. $x \approx_{rbhp} y;$
4. $x \approx_{rbhhp} y.$

Definition 2.58 (Cluster). *Let E be a guarded linear recursive specification, and $I \subseteq \mathbb{E}$. Two recursion variable X and Y in E are in the same cluster for I iff there exist sequences of transitions $\langle X|E \rangle \xrightarrow{\{b_{11}, \dots, b_{1i}\}} \dots \xrightarrow{\{b_{m1}, \dots, b_{mi}\}} \langle Y|E \rangle$ and $\langle Y|E \rangle \xrightarrow{\{c_{11}, \dots, c_{1j}\}} \dots \xrightarrow{\{c_{n1}, \dots, c_{nj}\}} \langle X|E \rangle$, where $b_{11}, \dots, b_{mi}, c_{11}, \dots, c_{nj} \in I \cup \{\tau\}$.*

$a_1 \parallel \dots \parallel a_k$ or $(a_1 \parallel \dots \parallel a_k)X$ is an exit for the cluster C iff: (1) $a_1 \parallel \dots \parallel a_k$ or $(a_1 \parallel \dots \parallel a_k)X$ is a summand at the right-hand side of the recursive equation for a recursion variable in C , and (2) in the case of $(a_1 \parallel \dots \parallel a_k)X$, either $a_l \notin I \cup \{\tau\}$ ($l \in \{1, 2, \dots, k\}$) or $X \notin C$.

Theorem 2.59 (Soundness of *CFAR*). *$CFAR$ is sound modulo rooted branching truly concurrent bisimulation equivalences \approx_{rbs} , \approx_{rbp} , \approx_{rbhp} and \approx_{rbhhp} .*

Theorem 2.60 (Completeness of $APTC_\tau$ with guarded linear recursion and *CFAR*). *Let p and q be closed $APTC_\tau$ with guarded linear recursion and *CFAR* terms, then,*

1. *if $p \approx_{rbs} q$ then $p = q$;*
2. *if $p \approx_{rbp} q$ then $p = q$;*
3. *if $p \approx_{rbhp} q$ then $p = q$;*
4. *if $p \approx_{rbhhp} q$ then $p = q$.*

2.4 Probabilistic Truly Concurrent Process Algebra – APPTC

The theory *APPTC* (Algebra of Probabilistic Processes for True Concurrency) has four modules: *BAPTC* (Basic Algebra for Probabilistic True Concurrency), *APPTC* (Algebra for Parallelism in Probabilistic True Concurrency), recursion and abstraction.

2.4.1 Basic Algebra for Probabilistic True Concurrency

In this section, we will discuss the algebraic laws for prime event structure \mathcal{E} , exactly for causality \leq , conflict $\#$ and probabilistic conflict $\#_\pi$. We will follow the conventions of process algebra, using \cdot instead of \leq , $+$ instead of $\#$ and \boxplus_π instead of $\#_\pi$. The resulted algebra is called Basic Algebra for Probabilistic True Concurrency, abbreviated *BAPTC*.

In the following, the variables x, x', y, y', z, z' range over the collection of process terms, s, s', t, t', u, u' are closed terms, τ is the special constant silent step, δ is the special constant deadlock, A is the collection of atomic actions, atomic actions $a, b \in A$, $A_\delta = A \cup \{\delta\}$, $A_\tau = A \cup \{\tau\}$. \leadsto denotes probabilistic transition, and action transition labelled by an atomic action $a \in A$, \xrightarrow{a} and $\xrightarrow{a} \checkmark$. $x \xrightarrow{a} p$ means that by performing action a process x evolves into p ; while $x \xrightarrow{a} \checkmark$ means that x performs an a action and then terminates. $p \leadsto x$ denotes that process p chooses to behave like process x with a non-zero probability $\pi > 0$.

Definition 2.61 (Probabilistic prime event structure with silent event). *Let Λ be a fixed set of labels, ranged over a, b, c, \dots and τ . A (Λ -labelled) prime event structure with silent event τ is a quintuple $\mathcal{E} = \langle \mathbb{E}, \leq, \#, \#_\pi, \lambda \rangle$, where \mathbb{E} is a denumerable set of events, including the silent event τ . Let $\hat{\mathbb{E}} = \mathbb{E} \setminus \{\tau\}$, exactly excluding τ , it is obvious that $\hat{\tau}^* = \epsilon$, where ϵ is the empty event. Let $\lambda: \mathbb{E} \rightarrow \Lambda$ be a labelling function and let $\lambda(\tau) = \tau$. And $\leq, \#, \#_\pi$ are binary relations on \mathbb{E} , called causality, conflict and probabilistic conflict respectively, such that:*

1. \leq is a partial order and $[e] = \{e' \in \mathbb{E} | e' \leq e\}$ is finite for all $e \in \mathbb{E}$. It is easy to see that $e \leq \tau^* \leq e' = e \leq \tau \leq \dots \leq \tau \leq e'$, then $e \leq e'$.
2. $\#$ is irreflexive, symmetric and hereditary with respect to \leq , that is, for all $e, e', e'' \in \mathbb{E}$, if $e \# e' \leq e''$, then $e \# e''$;
3. $\#_\pi$ is irreflexive, symmetric and hereditary with respect to \leq , that is, for all $e, e', e'' \in \mathbb{E}$, if $e \#_\pi e' \leq e''$, then $e \#_\pi e''$.

Then, the concepts of consistency and concurrency can be drawn from the above definition:

1. $e, e' \in \mathbb{E}$ are consistent, denoted as $e \sim e'$, if $\neg(e \# e')$ and $\neg(e \#_\pi e')$. A subset $X \subseteq \mathbb{E}$ is called consistent, if $e \sim e'$ for all $e, e' \in X$.
2. $e, e' \in \mathbb{E}$ are concurrent, denoted as $e \parallel e'$, if $\neg(e \leq e')$, $\neg(e' \leq e)$, and $\neg(e \# e')$ and $\neg(e \#_\pi e')$.

Definition 2.62 (Configuration). *Let \mathcal{E} be a PES. A (finite) configuration in \mathcal{E} is a (finite) consistent subset of events $C \subseteq \mathbb{E}$, closed with respect to causality (i.e. $[C] = C$). The set of finite configurations of \mathcal{E} is denoted by $\mathcal{C}(\mathcal{E})$. We let $\hat{C} = C \setminus \{\tau\}$.*

A consistent subset of $X \subseteq \mathbb{E}$ of events can be seen as a pomset. Given $X, Y \subseteq \mathbb{E}$, $\hat{X} \sim \hat{Y}$ if \hat{X} and \hat{Y} are isomorphic as pomsets. In the following of the paper, we say $C_1 \sim C_2$, we mean $\hat{C}_1 \sim \hat{C}_2$.

Definition 2.63 (Pomset transitions and step). *Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \mathbb{E}$, if $C \cap X = \emptyset$ and $C' = C \cup X \in \mathcal{C}(\mathcal{E})$, then $C \xrightarrow{X} C'$ is called a pomset transition from C to C' . When the events in X are pairwise concurrent, we say that $C \xrightarrow{X} C'$ is a step.*

Definition 2.64 (Probabilistic transitions). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, the transition $C \xrightarrow{\pi} C^\pi$ is called a probabilistic transition from C to C^π .

Definition 2.65 (Weak pomset transitions and weak step). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \hat{\mathbb{E}}$, if $C \cap X = \emptyset$ and $\hat{C}' = \hat{C} \cup X \in \mathcal{C}(\mathcal{E})$, then $C \xrightarrow{X} C'$ is called a weak pomset transition from C to C' , where we define $\xrightarrow{X} \triangleq \xrightarrow{e} \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$. And $\xrightarrow{X} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$, for every $e \in X$. When the events in X are pairwise concurrent, we say that $C \xrightarrow{X} C'$ is a weak step.

We will also suppose that all the PESs in this book are image finite, that is, for any PES \mathcal{E} and $C \in \mathcal{C}(\mathcal{E})$ and $a \in \Lambda$, $\{\langle C, s \rangle \xrightarrow{\pi} \langle C^\pi, s \rangle\}$, $\{e \in \mathbb{E} | \langle C, s \rangle \xrightarrow{e} \langle C', s' \rangle \wedge \lambda(e) = a\}$ and $\{e \in \hat{\mathbb{E}} | \langle C, s \rangle \xrightarrow{e} \langle C', s' \rangle \wedge \lambda(e) = a\}$ is finite.

A probability distribution function (PDF) μ is a map $\mu : \mathcal{C} \times \mathcal{C} \rightarrow [0, 1]$ and μ^* is the cumulative probability distribution function (cPDF).

Definition 2.66 (Probabilistic pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A probabilistic pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that (1) if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{X_1} C'_1$ then $C_2 \xrightarrow{X_2} C'_2$, with $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $X_1 \sim X_2$ and $(C'_1, C'_2) \in R$, and vice-versa; (2) if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{\pi} C_1^\pi$ then $C_2 \xrightarrow{\pi} C_2^\pi$ and $(C_1^\pi, C_2^\pi) \in R$, and vice-versa; (3) if $(C_1, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\sqrt{\cdot}]_R = \{\sqrt{\cdot}\}$. We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic pomset bisimilar, written $\mathcal{E}_1 \sim_{pp} \mathcal{E}_2$, if there exists a probabilistic pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$. By replacing probabilistic pomset transitions with steps, we can get the definition of probabilistic step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic step bisimilar, we write $\mathcal{E}_1 \sim_{ps} \mathcal{E}_2$.

Definition 2.67 (Posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the posetal product of their configurations, denoted $\mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, is defined as

$$\{(C_1, f, C_2) | C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : C_1 \rightarrow C_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ is called a posetal relation. We say that R is downward closed when for any $(C_1, f, C_2), (C'_1, f', C'_2) \in \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, if $(C_1, f, C_2) \subseteq (C'_1, f', C'_2)$ pointwise and $(C'_1, f', C'_2) \in R$, then $(C_1, f, C_2) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, (1) $f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; (2) $f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $x_1 \in \mathbb{E}_1$, $x_2 \in \mathbb{E}_2$.

Definition 2.68 (Probabilistic (hereditary) history-preserving bisimulation). A probabilistic history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ such that (1) if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{e_1} C'_1$, then $C_2 \xrightarrow{e_2} C'_2$, with $(C'_1, f[e_1 \mapsto e_2], C'_2) \in R$, and vice-versa; (2) if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{\pi} C_1^\pi$ then $C_2 \xrightarrow{\pi} C_2^\pi$ and $(C_1^\pi, f, C_2^\pi) \in R$, and vice-versa; (3) if $(C_1, f, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\sqrt{\cdot}]_R = \{\sqrt{\cdot}\}$. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \sim_{php} \mathcal{E}_2$ if there exists a probabilistic hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.

A probabilistic hereditary history-preserving (hhp-)bisimulation is a downward closed probabilistic hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \sim_{phhp} \mathcal{E}_2$.

No.	Axiom
A1	$x + y = y + x$
A2	$(x + y) + z = x + (y + z)$
A3	$x + x = x$
A4	$(x + y) \cdot z = x \cdot z + y \cdot z$
A5	$(x \cdot y) \cdot z = x \cdot (y \cdot z)$
PA1	$x \boxplus_{\pi} y = y \boxplus_{1-\pi} x$
PA2	$x \boxplus_{\pi} (y \boxplus_{\rho} z) = (x \boxplus_{\frac{\pi}{\pi+\rho-\pi\rho}} y) \boxplus_{\pi+\rho-\pi\rho} z$
PA3	$x \boxplus_{\pi} x = x$
PA4	$(x \boxplus_{\pi} y) \cdot z = x \cdot z \boxplus_{\pi} y \cdot z$
PA5	$(x \boxplus_{\pi} y) + z = (x + z) \boxplus_{\pi} (y + z)$

Table 13: Axioms of $BAPTC$

$$\begin{aligned}
\mu(e, \check{e}) &= 1 \\
\mu(x \cdot y, x' \cdot y) &= \mu(x, x') \\
\mu(x + y, x' + y') &= \mu(x, x') \cdot \mu(y, y') \\
\mu(x \boxplus_{\pi} y, z) &= \pi \mu(x, z) + (1 - \pi) \mu(y, z) \\
\mu(x, y) &= 0, \text{ otherwise}
\end{aligned}$$

Table 14: PDF definitions of $BAPTC$

Definition 2.69 (Basic terms of $BAPTC$). *The set of basic terms of $BAPTC$, $\mathcal{B}(BAPTC)$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(BAPTC)$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(BAPTC)$ then $e \cdot t \in \mathcal{B}(BAPTC)$;
3. if $t, s \in \mathcal{B}(BAPTC)$ then $t + s \in \mathcal{B}(BAPTC)$;
4. if $t, s \in \mathcal{B}(BAPTC)$ then $t \boxplus_{\pi} s \in \mathcal{B}(BAPTC)$.

Theorem 2.70 (Elimination theorem of $BAPTC$). *Let p be a closed $BAPTC$ term. Then there is a basic $BAPTC$ term q such that $BAPTC \vdash p = q$.*

In this subsection, we will define a term-deduction system which gives the operational semantics of $BAPTC$. Like the way in [10], we also introduce the counterpart \check{e} of the event e , and also the set $\check{\mathbb{E}} = \{\check{e} | e \in \mathbb{E}\}$.

We give the definition of PDFs of $BAPTC$ in Table 14.

We give the operational transition rules for operators \cdot , $+$ and \boxplus_{π} as Table 15 shows. And the predicate $\xrightarrow{e} \checkmark$ represents successful termination after execution of the event e .

$$\begin{array}{c}
\overline{e \rightsquigarrow \check{e}} \\
\frac{x \rightsquigarrow x'}{x \cdot y \rightsquigarrow x' \cdot y} \\
\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x + y \rightsquigarrow x' + y'} \\
\frac{x \rightsquigarrow x'}{x \boxplus_{\pi} y \rightsquigarrow x'} \quad \frac{y \rightsquigarrow y'}{x \boxplus_{\pi} y \rightsquigarrow y'} \\
\overline{\check{e} \xrightarrow{e} \surd} \\
\frac{x \xrightarrow{e} \surd}{x + y \xrightarrow{e} \surd} \quad \frac{x \xrightarrow{e} x'}{x + y \xrightarrow{e} x'} \quad \frac{y \xrightarrow{e} \surd}{x + y \xrightarrow{e} \surd} \quad \frac{y \xrightarrow{e} y'}{x + y \xrightarrow{e} y'} \\
\frac{x \xrightarrow{e} \surd}{x \cdot y \xrightarrow{e} y} \quad \frac{x \xrightarrow{e} x'}{x \cdot y \xrightarrow{e} x' \cdot y}
\end{array}$$

Table 15: Single event transition rules of *BAPTC*

Theorem 2.71 (Congruence of *BAPTC* with respect to probabilistic truly concurrent bisimulation equivalences). *Probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} , and \sim_{phhp} are all congruences with respect to *BAPTC*.*

Theorem 2.72 (Soundness of *BAPTC* modulo probabilistic truly concurrent bisimulation equivalences). *Let x and y be *BAPTC* terms.*

1. *If $BAPTC \vdash x = y$, then $x \sim_{pp} y$;*
2. *If $BAPTC \vdash x = y$, then $x \sim_{ps} y$;*
3. *If $BAPTC \vdash x = y$, then $x \sim_{php} y$;*
4. *If $BAPTC \vdash x = y$, then $x \sim_{phhp} y$.*

Theorem 2.73 (Completeness of *BAPTC* modulo probabilistic truly concurrent bisimulation equivalences). *Let p and q be closed *BAPTC* terms.*

1. *If $p \sim_{pp} q$ then $p = q$;*
2. *If $p \sim_{ps} q$ then $p = q$;*
3. *If $p \sim_{php} q$ then $p = q$;*
4. *If $p \sim_{phhp} q$ then $p = q$.*

2.4.2 Algebra for Parallelism in Probabilistic True Concurrency

We design the axioms of parallelism in Table 16, including algebraic laws for parallel operator \parallel , communication operator $|$, conflict elimination operator Θ and unless operator \triangleleft , and also the whole parallel operator \bowtie . Since the communication between two communicating events in different parallel branches may cause deadlock (a state of inactivity), which is caused by mismatch of two communicating events or the imperfectness of the communication channel. We introduce a new constant δ to denote the deadlock, and let the atomic event $e \in \mathbb{E} \cup \{\delta\}$.

Definition 2.74 (Basic terms of *APPTC*). *The set of basic terms of APPTC, $\mathcal{B}(\text{APPTC})$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(\text{APPTC})$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(\text{APPTC})$ then $e \cdot t \in \mathcal{B}(\text{APPTC})$;
3. if $t, s \in \mathcal{B}(\text{APPTC})$ then $t + s \in \mathcal{B}(\text{APPTC})$;
4. if $t, s \in \mathcal{B}(\text{APPTC})$ then $t \boxplus_{\pi} s \in \mathcal{B}(\text{APPTC})$;
5. if $t, s \in \mathcal{B}(\text{APPTC})$ then $t \parallel s \in \mathcal{B}(\text{APPTC})$.

Theorem 2.75 (Elimination theorem of parallelism). *Let p be a closed APPTC term. Then there is a basic APPTC term q such that $\text{APPTC} \vdash p = q$.*

We give the definition of PDFs of *APPTC* in Table 17.

We give the transition rules of *APPTC* in Table 18, 19, it is suitable for all truly concurrent behavioral equivalence, including probabilistic pomset bisimulation, probabilistic step bisimulation, probabilistic hp-bisimulation and probabilistic hhp-bisimulation.

Theorem 2.76 (Generalization of the algebra for parallelism with respect to *BAPTC*). *The algebra for parallelism is a generalization of BAPTC.*

Theorem 2.77 (Congruence of *APPTC* with respect to probabilistic truly concurrent bisimulation equivalences). *Probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} are all congruences with respect to APPTC.*

Theorem 2.78 (Soundness of parallelism modulo probabilistic truly concurrent bisimulation equivalences). *Let x and y be APPTC terms.*

No.	Axiom
A3	$e + e = e$
A6	$x + \delta = x$
A7	$\delta \cdot x = \delta$
P1	$(x + x = x, y + y = y) \quad x \bowtie y = x \parallel y + x \mid y$
P2	$x \parallel y = y \parallel x$
P3	$(x \parallel y) \parallel z = x \parallel (y \parallel z)$
P4	$(x + x = x, y + y = y) \quad x \parallel y = x \parallel y + y \parallel x$
P5	$(e_1 \leq e_2) \quad e_1 \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot y$
P6	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel e_2 = (e_1 \parallel e_2) \cdot x$
P7	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot (x \bowtie y)$
P8	$(x + y) \parallel z = (x \parallel z) + (y \parallel z)$
P9	$\delta \parallel x = \delta$
C10	$e_1 \mid e_2 = \gamma(e_1, e_2)$
C11	$e_1 \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot y$
C12	$(e_1 \cdot x) \mid e_2 = \gamma(e_1, e_2) \cdot x$
C13	$(e_1 \cdot x) \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot (x \bowtie y)$
C14	$(x + y) \mid z = (x \mid z) + (y \mid z)$
C15	$x \mid (y + z) = (x \mid y) + (x \mid z)$
C16	$\delta \mid x = \delta$
C17	$x \mid \delta = \delta$
PM1	$x \parallel (y \boxplus_\pi z) = (x \parallel y) \boxplus_\pi (x \parallel z)$
PM2	$(x \boxplus_\pi y) \parallel z = (x \parallel z) \boxplus_\pi (y \parallel z)$
PM3	$x \mid (y \boxplus_\pi z) = (x \mid y) \boxplus_\pi (x \mid z)$
PM4	$(x \boxplus_\pi y) \mid z = (x \mid z) \boxplus_\pi (y \mid z)$
CE18	$\Theta(e) = e$
CE19	$\Theta(\delta) = \delta$
CE20	$\Theta(x + y) = \Theta(x) \triangleleft y + \Theta(y) \triangleleft x$
PCE1	$\Theta(x \boxplus_\pi y) = \Theta(x) \triangleleft y \boxplus_\pi \Theta(y) \triangleleft x$
CE21	$\Theta(x \cdot y) = \Theta(x) \cdot \Theta(y)$
CE22	$\Theta(x \parallel y) = ((\Theta(x) \triangleleft y) \parallel y) + ((\Theta(y) \triangleleft x) \parallel x)$
CE23	$\Theta(x \mid y) = ((\Theta(x) \triangleleft y) \mid y) + ((\Theta(y) \triangleleft x) \mid x)$
U24	$(\sharp(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
U25	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
U26	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
PU1	$(\sharp_\pi(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
PU2	$(\sharp_\pi(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
PU3	$(\sharp_\pi(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
U27	$e \triangleleft \delta = e$
U28	$\delta \triangleleft e = \delta$
U29	$(x + y) \triangleleft z = (x \triangleleft z) + (y \triangleleft z)$
PU4	$(x \boxplus_\pi y) \triangleleft z = (x \triangleleft z) \boxplus_\pi (y \triangleleft z)$
U30	$(x \cdot y) \triangleleft z = (x \triangleleft z) \cdot (y \triangleleft z)$
U31	$(x \parallel y) \triangleleft z = (x \triangleleft z) \parallel (y \triangleleft z)$
U32	$(x \mid y) \triangleleft z = (x \triangleleft z) \mid (y \triangleleft z)$
U33	$x \triangleleft (y + z) = (x \triangleleft y) \triangleleft z$
PU5	$x \triangleleft (y \boxplus_\pi z) = (x \triangleleft y) \triangleleft z$
U34	$x \triangleleft (y \cdot z) = (x \triangleleft y) \triangleleft z$
U35	$x \triangleleft (y \parallel z) = (x \triangleleft y) \triangleleft z$
U36	$x \triangleleft (y \mid z) = (x \triangleleft y) \triangleleft z$

Table 16: Axioms of parallelism

$$\begin{aligned}
\mu(\delta, \delta) &= 1 \\
\mu(x \bowtie y, x' \parallel y' + x' \mid y') &= \mu(x, x') \cdot \mu(y, y') \\
\mu(x \parallel y, x' \parallel y + y' \parallel x) &= \mu(x, x') \cdot \mu(y, y') \\
\mu(x \parallel y, x' \parallel y) &= \mu(x, x') \\
\mu(x \mid y, x' \mid y') &= \mu(x, x') \cdot \mu(y, y') \\
\mu(\Theta(x), \Theta(x')) &= \mu(x, x') \\
\mu(x \triangleleft y, x' \triangleleft y) &= \mu(x, x') \\
\mu(x, y) &= 0, \text{ otherwise}
\end{aligned}$$

Table 17: PDF definitions of *APPTC*

$$\begin{aligned}
&\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \bowtie y \rightsquigarrow x' \parallel y' + x' \mid y'} \\
&\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \parallel y \rightsquigarrow x' \parallel y + y' \parallel x} \\
&\frac{x \rightsquigarrow x'}{x \parallel y \rightsquigarrow x' \parallel y} \\
&\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \mid y \rightsquigarrow x' \mid y'} \\
&\frac{x \rightsquigarrow x'}{\Theta(x) \rightsquigarrow \Theta(x')} \\
&\frac{x \rightsquigarrow x'}{x \triangleleft y \rightsquigarrow x' \triangleleft y}
\end{aligned}$$

Table 18: Probabilistic transition rules of *APPTC*

$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \parallel y \xrightarrow{\{e_1, e_2\}} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \parallel y \xrightarrow{\{e_1, e_2\}} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y'}{x \parallel y \xrightarrow{\{e_1, e_2\}} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y'}{x \parallel y \xrightarrow{\{e_1, e_2\}} x' \text{ } \& \text{ } y'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad} \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad} \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y' \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y' \quad (e_1 \leq e_2)}{x \parallel y \xrightarrow{\{e_1, e_2\}} x' \text{ } \& \text{ } y'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \mid y \xrightarrow{\gamma(e_1, e_2)} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} \sqrt{\quad}}{x \mid y \xrightarrow{\gamma(e_1, e_2)} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \xrightarrow{e_2} y'}{x \mid y \xrightarrow{\gamma(e_1, e_2)} y'}$	$\frac{x \xrightarrow{e_1} x' \quad y \xrightarrow{e_2} y'}{x \mid y \xrightarrow{\gamma(e_1, e_2)} x' \text{ } \& \text{ } y'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_2} \sqrt{\quad} \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \sqrt{\quad}}$
$\frac{x \xrightarrow{e_1} x' \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \Theta(x')}$	$\frac{x \xrightarrow{e_2} x' \quad (\sharp(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \Theta(x')}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad (\sharp_{\pi}(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_2} \sqrt{\quad} \quad (\sharp_{\pi}(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \sqrt{\quad}}$
$\frac{x \xrightarrow{e_1} x' \quad (\sharp_{\pi}(e_1, e_2))}{\Theta(x) \xrightarrow{e_1} \Theta(x')}$	$\frac{x \xrightarrow{e_2} x' \quad (\sharp_{\pi}(e_1, e_2))}{\Theta(x) \xrightarrow{e_2} \Theta(x')}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_3} \quad (\sharp(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_3} \quad (\sharp(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} x'}$
$\frac{x \xrightarrow{e_3} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_3} x' \quad y \nrightarrow^{e_2} \quad (\sharp(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp_{\pi}(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_2} \quad (\sharp_{\pi}(e_1, e_2))}{x \triangleleft y \xrightarrow{\tau} x'}$
$\frac{x \xrightarrow{e_1} \sqrt{\quad} \quad y \nrightarrow^{e_3} \quad (\sharp_{\pi}(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_1} x' \quad y \nrightarrow^{e_3} \quad (\sharp_{\pi}(e_1, e_2), e_2 \leq e_3)}{x \triangleleft y \xrightarrow{e_1} x'}$
$\frac{x \xrightarrow{e_3} \sqrt{\quad} \quad y \nrightarrow^{e_2} \quad (\sharp_{\pi}(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} \sqrt{\quad}}$	$\frac{x \xrightarrow{e_3} x' \quad y \nrightarrow^{e_2} \quad (\sharp_{\pi}(e_1, e_2), e_1 \leq e_3)}{x \triangleleft y \xrightarrow{\tau} x'}$

Table 19: Action transition rules of APPTC

$$\begin{aligned}\mu(\partial_H(x), \partial_H(x')) &= \mu(x, x') \\ \mu(x, y) &= 0, \text{ otherwise}\end{aligned}$$

Table 20: PDF definitions of ∂_H

$$\begin{array}{c} \frac{x \rightsquigarrow x'}{\partial_H(x) \rightsquigarrow \partial_H(x')} \\[10pt] \frac{x \xrightarrow{e} \surd}{\partial_H(x) \xrightarrow{e} \surd} \quad (e \notin H) \qquad \frac{x \xrightarrow{e} x'}{\partial_H(x) \xrightarrow{e} \partial_H(x')} \quad (e \notin H) \end{array}$$

Table 21: Transition rules of encapsulation operator ∂_H

1. If $APPTC \vdash x = y$, then $x \sim_{pp} y$;
2. If $APPTC \vdash x = y$, then $x \sim_{ps} y$;
3. If $APPTC \vdash x = y$, then $x \sim_{php} y$;
4. If $APPTC \vdash x = y$, then $x \sim_{phhp} y$.

Theorem 2.79 (Completeness of parallelism modulo probabilistic truly concurrent bisimulation equivalences). *Let p and q be closed $APPTC$ terms.*

1. If $p \sim_{pp} q$ then $p = q$;
2. If $p \sim_{ps} q$ then $p = q$;
3. If $p \sim_{php} q$ then $p = q$;
4. If $p \sim_{phhp} q$ then $p = q$.

We give the definition of PDFs of encapsulation in Table 20.

The transition rules of encapsulation operator ∂_H are shown in Table 21.

Based on the transition rules for encapsulation operator ∂_H in Table 21, we design the axioms as Table 22 shows.

Theorem 2.80 (Conservativity of $APPTC$ with respect to the algebra for parallelism). *$APPTC$ is a conservative extension of the algebra for parallelism.*

No.	Axiom
D1	$e \notin H \quad \partial_H(e) = e$
D2	$e \in H \quad \partial_H(e) = \delta$
D3	$\partial_H(\delta) = \delta$
D4	$\partial_H(x + y) = \partial_H(x) + \partial_H(y)$
D5	$\partial_H(x \cdot y) = \partial_H(x) \cdot \partial_H(y)$
D6	$\partial_H(x \parallel y) = \partial_H(x) \parallel \partial_H(y)$
PD1	$\partial_H(x \boxplus_\pi y) = \partial_H(x) \boxplus_\pi \partial_H(y)$

Table 22: Axioms of encapsulation operator

Theorem 2.81 (Elimination theorem of APPTC). *Let p be a closed APPTC term including the encapsulation operator ∂_H . Then there is a basic APPTC term q such that $APPTC \vdash p = q$.*

Theorem 2.82 (Congruence theorem of encapsulation operator ∂_H with respect to probabilistic truly concurrent bisimulation equivalences). *Probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} are all congruences with respect to encapsulation operator ∂_H .*

Theorem 2.83 (Soundness of APPTC modulo probabilistic truly concurrent bisimulation equivalences). *Let x and y be APPTC terms including encapsulation operator ∂_H .*

1. *If $APPTC \vdash x = y$, then $x \sim_{pp} y$;*
2. *If $APPTC \vdash x = y$, then $x \sim_{ps} y$;*
3. *If $APPTC \vdash x = y$, then $x \sim_{php} y$;*
4. *If $APPTC \vdash x = y$, then $x \sim_{phhp} y$.*

Theorem 2.84 (Completeness of APPTC modulo probabilistic truly concurrent bisimulation equivalences). *Let p and q be closed APPTC terms including encapsulation operator ∂_H .*

1. *If $p \sim_{pp} q$ then $p = q$;*
2. *If $p \sim_{ps} q$ then $p = q$;*
3. *If $p \sim_{php} q$ then $p = q$;*
4. *If $p \sim_{phhp} q$ then $p = q$.*

2.4.3 Recursion

Definition 2.85 (Guarded recursive specification). *A recursive specification*

$$\begin{aligned}
X_1 &= t_1(X_1, \dots, X_n) \\
&\dots \\
X_n &= t_n(X_1, \dots, X_n)
\end{aligned}$$

$$\begin{aligned}\mu(\langle X|E \rangle, y) &= \mu(\langle t_X|E \rangle, y) \\ \mu(x, y) &= 0, \text{ otherwise}\end{aligned}$$

Table 23: PDF definitions of recursion

is guarded if the right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in *APPTC* and replacing recursion variables by the right-hand sides of their recursive equations,

$$((a_{111} \parallel \dots \parallel a_{11i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{1k1} \parallel \dots \parallel a_{1ki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{111} \parallel \dots \parallel b_{11j_1}) + \dots + (b_{11j_1} \parallel \dots \parallel b_{1lj_l})) \boxplus_{\pi_1} \dots \boxplus_{\pi_{m-1}} ((a_{m11} \parallel \dots \parallel a_{m1i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{mk1} \parallel \dots \parallel a_{mki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{m11} \parallel \dots \parallel b_{m1j_1}) + \dots + (b_{m1j_1} \parallel \dots \parallel b_{mlj_l}))$$

where $a_{111}, \dots, a_{11i_1}, a_{1k1}, \dots, a_{1ki_k}, b_{111}, \dots, b_{11j_1}, b_{11j_1}, \dots, b_{1lj_l}, \dots, a_{m11}, \dots, a_{m1i_1}, a_{mk1}, \dots, a_{mki_k}, b_{m11}, \dots, b_{m1j_1}, b_{m1j_1}, \dots, b_{mlj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

Definition 2.86 (Linear recursive specification). *A recursive specification is linear if its recursive equations are of the form*

$$((a_{111} \parallel \dots \parallel a_{11i_1})X_1 + \dots + (a_{1k1} \parallel \dots \parallel a_{1ki_k})X_k + (b_{111} \parallel \dots \parallel b_{11j_1}) + \dots + (b_{11j_1} \parallel \dots \parallel b_{1lj_l})) \boxplus_{\pi_1} \dots \boxplus_{\pi_{m-1}} ((a_{m11} \parallel \dots \parallel a_{m1i_1})X_1 + \dots + (a_{mk1} \parallel \dots \parallel a_{mki_k})X_k + (b_{m11} \parallel \dots \parallel b_{m1j_1}) + \dots + (b_{m1j_1} \parallel \dots \parallel b_{mlj_l}))$$

where $a_{111}, \dots, a_{11i_1}, a_{1k1}, \dots, a_{1ki_k}, b_{111}, \dots, b_{11j_1}, b_{11j_1}, \dots, b_{1lj_l}, \dots, a_{m11}, \dots, a_{m1i_1}, a_{mk1}, \dots, a_{mki_k}, b_{m11}, \dots, b_{m1j_1}, b_{m1j_1}, \dots, b_{mlj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

We give the definition of PDFs of recursion in Table 23.

For a guarded recursive specifications E with the form

$$\begin{aligned}X_1 &= t_1(X_1, \dots, X_n) \\ &\dots \\ X_n &= t_n(X_1, \dots, X_n)\end{aligned}$$

the behavior of the solution $\langle X_i|E \rangle$ for the recursion variable X_i in E , where $i \in \{1, \dots, n\}$, is exactly the behavior of their right-hand sides $t_i(X_1, \dots, X_n)$, which is captured by the two transition rules in Table 24.

Theorem 2.87 (Conservativity of *APPTC* with guarded recursion). *APPTC with guarded recursion is a conservative extension of APPTC.*

$$\begin{array}{c}
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \rightsquigarrow y}{\langle X_i|E \rangle \rightsquigarrow y} \\
\\
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} \surd}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} \surd} \\
\\
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} y}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} y}
\end{array}$$

Table 24: Transition rules of guarded recursion

Theorem 2.88 (Congruence theorem of *APPTC* with guarded recursion). *Probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} are all congruences with respect to *APPTC* with guarded recursion.*

Theorem 2.89 (Elimination theorem of *APPTC* with linear recursion). *Each process term in *APPTC* with linear recursion is equal to a process term $\langle X_1|E \rangle$ with E a linear recursive specification.*

Theorem 2.90 (Soundness of *APPTC* with guarded recursion). *Let x and y be *APPTC* with guarded recursion terms. If *APPTC* with guarded recursion $\vdash x = y$, then*

1. $x \sim_{pp} y$;
2. $x \sim_{ps} y$;
3. $x \sim_{php} y$;
4. $x \sim_{phhp} y$.

Theorem 2.91 (Completeness of *APPTC* with linear recursion). *Let p and q be closed *APPTC* with linear recursion terms, then,*

1. if $p \sim_{pp} q$ then $p = q$;
2. if $p \sim_{ps} q$ then $p = q$;
3. if $p \sim_{php} q$ then $p = q$;
4. if $p \sim_{phhp} q$ then $p = q$.

2.4.4 Abstraction

Definition 2.92 (Weakly posetal product). *Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the weakly posetal product of their configurations, denoted $\mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, is defined as*

$$\{(C_1, f, C_2) | C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : \hat{C}_1 \rightarrow \hat{C}_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ is called a weakly posetal relation. We say that R is downward closed when for any $(C_1, f, C_2), (C'_1, f', C'_2) \in \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$, if $(C_1, f, C_2) \subseteq (C'_1, f', C'_2)$ pointwise and $(C'_1, f', C'_2) \in R$, then $(C_1, f, C_2) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, $(1)f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; $(2)f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \hat{\mathbb{E}}_1$, $X_2 \subseteq \hat{\mathbb{E}}_2$, $x_1 \in \hat{\mathbb{E}}_1$, $x_2 \in \hat{\mathbb{E}}_2$. Also, we define $f(\tau^*) = f(\tau^*)$.

Definition 2.93 (Weak pomset transitions and weak step). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \hat{\mathbb{E}}$, if $C \cap X = \emptyset$ and $\hat{C}' = \hat{C} \cup X \in \mathcal{C}(\mathcal{E})$, then $C \xrightarrow{X} C'$ is called a weak pomset transition from C to C' , where we define $\xrightarrow{e} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$. And $\xrightarrow{X} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$, for every $e \in X$. When the events in X are pairwise concurrent, we say that $C \xrightarrow{X} C'$ is a weak step.

Definition 2.94 (Probabilistic branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A probabilistic branching pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that:

1. if $(C_1, C_2) \in R$, and $C_1 \xrightarrow{X} C'_1$ then
 - either $X \equiv \tau^*$, and $(C'_1, C_2) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_2 \rightsquigarrow^* \xrightarrow{\tau^*} C_2^0$, such that $(C_1, C_2^0) \in R$ and $C_2^0 \xrightarrow{X} C'_2$ with $(C'_1, C'_2) \in R$;
2. if $(C_1, C_2) \in R$, and $C_2 \xrightarrow{X} C'_2$ then
 - either $X \equiv \tau^*$, and $(C_1, C'_2) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_1 \rightsquigarrow^* \xrightarrow{\tau^*} C_1^0$, such that $(C_1^0, C_2) \in R$ and $C_1^0 \xrightarrow{X} C'_1$ with $(C'_1, C'_2) \in R$;
3. if $(C_1, C_2) \in R$ and $C_1 \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_2 \rightsquigarrow^* \xrightarrow{\tau^*} C_2^0$ such that $(C_1, C_2^0) \in R$ and $C_2^0 \downarrow$;
4. if $(C_1, C_2) \in R$ and $C_2 \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_1 \rightsquigarrow^* \xrightarrow{\tau^*} C_1^0$ such that $(C_1^0, C_2) \in R$ and $C_1^0 \downarrow$.
5. if $(C_1, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$;
6. $[\surd]_R = \{\surd\}$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching pomset bisimilar, written $\mathcal{E}_1 \approx_{pbp} \mathcal{E}_2$, if there exists a probabilistic branching pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$.

By replacing probabilistic branching pomset transitions with steps, we can get the definition of probabilistic branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic branching step bisimilar, we write $\mathcal{E}_1 \approx_{pbs} \mathcal{E}_2$.

Definition 2.95 (Probabilistic rooted branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A branching pomset bisimulation is a relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$, such that:

1. if $(C_1, C_2) \in R$, and $C_1 \rightsquigarrow C_1^\pi \xrightarrow{X} C'_1$ then $C_2 \rightsquigarrow C_2^\pi \xrightarrow{X} C'_2$ with $C'_1 \approx_{pbp} C'_2$;
2. if $(C_1, C_2) \in R$, and $C_2 \rightsquigarrow C_2^\pi \xrightarrow{X} C'_2$ then $C_1 \rightsquigarrow C_1^\pi \xrightarrow{X} C'_1$ with $C'_1 \approx_{pbp} C'_2$;
3. if $(C_1, C_2) \in R$ and $C_1 \downarrow$, then $C_2 \downarrow$;
4. if $(C_1, C_2) \in R$ and $C_2 \downarrow$, then $C_1 \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching pomset bisimilar, written $\mathcal{E}_1 \approx_{prbp} \mathcal{E}_2$, if there exists a probabilistic rooted branching pomset bisimulation R , such that $(\emptyset, \emptyset) \in R$.

By replacing probabilistic pomset transitions with steps, we can get the definition of probabilistic rooted branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic rooted branching step bisimilar, we write $\mathcal{E}_1 \approx_{prbs} \mathcal{E}_2$.

Definition 2.96 (Probabilistic branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. A probabilistic branching history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \times \mathcal{C}(\mathcal{E}_2)$ such that:

1. if $(C_1, f, C_2) \in R$, and $C_1 \xrightarrow{e_1} C'_1$ then
 - either $e_1 \equiv \tau$, and $(C'_1, f[e_1 \mapsto \tau], C_2) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_2 \rightsquigarrow^* \xrightarrow{\tau^*} C_2^0$, such that $(C_1, f, C_2^0) \in R$ and $C_2^0 \xrightarrow{e_2} C'_2$ with $(C'_1, f[e_1 \mapsto e_2], C'_2) \in R$;
2. if $(C_1, f, C_2) \in R$, and $C_2 \xrightarrow{e_2} C'_2$ then
 - either $X \equiv \tau$, and $(C_1, f[e_2 \mapsto \tau], C'_2) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_1 \rightsquigarrow^* \xrightarrow{\tau^*} C_1^0$, such that $(C_1^0, f, C_2) \in R$ and $C_1^0 \xrightarrow{e_1} C'_1$ with $(C'_1, f[e_2 \mapsto e_1], C'_2) \in R$;
3. if $(C_1, f, C_2) \in R$ and $C_1 \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_2 \rightsquigarrow^* \xrightarrow{\tau^*} C_2^0$ such that $(C_1, f, C_2^0) \in R$ and $C_2^0 \downarrow$;
4. if $(C_1, f, C_2) \in R$ and $C_2 \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $C_1 \rightsquigarrow^* \xrightarrow{\tau^*} C_1^0$ such that $(C_1^0, f, C_2) \in R$ and $C_1^0 \downarrow$;
5. if $(C_1, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$;
6. $[\checkmark]_R = \{\checkmark\}$.

$\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching history-preserving (hpb-)bisimilar and are written $\mathcal{E}_1 \approx_{pbhp} \mathcal{E}_2$ if there exists a probabilistic branching hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.

A probabilistic branching hereditary history-preserving (hhp-)bisimulation is a downward closed probabilistic branching hhp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{pbhhp} \mathcal{E}_2$.

$$\frac{}{\tau \rightsquigarrow \tilde{\tau}}$$

$$\frac{}{\tau \xrightarrow{\tau} \surd}$$

Table 25: Transition rules of the silent step

Definition 2.97 (Probabilistic rooted branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. A probabilistic rooted branching history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \mathcal{C}(\mathcal{E}_1) \overline{\times} \mathcal{C}(\mathcal{E}_2)$ such that:

1. if $(C_1, f, C_2) \in R$, and $C_1 \rightsquigarrow C_1^\pi \xrightarrow{e_1} C'_1$, then $C_2 \rightsquigarrow C_2^\pi \xrightarrow{e_2} C'_2$ with $C'_1 \approx_{pbhp} C'_2$;
2. if $(C_1, f, C_2) \in R$, and $C_2 \rightsquigarrow C_2^\pi \xrightarrow{e_2} C'_2$, then $C_1 \rightsquigarrow C_1^\pi \xrightarrow{e_1} C'_1$ with $C'_1 \approx_{pbhp} C'_2$;
3. if $(C_1, f, C_2) \in R$ and $C_1 \downarrow$, then $C_2 \downarrow$;
4. if $(C_1, f, C_2) \in R$ and $C_2 \downarrow$, then $C_1 \downarrow$.

$\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{prbhp} \mathcal{E}_2$ if there exists a probabilistic rooted branching hp-bisimulation R such that $(\emptyset, \emptyset, \emptyset) \in R$.

A probabilistic rooted branching hereditary history-preserving (hbp-)bisimulation is a downward closed probabilistic rooted branching hbp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching hereditary history-preserving (hbp-)bisimilar and are written $\mathcal{E}_1 \approx_{prbhbp} \mathcal{E}_2$.

To abstract away from the internal implementations of a program, and verify that the program exhibits the desired external behaviors, the silent step τ and abstraction operator τ_I are introduced, where $I \subseteq \mathbb{E}$ denotes the internal events. The silent step τ represents the internal events, when we consider the external behaviors of a process, τ events can be removed, that is, τ events must keep silent. The transition rule of τ is shown in Table 25. In the following, let the atomic event e range over $\mathbb{E} \cup \{\delta\} \cup \{\tau\}$, and let the communication function $\gamma : \mathbb{E} \cup \{\tau\} \times \mathbb{E} \cup \{\tau\} \rightarrow \mathbb{E} \cup \{\delta\}$, with each communication involved τ resulting into δ .

The silent step τ as an atomic event, is introduced into E . Considering the recursive specification $X = \tau X$, τs , $\tau \tau s$, and $\tau \dots s$ are all its solutions, that is, the solutions make the existence of τ -loops which cause unfairness. To prevent τ -loops, we extend the definition of linear recursive specification to the guarded one.

Definition 2.98 (Guarded linear recursive specification). A recursive specification is linear if its recursive equations are of the form

$$((a_{111} \parallel \dots \parallel a_{11i_1})X_1 + \dots + (a_{1k1} \parallel \dots \parallel a_{1ki_k})X_k + (b_{111} \parallel \dots \parallel b_{11j_1}) + \dots + (b_{1l1} \parallel \dots \parallel b_{1lj_l})) \boxplus_{\pi_1} \dots \boxplus_{\pi_{m-1}} ((a_{m11} \parallel \dots \parallel a_{m1i_1})X_1 + \dots + (a_{mk1} \parallel \dots \parallel a_{mki_k})X_k + (b_{m11} \parallel \dots \parallel b_{m1j_1}) + \dots + (b_{ml1} \parallel \dots \parallel b_{mlj_l}))$$

No.	Axiom
B1	$(y = y + y, z = z + z) \quad x \cdot ((y + \tau \cdot (y + z)) \boxplus_{\pi} w) = x \cdot ((y + z) \boxplus_{\pi} w)$
B2	$(y = y + y, z = z + z) \quad x \parallel ((y + \tau \parallel (y + z)) \boxplus_{\pi} w) = x \parallel ((y + z) \boxplus_{\pi} w)$

Table 26: Axioms of silent step

where $a_{111}, \dots, a_{11i_1}, a_{1k1}, \dots, a_{1ki_k}, b_{111}, \dots, b_{11j_1}, b_{11j_1}, \dots, b_{1lj_l} \dots$
 $a_{m11}, \dots, a_{m1i_1}, a_{mk1}, \dots, a_{mki_k}, b_{m11}, \dots, b_{m1j_1}, b_{m1j_1}, \dots, b_{mlj_l} \in \mathbb{E} \cup \{\tau\}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

A linear recursive specification E is guarded if there does not exist an infinite sequence of τ -transitions $\langle X|E \rangle \rightsquigarrow^{\tau} \langle X'|E \rangle \rightsquigarrow^{\tau} \langle X''|E \rangle \rightsquigarrow^{\tau} \dots$.

Theorem 2.99 (Conservativity of *APTC* with silent step and guarded linear recursion). *APTC with silent step and guarded linear recursion is a conservative extension of APTC with linear recursion.*

Theorem 2.100 (Congruence theorem of *APTC* with silent step and guarded linear recursion). *Probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to APTC with silent step and guarded linear recursion.*

We design the axioms for the silent step τ in Table 26.

Theorem 2.101 (Elimination theorem of *APTC* with silent step and guarded linear recursion). *Each process term in APTC with silent step and guarded linear recursion is equal to a process term $\langle X_1|E \rangle$ with E a guarded linear recursive specification.*

Theorem 2.102 (Soundness of *APTC* with silent step and guarded linear recursion). *Let x and y be APTC with silent step and guarded linear recursion terms. If APTC with silent step and guarded linear recursion $\vdash x = y$, then*

1. $x \approx_{prbp} y$;
2. $x \approx_{prbs} y$;
3. $x \approx_{prbhp} y$;
4. $x \approx_{prbhhp} y$.

Theorem 2.103 (Completeness of *APTC* with silent step and guarded linear recursion). *Let p and q be closed APTC with silent step and guarded linear recursion terms, then,*

1. *if $p \approx_{prbp} q$ then $p = q$;*
2. *if $p \approx_{prbs} q$ then $p = q$;*
3. *if $p \approx_{prbhp} q$ then $p = q$;*
4. *if $p \approx_{prbhhp} q$ then $p = q$.*

$$\begin{array}{c}
\frac{x \rightsquigarrow x'}{\tau_I(x) \rightsquigarrow \tau_I(x')} \\
\\
\frac{x \xrightarrow{e} \sqrt{\quad}}{\tau_I(x) \xrightarrow{e} \sqrt{\quad}} \quad e \notin I \quad \frac{x \xrightarrow{e} x'}{\tau_I(x) \xrightarrow{e} \tau_I(x')} \quad e \notin I \\
\\
\frac{x \xrightarrow{e} \sqrt{\quad}}{\tau_I(x) \xrightarrow{\tau} \sqrt{\quad}} \quad e \in I \quad \frac{x \xrightarrow{e} x'}{\tau_I(x) \xrightarrow{\tau} \tau_I(x')} \quad e \in I
\end{array}$$

Table 27: Transition rules of the abstraction operator

No.	Axiom
<i>TI1</i>	$e \notin I \quad \tau_I(e) = e$
<i>TI2</i>	$e \in I \quad \tau_I(e) = \tau$
<i>TI3</i>	$\tau_I(\delta) = \delta$
<i>TI4</i>	$\tau_I(x + y) = \tau_I(x) + \tau_I(y)$
<i>PTI1</i>	$\tau_I(x \boxplus_{\pi} y) = \tau_I(x) \boxplus_{\pi} \tau_I(y)$
<i>TI5</i>	$\tau_I(x \cdot y) = \tau_I(x) \cdot \tau_I(y)$
<i>TI6</i>	$\tau_I(x \parallel y) = \tau_I(x) \parallel \tau_I(y)$

Table 28: Axioms of abstraction operator

The unary abstraction operator τ_I ($I \subseteq \mathbb{E}$) renames all atomic events in I into τ . *APTC* with silent step and abstraction operator is called *APTC_τ*. The transition rules of operator τ_I are shown in Table 27.

Theorem 2.104 (Conservativity of *APTC_τ* with guarded linear recursion). *APTC_τ with guarded linear recursion is a conservative extension of APTC with silent step and guarded linear recursion.*

Theorem 2.105 (Congruence theorem of *APTC_τ* with guarded linear recursion). *Probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhyp} are all congruences with respect to *APTC_τ* with guarded linear recursion.*

We design the axioms for the abstraction operator τ_I in Table 28.

Theorem 2.106 (Soundness of *APTC_τ* with guarded linear recursion). *Let x and y be *APTC_τ* with guarded linear recursion terms. If *APTC_τ* with guarded linear recursion $\vdash x = y$, then*

1. $x \approx_{prbp} y$;
2. $x \approx_{prbs} y$;
3. $x \approx_{prbhp} y$;

$$\begin{array}{l}
VR_1 \quad \frac{x = y + (i_1 \parallel \dots \parallel i_m) \cdot x, y = y + y}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(y)} \\
VR_2 \quad \frac{x = z \boxplus_\pi (u + (i_1 \parallel \dots \parallel i_m) \cdot x), z = z + u, z = z + z}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(z)} \\
VR_3 \quad \frac{x = z + (i_1 \parallel \dots \parallel i_m) \cdot y, y = z \boxplus_\pi (u + (j_1 \parallel \dots \parallel j_n) \cdot x), z = z + u, z = z + z}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(y') \text{ for } y' = z \boxplus_\pi (u + (i_1 \parallel \dots \parallel i_m) \cdot y')}
\end{array}$$

Table 29: Recursive verification rules

4. $x \approx_{prbhhp} y$.

Though τ -loops are prohibited in guarded linear recursive specifications in a specifiable way, they can be constructed using the abstraction operator, for example, there exist τ -loops in the process term $\tau_{\{a\}}(\langle X | X = aX \rangle)$. To avoid τ -loops caused by τ_I and ensure fairness, we introduce the following recursive verification rules as Table 29 shows, note that $i_1, \dots, i_m, j_1, \dots, j_n \in I \subseteq \mathbb{E} \setminus \{\tau\}$.

Theorem 2.107 (Soundness of VR_1, VR_2, VR_3). *VR_1, VR_2 and VR_3 are sound modulo probabilistic rooted branching truly concurrent bisimulation equivalences $\approx_{prbp}, \approx_{prbp}, \approx_{prbhp}$ and \approx_{prbhhp} .*

2.5 Operational Semantics for Quantum Computing

in quantum processes, to avoid the abuse of quantum information which may violate the no-cloning theorem, a quantum configuration $\langle C, \varrho \rangle$ [13] [16] [17] [14] [15] [20] [21] [13] [23] is usually consisted of a traditional configuration C and state information ϱ of all (public) quantum information variables. Though quantum information variables are not explicitly defined and are hidden behind quantum operations or unitary operators, more importantly, the state information ϱ is the effects of execution of a series of quantum operations or unitary operators on involved quantum systems, the execution of a series of quantum operations or unitary operators should not only obey the restrictions of the structure of the process terms, but also those of quantum mechanics principles. Through the state information ϱ , we can check and observe the functions of quantum mechanics principles, such as quantum entanglement, quantum measurement, etc.

So, the operational semantics of quantum processes should be defined based on quantum process configuration $\langle C, \varrho \rangle$, in which $\varrho = \varsigma$ of two state information ϱ and ς means equality under the framework of quantum information and quantum computing, that is, these two quantum processes are in the same quantum state.

Definition 2.108 (Pomset transitions and step). *Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \mathbb{E}$, if $C \cap X = \emptyset$ and $C' = C \cup X \in \mathcal{C}(\mathcal{E})$, then $\langle C, s \rangle \xrightarrow{X} \langle C', s' \rangle$ is called a pomset transition from $\langle C, s \rangle$ to $\langle C', s' \rangle$. When the events in X are pairwise concurrent, we say that $\langle C, s \rangle \xrightarrow{X} \langle C', s' \rangle$ is a step. It is obvious that $\rightarrow^* \xrightarrow{X} \rightarrow^* \xrightarrow{X} \rightarrow^*$ and $\rightarrow^* \xrightarrow{e} \rightarrow^* \xrightarrow{e} \rightarrow^*$ for any $e \in \mathbb{E}$ and $X \subseteq \mathbb{E}$.*

Definition 2.109 (Weak pomset transitions and weak step). *Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, and $\emptyset \neq X \subseteq \mathbb{E}$, if $C \cap X = \emptyset$ and $\hat{C}' = \hat{C} \cup X \in \mathcal{C}(\mathcal{E})$, then $\langle C, \varrho \rangle \xRightarrow{X} \langle C', \varrho' \rangle$ is called a weak*

pomset transition from $\langle C, \varrho \rangle$ to $\langle C', \varrho' \rangle$, where we define $\xrightarrow{e} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$. And $\xrightarrow{X} \triangleq \xrightarrow{\tau^*} \xrightarrow{e} \xrightarrow{\tau^*}$, for every $e \in X$. When the events in X are pairwise concurrent, we say that $\langle C, \varrho \rangle \xrightarrow{X} \langle C', \varrho' \rangle$ is a weak step.

Definition 2.110 (Probabilistic transitions). Let \mathcal{E} be a PES and let $C \in \mathcal{C}(\mathcal{E})$, the transition $\langle C, \varrho \rangle \xrightarrow{\pi} \langle C^\pi, \varrho \rangle$ is called a probabilistic transition from $\langle C, \varrho \rangle$ to $\langle C^\pi, \varrho \rangle$.

We will also suppose that all the PESs in this chapter are image finite, that is, for any PES \mathcal{E} and $C \in \mathcal{C}(\mathcal{E})$ and $a \in \Lambda$, $\{\langle C, \varrho \rangle \xrightarrow{\pi} \langle C^\pi, \varrho \rangle\}$, $\{e \in \mathbb{E}[\langle C, \varrho \rangle \xrightarrow{e} \langle C', \varrho' \rangle \wedge \lambda(e) = a]\}$ and $\{e \in \hat{\mathbb{E}}[\langle C, \varrho \rangle \xrightarrow{e} \langle C', \varrho' \rangle \wedge \lambda(e) = a]\}$ is finite.

Definition 2.111 (Pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X_1} \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{X_2} \langle C'_2, \varrho' \rangle$, with $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $X_1 \sim X_2$ and $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa. We say that $\mathcal{E}_1, \mathcal{E}_2$ are pomset bisimilar, written $\mathcal{E}_1 \sim_p \mathcal{E}_2$, if there exists a pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$. By replacing pomset transitions with steps, we can get the definition of step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are step bisimilar, we write $\mathcal{E}_1 \sim_s \mathcal{E}_2$.

Definition 2.112 (Weak pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A weak pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X_1} \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{X_2} \langle C'_2, \varrho' \rangle$, with $X_1 \subseteq \hat{\mathbb{E}}_1$, $X_2 \subseteq \hat{\mathbb{E}}_2$, $X_1 \sim X_2$ and $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa. We say that $\mathcal{E}_1, \mathcal{E}_2$ are weak pomset bisimilar, written $\mathcal{E}_1 \approx_p \mathcal{E}_2$, if there exists a weak pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$. By replacing weak pomset transitions with weak steps, we can get the definition of weak step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are weak step bisimilar, we write $\mathcal{E}_1 \approx_s \mathcal{E}_2$.

Definition 2.113 (Posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the posetal product of their configurations, denoted $\langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, is defined as

$$\{(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \mid C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : C_1 \rightarrow C_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ is called a posetal relation. We say that R is downward closed when for any $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle), (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \subseteq (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle)$ pointwise and $(\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in R$, then $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, $(1)f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; $(2)f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $x_1 \in \mathbb{E}_1$, $x_2 \in \mathbb{E}_2$.

Definition 2.114 (Weakly posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the weakly posetal product of their configurations, denoted $\langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, is defined as

$$\{(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \mid C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : \hat{C}_1 \rightarrow \hat{C}_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ is called a weakly posetal relation. We say that R is downward closed when for any $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle), (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, if

$(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \subseteq (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle)$ pointwise and $(\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in R$, then $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, (1) $f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; (2) $f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \hat{\mathbb{E}}_1$, $X_2 \subseteq \hat{\mathbb{E}}_2$, $x_1 \in \hat{\mathbb{E}}_1$, $x_2 \in \hat{\mathbb{E}}_2$. Also, we define $f(\tau^*) = f(\tau^*)$.

Definition 2.115 ((Hereditary) history-preserving bisimulation). A history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$, with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa. $\mathcal{E}_1, \mathcal{E}_2$ are history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \sim_{hp} \mathcal{E}_2$ if there exists a hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A hereditary history-preserving (hhp-)bisimulation is a downward closed hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \sim_{hhp} \mathcal{E}_2$.

Definition 2.116 (Weak (hereditary) history-preserving bisimulation). A weak history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xRightarrow{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \xRightarrow{e_2} \langle C'_2, \varrho' \rangle$, with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa. $\mathcal{E}_1, \mathcal{E}_2$ are weak history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{hp} \mathcal{E}_2$ if there exists a weak hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A weakly hereditary history-preserving (hhp-)bisimulation is a downward closed weak hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are weakly hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{hhp} \mathcal{E}_2$.

Definition 2.117 (Branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A branching pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that:

1. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ then
 - either $X \equiv \tau^*$, and $(\langle C'_1, \varrho' \rangle, \langle C_2, \varrho \rangle) \in R$ with $\varrho' \in \tau(\varrho)$;
 - or there is a sequence of (zero or more) τ -transitions $\langle C_2, \varrho \rangle \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$, such that $(\langle C_1, \varrho \rangle, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$;
2. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ then
 - either $X \equiv \tau^*$, and $(\langle C_1, \varrho \rangle, \langle C'_2, \varrho' \rangle) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $\langle C_1, \varrho \rangle \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$, such that $(\langle C_1^0, \varrho^0 \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$;
3. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) τ -transitions $\langle C_2, \varrho \rangle \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$ such that $(\langle C_1, \varrho \rangle, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) τ -transitions $\langle C_1, \varrho \rangle \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$ such that $(\langle C_1^0, \varrho^0 \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are branching pomset bisimilar, written $\mathcal{E}_1 \approx_{bp} \mathcal{E}_2$, if there exists a branching pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$.

By replacing pomset transitions with steps, we can get the definition of branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are branching step bisimilar, we write $\mathcal{E}_1 \approx_{bs} \mathcal{E}_2$.

Definition 2.118 (Rooted branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A rooted branching pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that:

1. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{bp} \langle C'_2, \varrho' \rangle$;
2. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ then $\langle C_1, \varrho \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{bp} \langle C'_2, \varrho' \rangle$;
3. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then $\langle C_2, \varrho \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then $\langle C_1, \varrho \rangle \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are rooted branching pomset bisimilar, written $\mathcal{E}_1 \approx_{rbp} \mathcal{E}_2$, if there exists a rooted branching pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$.

By replacing pomset transitions with steps, we can get the definition of rooted branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are rooted branching step bisimilar, we write $\mathcal{E}_1 \approx_{rbs} \mathcal{E}_2$.

Definition 2.119 (Branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. A branching history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that:

1. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$ then
 - either $e_1 \equiv \tau$, and $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto \tau^{e_1}], \langle C_2, \varrho \rangle) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $\langle C_2, \varrho \rangle \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$, such that $(\langle C_1, \varrho \rangle, f, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$;
2. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$ then
 - either $e_2 \equiv \tau$, and $(\langle C_1, \varrho \rangle, f[e_2 \mapsto \tau^{e_2}], \langle C'_2, \varrho' \rangle) \in R$;
 - or there is a sequence of (zero or more) τ -transitions $\langle C_1, \varrho \rangle \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$, such that $(\langle C_1^0, \varrho^0 \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, f[e_2 \mapsto e_1], \langle C'_2, \varrho' \rangle) \in R$;
3. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) τ -transitions $\langle C_2, \varrho \rangle \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$ such that $(\langle C_1, \varrho \rangle, f, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) τ -transitions $\langle C_1, \varrho \rangle \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$ such that $(\langle C_1^0, \varrho^0 \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \downarrow$.

$\mathcal{E}_1, \mathcal{E}_2$ are branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{bhp} \mathcal{E}_2$ if there exists a branching hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A branching hereditary history-preserving (hhp-)bisimulation is a downward closed branching hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{bhhp} \mathcal{E}_2$.

Definition 2.120 (Rooted branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. A rooted branching history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that:

1. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{bhp} \langle C'_2, \varrho' \rangle$;
2. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$, then $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{bhp} \langle C'_2, \varrho' \rangle$;
3. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then $\langle C_2, \varrho \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then $\langle C_1, \varrho \rangle \downarrow$.

$\mathcal{E}_1, \mathcal{E}_2$ are rooted branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{rbhp} \mathcal{E}_2$ if there exists a rooted branching hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A rooted branching hereditary history-preserving (hhp-)bisimulation is a downward closed rooted branching hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are rooted branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{rbhhp} \mathcal{E}_2$.

Definition 2.121 (Probabilistic pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A probabilistic pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that (1) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X_1} \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{X_2} \langle C'_2, \varrho' \rangle$, with $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $X_1 \sim X_2$ and $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa; (2) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{\pi} \langle C_1^\pi, \varrho \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{\pi} \langle C_2^\pi, \varrho \rangle$ and $(\langle C_1^\pi, \varrho \rangle, \langle C_2^\pi, \varrho \rangle) \in R$, and vice-versa; (3) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\checkmark]_R = \{\checkmark\}$. We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic pomset bisimilar, written $\mathcal{E}_1 \sim_{pp} \mathcal{E}_2$, if there exists a probabilistic pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$. By replacing probabilistic pomset transitions with probabilistic steps, we can get the definition of probabilistic step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic step bisimilar, we write $\mathcal{E}_1 \sim_{ps} \mathcal{E}_2$.

Definition 2.122 (Weakly probabilistic pomset, step bisimulation). Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A weakly probabilistic pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that (1) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X_1} \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{X_2} \langle C'_2, \varrho' \rangle$, with $X_1 \subseteq \hat{\mathbb{E}}_1$, $X_2 \subseteq \hat{\mathbb{E}}_2$, $X_1 \sim X_2$ and $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa; (2) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{\pi} \langle C_1^\pi, \varrho \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{\pi} \langle C_2^\pi, \varrho \rangle$ and $(\langle C_1^\pi, \varrho \rangle, \langle C_2^\pi, \varrho \rangle) \in R$, and vice-versa; (3) if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\checkmark]_R = \{\checkmark\}$. We say that $\mathcal{E}_1, \mathcal{E}_2$ are weakly probabilistic pomset bisimilar, written $\mathcal{E}_1 \approx_{pp} \mathcal{E}_2$, if there exists a weakly probabilistic pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$. By replacing weakly probabilistic pomset transitions with weakly probabilistic steps, we can get the definition of weakly

probabilistic step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are weakly probabilistic step bisimilar, we write $\mathcal{E}_1 \approx_{ps} \mathcal{E}_2$.

Definition 2.123 (Posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the posetal product of their configurations, denoted $\langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, is defined as

$$\{(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \mid C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : C_1 \rightarrow C_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ is called a posetal relation. We say that R is downward closed when for any $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle), (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \subseteq (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle)$ pointwise and $(\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in R$, then $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, $(1)f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; $(2)f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \mathbb{E}_1$, $X_2 \subseteq \mathbb{E}_2$, $x_1 \in \mathbb{E}_1$, $x_2 \in \mathbb{E}_2$.

Definition 2.124 (Weakly posetal product). Given two PESs $\mathcal{E}_1, \mathcal{E}_2$, the weakly posetal product of their configurations, denoted $\langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, is defined as

$$\{(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \mid C_1 \in \mathcal{C}(\mathcal{E}_1), C_2 \in \mathcal{C}(\mathcal{E}_2), f : \hat{C}_1 \rightarrow \hat{C}_2 \text{ isomorphism}\}.$$

A subset $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ is called a weakly posetal relation. We say that R is downward closed when for any $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle), (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \subseteq (\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle)$ pointwise and $(\langle C'_1, \varrho' \rangle, f', \langle C'_2, \varrho' \rangle) \in R$, then $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$.

For $f : X_1 \rightarrow X_2$, we define $f[x_1 \mapsto x_2] : X_1 \cup \{x_1\} \rightarrow X_2 \cup \{x_2\}$, $z \in X_1 \cup \{x_1\}$, $(1)f[x_1 \mapsto x_2](z) = x_2$, if $z = x_1$; $(2)f[x_1 \mapsto x_2](z) = f(z)$, otherwise. Where $X_1 \subseteq \hat{\mathbb{E}}_1$, $X_2 \subseteq \hat{\mathbb{E}}_2$, $x_1 \in \hat{\mathbb{E}}_1$, $x_2 \in \hat{\mathbb{E}}_2$. Also, we define $f(\tau^*) = f(\tau^*)$.

Definition 2.125 (Probabilistic (hereditary) history-preserving bisimulation). A probabilistic history-preserving (hp-) bisimulation is a posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that (1) if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$, with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa; (2) if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{\pi} \langle C_1^\pi, \varrho \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{\pi} \langle C_2^\pi, \varrho \rangle$ and $(\langle C_1^\pi, \varrho \rangle, f, \langle C_2^\pi, \varrho \rangle) \in R$, and vice-versa; (3) if $(C_1, f, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\sqrt{\cdot}]_R = \{\sqrt{\cdot}\}$. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \sim_{php} \mathcal{E}_2$ if there exists a probabilistic hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A probabilistic hereditary history-preserving (hhp-)bisimulation is a downward closed probabilistic hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \sim_{phhp} \mathcal{E}_2$.

Definition 2.126 (Weakly probabilistic (hereditary) history-preserving bisimulation). A weakly probabilistic history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \overline{\times} \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that (1) if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$, with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$ for all $\varrho, \varrho' \in S$, and vice-versa; (2) if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{\pi} \langle C_1^\pi, \varrho \rangle$ then $\langle C_2, \varrho \rangle \xrightarrow{\pi} \langle C_2^\pi, \varrho \rangle$ and $(\langle C_1^\pi, \varrho \rangle, f, \langle C_2^\pi, \varrho \rangle) \in R$, and vice-versa; (3) if $(C_1, f, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$; (4) $[\sqrt{\cdot}]_R = \{\sqrt{\cdot}\}$. $\mathcal{E}_1, \mathcal{E}_2$ are weakly probabilistic history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{php} \mathcal{E}_2$ if there exists a weakly probabilistic hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A weakly probabilistic hereditary history-preserving (hhp-)bisimulation is a downward closed weakly probabilistic hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are weakly probabilistic hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{phhp} \mathcal{E}_2$.

Definition 2.127 (Probabilistic branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A probabilistic branching pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that:

1. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ then
 - either $X \equiv \tau^*$, and $(\langle C'_1, \varrho' \rangle, \langle C_2, \varrho \rangle) \in R$ with $\varrho' \in \tau(\varrho)$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_2, \varrho \rangle \rightsquigarrow^* \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$, such that $(\langle C_1, \varrho \rangle, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$;
2. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{X} \langle C'_2, \varrho' \rangle$ then
 - either $X \equiv \tau^*$, and $(\langle C_1, \varrho \rangle, \langle C'_2, \varrho' \rangle) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_1, \varrho \rangle \rightsquigarrow^* \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$, such that $(\langle C_1^0, \varrho^0 \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \xrightarrow{X} \langle C'_1, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, \langle C'_2, \varrho' \rangle) \in R$;
3. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_2, \varrho \rangle \rightsquigarrow^* \xrightarrow{\tau^*} \langle C_2^0, \varrho^0 \rangle$ such that $(\langle C_1, \varrho \rangle, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_1, \varrho \rangle \rightsquigarrow^* \xrightarrow{\tau^*} \langle C_1^0, \varrho^0 \rangle$ such that $(\langle C_1^0, \varrho^0 \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \downarrow$;
5. if $(C_1, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$;
6. $[\surd]_R = \{\surd\}$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching pomset bisimilar, written $\mathcal{E}_1 \approx_{pbp} \mathcal{E}_2$, if there exists a probabilistic branching pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$.

By replacing probabilistic pomset transitions with steps, we can get the definition of probabilistic branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic branching step bisimilar, we write $\mathcal{E}_1 \approx_{pbs} \mathcal{E}_2$.

Definition 2.128 (Probabilistic rooted branching pomset, step bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. Let $\mathcal{E}_1, \mathcal{E}_2$ be PESs. A probabilistic rooted branching pomset bisimulation is a relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$, such that:

1. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \rightsquigarrow^X \langle C'_1, \varrho' \rangle$ then $\langle C_2, \varrho \rangle \rightsquigarrow^X \langle C'_2, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{pbp} \langle C'_2, \varrho' \rangle$;

2. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \rightsquigarrow^X \langle C'_2, \varrho' \rangle$ then $\langle C_1, \varrho \rangle \rightsquigarrow^X \langle C'_1, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{pbp} \langle C'_2, \varrho' \rangle$;
3. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then $\langle C_2, \varrho \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then $\langle C_1, \varrho \rangle \downarrow$.

We say that $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching pomset bisimilar, written $\mathcal{E}_1 \approx_{prbp} \mathcal{E}_2$, if there exists a probabilistic rooted branching pomset bisimulation R , such that $(\langle \emptyset, \emptyset \rangle, \langle \emptyset, \emptyset \rangle) \in R$.

By replacing pomset transitions with steps, we can get the definition of probabilistic rooted branching step bisimulation. When PESs \mathcal{E}_1 and \mathcal{E}_2 are probabilistic rooted branching step bisimilar, we write $\mathcal{E}_1 \approx_{prbs} \mathcal{E}_2$.

Definition 2.129 (Probabilistic branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \surd represent a state with $\surd \downarrow$. A probabilistic branching history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that:

1. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$ then
 - either $e_1 \equiv \tau$, and $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto \tau], \langle C_2, \varrho \rangle) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_2, \varrho \rangle \rightsquigarrow^* \langle C_2^0, \varrho^0 \rangle$, such that $(\langle C_1, \varrho \rangle, f, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, f[e_1 \mapsto e_2], \langle C'_2, \varrho' \rangle) \in R$;
2. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \xrightarrow{e_2} \langle C'_2, \varrho' \rangle$ then
 - either $e_2 \equiv \tau$, and $(\langle C_1, \varrho \rangle, f[e_2 \mapsto \tau], \langle C'_2, \varrho' \rangle) \in R$;
 - or there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_1, \varrho \rangle \rightsquigarrow^* \langle C_1^0, \varrho^0 \rangle$, such that $(\langle C_1^0, \varrho^0 \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \xrightarrow{e_1} \langle C'_1, \varrho' \rangle$ with $(\langle C'_1, \varrho' \rangle, f[e_2 \mapsto e_1], \langle C'_2, \varrho' \rangle) \in R$;
3. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_2, \varrho \rangle \rightsquigarrow^* \langle C_2^0, \varrho^0 \rangle$ such that $(\langle C_1, \varrho \rangle, f, \langle C_2^0, \varrho^0 \rangle) \in R$ and $\langle C_2^0, \varrho^0 \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then there is a sequence of (zero or more) probabilistic transitions and τ -transitions $\langle C_1, \varrho \rangle \rightsquigarrow^* \langle C_1^0, \varrho^0 \rangle$ such that $(\langle C_1^0, \varrho^0 \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1^0, \varrho^0 \rangle \downarrow$;
5. if $(C_1, C_2) \in R$, then $\mu(C_1, C) = \mu(C_2, C)$ for each $C \in \mathcal{C}(\mathcal{E})/R$;
6. $[\surd]_R = \{\surd\}$.

$\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{pbhp} \mathcal{E}_2$ if there exists a probabilistic branching hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A probabilistic branching hereditary history-preserving (hhp-)bisimulation is a downward closed probabilistic branching hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic branching hereditary history-preserving (hhp-)bisimilar and are written $\mathcal{E}_1 \approx_{pbhhp} \mathcal{E}_2$.

Definition 2.130 (Probabilistic rooted branching (hereditary) history-preserving bisimulation). Assume a special termination predicate \downarrow , and let \checkmark represent a state with $\checkmark \downarrow$. A probabilistic rooted branching history-preserving (hp-) bisimulation is a weakly posetal relation $R \subseteq \langle \mathcal{C}(\mathcal{E}_1), S \rangle \times \langle \mathcal{C}(\mathcal{E}_2), S \rangle$ such that:

1. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_1, \varrho \rangle \rightsquigarrow^{e_1} \langle C'_1, \varrho' \rangle$, then $\langle C_2, \varrho \rangle \rightsquigarrow^{e_2} \langle C'_2, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{pbhp} \langle C'_2, \varrho' \rangle$;
2. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$, and $\langle C_2, \varrho \rangle \rightsquigarrow^{e_2} \langle C'_2, \varrho' \rangle$, then $\langle C_1, \varrho \rangle \rightsquigarrow^{e_1} \langle C'_1, \varrho' \rangle$ with $\langle C'_1, \varrho' \rangle \approx_{pbhp} \langle C'_2, \varrho' \rangle$;
3. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_1, \varrho \rangle \downarrow$, then $\langle C_2, \varrho \rangle \downarrow$;
4. if $(\langle C_1, \varrho \rangle, f, \langle C_2, \varrho \rangle) \in R$ and $\langle C_2, \varrho \rangle \downarrow$, then $\langle C_1, \varrho \rangle \downarrow$.

$\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching history-preserving (hp-)bisimilar and are written $\mathcal{E}_1 \approx_{prbhp} \mathcal{E}_2$ if there exists a probabilistic rooted branching hp-bisimulation R such that $(\langle \emptyset, \emptyset \rangle, \emptyset, \langle \emptyset, \emptyset \rangle) \in R$.

A probabilistic rooted branching hereditary history-preserving (hbp-)bisimulation is a downward closed probabilistic rooted branching hp-bisimulation. $\mathcal{E}_1, \mathcal{E}_2$ are probabilistic rooted branching hereditary history-preserving (hbp-)bisimilar and are written $\mathcal{E}_1 \approx_{prbhbp} \mathcal{E}_2$.

No.	Axiom
A1	$x + y = y + x$
A2	$(x + y) + z = x + (y + z)$
A3	$x + x = x$
A4	$(x + y) \cdot z = x \cdot z + y \cdot z$
A5	$(x \cdot y) \cdot z = x \cdot (y \cdot z)$

Table 30: Axioms of qBATC

3 APTC for Open Quantum Systems

In this chapter, we introduce APTC for open quantum systems, including BATC for open quantum systems abbreviated qBATC in section 3.1, APTC for open quantum systems abbreviated qAPTC in section 3.2, recursion in section 3.3, abstraction in section 3.4, quantum entanglement in section 3.5 and unification of quantum and classical computing for open quantum systems in section 3.6.

Note that, in open quantum systems, quantum operations denoted \mathbb{E} are the atomic actions (events), and a quantum operation $e \in \mathbb{E}$.

3.1 BATC for Open Quantum Systems

qBATC has sequential composition \cdot and alternative composition $+$ to capture the chronological ordered causality and the structural conflation.

In the following, x, y, z range over the set of terms for true concurrency, p, q, s range over the set of closed terms. The set of axioms of qBATC consists of the laws given in Table 30.

Definition 3.1 (Basic terms of $qBATC$). *The set of basic terms of $qBATC$, $\mathcal{B}(qBATC)$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(qBATC)$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(qBATC)$ then $e \cdot t \in \mathcal{B}(qBATC)$;
3. if $t, s \in \mathcal{B}(qBATC)$ then $t + s \in \mathcal{B}(qBATC)$.

Theorem 3.2 (Elimination theorem of $qBATC$). *Let p be a closed $qBATC$ term. Then there is a basic $qBATC$ term q such that $qBATC \vdash p = q$.*

Proof. The same as that of $BATC$, we omit the proof, please refer to [7] for details. \square

We give the operational transition rules of operators \cdot and $+$ as Table 31 shows.

Theorem 3.3 (Congruence of $qBATC$ with respect to truly concurrent bisimulations). *Truly concurrent bisimulations $\sim_p, \sim_s, \sim_{hp}$ and \sim_{hhp} are all congruences with respect to $qBATC$.*

$\overline{\langle e, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}$	
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}$
$\frac{\langle y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}$	$\frac{\langle y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e} \langle y, \varrho' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e} \langle x' \cdot y, \varrho' \rangle}$

Table 31: Transition rules of qBATC

Proof. It is obvious that truly concurrent bisimulations \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all equivalent relations with respect to $qBATC$. So, it is sufficient to prove that truly concurrent bisimulations \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are preserved for \cdot and $+$ according to the transition rules in Table 31, that is, if $x \sim_p x'$ and $y \sim_p y'$, then $x + y \sim_p x' + y'$ and $x \cdot y \sim_p x' \cdot y'$; if $x \sim_s x'$ and $y \sim_s y'$, then $x + y \sim_s x' + y'$ and $x \cdot y \sim_s x' \cdot y'$; if $x \sim_{hp} x'$ and $y \sim_{hp} y'$, then $x + y \sim_{hp} x' + y'$ and $x \cdot y \sim_{hp} x' \cdot y'$; and if $x \sim_{hhp} x'$ and $y \sim_{hhp} y'$, then $x + y \sim_{hhp} x' + y'$ and $x \cdot y \sim_{hhp} x' \cdot y'$. The proof is quit trivial, and we leave the proof as an exercise for the readers. \square

Theorem 3.4 (Soundness of qBATC modulo truly concurrent bisimulation equivalences). *The axiomatization of qBATC is sound modulo truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} . That is,*

1. let x and y be qBATC terms. If $qBATC \vdash x = y$, then $x \sim_p y$;
2. let x and y be qBATC terms. If $qBATC \vdash x = y$, then $x \sim_s y$;
3. let x and y be qBATC terms. If $qBATC \vdash x = y$, then $x \sim_{hp} y$;
4. let x and y be qBATC terms. If $qBATC \vdash x = y$, then $x \sim_{hhp} y$.

Proof. (1) Since pomset bisimulation \sim_p is both an equivalent and a congruent relation, we only need to check if each axiom in Table 30 is sound modulo pomset bisimulation equivalence. We leave the proof as an exercise for the readers.

(2) Since step bisimulation \sim_s is both an equivalent and a congruent relation, we only need to check if each axiom in Table 30 is sound modulo step bisimulation equivalence. We leave the proof as an exercise for the readers.

(3) Since hp-bisimulation \sim_{hp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 30 is sound modulo hp-bisimulation equivalence. We leave the proof as an exercise for the readers.

(4) Since hhp-bisimulation \sim_{hhp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 30 is sound modulo hhp-bisimulation equivalence. We leave the proof as an exercise for the readers. \square

Theorem 3.5 (Completeness of qBATC modulo truly concurrent bisimulation equivalences). *The axiomatization of qBATC is complete modulo truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} . That is,*

1. *let p and q be closed qBATC terms, if $p \sim_p q$ then $p = q$;*
2. *let p and q be closed qBATC terms, if $p \sim_s q$ then $p = q$;*
3. *let p and q be closed qBATC terms, if $p \sim_{hp} q$ then $p = q$;*
4. *let p and q be closed qBATC terms, if $p \sim_{hhp} q$ then $p = q$.*

Proof. According to the definition of truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} , $p \sim_p q$, $p \sim_s q$, $p \sim_{hp} q$ and $p \sim_{hhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of BATC (please refer to [7] for details), we can get the completeness of qBATC. \square

3.2 APTC for Open Quantum Systems

We give the transition rules of qAPTC in Table 3, it is suitable for all truly concurrent behavioral equivalence, including pomset bisimulation, step bisimulation, hp-bisimulation and hhp-bisimulation.

The axioms for qAPTC are listed in Table 33.

Definition 3.6 (Basic terms of qAPTC). *The set of basic terms of qAPTC, $\mathcal{B}(qAPTC)$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(qAPTC)$;
2. *if $e \in \mathbb{E}, t \in \mathcal{B}(qAPTC)$ then $e \cdot t \in \mathcal{B}(qAPTC)$;*
3. *if $t, s \in \mathcal{B}(qAPTC)$ then $t + s \in \mathcal{B}(qAPTC)$;*
4. *if $t, s \in \mathcal{B}(qAPTC)$ then $t \parallel s \in \mathcal{B}(qAPTC)$.*

Theorem 3.7 (Elimination theorem of qAPTC). *Let p be a closed qAPTC with left parallel composition term. Then there is a basic qAPTC term q such that $qAPTC \vdash p = q$.*

Proof. The same as that of APTC, we omit the proof, please refer to [7] for details. \square

Theorem 3.8 (Generalization of qBATC). *The algebra for left parallelism is a generalization of qBATC.*

Proof. It follows from the following three facts.

[illegible]

Table 32: Transition rules of qAPTC

No.	Axiom
A6	$x + \delta = x$
A7	$\delta \cdot x = \delta$
P1	$x \bowtie y = x \parallel y + x \mid y$
P2	$x \parallel y = y \parallel x$
P3	$(x \parallel y) \parallel z = x \parallel (y \parallel z)$
P4	$x \parallel y = x \parallel y + y \parallel x$
P5	$(e_1 \leq e_2) \quad e_1 \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot y$
P6	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel e_2 = (e_1 \parallel e_2) \cdot x$
P7	$(e_1 \leq e_2) \quad (e_1 \cdot x) \parallel (e_2 \cdot y) = (e_1 \parallel e_2) \cdot (x \bowtie y)$
P8	$(x + y) \parallel z = (x \parallel z) + (y \parallel z)$
P9	$\delta \parallel x = \delta$
C10	$e_1 \mid e_2 = \gamma(e_1, e_2)$
C11	$e_1 \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot y$
C12	$(e_1 \cdot x) \mid e_2 = \gamma(e_1, e_2) \cdot x$
C13	$(e_1 \cdot x) \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot (x \bowtie y)$
C14	$(x + y) \mid z = (x \mid z) + (y \mid z)$
C15	$x \mid (y + z) = (x \mid y) + (x \mid z)$
C16	$\delta \mid x = \delta$
C17	$x \mid \delta = \delta$
CE18	$\Theta(e) = e$
CE19	$\Theta(\delta) = \delta$
CE20	$\Theta(x + y) = \Theta(x) \triangleleft y + \Theta(y) \triangleleft x$
CE21	$\Theta(x \cdot y) = \Theta(x) \cdot \Theta(y)$
CE22	$\Theta(x \parallel y) = ((\Theta(x) \triangleleft y) \parallel y) + ((\Theta(y) \triangleleft x) \parallel x)$
CE23	$\Theta(x \mid y) = ((\Theta(x) \triangleleft y) \mid y) + ((\Theta(y) \triangleleft x) \mid x)$
U24	$(\sharp(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
U25	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
U26	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
U27	$e \triangleleft \delta = e$
U28	$\delta \triangleleft e = \delta$
U29	$(x + y) \triangleleft z = (x \triangleleft z) + (y \triangleleft z)$
U30	$(x \cdot y) \triangleleft z = (x \triangleleft z) \cdot (y \triangleleft z)$
U31	$(x \parallel y) \triangleleft z = (x \triangleleft z) \parallel (y \triangleleft z)$
U32	$(x \mid y) \triangleleft z = (x \triangleleft z) \mid (y \triangleleft z)$
U33	$x \triangleleft (y + z) = (x \triangleleft y) \triangleleft z$
U34	$x \triangleleft (y \cdot z) = (x \triangleleft y) \triangleleft z$
U35	$x \triangleleft (y \parallel z) = (x \triangleleft y) \triangleleft z$
U36	$x \triangleleft (y \mid z) = (x \triangleleft y) \triangleleft z$
D1	$e \notin H \quad \partial_H(e) = e$
D2	$e \in H \quad \partial_H(e) = \delta$
D3	$\partial_H(\delta) = \delta$
D4	$\partial_H(x + y) = \partial_H(x) + \partial_H(y)$
D5	$\partial_H(x \cdot y) = \partial_H(x) \cdot \partial_H(y)$
D6	$\partial_H(x \parallel y) = \partial_H(x) \parallel \partial_H(y)$

Table 33: Axioms of parallelism with left parallel composition

1. The transition rules of $qBATC$ in are all source-dependent;
2. The sources of the transition rules $qAPTC$ contain an occurrence of \bowtie , or \parallel , or \ll , or $|$, or Θ , or \triangleleft , or ∂_H ;
3. The transition rules of $qAPTC$ are all source-dependent.

So, $qAPTC$ is a generalization of $qBATC$, that is, $qBATC$ is an embedding of $qAPTC$, as desired. \square

Theorem 3.9 (Congruence theorem of $qAPTC$). *Truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all congruences with respect to $qAPTC$ with left parallel composition.*

Proof. It is obvious that truly concurrent bisimulations \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all equivalent relations with respect to $qAPTC$. So, it is sufficient to prove that truly concurrent bisimulations \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are preserved for \bowtie , \parallel , \ll , $|$, Θ , \triangleleft and ∂_H according to the transition rules in Table 32, that is, if $x \sim_p x'$ and $y \sim_p y'$, then $x \bowtie y \sim_p x' \bowtie y'$, $x \parallel y \sim_p x' \parallel y'$, $x \ll y \sim_p x' \ll y'$, $x | y \sim_p x' | y'$, $\Theta(x) \sim_p \Theta(x')$, $x \triangleleft y \sim_p x' \triangleleft y'$, and $\partial_H(x) \sim_p \partial_H(x')$; if $x \sim_s x'$ and $y \sim_s y'$, then $x \bowtie y \sim_s x' \bowtie y'$, $x \parallel y \sim_s x' \parallel y'$, $x \ll y \sim_s x' \ll y'$, $x | y \sim_s x' | y'$, $\Theta(x) \sim_s \Theta(x')$, $x \triangleleft y \sim_s x' \triangleleft y'$, and $\partial_H(x) \sim_s \partial_H(x')$; if $x \sim_{hp} x'$ and $y \sim_{hp} y'$, then $x \bowtie y \sim_{hp} x' \bowtie y'$, $x \parallel y \sim_{hp} x' \parallel y'$, $x \ll y \sim_{hp} x' \ll y'$, $x | y \sim_{hp} x' | y'$, $\Theta(x) \sim_{hp} \Theta(x')$, $x \triangleleft y \sim_{hp} x' \triangleleft y'$, and $\partial_H(x) \sim_{hp} \partial_H(x')$; and if $x \sim_{hhp} x'$ and $y \sim_{hhp} y'$, then $x \bowtie y \sim_{hhp} x' \bowtie y'$, $x \parallel y \sim_{hhp} x' \parallel y'$, $x \ll y \sim_{hhp} x' \ll y'$, $x | y \sim_{hhp} x' | y'$, $\Theta(x) \sim_{hhp} \Theta(x')$, $x \triangleleft y \sim_{hhp} x' \triangleleft y'$ and $\partial_H(x) \sim_{hhp} \partial_H(x')$. The proof is quit trivial, and we leave the proof as an exercise for the readers. \square

Theorem 3.10 (Soundness of $qAPTC$ modulo truly concurrent bisimulation equivalences). *Let x and y be $qAPTC$ with left parallel composition terms. If $qAPTC \vdash x = y$, then*

1. $x \sim_s y$;
2. $x \sim_p y$;
3. $x \sim_{hp} y$;
4. $x \sim_{hhp} y$.

Proof. (1) Since pomset bisimulation \sim_p is both an equivalent and a congruent relation, we only need to check if each axiom in Table 33 is sound modulo pomset bisimulation equivalence. We leave the proof as an exercise for the readers.

(2) Since step bisimulation \sim_s is both an equivalent and a congruent relation, we only need to check if each axiom in Table 33 is sound modulo step bisimulation equivalence. We leave the proof as an exercise for the readers.

(3) Since hp-bisimulation \sim_{hp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 33 is sound modulo hp-bisimulation equivalence. We leave the proof as an exercise for the readers.

(4) Since hhp-bisimulation \sim_{hhp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 33 is sound modulo hhp-bisimulation equivalence. We leave the proof as an exercise for the readers. \square

Theorem 3.11 (Completeness of $qAPTC$ modulo truly concurrent bisimulation equivalences).
Let x and y be $qAPTC$ terms.

1. If $x \sim_s y$, then $qAPTC \vdash x = y$;
2. if $x \sim_p y$, then $qAPTC \vdash x = y$;
3. if $x \sim_{hp} y$, then $qAPTC \vdash x = y$;
4. if $x \sim_{hhp} y$, then $qAPTC \vdash x = y$.

Proof. According to the definition of truly concurrent bisimulation equivalences $\sim_p, \sim_s, \sim_{hp}$ and \sim_{hhp} , $p \sim_p q$, $p \sim_s q$, $p \sim_{hp} q$ and $p \sim_{hhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of APTC (please refer to [7] for details), we can get the completeness of $qAPTC$. \square

3.3 Recursion

Definition 3.12 (Recursive specification). *A recursive specification is a finite set of recursive equations*

$$\begin{aligned} X_1 &= t_1(X_1, \dots, X_n) \\ &\dots \\ X_n &= t_n(X_1, \dots, X_n) \end{aligned}$$

where the left-hand sides of X_i are called recursion variables, and the right-hand sides $t_i(X_1, \dots, X_n)$ are process terms in $qAPTC$ with possible occurrences of the recursion variables X_1, \dots, X_n .

Definition 3.13 (Solution). *Processes p_1, \dots, p_n are a solution for a recursive specification $\{X_i = t_i(X_1, \dots, X_n) | i \in \{1, \dots, n\}\}$ (with respect to truly concurrent bisimulation equivalences $\sim_s(\sim_p, \sim_{hp}, \sim_{hhp})$) if $p_i \sim_s(\sim_p, \sim_{hp}, \sim_{hhp}) t_i(p_1, \dots, p_n)$ for $i \in \{1, \dots, n\}$.*

Definition 3.14 (Guarded recursive specification). *A recursive specification*

$$\begin{aligned} X_1 &= t_1(X_1, \dots, X_n) \\ &\dots \\ X_n &= t_n(X_1, \dots, X_n) \end{aligned}$$

is guarded if the right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in $qAPTC$ and replacing recursion variables by the right-hand sides of their recursive equations,

$$(a_{11} \parallel \dots \parallel a_{1i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l1} \parallel \dots \parallel b_{lj_l})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l1}, \dots, b_{lj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

$$\begin{array}{c}
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} \surd}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} \surd} \\
\\
\frac{t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle) \xrightarrow{\{e_1, \dots, e_k\}} y}{\langle X_i|E \rangle \xrightarrow{\{e_1, \dots, e_k\}} y}
\end{array}$$

Table 34: Transition rules of guarded recursion

Definition 3.15 (Linear recursive specification). *A recursive specification is linear if its recursive equations are of the form*

$$(a_{11} \parallel \dots \parallel a_{1i_1})X_1 + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k})X_k + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l1} \parallel \dots \parallel b_{lj_l})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l1}, \dots, b_{lj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

Theorem 3.16 (Conservativity of $qAPTC$ with guarded recursion). *$qAPTC$ with guarded recursion is a conservative extension of $qAPTC$.*

Proof. It follows from the following three facts.

1. The transition rules of $qAPTC$ in are all source-dependent;
2. The sources of the transition rules $qAPTC$ with guarded recursion contain only one constant;
3. The transition rules of $qAPTC$ with guarded recursion are all source-dependent.

So, $qAPTC$ with guarded recursion is a conservative extension of $qAPTC$, as desired. \square

Theorem 3.17 (Congruence theorem of $qAPTC$ with guarded recursion). *Truly concurrent bisimulation equivalences $\sim_p, \sim_s, \sim_{hp}, \sim_{hhp}$ are all congruences with respect to $qAPTC$ with guarded recursion.*

Proof. It follows the following two facts:

1. in a guarded recursive specification, right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in $qAPTC$ and replacing recursion variables by the right-hand sides of their recursive equations;
2. truly concurrent bisimulation equivalences $\sim_p, \sim_s, \sim_{hp}$ and \sim_{hhp} are all congruences with respect to all operators of $qAPTC$.

\square

Theorem 3.18 (Elimination theorem of $qAPTC$ with linear recursion). *Each process term in $qAPTC$ with linear recursion is equal to a process term $\langle X_1 | E \rangle$ with E a linear recursive specification.*

Proof. The same as that of $APTC$ with linear recursion, we omit the proof, please refer to [7] for details. \square

The behavior of the solution $\langle X_i | E \rangle$ for the recursion variable X_i in E , where $i \in \{1, \dots, n\}$, is exactly the behavior of their right-hand sides $t_i(X_1, \dots, X_n)$, which is captured by the two transition rules in Table 34.

Theorem 3.19 (Soundness of $qAPTC$ with guarded recursion). *Let x and y be $qAPTC$ with guarded recursion terms. If $qAPTC$ with guarded recursion $\vdash x = y$, then*

1. $x \sim_s y$;
2. $x \sim_p y$;
3. $x \sim_{hp} y$;
4. $x \sim_{hhp} y$.

Proof. (1) Since pomset bisimulation \sim_p is both an equivalent and a congruent relation, we only need to check if each axiom in Table 8 is sound modulo pomset bisimulation equivalence. We leave the proof as an exercise for the readers.

(2) Since step bisimulation \sim_s is both an equivalent and a congruent relation, we only need to check if each axiom in Table 8 is sound modulo step bisimulation equivalence. We leave the proof as an exercise for the readers.

(3) Since hp-bisimulation \sim_{hp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 8 is sound modulo hp-bisimulation equivalence. We leave the proof as an exercise for the readers.

(4) Since hhp-bisimulation \sim_{hhp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 8 is sound modulo hhp-bisimulation equivalence. We leave the proof as an exercise for the readers. \square

Theorem 3.20 (Completeness of $qAPTC$ with linear recursion). *Let p and q be closed $qAPTC$ with linear recursion terms, then,*

1. if $p \sim_s q$ then $p = q$;
2. if $p \sim_p q$ then $p = q$;
3. if $p \sim_{hp} q$ then $p = q$;
4. if $p \sim_{hhp} q$ then $p = q$.

Proof. According to the definition of truly concurrent bisimulation equivalences $\sim_p, \sim_s, \sim_{hp}$ and \sim_{hhp} , $p \sim_p q, p \sim_s q, p \sim_{hp} q$ and $p \sim_{hhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of $APTC$ with linear recursion (please refer to [7] for details), we can get the completeness of $qAPTC$ with linear recursion. \square

$\overline{\langle \tau, \varrho \rangle \xrightarrow{\tau} \langle \surd, \tau(\varrho) \rangle}$	
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle} \quad e \notin I$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{e} \langle \tau_I(x'), \varrho' \rangle} \quad e \notin I$
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{\tau} \langle \surd, \tau(\varrho) \rangle} \quad e \in I$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{\tau} \langle \tau_I(x'), \tau(\varrho) \rangle} \quad e \in I$

Table 35: Transition rule of $qAPTC_\tau$

3.4 Abstraction

Definition 3.21 (Guarded linear recursive specification). *A recursive specification is linear if its recursive equations are of the form*

$$(a_{11} \parallel \dots \parallel a_{1i_1})X_1 + \dots + (a_{k1} \parallel \dots \parallel a_{ki_k})X_k + (b_{11} \parallel \dots \parallel b_{1j_1}) + \dots + (b_{l_{j_1}} \parallel \dots \parallel b_{l_{j_l}})$$

where $a_{11}, \dots, a_{1i_1}, a_{k1}, \dots, a_{ki_k}, b_{11}, \dots, b_{1j_1}, b_{l_{j_1}}, \dots, b_{l_{j_l}} \in \mathbb{E} \cup \{\tau\}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ .

A linear recursive specification E is guarded if there does not exist an infinite sequence of τ -transitions $\langle X|E \rangle \xrightarrow{\tau} \langle X'|E \rangle \xrightarrow{\tau} \langle X''|E \rangle \xrightarrow{\tau} \dots$.

The transition rules of τ are shown in Table 35, and axioms of τ are as Table 36 shows.

Theorem 3.22 (Conservativity of $qAPTC$ with silent step and guarded linear recursion). *$qAPTC$ with silent step and guarded linear recursion is a conservative extension of $qAPTC$ with linear recursion.*

Proof. Since the transition rules of $qAPTC$ with silent step and guarded linear recursion are source-dependent, and the transition rules for τ in Table 35 contain only a fresh constant τ in their source, so the transition rules of $qAPTC$ with silent step and guarded linear recursion is a conservative extension of those of $qAPTC$ with guarded linear recursion. \square

Theorem 3.23 (Congruence theorem of $qAPTC$ with silent step and guarded linear recursion). *Routed branching truly concurrent bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} , and \approx_{rbhhp} are all congruences with respect to $qAPTC$ with silent step and guarded linear recursion.*

Proof. It follows the following three facts:

1. in a guarded linear recursive specification, right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in $qAPTC$ and replacing recursion variables by the right-hand sides of their recursive equations;

No.	Axiom
B1	$e \cdot \tau = e$
B2	$e \cdot (\tau \cdot (x + y) + x) = e \cdot (x + y)$
B3	$x \parallel \tau = x$

Table 36: Axioms of silent step

2. truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} are all congruences with respect to all operators of $qAPTC$, while truly concurrent bisimulation equivalences \sim_p , \sim_s , \sim_{hp} and \sim_{hhp} imply the corresponding rooted branching truly concurrent bisimulations \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} , so rooted branching truly concurrent bisimulations \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} are all congruences with respect to all operators of $qAPTC$;
3. While \mathbb{E} is extended to $\mathbb{E} \cup \{\tau\}$, it can be proved that rooted branching truly concurrent bisimulations \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} are all congruences with respect to all operators of $qAPTC$, we omit it.

□

Theorem 3.24 (Elimination theorem of $qAPTC$ with silent step and guarded linear recursion). *Each process term in $qAPTC$ with silent step and guarded linear recursion is equal to a process term $\langle X_1 | E \rangle$ with E a guarded linear recursive specification.*

Proof. The same as that of $APTC$ with silent step and guarded linear recursion, we omit the proof, please refer to [7] for details. □

Theorem 3.25 (Soundness of $qAPTC$ with silent step and guarded linear recursion). *Let x and y be $qAPTC$ with silent step and guarded linear recursion terms. If $qAPTC$ with silent step and guarded linear recursion $\vdash x = y$, then*

1. $x \approx_{rbs} y$;
2. $x \approx_{rbp} y$;
3. $x \approx_{rbhp} y$;
4. $x \approx_{rbhhp} y$.

Proof. (1) Since rooted branching pomset bisimulation \approx_{rbp} is both an equivalent and a congruent relation with respect to $qAPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 36 is sound modulo rooted branching pomset bisimulation \approx_{rbp} . We leave them as exercises to the readers.

(2) Since rooted branching step bisimulation \approx_{rbs} is both an equivalent and a congruent relation with respect to $qAPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 36 is sound modulo rooted branching step bisimulation \approx_{rbs} . We leave them as exercises to the readers.

(3) Since rooted branching hp-bisimulation \approx_{rbhp} is both an equivalent and a congruent relation with respect to $qAPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 36 is sound modulo rooted branching hp-bisimulation \approx_{rbhp} . We leave them as exercises to the readers.

(4) Since rooted branching hhp-bisimulation \approx_{rbhhp} is both an equivalent and a congruent relation with respect to $qAPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 36 is sound modulo rooted branching hhp-bisimulation \approx_{rbhhp} . We leave them as exercises to the readers. \square

Theorem 3.26 (Completeness of $qAPTC$ with silent step and guarded linear recursion). *Let p and q be closed $qAPTC$ with silent step and guarded linear recursion terms, then,*

1. *if $p \approx_{rbs} q$ then $p = q$;*
2. *if $p \approx_{rbp} q$ then $p = q$;*
3. *if $p \approx_{rbhp} q$ then $p = q$;*
4. *if $p \approx_{rbhhp} q$ then $p = q$.*

Proof. According to the definition of truly concurrent rooted branching bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} , $p \approx_{rbp} q$, $p \approx_{rbs} q$, $p \approx_{rbhp} q$ and $p \approx_{rbhhp} q$ implies both the rooted branching bisimilarities between p and q , and also the in the same quantum states. According to the completeness of APTC with silent step and guarded linear recursion (please refer to [7] for details), we can get the completeness of $qAPTC$ with silent step and guarded linear recursion. \square

The transition rules of τ_I are shown in Table 35, and the axioms are shown in Table 37.

Theorem 3.27 (Conservativity of $qAPTC_\tau$ with guarded linear recursion). *$qAPTC_\tau$ with guarded linear recursion is a conservative extension of $qAPTC$ with silent step and guarded linear recursion.*

Proof. Since the transition rules of $qAPTC$ with silent step and guarded linear recursion are source-dependent, and the transition rules for abstraction operator in Table 35 contain only a fresh operator τ_I in their source, so the transition rules of $qAPTC_\tau$ with guarded linear recursion is a conservative extension of those of $qAPTC$ with silent step and guarded linear recursion. \square

Theorem 3.28 (Congruence theorem of $qAPTC_\tau$ with guarded linear recursion). *Rooted branching truly concurrent bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} are all congruences with respect to $qAPTC_\tau$ with guarded linear recursion.*

Proof. (1) It is easy to see that rooted branching pomset bisimulation is an equivalent relation on $qAPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{rbp} is preserved by the operator τ_I . It is trivial and we leave the proof as an exercise for the readers.

(2) It is easy to see that rooted branching step bisimulation is an equivalent relation on $qAPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{rbs} is preserved by the operator τ_I . It is trivial and we leave the proof as an exercise for the readers.

No.	Axiom
TI1	$e \notin I \quad \tau_I(e) = e$
TI2	$e \in I \quad \tau_I(e) = \tau$
TI3	$\tau_I(\delta) = \delta$
TI4	$\tau_I(x + y) = \tau_I(x) + \tau_I(y)$
TI5	$\tau_I(x \cdot y) = \tau_I(x) \cdot \tau_I(y)$
TI6	$\tau_I(x \parallel y) = \tau_I(x) \parallel \tau_I(y)$

Table 37: Axioms of abstraction operator

(3) It is easy to see that rooted branching hp-bisimulation is an equivalent relation on $qAPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{rbhp} is preserved by the operator τ_I . It is trivial and we leave the proof as an exercise for the readers.

(4) It is easy to see that rooted branching hhp-bisimulation is an equivalent relation on $qAPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{rbhhp} is preserved by the operator τ_I . It is trivial and we leave the proof as an exercise for the readers. \square

Theorem 3.29 (Soundness of $qAPTC_\tau$ with guarded linear recursion). *Let x and y be $qAPTC_\tau$ with guarded linear recursion terms. If $qAPTC_\tau$ with guarded linear recursion $x = y$, then*

1. $x \approx_{rbs} y$;
2. $x \approx_{rbp} y$;
3. $x \approx_{rbhp} y$;
4. $x \approx_{rbhhp} y$.

Proof. (1) Since rooted branching step bisimulation \approx_{rbs} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 37 is sound modulo rooted branching step bisimulation \approx_{rbs} . We leave them as exercises to the readers.

(2) Since rooted branching pomset bisimulation \approx_{rbp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 37 is sound modulo rooted branching pomset bisimulation \approx_{rbp} . We leave them as exercises to the readers.

(3) Since rooted branching hp-bisimulation \approx_{rbhp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 37 is sound modulo rooted branching hp-bisimulation \approx_{rbhp} . We leave them as exercises to the readers.

(4) Since rooted branching hhp-bisimulation \approx_{rbhhp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 37 is sound modulo rooted branching hhp-bisimulation \approx_{rbhhp} . We leave them as exercises to the readers. \square

No.	Axiom
<i>CFAR</i>	<p>If X is in a cluster for I with exits</p> $\{(a_{11} \parallel \dots \parallel a_{1i})Y_1, \dots, (a_{m1} \parallel \dots \parallel a_{mi})Y_m, b_{11} \parallel \dots \parallel b_{1j}, \dots, b_{n1} \parallel \dots \parallel b_{nj}\},$ <p>then $\tau \cdot \tau_I(\langle X E \rangle) =$</p> $\tau \cdot \tau_I((a_{11} \parallel \dots \parallel a_{1i})\langle Y_1 E \rangle + \dots + (a_{m1} \parallel \dots \parallel a_{mi})\langle Y_m E \rangle + b_{11} \parallel \dots \parallel b_{1j} + \dots + b_{n1} \parallel \dots \parallel b_{nj})$

Table 38: Cluster fair abstraction rule

Definition 3.30 (Cluster). *Let E be a guarded linear recursive specification, and $I \subseteq \mathbb{E}$. Two recursion variable X and Y in E are in the same cluster for I iff there exist sequences of transitions $\langle X|E \rangle \xrightarrow{\{b_{11}, \dots, b_{1i}\}} \dots \xrightarrow{\{b_{m1}, \dots, b_{mi}\}} \langle Y|E \rangle$ and $\langle Y|E \rangle \xrightarrow{\{c_{11}, \dots, c_{1j}\}} \dots \xrightarrow{\{c_{n1}, \dots, c_{nj}\}} \langle X|E \rangle$, where $b_{11}, \dots, b_{mi}, c_{11}, \dots, c_{nj} \in I \cup \{\tau\}$.*

$a_1 \parallel \dots \parallel a_k$ or $(a_1 \parallel \dots \parallel a_k)X$ is an exit for the cluster C iff: (1) $a_1 \parallel \dots \parallel a_k$ or $(a_1 \parallel \dots \parallel a_k)X$ is a summand at the right-hand side of the recursive equation for a recursion variable in C , and (2) in the case of $(a_1 \parallel \dots \parallel a_k)X$, either $a_l \notin I \cup \{\tau\}$ ($l \in \{1, 2, \dots, k\}$) or $X \notin C$.

Theorem 3.31 (Soundness of *CFAR*). *$CFAR$ is sound modulo rooted branching truly concurrent bisimulation equivalences \approx_{rbs} , \approx_{rbp} , \approx_{rbhp} and \approx_{rbhhp} .*

Proof. (1) Since rooted branching step bisimulation \approx_{rbs} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 38 is sound modulo rooted branching step bisimulation \approx_{rbs} . We leave them as exercises to the readers.

(2) Since rooted branching pomset bisimulation \approx_{rbp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 38 is sound modulo rooted branching pomset bisimulation \approx_{rbp} . We leave them as exercises to the readers.

(3) Since rooted branching hp-bisimulation \approx_{rbhp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 38 is sound modulo rooted branching hp-bisimulation \approx_{rbhp} . We leave them as exercises to the readers.

(4) Since rooted branching hhp-bisimulation \approx_{rbhhp} is both an equivalent and a congruent relation with respect to $APPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 38 is sound modulo rooted branching hhp-bisimulation \approx_{rbhhp} . We leave them as exercises to the readers. \square

Theorem 3.32 (Completeness of $qAPTC_\tau$ with guarded linear recursion and *CFAR*). *Let p and q be closed $qAPTC_\tau$ with guarded linear recursion and *CFAR* terms, then,*

1. *if $p \approx_{rbs} q$ then $p = q$;*
2. *if $p \approx_{rbp} q$ then $p = q$;*
3. *if $p \approx_{rbhp} q$ then $p = q$;*

No.	Axiom
SC1	$\textcircled{S} \cdot x = x$
SC2	$x \cdot \textcircled{S} = x$
SC3	$e \parallel \textcircled{S}^e = e$
SC4	$\textcircled{S}^e \parallel e = e$
SC5	$e \parallel (\textcircled{S}^e \cdot y) = e \cdot y$
SC6	$\textcircled{S}^e \parallel (e \cdot y) = e \cdot y$
SC7	$(e \cdot x) \parallel \textcircled{S}^e = e \cdot x$
SC8	$(\textcircled{S}^e \cdot x) \parallel e = e \cdot x$
SC9	$(e \cdot x) \parallel (\textcircled{S}^e \cdot y) = e \cdot (x \bowtie y)$
SC10	$(\textcircled{S}^e \cdot x) \parallel (e \cdot y) = e \cdot (x \bowtie y)$

Table 39: Axioms of quantum entanglement

4. if $p \approx_{rbhhp} q$ then $p = q$.

Proof. According to the definition of truly concurrent rooted branching bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} , $p \approx_{rbp} q$, $p \approx_{rbs} q$, $p \approx_{rbhp} q$ and $p \approx_{rbhhp} q$ implies both the rooted branching bisimilarities between p and q , and also the in the same quantum states. According to the completeness of $APTC_\tau$ guarded linear recursion (please refer to [7] for details), we can get the completeness of $qAPTC_\tau$ with guarded linear recursion. \square

3.5 Quantum Entanglement

If two quantum variables are entangled, then a quantum operation performed on one variable, then state of the other quantum variable is also changed. So, the entangled states must be all the inner variables or all the public variables. We will introduced a mechanism to explicitly define quantum entanglement in open quantum systems. A new constant called shadow constant denoted \textcircled{S}_i^e corresponding to a specific quantum operation. If there are n quantum variables entangled, they maybe be distributed in different quantum systems, with a quantum operation performed on one variable, there should be one \textcircled{S}_i^e ($1 \leq i \leq n - 1$) executed on each variable in the other $n - 1$ variables. Thus, distributed variables are all hidden behind actions. In the following, we let $\textcircled{S} \in \mathbb{E}$.

The axiom system of the shadow constant \textcircled{S} is shown in Table 39.

The transition rules of constant \textcircled{S} are as Table 40 shows.

Theorem 3.33 (Elimination theorem of $qAPTC_\tau$ with guarded linear recursion and shadow constant). *Let p be a closed $qAPTC_\tau$ with guarded linear recursion and shadow constant term. Then there is a closed $qAPTC$ term such that $qAPTC_\tau$ with guarded linear recursion and shadow constant- $p = q$.*

$$\begin{array}{c}
\overline{\langle \textcircled{S}, \varrho \rangle \rightarrow \langle \sqrt{}, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{S}^e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle x' \bowtie y', \varrho' \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{S}^e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle} \\
\frac{\langle x, \varrho' \rangle \xrightarrow{\textcircled{S}^e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{S}^e} \langle \sqrt{}, \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle}
\end{array}$$

Table 40: Transition rules of constant \textcircled{S}

Proof. We leave the proof to the readers as an excise. \square

Theorem 3.34 (Conservativity of $qAPTC_\tau$ with guarded linear recursion and shadow constant). *$qAPTC_\tau$ with guarded linear recursion and shadow constant is a conservative extension of $qAPTC_\tau$ with guarded linear recursion.*

Proof. We leave the proof to the readers as an excise. \square

Theorem 3.35 (Congruence theorem of $qAPTC_\tau$ with guarded linear recursion and shadow constant). *Routed branching truly concurrent bisimulation equivalences \approx_{rbp} , \approx_{rbs} , \approx_{rbhp} and \approx_{rbhhp} are all congruences with respect to $qAPTC_\tau$ with guarded linear recursion and shadow constant.*

Proof. We leave the proof to the readers as an excise. \square

Theorem 3.36 (Soundness of $qAPTC_\tau$ with guarded linear recursion and shadow constant). *Let p and q be closed $qAPTC_\tau$ with guarded linear recursion and shadow constant terms. If $qAPTC_\tau$ with guarded linear recursion and shadow constant $\vdash x = y$, then*

1. $x \approx_{rbs} y$;
2. $x \approx_{rbp} y$;
3. $x \approx_{rbhp} y$;
4. $x \approx_{rbhhp} y$.

Proof. We leave the proof to the readers as an excise. \square

Theorem 3.37 (Completeness of $qAPTC_\tau$ with guarded linear recursion and shadow constant). *Let p and q are closed $qAPTC_\tau$ with guarded linear recursion and shadow constant terms, then,*

$\langle e', \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle x, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle x + y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle x, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle$
$\langle x + y, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle$
$\langle y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle x + y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle y, \varrho \rangle \xrightarrow{e'} \langle y', \varrho \rangle$
$\langle x + y, \varrho \rangle \xrightarrow{e'} \langle y', \varrho \rangle$
$\langle x, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle$
$\langle x \cdot y, \varrho \rangle \xrightarrow{e'} \langle y, \varrho \rangle$
$\langle x, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle$
$\langle x \cdot y, \varrho \rangle \xrightarrow{e'} \langle x' \cdot y, \varrho \rangle$

Table 41: Transition rules of BATC under quantum configuration

1. if $p \approx_{rbs} q$ then $p = q$;
2. if $p \approx_{rbp} q$ then $p = q$;
3. if $p \approx_{rbhp} q$ then $p = q$;
4. if $p \approx_{rbhhp} q$ then $p = q$.

Proof. We leave the proof to the readers as an excise. □

3.6 Unification of Quantum and Classical Computing for Open Quantum Systems

We give the transition rules under quantum configuration for traditional atomic actions (events) $e' \in \mathbb{E}$ as Table 41 shows.

And the axioms for traditional actions are the same as those of qBATC. And it is natural can be extended to qAPTC, recursion and abstraction. So, quantum and classical computing are unified under the framework of qAPTC for open quantum systems.

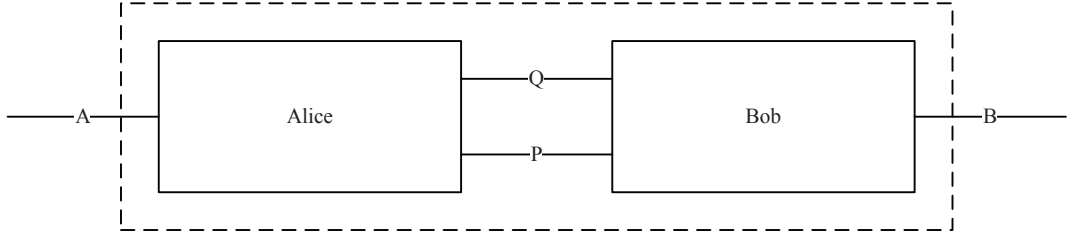


Figure 1: The BB84 protocol.

4 Applications of qAPTC

Quantum and classical computing in open systems are unified with qAPTC, which have the same equational logic and the same quantum configuration based operational semantics. The unification can be used widely in verification for the behaviors of quantum and classical computing mixed systems. In this chapter, we show its usage in verification of the quantum communication protocols.

4.1 Verification of BB84 Protocol

The BB84 protocol is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic BB84 protocol briefly, which is illustrated in Figure 1.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a .
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n .
6. Bob sends his measurement bases B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a .
8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

We re-introduce the basic BB84 protocol in an abstract way with more technical details as Figure 1 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a]$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a]$, $Rand[q'; B_b]$. $M[q; K_b]$ denotes the Bob's measurement operation of q . The generation of n qubits q through two

quantum operations $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; B_a] \cdot A_2 \\
A_2 &= Rand[q; K_a] \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_P(B_b) \cdot A_7 \\
A_7 &= send_P(B_a) \cdot A_8 \\
A_8 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= Rand[q'; B_b] \cdot B_2 \\
B_2 &= M[q; K_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \bowtie B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{Rand[q; B_a], Rand[q; K_a], Set_{K_a}[q], H_{B_a}[q], Rand[q'; B_b], M[q; K_b], c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.1. *The basic BB84 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic BB84 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

4.2 Verification of E91 Protocol

With support of Entanglement merge \bowtie , now, qACP can be used to verify quantum protocols utilizing entanglement. The E91 protocol[31] is the first quantum protocol which utilizes entanglement and mixes quantum and classical information. In this section, we take an example of verification for the E91 protocol.

The E91 protocol is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic E91 protocol briefly, which is illustrated in Figure 2.

1. Alice generates a string of EPR pairs q with size n , i.e., $2n$ particles, and sends a string of qubits q_b from each EPR pair with n to Bob through a quantum channel Q , remains the other string of qubits q_a from each pair with size n .
2. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
3. Bob receives q_b and randomly generates a string of bits B_b with size n .
4. Alice measures each qubit of q_a according to a basis by bits of B_a . And the measurement results would be K_a , which is also with size n .
5. Bob measures each qubit of q_b according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n .
6. Bob sends his measurement bases B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a .
8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

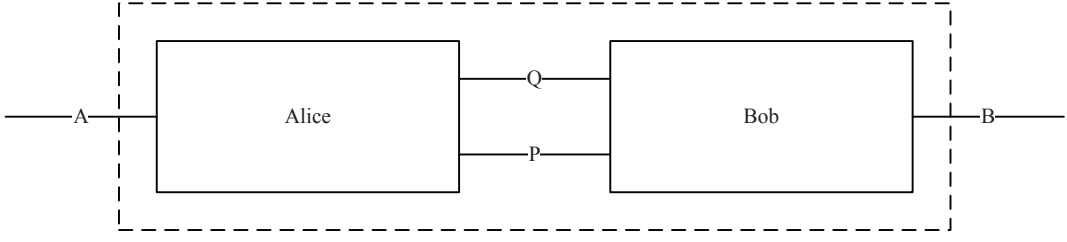


Figure 2: The E91 protocol.

We re-introduce the basic E91 protocol in an abstract way with more technical details as Figure 2 illustrates.

Now, $M[q_a; K_a]$ denotes the Alice's measurement operation of q_a , and $\textcircled{S}_{M[q_a; K_a]}$ denotes the responding shadow constant; $M[q_b; K_b]$ denotes the Bob's measurement operation of q_b , and $\textcircled{S}_{M[q_b; K_b]}$ denotes the responding shadow constant. Alice sends q_b to Bob through the quantum channel Q by quantum communicating action $send_Q(q_b)$ and Bob receives q_b through Q by quantum communicating action $receive_Q(q_b)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= send_Q(q_b) \cdot A_2 \\
A_2 &= M[q_a; K_a] \cdot A_3 \\
A_3 &= \textcircled{S}_{M[q_b; K_b]} \cdot A_4 \\
A_4 &= receive_P(B_b) \cdot A_5 \\
A_5 &= send_P(B_a) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q_b) \cdot B_1 \\
B_1 &= (\mathbb{S})_{M[q_a; K_a]} \cdot B_2 \\
B_2 &= M[q_b; K_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. The quantum operation and its shadow constant pair will lead entanglement occur, otherwise, a deadlock δ will occur. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q_b), receive_Q(q_b)) &\triangleq c_Q(q_b) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q_b), receive_Q(q_b), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a), M[q_a; K_a], (\mathbb{S})_{M[q_a; K_a]}, M[q_b; K_b], (\mathbb{S})_{M[q_b; K_b]}\}$ and $I = \{c_Q(q_b), c_P(B_b), c_P(B_a), M[q_a; K_a], M[q_b; K_b], cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.2. *The basic E91 protocol $\tau_I(\partial_H(A \parallel B))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic E91 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

4.3 Verification of B92 Protocol

The famous B92 protocol[32] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the B92 protocol to illustrate the usage of qACP in verification of quantum protocols.

The B92 protocol is used to create a private key between two parties, Alice and Bob. B92 is a protocol of quantum key distribution (QKD) which uses polarized photons as information carriers. Firstly, we introduce the basic B92 protocol briefly, which is illustrated in Figure 3.

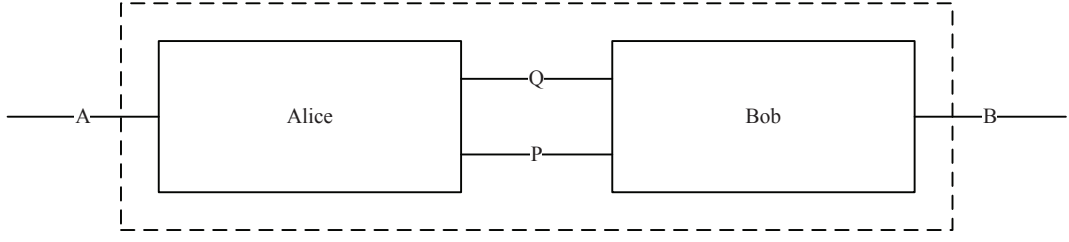


Figure 3: The B92 protocol.

1. Alice create a string of bits with size n randomly, denoted as A .
2. Alice generates a string of qubits q with size n , carried by polarized photons. If $A_i = 0$, the i th qubit is $|0\rangle$; else if $A_i = 1$, the i th qubit is $|+\rangle$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B with size n .
5. If $B_i = 0$, Bob chooses the basis \oplus ; else if $B_i = 1$, Bob chooses the basis \otimes . Bob measures each qubit of q according to the above basses. And Bob builds a String of bits T , if the measurement produces $|0\rangle$ or $|+\rangle$, then $T_i = 0$; else if the measurement produces $|1\rangle$ or $|-\rangle$, then $T_i = 1$, which is also with size n .
6. Bob sends T to Alice through a public channel P .
7. Alice and Bob determine that at which position the bit strings A and B are remained for which $T_i = 1$. In absence of Eve, $A_i = 1 - B_i$, a shared raw key $K_{a,b}$ is formed by A_i .

We re-introduce the basic B92 protocol in an abstract way with more technical details as Figure 3 illustrates.

Now, we assume a special measurement operation $Rand[q; A]$ which create a string of n random bits A from the q quantum system, and the same as $Rand[q'; B]$. $M[q; T]$ denotes the Bob's measurement operation of q . The generation of n qubits q through a quantum operation $Set_A[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends T to Alice through the public channel P by classical communicating action $send_P(T)$ and Alice receives T through channel P by classical communicating action $receive_P(T)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, T, A, B)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; A] \cdot A_2 \\
A_2 &= Set_A[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= receive_P(T) \cdot A_5 \\
A_5 &= cmp(K_{a,b}, T, A, B) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= Rand[q'; B] \cdot B_2 \\
B_2 &= M[q; T] \cdot B_3 \\
B_3 &= send_P(T) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, T, A, B) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(T), receive_P(T)) &\triangleq c_P(T)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(T), receive_P(T)\}$ and $I = \{Rand[q; A], Set_A[q], Rand[q'; B], M[q; T], c_Q(q), c_P(T), cmp(K_{a,b}, T, A, B)\}$.

Then we get the following conclusion.

Theorem 4.3. *The basic B92 protocol $\tau_I(\partial_H(A \parallel B))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic B92 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

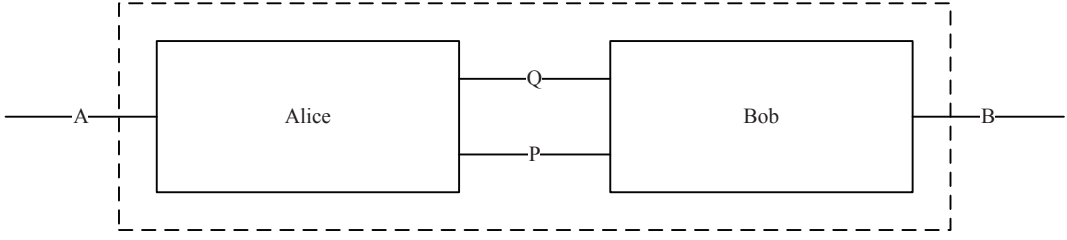


Figure 4: The DPS protocol.

4.4 Verification of DPS Protocol

The famous DPS protocol[33] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the DPS protocol to illustrate the usage of qACP in verification of quantum protocols.

The DPS protocol is used to create a private key between two parties, Alice and Bob. DPS is a protocol of quantum key distribution (QKD) which uses pulses of a photon which has nonorthogonal four states. Firstly, we introduce the basic DPS protocol briefly, which is illustrated in Figure 4.

1. Alice generates a string of qubits q with size n , carried by a series of single photons possibly at four time instances.
2. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
3. Bob receives q by detectors clicking at the second or third time instance, and records the time into T with size n and which detector clicks into D with size n .
4. Bob sends T to Alice through a public channel P .
5. Alice receives T . From T and her modulation data, Alice knows which detector clicked in Bob's site, i.e. D .
6. Alice and Bob have an identical bit string, provided that the first detector click represents "0" and the other detector represents "1", then a shared raw key $K_{a,b}$ is formed.

We re-introduce the basic DPS protocol in an abstract way with more technical details as Figure 4 illustrates.

Now, we assume $M[q;T]$ denotes the Bob's measurement operation of q . The generation of n qubits q through a quantum operation $Set_A[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends T to Alice through the public channel P by classical communicating action $send_P(T)$ and Alice receives T through channel P by classical communicating action $receive_P(T)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, D)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Set_A[q] \cdot A_2 \\
A_2 &= send_Q(q) \cdot A_3 \\
A_3 &= receive_P(T) \cdot A_4 \\
A_4 &= cmp(K_{a,b}, D) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= M[q; T] \cdot B_2 \\
B_2 &= send_P(T) \cdot B_3 \\
B_3 &= cmp(K_{a,b}, D) \cdot B_4 \\
B_4 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(T), receive_P(T)) &\triangleq c_P(T)
\end{aligned} \tag{1}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(T), receive_P(T)\}$

and $I = \{Set_A[q], M[q; T], c_Q(q), c_P(T), cmp(K_{a,b}, D)\}$.

Then we get the following conclusion.

Theorem 4.4. *The basic DPS protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic DPS protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

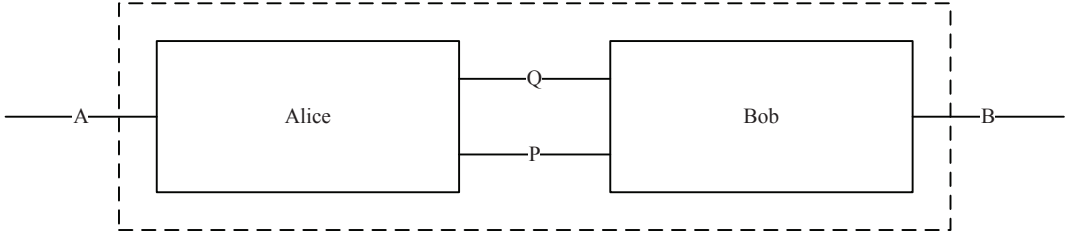


Figure 5: The BBM92 protocol.

4.5 Verification of BBM92 Protocol

The famous BBM92 protocol[34] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the BBM92 protocol to illustrate the usage of qACP in verification of quantum protocols.

The BBM92 protocol is used to create a private key between two parties, Alice and Bob. BBM92 is a protocol of quantum key distribution (QKD) which uses EPR pairs as information carriers. Firstly, we introduce the basic BBM92 protocol briefly, which is illustrated in Figure 5.

1. Alice generates a string of EPR pairs q with size n , i.e., $2n$ particles, and sends a string of qubits q_b from each EPR pair with n to Bob through a quantum channel Q , remains the other string of qubits q_a from each pair with size n .
2. Alice create a string of bits with size n randomly, denoted as B_a .
3. Bob receives q_b and randomly generates a string of bits B_b with size n .
4. Alice measures each qubit of q_a according to bits of B_a , if $B_{a_i} = 0$, then uses x axis (\rightarrow); else if $B_{a_i} = 1$, then uses z axis (\uparrow).
5. Bob measures each qubit of q_b according to bits of B_b , if $B_{b_i} = 0$, then uses x axis (\rightarrow); else if $B_{b_i} = 1$, then uses z axis (\uparrow).
6. Bob sends his measurement axis choices B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her axis choices B_a to Bob through channel P , and Bob receives B_a .
8. Alice and Bob agree to discard all instances in which they happened to measure along different axes, as well as instances in which measurements fails because of imperfect quantum efficiency of the detectors. Then the remaining instances can be used to generate a private key $K_{a,b}$.

We re-introduce the basic BBM92 protocol in an abstract way with more technical details as Figure 5 illustrates.

Now, $M[q_a; B_a]$ denotes the Alice's measurement operation of q_a , and $\textcircled{S}_{M[q_a; B_a]}$ denotes the responding shadow constant; $M[q_b; B_b]$ denotes the Bob's measurement operation of q_b , and $\textcircled{S}_{M[q_b; B_b]}$ denotes the responding shadow constant. Alice sends q_b to Bob through the quantum channel Q by quantum communicating action $send_Q(q_b)$ and Bob receives q_b through Q by

quantum communicating action $receive_Q(q_b)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= send_Q(q_b) \cdot A_2 \\
A_2 &= M[q_a; B_a] \cdot A_3 \\
A_3 &= \textcircled{S}_{M[q_b; B_b]} \cdot A_4 \\
A_4 &= receive_P(B_b) \cdot A_5 \\
A_5 &= send_P(B_a) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q_b) \cdot B_1 \\
B_1 &= \textcircled{S}_{M[q_a; B_a]} \cdot B_2 \\
B_2 &= M[q_b; B_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. The quantum operation and its shadow constant pair will lead entanglement occur, otherwise, a deadlock δ will occur. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q_b), receive_Q(q_b)) &\triangleq c_Q(q_b) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \bowtie B)))$$

where $H = \{send_Q(q_b), receive_Q(q_b), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a), M[q_a; B_a], \mathbb{S}_{M[q_a; B_a]}, M[q_b; B_b], \mathbb{S}_{M[q_b; B_b]}\}$ and $I = \{c_Q(q_b), c_P(B_b), c_P(B_a), M[q_a; B_a], M[q_b; B_b], cmp(K_{a,b}, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.5. *The basic BBM92 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic BBM92 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

4.6 Verification of SARG04 Protocol

The famous SARG04 protocol[35] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the SARG04 protocol to illustrate the usage of qACP in verification of quantum protocols.

The SARG04 protocol is used to create a private key between two parties, Alice and Bob. SARG04 is a protocol of quantum key distribution (QKD) which refines the BB84 protocol against PNS (Photon Number Splitting) attacks. The main innovations are encoding bits in nonorthogonal states and the classical sifting procedure. Firstly, we introduce the basic SARG04 protocol briefly, which is illustrated in Figure 6.

1. Alice create a string of bits with size n randomly, denoted as K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit of q has four nonorthogonal states, it is $|\pm x\rangle$ if $K_a = 0$; it is $|\pm z\rangle$ if $K_a = 1$. And she records the corresponding one of the four pairs of nonorthogonal states into B_a with size $2n$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Alice sends B_a through a public channel P .
5. Bob measures each qubit of q σ_x or σ_z . And he records the unambiguous discriminations into K_b with a raw size $n/4$, and the unambiguous discrimination information into B_b with size n .
6. Bob sends B_b to Alice through the public channel P .
7. Alice and Bob determine that at which position the bit should be remained. Then the remaining bits of K_a and K_b is the private key $K_{a,b}$.

We re-introduce the basic SARG04 protocol in an abstract way with more technical details as Figure 6 illustrates.

Now, we assume a special measurement operation $Rand[q; K_a]$ which create a string of n random bits K_a from the q quantum system. $M[q; K_b]$ denotes the Bob's measurement operation

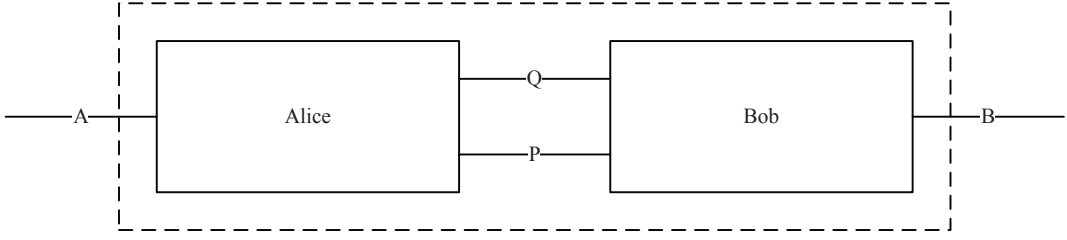


Figure 6: The SARG04 protocol.

of q . The generation of n qubits q through a quantum operation $Set_{K_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; K_a] \cdot A_2 \\
A_2 &= Set_{K_a}[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= send_P(B_a) \cdot A_5 \\
A_5 &= receive_P(B_b) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(B_a) \cdot B_2 \\
B_2 &= M[q; K_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}\gamma(\text{send}_Q(q), \text{receive}_Q(q)) &\triangleq c_Q(q) \\ \gamma(\text{send}_P(B_b), \text{receive}_P(B_b)) &\triangleq c_P(B_b) \\ \gamma(\text{send}_P(B_a), \text{receive}_P(B_a)) &\triangleq c_P(B_a)\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{\text{send}_Q(q), \text{receive}_Q(q), \text{send}_P(B_b), \text{receive}_P(B_b), \text{send}_P(B_a), \text{receive}_P(B_a)\}$ and $I = \{\text{Rand}[q; K_a], \text{Set}_{K_a}[q], M[q; K_b], c_Q(q), c_P(B_b), c_P(B_a), \text{cmp}(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.6. *The basic SARG04 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic SARG04 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

4.7 Verification of COW Protocol

The famous COW protocol[36] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the COW protocol to illustrate the usage of qACP in verification of quantum protocols.

The COW protocol is used to create a private key between two parties, Alice and Bob. COW is a protocol of quantum key distribution (QKD) which is practical. Firstly, we introduce the basic COW protocol briefly, which is illustrated in Figure 7.

1. Alice generates a string of qubits q with size n , and the i th qubit of q is "0" with probability $\frac{1-f}{2}$, "1" with probability $\frac{1+f}{2}$ and the decoy sequence with probability f .
2. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
3. Alice sends A of the items corresponding to a decoy sequence through a public channel P .
4. Bob removes all the detections at times $2A-1$ and $2A$ from his raw key and looks whether detector D_{2M} has ever fired at time $2A$.
5. Bob sends B of the times $2A+1$ in which he had a detector in D_{2M} to Alice through the public channel P .

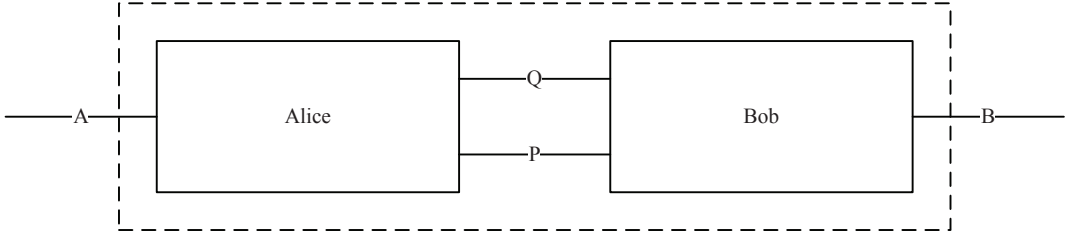


Figure 7: The COW protocol.

6. Alice receives B and verifies if some of these items corresponding to a bit sequence "1,0".
7. Bob sends C of the items that he has detected through the public channel P .
8. Alice and Bob run error correction and privacy amplification on these bits, and the private key $K_{a,b}$ is established.

We re-introduce the basic COW protocol in an abstract way with more technical details as Figure 7 illustrates.

Now, we assume The generation of n qubits q through a quantum operation $Set[q]$. $M[q]$ denotes the Bob's measurement operation of q . Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Alice sends A to Alice through the public channel P by classical communicating action $send_P(A)$ and Alice receives A through channel P by classical communicating action $receive_P(A)$, and the same as $send_P(B)$ and $receive_P(B)$, and $send_P(C)$ and $receive_P(C)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b})$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Set[q] \cdot A_2 \\
A_2 &= send_Q(q) \cdot A_3 \\
A_3 &= send_P(A) \cdot A_4 \\
A_4 &= receive_P(B) \cdot A_5 \\
A_5 &= receive_P(C) \cdot A_6 \\
A_6 &= cmp(K_{a,b}) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(A) \cdot B_2 \\
B_2 &= M[q] \cdot B_3 \\
B_3 &= send_P(B) \cdot B_4 \\
B_4 &= send_P(C) \cdot B_5 \\
B_5 &= cmp(K_{a,b}) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(A), receive_P(A)) &\triangleq c_P(A) \\
\gamma(send_P(B), receive_P(B)) &\triangleq c_P(B) \\
\gamma(send_P(C), receive_P(C)) &\triangleq c_P(C)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(A), receive_P(A), send_P(B), receive_P(B), send_P(C), receive_P(C)\}$ and $I = \{Set[q], M[q], c_Q(q), c_P(A), c_P(B), c_P(C), cmp(K_{a,b})\}$.

Then we get the following conclusion.

Theorem 4.7. *The basic COW protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic COW protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

4.8 Verification of SSP Protocol

The famous SSP protocol[37] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the SSP protocol to illustrate the usage of qACP in verification of quantum protocols.

The SSP protocol is used to create a private key between two parties, Alice and Bob. SSP is a protocol of quantum key distribution (QKD) which uses six states. Firstly, we introduce the basic SSP protocol briefly, which is illustrated in Figure 8.

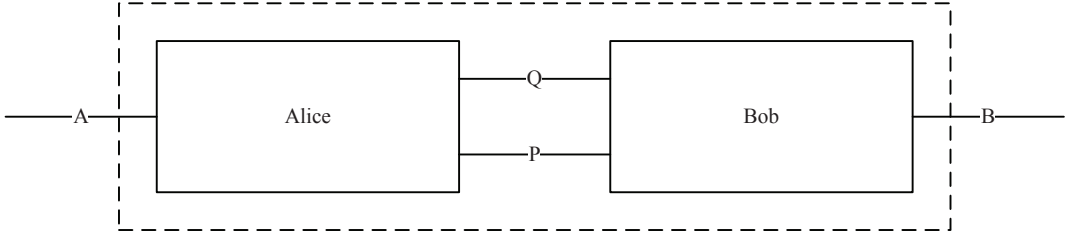


Figure 8: The SSP protocol.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is one of the six states $\pm x$, $\pm y$ and $\pm z$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b , i.e., x , y or z basis. And the measurement results would be K_b , which is also with size n .
6. Bob sends his measurement bases B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a .
8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

We re-introduce the basic SSP protocol in an abstract way with more technical details as Figure 8 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a]$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a]$, $Rand[q'; B_b]$. $M[q; K_b]$ denotes the Bob's measurement operation of q . The generation of n qubits q through two quantum operations $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; B_a] \cdot A_2 \\
A_2 &= Rand[q; K_a] \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_P(B_b) \cdot A_7 \\
A_7 &= send_P(B_a) \cdot A_8 \\
A_8 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= Rand[q'; B_b] \cdot B_2 \\
B_2 &= M[q; K_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{Rand[q; B_a], Rand[q; K_a], Set_{K_a}[q], H_{B_a}[q], Rand[q'; B_b], M[q; K_b], c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

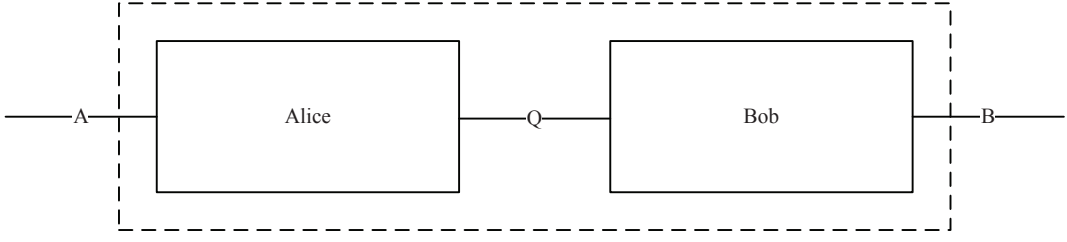


Figure 9: The S09 protocol.

Theorem 4.8. *The basic SSP protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic SSP protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

4.9 Verification of S09 Protocol

The famous S09 protocol[38] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the S09 protocol to illustrate the usage of qACP in verification of quantum protocols.

The S09 protocol is used to create a private key between two parties, Alice and Bob, by use of pure quantum information. Firstly, we introduce the basic S09 protocol briefly, which is illustrated in Figure 9.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a .
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b . After the measurement, the state of q evolves into q' .
6. Bob sends q' to Alice through the quantum channel Q .
7. Alice measures each qubit of q' to generate a string C .
8. Alice sums $C_i \oplus B_{a_i}$ to get the private key $K_{a,b} = B_b$.

We re-introduce the basic S09 protocol in an abstract way with more technical details as Figure 9 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a]$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a]$, $Rand[q'; B_b]$. $M[q; B_b]$ denotes the Bob's measurement operation of q , and the same as $M[q'; C]$. The generation of n qubits q through two quantum operations $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through

Q by quantum communicating action $receive_Q(q)$, and the same as $send_Q(q')$ and $receive_Q(q')$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, B_b)$. We omit the sum classical \oplus actions without loss of generality. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; B_a] \cdot A_2 \\
A_2 &= Rand[q; K_a] \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_Q(q') \cdot A_7 \\
A_7 &= M[q'; C] \cdot A_8 \\
A_8 &= cmp(K_{a,b}, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= Rand[q'; B_b] \cdot B_2 \\
B_2 &= M[q; B_b] \cdot B_3 \\
B_3 &= send_Q(q') \cdot B_4 \\
B_4 &= cmp(K_{a,b}, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_Q(q'), receive_Q(q')) &\triangleq c_Q(q')
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \bowtie B)))$$

where $H = \{send_Q(q), receive_Q(q), send_Q(q'), receive_Q(q')\}$ and $I = \{Rand[q; B_a], Rand[q; K_a], Set_{K_a}[q], H_{B_a}[q], Rand[q'; B_b], M[q; K_b], M[q'; C], c_Q(q), c_Q(q'), cmp(K_{a,b}, B_b)\}$.

Then we get the following conclusion.

Theorem 4.9. *The basic S09 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic S09 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

4.10 Verification of KMB09 Protocol

The famous KMB09 protocol[39] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the KMB09 protocol to illustrate the usage of qACP in verification of quantum protocols.

The KMB09 protocol is used to create a private key between two parties, Alice and Bob. KMB09 is a protocol of quantum key distribution (QKD) which refines the BB84 protocol against PNS (Photon Number Splitting) attacks. The main innovations are encoding bits in nonorthogonal states and the classical sifting procedure. Firstly, we introduce the basic KMB09 protocol briefly, which is illustrated in Figure 10.

1. Alice create a string of bits with size n randomly, denoted as K_a , and randomly assigns each bit value a random index $i = 1, 2, \dots, N$ into B_a .
2. Alice generates a string of qubits q with size n , accordingly either in $|e_i\rangle$ or $|f_i\rangle$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Alice sends B_a through a public channel P .
5. Bob measures each qubit of q by randomly switching the measurement basis between e and f . And he records the unambiguous discriminations into K_b , and the unambiguous discrimination information into B_b .
6. Bob sends B_b to Alice through the public channel P .
7. Alice and Bob determine that at which position the bit should be remained. Then the remaining bits of K_a and K_b is the private key $K_{a,b}$.

We re-introduce the basic KMB09 protocol in an abstract way with more technical details as Figure 10 illustrates.

Now, we assume a special measurement operation $Rand[q; K_a]$ which create a string of n random bits K_a from the q quantum system. $M[q; K_b]$ denotes the Bob's measurement operation of q . The generation of n qubits q through a quantum operation $Set_{K_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the

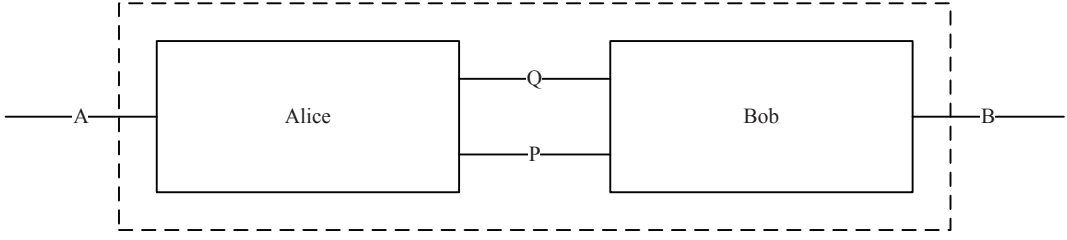


Figure 10: The KMB09 protocol.

public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; K_a] \cdot A_2 \\
A_2 &= Set_{K_a}[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= send_P(B_a) \cdot A_5 \\
A_5 &= receive_P(B_b) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(B_a) \cdot B_2 \\
B_2 &= M[q; K_b] \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(\text{send}_Q(q), \text{receive}_Q(q)) &\triangleq c_Q(q) \\
\gamma(\text{send}_P(B_b), \text{receive}_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(\text{send}_P(B_a), \text{receive}_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{\text{send}_Q(q), \text{receive}_Q(q), \text{send}_P(B_b), \text{receive}_P(B_b), \text{send}_P(B_a), \text{receive}_P(B_a)\}$ and $I = \{\text{Rand}[q; K_a], \text{Set}_{K_a}[q], M[q; K_b], c_Q(q), c_P(B_b), c_P(B_a), \text{cmp}(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.10. *The basic KMB09 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic KMB09 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

4.11 Verification of S13 Protocol

The famous S13 protocol[40] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the S13 protocol to illustrate the usage of qACP in verification of quantum protocols.

The S13 protocol is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic S13 protocol briefly, which is illustrated in Figure 11.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a .
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n .
6. Alice sends a random binary string C to Bob through the public channel P .
7. Alice sums $B_{a_i} \oplus C_i$ to obtain T and generates other random string of binary values J . From the elements occupying a concrete position, i , of the preceding strings, Alice get the new states of q' , and sends it to Bob through the quantum channel Q .
8. Bob sums $1 \oplus B_{b_i}$ to obtain the string of binary basis N and measures q' according to these bases, and generating D .

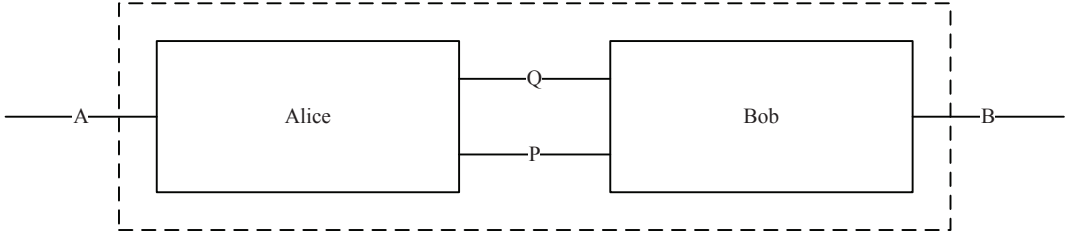


Figure 11: The S13 protocol.

9. Alice sums $K_{a_i} \oplus J_i$ to obtain the binary string Y and sends it to Bob through the public channel P .
10. Bob encrypts B_b to obtain U and sends to Alice through the public channel P .
11. Alice decrypts U to obtain B_b . She sums $B_{a_i} \oplus B_{b_i}$ to obtain L and sends L to Bob through the public channel P .
12. Bob sums $B_{b_i} \oplus L_i$ to get the private key $K_{a,b}$.

We re-introduce the basic S13 protocol in an abstract way with more technical details as Figure 11 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a]$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a]$, $Rand[q'; B_b]$. $M[q; K_b]$ denotes the Bob's measurement operation of q , and the same as $M[q'; D]$. The generation of n qubits q through two quantum operations $Set_{K_a}[q]$ and $H_{B_a}[q]$, and the same as $Set_T[q']$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$, and the same as $send_Q(q')$ and $receive_Q(q')$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$, $send_P(C)$ and $receive_P(C)$, $send_P(Y)$ and $receive_P(Y)$, $send_P(U)$ and $receive_P(U)$, $send_P(L)$ and $receive_P(L)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. We omit the sum classical \oplus actions without loss of generality. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by qACP as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Rand[q; B_a] \cdot A_2 \\
A_2 &= Rand[q; K_a] \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= send_P(C) \cdot A_7 \\
A_7 &= send_Q(q') \cdot A_8 \\
A_8 &= send_P(Y) \cdot A_9 \\
A_9 &= receive_P(U) \cdot A_{10} \\
A_{10} &= send_P(L) \cdot A_{11} \\
A_{11} &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by qACP as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= Rand[q'; B_b] \cdot B_2 \\
B_2 &= M[q; K_b] \cdot B_3 \\
B_3 &= receive_P(C) \cdot B_4 \\
B_4 &= receive_Q(q') \cdot B_5 \\
B_5 &= M[q'; D] \cdot B_6 \\
B_6 &= receive_P(Y) \cdot B_7 \\
B_7 &= send_P(U) \cdot B_8 \\
B_8 &= receive_P(L) \cdot B_9 \\
B_9 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_{10} \\
B_{10} &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(\text{send}_Q(q), \text{receive}_Q(q)) &\triangleq c_Q(q) \\
\gamma(\text{send}_Q(q'), \text{receive}_Q(q')) &\triangleq c_Q(q') \\
\gamma(\text{send}_P(C), \text{receive}_P(C)) &\triangleq c_P(C) \\
\gamma(\text{send}_P(Y), \text{receive}_P(Y)) &\triangleq c_P(Y) \\
\gamma(\text{send}_P(U), \text{receive}_P(U)) &\triangleq c_P(U) \\
\gamma(\text{send}_P(L), \text{receive}_P(L)) &\triangleq c_P(L)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{\text{send}_Q(q), \text{receive}_Q(q), \text{send}_Q(q'), \text{receive}_Q(q'), \text{send}_P(C), \text{receive}_P(C), \text{send}_P(Y), \text{receive}_P(Y), \text{send}_P(U), \text{receive}_P(U), \text{send}_P(L), \text{receive}_P(L)\}$ and $I = \{\text{Rand}[q; B_a], \text{Rand}[q; K_a], \text{Set}_{K_a}[q], H_{B_a}[q], \text{Rand}[q'; B_b], M[q; K_b], M[q'; D], c_Q(q), c_P(C), c_Q(q'), c_P(Y), c_P(U), c_P(L), \text{cmp}(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 4.11. *The basic S13 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic S13 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

No.	Axiom
A1	$x + y = y + x$
A2	$(x + y) + z = x + (y + z)$
A3	$e + e = e$
A4	$(x + y) \cdot z = x \cdot z + y \cdot z$
A5	$(x \cdot y) \cdot z = x \cdot (y \cdot z)$
A6	$x + \delta = x$
A7	$\delta \cdot x = \delta$
PA1	$x \boxplus_{\pi} y = y \boxplus_{1-\pi} x$
PA2	$x \boxplus_{\pi} (y \boxplus_{\rho} z) = (x \boxplus_{\frac{\pi}{\pi+\rho-\pi\rho}} y) \boxplus_{\pi+\rho-\pi\rho} z$
PA3	$x \boxplus_{\pi} x = x$
PA4	$(x \boxplus_{\pi} y) \cdot z = x \cdot z \boxplus_{\pi} y \cdot z$
PA5	$(x \boxplus_{\pi} y) + z = (x + z) \boxplus_{\pi} (y + z)$

Table 42: Axioms of $qBAPTC$

5 APPTC for Closed Quantum Systems

The theory $APPTC$ for closed quantum systems abbreviated $qAPPTC$ has four modules: $qBAPTC$, $qAPPTC$, recursion and abstraction.

This chapter is organized as follows. We introduce $qBAPTC$ in section 5.1, $APPTC$ in section 5.2, recursion in section 5.3, and abstraction in section 5.4. And we introduce quantum measurement in section 5.5, quantum entanglement in section 5.6, and unification of quantum and classical computing in section 5.7.

Note that, for a closed quantum system, the unitary operators are the atomic actions (events) and let unitary operators into \mathbb{E} . And for the existence of quantum measurement, the probabilism is unavoidable.

5.1 $BAPTC$ for Closed Quantum Systems

In this subsection, we will discuss $qBAPTC$. Let \mathbb{E} be the set of atomic events (actions, unitary operators).

In the following, let $e_1, e_2, e'_1, e'_2 \in \mathbb{E}$, and let variables x, y, z range over the set of terms for true concurrency, p, q range over the set of closed terms.

The set of axioms of $qBAPTC$ consists of the laws given in Table 42.

Definition 5.1 (Basic terms of $qBAPTC$). *The set of basic terms of $qBAPTC$, $\mathcal{B}(qBAPTC)$, is inductively defined as follows:*

1. $\mathbb{E} \subset \mathcal{B}(qBAPTC)$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(qBAPTC)$ then $e \cdot t \in \mathcal{B}(qBAPTC)$;
3. if $t, t' \in \mathcal{B}(qBAPTC)$ then $t + t' \in \mathcal{B}(qBAPTC)$;

$$\begin{array}{c}
\frac{}{\langle e, \varrho \rangle \rightsquigarrow \langle \check{e}, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle}{\langle x \cdot y, \varrho \rangle \rightsquigarrow \langle x' \cdot y, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle \quad \langle y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle}{\langle x + y, \varrho \rangle \rightsquigarrow \langle x' + y', \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle}{\langle x \boxplus_{\pi} y, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle} \quad \frac{\langle y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle}{\langle x \boxplus_{\pi} y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle} \\
\frac{}{\langle \check{e}, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle} \text{ if } \varrho' \in \text{effect}(e, \varrho) \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle} \quad \frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle} \\
\frac{\langle y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle} \quad \frac{\langle y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e} \langle y, \varrho' \rangle} \quad \frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e} \langle x' \cdot y, \varrho' \rangle}
\end{array}$$

Table 43: Single event transition rules of $qBAPTC$

4. if $t, t' \in \mathcal{B}(qBAPTC)$ then $t \boxplus_{\pi} t' \in \mathcal{B}(qBAPTC)$.

Theorem 5.2 (Elimination theorem of $qBAPTC$). *Let p be a closed $qBAPTC$ term. Then there is a basic $qBAPTC$ term q such that $qBAPTC \vdash p = q$.*

Proof. The same as that of $BAPTC$, we omit the proof, please refer to [9] for details. \square

We will define a term-deduction system which gives the operational semantics of $qBAPTC$. We give the operational transition rules for atomic event $e \in \mathbb{E}$, operators \cdot and $+$ as Table 43 shows. And the predicate $\xrightarrow{e} \surd$ represents successful termination after execution of the event e .

Note that, we replace the single atomic event $e \in \mathbb{E}$ by $X \subseteq \mathbb{E}$, we can obtain the pomset transition rules of $qBAPTC$, and omit them.

Theorem 5.3 (Congruence of $qBAPTC$ with respect to probabilistic truly concurrent bisimulation equivalences). *(1) Probabilistic pomset bisimulation equivalence \sim_{pp} is a congruence with respect to $qBAPTC$.*

(2) Probabilistic step bisimulation equivalence \sim_{ps} is a congruence with respect to $qBAPTC$.

(3) Probabilistic hp-bisimulation equivalence \sim_{php} is a congruence with respect to $qBAPTC$.

(4) Probabilistic hhp-bisimulation equivalence \sim_{phhp} is a congruence with respect to $qBAPTC$.

Proof. (1) It is easy to see that probabilistic pomset bisimulation is an equivalent relation on $qBAPTC$ terms, we only need to prove that \sim_{pp} is preserved by the operators \cdot , $+$ and \boxplus_π . It is trivial and we leave the proof as an exercise for the readers.

(2) It is easy to see that probabilistic step bisimulation is an equivalent relation on $qBAPTC$ terms, we only need to prove that \sim_{ps} is preserved by the operators \cdot , $+$ and \boxplus_π . It is trivial and we leave the proof as an exercise for the readers.

(3) It is easy to see that probabilistic hp-bisimulation is an equivalent relation on $qBAPTC$ terms, we only need to prove that \sim_{php} is preserved by the operators \cdot , $+$, and \boxplus_π . It is trivial and we leave the proof as an exercise for the readers.

(4) It is easy to see that probabilistic hhp-bisimulation is an equivalent relation on $qBAPTC$ terms, we only need to prove that \sim_{phhp} is preserved by the operators \cdot , $+$, and \boxplus_π . It is trivial and we leave the proof as an exercise for the readers. \square

Theorem 5.4 (Soundness of $qBAPTC$ modulo probabilistic truly concurrent bisimulation equivalences). (1) Let x and y be $qBAPTC$ terms. If $BATC \vdash x = y$, then $x \sim_{pp} y$.

(2) Let x and y be $qBAPTC$ terms. If $BATC \vdash x = y$, then $x \sim_{ps} y$.

(3) Let x and y be $qBAPTC$ terms. If $BATC \vdash x = y$, then $x \sim_{php} y$.

(4) Let x and y be $qBAPTC$ terms. If $BATC \vdash x = y$, then $x \sim_{phhp} y$.

Proof. (1) Since probabilistic pomset bisimulation \sim_{pp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 42 is sound modulo probabilistic pomset bisimulation equivalence. We leave the proof as an exercise for the readers.

(2) Since probabilistic step bisimulation \sim_{ps} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 42 is sound modulo probabilistic step bisimulation equivalence. We leave the proof as an exercise for the readers.

(3) Since probabilistic hp-bisimulation \sim_{php} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 42 is sound modulo probabilistic hp-bisimulation equivalence. We leave the proof as an exercise for the readers.

(4) Since probabilistic hhp-bisimulation \sim_{phhp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 42 is sound modulo probabilistic hhp-bisimulation equivalence. We leave the proof as an exercise for the readers. \square

Theorem 5.5 (Completeness of $qBAPTC$ modulo probabilistic truly concurrent bisimulation equivalences). (1) Let p and q be closed $qBAPTC$ terms, if $p \sim_{pp} q$ then $p = q$.

(2) Let p and q be closed $qBAPTC$ terms, if $p \sim_{ps} q$ then $p = q$.

(3) Let p and q be closed $qBAPTC$ terms, if $p \sim_{php} q$ then $p = q$.

(4) Let p and q be closed $qBAPTC$ terms, if $p \sim_{phhp} q$ then $p = q$.

Proof. According to the definition of probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} , $p \sim_{pp} q$, $p \sim_{ps} q$, $p \sim_{php} q$ and $p \sim_{phhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of $BAPTC$ (please refer to [9] for details), we can get the completeness of $qBAPTC$. \square

No.	Axiom
$P1$	$(x + x = x, y + y = y) \quad x \bowtie y = x \parallel y + x \mid y$
$P2$	$x \parallel y = y \parallel x$
$P3$	$(x \parallel y) \parallel z = x \parallel (y \parallel z)$
$P4$	$(x + x = x, y + y = y) \quad x \parallel y = x \ll y + y \ll x$
$P5$	$(e_1 \leq e_2) \quad e_1 \ll (e_2 \cdot y) = (e_1 \ll e_2) \cdot y$
$P6$	$(e_1 \leq e_2) \quad (e_1 \cdot x) \ll e_2 = (e_1 \ll e_2) \cdot x$
$P7$	$(e_1 \leq e_2) \quad (e_1 \cdot x) \ll (e_2 \cdot y) = (e_1 \ll e_2) \cdot (x \bowtie y)$
$P8$	$(x + y) \ll z = (x \ll z) + (y \ll z)$
$P9$	$\delta \ll x = \delta$
$C1$	$e_1 \mid e_2 = \gamma(e_1, e_2)$
$C2$	$e_1 \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot y$
$C3$	$(e_1 \cdot x) \mid e_2 = \gamma(e_1, e_2) \cdot x$
$C4$	$(e_1 \cdot x) \mid (e_2 \cdot y) = \gamma(e_1, e_2) \cdot (x \bowtie y)$
$C5$	$(x + y) \mid z = (x \mid z) + (y \mid z)$
$C6$	$x \mid (y + z) = (x \mid y) + (x \mid z)$
$C7$	$\delta \mid x = \delta$
$C8$	$x \mid \delta = \delta$
$PM1$	$x \parallel (y \boxplus_\pi z) = (x \parallel y) \boxplus_\pi (x \parallel z)$
$PM2$	$(x \boxplus_\pi y) \parallel z = (x \parallel z) \boxplus_\pi (y \parallel z)$
$PM3$	$x \mid (y \boxplus_\pi z) = (x \mid y) \boxplus_\pi (x \mid z)$
$PM4$	$(x \boxplus_\pi y) \mid z = (x \mid z) \boxplus_\pi (y \mid z)$
$CE1$	$\Theta(e) = e$
$CE2$	$\Theta(\delta) = \delta$
$CE3$	$\Theta(\epsilon) = \epsilon$
$CE4$	$\Theta(x + y) = \Theta(x) \triangleleft y + \Theta(y) \triangleleft x$
$PCE1$	$\Theta(x \boxplus_\pi y) = \Theta(x) \triangleleft y \boxplus_\pi \Theta(y) \triangleleft x$
$CE5$	$\Theta(x \cdot y) = \Theta(x) \cdot \Theta(y)$
$CE6$	$\Theta(x \ll y) = ((\Theta(x) \triangleleft y) \ll y) + ((\Theta(y) \triangleleft x) \ll x)$
$CE7$	$\Theta(x \mid y) = ((\Theta(x) \triangleleft y) \mid y) + ((\Theta(y) \triangleleft x) \mid x)$

Table 44: Axioms of $qAPPTC$

5.2 $APPTC$ for Closed Quantum Systems

In this subsection, we will extend $APPTC$ for closed quantum systems, which is abbreviated $qAPPTC$.

The set of axioms of $qAPPTC$ including axioms of $qBAPTC$ in Table 42 and the axioms are shown in Table 44.

Definition 5.6 (Basic terms of $qAPPTC$). *The set of basic terms of $qAPPTC$, $\mathcal{B}(qAPPTC)$, is inductively defined as follows:*

No.	Axiom
$U1$	$(\sharp(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
$U2$	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
$U3$	$(\sharp(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
$PU1$	$(\sharp_\pi(e_1, e_2)) \quad e_1 \triangleleft e_2 = \tau$
$PU2$	$(\sharp_\pi(e_1, e_2), e_2 \leq e_3) \quad e_1 \triangleleft e_3 = e_1$
$PU3$	$(\sharp_\pi(e_1, e_2), e_2 \leq e_3) \quad e_3 \triangleleft e_1 = \tau$
$U4$	$e \triangleleft \delta = e$
$U5$	$\delta \triangleleft e = \delta$
$U6$	$(x + y) \triangleleft z = (x \triangleleft z) + (y \triangleleft z)$
$PU4$	$(x \boxplus_\pi y) \triangleleft z = (x \triangleleft z) \boxplus_\pi (y \triangleleft z)$
$U7$	$(x \cdot y) \triangleleft z = (x \triangleleft z) \cdot (y \triangleleft z)$
$U8$	$(x \parallel y) \triangleleft z = (x \triangleleft z) \parallel (y \triangleleft z)$
$U9$	$(x \mid y) \triangleleft z = (x \triangleleft z) \mid (y \triangleleft z)$
$U10$	$x \triangleleft (y + z) = (x \triangleleft y) \triangleleft z$
$PU5$	$x \triangleleft (y \boxplus_\pi z) = (x \triangleleft y) \triangleleft z$
$U11$	$x \triangleleft (y \cdot z) = (x \triangleleft y) \triangleleft z$
$U12$	$x \triangleleft (y \parallel z) = (x \triangleleft y) \triangleleft z$
$U13$	$x \triangleleft (y \mid z) = (x \triangleleft y) \triangleleft z$
$D1$	$e \notin H \quad \partial_H(e) = e$
$D2$	$e \in H \quad \partial_H(e) = \delta$
$D3$	$\partial_H(\delta) = \delta$
$D4$	$\partial_H(x + y) = \partial_H(x) + \partial_H(y)$
$D5$	$\partial_H(x \cdot y) = \partial_H(x) \cdot \partial_H(y)$
$D6$	$\partial_H(x \parallel y) = \partial_H(x) \parallel \partial_H(y)$
$PD1$	$\partial_H(x \boxplus_\pi y) = \partial_H(x) \boxplus_\pi \partial_H(y)$

Table 45: Axioms of $qAPPTC$ (continuing)

$$\begin{array}{c}
\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \bowtie y \rightsquigarrow x' \parallel y' + x' \mid y'} \\
\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \parallel y \rightsquigarrow x' \parallel y + y' \parallel x} \\
\frac{x \rightsquigarrow x'}{x \parallel y \rightsquigarrow x' \parallel y} \\
\frac{x \rightsquigarrow x' \quad y \rightsquigarrow y'}{x \mid y \rightsquigarrow x' \mid y'} \\
\frac{x \rightsquigarrow x'}{\Theta(x) \rightsquigarrow \Theta(x')} \\
\frac{x \rightsquigarrow x'}{x \triangleleft y \rightsquigarrow x' \triangleleft y}
\end{array}$$

Table 46: Probabilistic transition rules of $qAPPTC$

1. $\mathbb{E} \subset \mathcal{B}(qAPPTC)$;
2. if $e \in \mathbb{E}, t \in \mathcal{B}(qAPPTC)$ then $e \cdot t \in \mathcal{B}(qAPPTC)$;
3. if $t, t' \in \mathcal{B}(qAPPTC)$ then $t + t' \in \mathcal{B}(qAPPTC)$;
4. if $t, t' \in \mathcal{B}(qAPPTC)$ then $t \boxplus_{\pi} t' \in \mathcal{B}(qAPPTC)$
5. if $t, t' \in \mathcal{B}(qAPPTC)$ then $t \parallel t' \in \mathcal{B}(qAPPTC)$.

Based on the definition of basic terms for $qAPPTC$ (see Definition 5.6) and axioms of $qAPPTC$, we can prove the elimination theorem of $qAPPTC$.

Theorem 5.7 (Elimination theorem of $qAPPTC$). *Let p be a closed $qAPPTC$ term. Then there is a basic $qAPPTC$ term q such that $qAPPTC \vdash p = q$.*

Proof. The same as that of $APPTC$, we omit the proof, please refer to [9] for details. \square

We will define a term-deduction system which gives the operational semantics of $qAPPTC$. Two atomic events e_1 and e_2 are in race condition, which are denoted $e_1 \% e_2$.

Theorem 5.8 (Generalization of $qAPPTC$ with respect to $qBAPTC$). *$qAPPTC$ is a generalization of $qBAPTC$.*

Proof. It follows from the following three facts.

$\frac{}{\langle \check{e}_1 \parallel \dots \parallel \check{e}_n, \varrho \rangle \xrightarrow{\{e_1, \dots, e_n\}} \langle \surd, \varrho' \rangle} \text{ if } \varrho' \in \text{effect}(e_1, \varrho) \cup \dots \cup \text{effect}(e_n, \varrho)$	
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle \surd, \varrho' \cup \varrho'' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle x', \varrho' \cup \varrho'' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle y', \varrho' \cup \varrho'' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle x' \bowtie y', \varrho' \cup \varrho'' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \not\xrightarrow{e_2} (e_1 \% e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{e_1} \langle y, \varrho' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \not\xrightarrow{e_2} (e_1 \% e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{e_1} \langle x' \bowtie y, \varrho' \rangle}$
$\frac{\langle x, \varrho \rangle \not\xrightarrow{e_1} \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle \quad (e_1 \% e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{e_2} \langle x, \varrho'' \rangle}$	$\frac{\langle x, \varrho \rangle \not\xrightarrow{e_1} \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle \quad (e_1 \% e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{e_2} \langle x \bowtie y', \varrho'' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle \quad (e_1 \leq e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle \surd, \varrho' \cup \varrho'' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle \quad (e_1 \leq e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle x', \varrho' \cup \varrho'' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle \quad (e_1 \leq e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle y', \varrho' \cup \varrho'' \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle \quad (e_1 \leq e_2)}{\langle x \parallel y, \varrho \rangle \xrightarrow{\{e_1, e_2\}} \langle x' \bowtie y', \varrho' \cup \varrho'' \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle}{\langle x \mid y, \varrho \rangle \xrightarrow{\gamma(e_1, e_2)} \langle \surd, \text{effect}(\gamma(e_1, e_2), \varrho) \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle \surd, \varrho'' \rangle}{\langle x \mid y, \varrho \rangle \xrightarrow{\gamma(e_1, e_2)} \langle x', \text{effect}(\gamma(e_1, e_2), \varrho) \rangle}$
$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle \surd, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle}{\langle x \mid y, \varrho \rangle \xrightarrow{\gamma(e_1, e_2)} \langle y', \text{effect}(\gamma(e_1, e_2), \varrho) \rangle}$	$\frac{\langle x, \varrho \rangle \xrightarrow{e_1} \langle x', \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e_2} \langle y', \varrho'' \rangle}{\langle x \mid y, \varrho \rangle \xrightarrow{\gamma(e_1, e_2)} \langle x' \bowtie y', \text{effect}(\gamma(e_1, e_2), \varrho) \rangle}$

Table 47: Action transition rules of $qAPPTC$

1. The transition rules of $qBAPTC$ in section 5.1 are all source-dependent;
2. The sources of the transition rules $qAPPTC$ contain an occurrence of \bowtie , or \parallel , or $\underline{\parallel}$, or $|$, or Θ , or \triangleleft ;
3. The transition rules of $qAPPTC$ are all source-dependent.

So, $qAPPTC$ is a generalization of $qBAPTC$, that is, $qBAPTC$ is an embedding of $qAPPTC$, as desired. \square

Theorem 5.9 (Congruence of $qAPPTC$ with respect to probabilistic truly concurrent bisimulation equivalences). *(1) Probabilistic pomset bisimulation equivalence \sim_{pp} is a congruence with respect to $qAPPTC$.*

(2) Probabilistic step bisimulation equivalence \sim_{ps} is a congruence with respect to $qAPPTC$.

(3) Probabilistic hp-bisimulation equivalence \sim_{php} is a congruence with respect to $qAPPTC$.

(4) Probabilistic hhp-bisimulation equivalence \sim_{phhp} is a congruence with respect to $qAPPTC$.

Proof. (1) It is easy to see that probabilistic pomset bisimulation is an equivalent relation on $qAPPTC$ terms, we only need to prove that \sim_{pp} is preserved by the operators $\parallel, \underline{\parallel}, |, \Theta, \triangleleft, \partial_H$. It is trivial and we leave the proof as an exercise for the readers.

(2) It is easy to see that probabilistic step bisimulation is an equivalent relation on $qAPPTC$ terms, we only need to prove that \sim_{ps} is preserved by the operators $\parallel, \underline{\parallel}, |, \Theta, \triangleleft, \partial_H$. It is trivial and we leave the proof as an exercise for the readers.

(3) It is easy to see that probabilistic hp-bisimulation is an equivalent relation on $qAPPTC$ terms, we only need to prove that \sim_{php} is preserved by the operators $\parallel, \underline{\parallel}, |, \Theta, \triangleleft, \partial_H$. It is trivial and we leave the proof as an exercise for the readers.

(4) It is easy to see that probabilistic hhp-bisimulation is an equivalent relation on $qAPPTC$ terms, we only need to prove that \sim_{phhp} is preserved by the operators $\parallel, \underline{\parallel}, |, \Theta, \triangleleft, \partial_H$. It is trivial and we leave the proof as an exercise for the readers. \square

Theorem 5.10 (Soundness of $qAPPTC$ modulo probabilistic truly concurrent bisimulation equivalences). *(1) Let x and y be $qAPPTC$ terms. If $APTC \vdash x = y$, then $x \sim_{pp} y$.*

(2) Let x and y be $qAPPTC$ terms. If $APTC \vdash x = y$, then $x \sim_{ps} y$.

(3) Let x and y be $qAPPTC$ terms. If $APTC \vdash x = y$, then $x \sim_{php} y$;

(3) Let x and y be $qAPPTC$ terms. If $APTC \vdash x = y$, then $x \sim_{phhp} y$.

Proof. (1) Since probabilistic pomset bisimulation \sim_{pp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 44 is sound modulo probabilistic pomset bisimulation equivalence. We leave the proof as an exercise for the readers.

(2) Since probabilistic step bisimulation \sim_{ps} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 44 is sound modulo probabilistic step bisimulation equivalence. We leave the proof as an exercise for the readers.

(3) Since probabilistic hp-bisimulation \sim_{php} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 44 is sound modulo probabilistic hp-bisimulation equivalence. We leave the proof as an exercise for the readers.

(4) Since probabilistic hhp-bisimulation \sim_{phhp} is both an equivalent and a congruent relation, we only need to check if each axiom in Table 44 is sound modulo probabilistic hhp-bisimulation equivalence. We leave the proof as an exercise for the readers. \square

Theorem 5.11 (Completeness of $qAPPTC$ modulo probabilistic truly concurrent bisimulation equivalences). (1) Let p and q be closed $qAPPTC$ terms, if $p \sim_{pp} q$ then $p = q$.

(2) Let p and q be closed $qAPPTC$ terms, if $p \sim_{ps} q$ then $p = q$.

(3) Let p and q be closed $qAPPTC$ terms, if $p \sim_{php} q$ then $p = q$.

(3) Let p and q be closed $qAPPTC$ terms, if $p \sim_{phhp} q$ then $p = q$.

Proof. According to the definition of probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} , $p \sim_{pp} q$, $p \sim_{ps} q$, $p \sim_{php} q$ and $p \sim_{phhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of APPTC (please refer to [9] for details), we can get the completeness of $qAPPTC$. \square

5.3 Recursion

In this subsection, we introduce recursion to capture infinite processes based on $qAPPTC$. In the following, E, F, G are recursion specifications, X, Y, Z are recursive variables.

Definition 5.12 (Guarded recursive specification). A recursive specification

$$X_1 = t_1(X_1, \dots, X_n)$$

...

$$X_n = t_n(X_1, \dots, X_n)$$

is guarded if the right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in APPTC and replacing recursion variables by the right-hand sides of their recursive equations,

$$((a_{111} \parallel \dots \parallel a_{11i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{1k1} \parallel \dots \parallel a_{1ki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{111} \parallel \dots \parallel b_{11j_1}) + \dots + (b_{1l1} \parallel \dots \parallel b_{1lj_l})) \boxplus_{\pi_1} \dots \boxplus_{\pi_{m-1}} ((a_{m11} \parallel \dots \parallel a_{m1i_1}) \cdot s_1(X_1, \dots, X_n) + \dots + (a_{mk1} \parallel \dots \parallel a_{mki_k}) \cdot s_k(X_1, \dots, X_n) + (b_{m11} \parallel \dots \parallel b_{m1j_1}) + \dots + (b_{ml1} \parallel \dots \parallel b_{mlj_l}))$$

where $a_{111}, \dots, a_{11i_1}, a_{1k1}, \dots, a_{1ki_k}, b_{111}, \dots, b_{11j_1}, b_{1l1}, \dots, b_{1lj_l}, \dots, a_{m11}, \dots, a_{m1i_1}, a_{mk1}, \dots, a_{mki_k}, b_{m11}, \dots, b_{m1j_1}, b_{ml1}, \dots, b_{mlj_l} \in \mathbb{E}$, and the sum above is allowed to be empty, in which case it represents the deadlock δ . And there does not exist an infinite sequence of ϵ -transitions $\langle X|E \rangle \rightarrow \langle X'|E \rangle \rightarrow \langle X''|E \rangle \rightarrow \dots$.

Theorem 5.13 (Conservativity of $qAPPTC$ with guarded recursion). $qAPPTC$ with guarded recursion is a conservative extension of $qAPPTC$.

Proof. Since the transition rules of $qAPPTC$ are source-dependent, and the transition rules for guarded recursion in Table 49 contain only a fresh constant in their source, so the transition rules of $qAPPTC$ with guarded recursion are a conservative extension of those of $qAPPTC$. \square

$$\begin{array}{c}
\frac{\langle t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle), \varrho \rangle \rightsquigarrow \langle y, \varrho \rangle}{\langle \langle X_i|E \rangle, \varrho \rangle \rightsquigarrow \langle y, \varrho \rangle} \\
\\
\frac{\langle t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle), \varrho \rangle \xrightarrow{\{e_1, \dots, e_k\}} \langle \surd, \varrho' \rangle}{\langle \langle X_i|E \rangle, \varrho \rangle \xrightarrow{\{e_1, \dots, e_k\}} \langle \surd, \varrho' \rangle} \\
\\
\frac{\langle t_i(\langle X_1|E \rangle, \dots, \langle X_n|E \rangle), \varrho \rangle \xrightarrow{\{e_1, \dots, e_k\}} \langle y, \varrho' \rangle}{\langle \langle X_i|E \rangle, \varrho \rangle \xrightarrow{\{e_1, \dots, e_k\}} \langle y, \varrho' \rangle}
\end{array}$$

Table 49: Transition rules of guarded recursion

Theorem 5.14 (Congruence theorem of $qAPPTC$ with guarded recursion). *Probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_p , \sim_{php} and \sim_{phhp} are all congruences with respect to $qAPPTC$ with guarded recursion.*

Proof. It follows the following two facts:

1. in a guarded recursive specification, right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in $qAPPTC$ and replacing recursion variables by the right-hand sides of their recursive equations;
2. probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} are all congruences with respect to all operators of $qAPPTC$.

□

Theorem 5.15 (Elimination theorem of $qAPPTC$ with linear recursion). *Each process term in $qAPPTC$ with linear recursion is equal to a process term $\langle X_1|E \rangle$ with E a linear recursive specification.*

Proof. The same as that of $APPTC$, we omit the proof, please refer to [9] for details. □

Theorem 5.16 (Soundness of $qAPPTC$ with guarded recursion). *Let x and y be $qAPPTC$ with guarded recursion terms. If $qAPPTC$ with guarded recursion $\vdash x = y$, then*

- (1) $x \sim_{ps} y$.
- (2) $x \sim_{pp} y$.
- (3) $x \sim_{php} y$.
- (4) $x \sim_{phhp} y$.

Proof. (1) Since probabilistic step bisimulation \sim_{ps} is both an equivalent and a congruent relation with respect to $qAPPTC$ with guarded recursion, we only need to check if each axiom in Table 8 is sound modulo probabilistic step bisimulation equivalence. We leave them as exercises to the readers.

(2) Since probabilistic pomset bisimulation \sim_{pp} is both an equivalent and a congruent relation with respect to the guarded recursion, we only need to check if each axiom in Table 8 is sound modulo probabilistic pomset bisimulation equivalence. We leave them as exercises to the readers.

$$\frac{\overline{\tau \rightsquigarrow \tilde{\tau}}}{\langle \tau, \varrho \rangle \xrightarrow{\tau} \langle \surd, \tau(\varrho) \rangle}$$

Table 50: Transition rule of the silent step

(3) Since probabilistic hp-bisimulation \sim_{php} is both an equivalent and a congruent relation with respect to guarded recursion, we only need to check if each axiom in Table 8 is sound modulo probabilistic hp-bisimulation equivalence. We leave them as exercises to the readers.

(4) Since probabilistic hhp-bisimulation \sim_{phhp} is both an equivalent and a congruent relation with respect to guarded recursion, we only need to check if each axiom in Table 8 is sound modulo probabilistic hhp-bisimulation equivalence. We leave them as exercises to the readers. \square

Theorem 5.17 (Completeness of $qAPPTC$ with linear recursion). *Let p and q be closed $qAPPTC$ with linear recursion terms, then,*

- (1) *if $p \sim_{ps} q$ then $p = q$.*
- (2) *if $p \sim_{pp} q$ then $p = q$.*
- (3) *if $p \sim_{php} q$ then $p = q$.*
- (4) *if $p \sim_{phhp} q$ then $p = q$.*

Proof. According to the definition of probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} , $p \sim_{pp} q$, $p \sim_{ps} q$, $p \sim_{php} q$ and $p \sim_{phhp} q$ implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of APPTC with linear recursion (please refer to [9] for details), we can get the completeness of qAPPTC with linear recursion. \square

5.4 Abstraction

To abstract away from the internal implementations of a program, and verify that the program exhibits the desired external behaviors, the silent step τ and abstraction operator τ_I are introduced, where $I \subseteq \mathbb{E} \cup G_{at}$ denotes the internal events or guards. The silent step τ represents the internal events or guards, when we consider the external behaviors of a process, τ steps can be removed, that is, τ steps must keep silent. The transition rule of τ is shown in Table 50. In the following, let the atomic event e range over $\mathbb{E} \cup \{\epsilon\} \cup \{\delta\} \cup \{\tau\}$, and ϕ range over $G \cup \{\tau\}$, and let the communication function $\gamma : \mathbb{E} \cup \{\tau\} \times \mathbb{E} \cup \{\tau\} \rightarrow \mathbb{E} \cup \{\delta\}$, with each communication involved τ resulting in δ . We use $\tau(\varrho)$ to denote $effect(\tau, \varrho)$, for the fact that τ only change the state of internal data environment, that is, for the external data environments, $\varrho = \tau(\varrho)$.

Theorem 5.18 (Conservativity of $qAPPTC$ with silent step and guarded linear recursion). *$qAPPTC$ with silent step and guarded linear recursion is a conservative extension of $qAPPTC$ with linear recursion.*

No.	Axiom
B1	$(y = y + y, z = z + z) \quad x \cdot ((y + \tau \cdot (y + z)) \boxplus_{\pi} w) = x \cdot ((y + z) \boxplus_{\pi} w)$
B2	$(y = y + y, z = z + z) \quad x \parallel ((y + \tau \parallel (y + z)) \boxplus_{\pi} w) = x \parallel ((y + z) \boxplus_{\pi} w)$

Table 51: Axioms of silent step

Proof. Since the transition rules of $qAPPTC$ with linear recursion are source-dependent, and the transition rules for silent step in Table 50 contain only a fresh constant τ in their source, so the transition rules of $qAPPTC$ with silent step and guarded linear recursion is a conservative extension of those of $qAPPTC$ with linear recursion. \square

Theorem 5.19 (Congruence theorem of $qAPPTC$ with silent step and guarded linear recursion). *Probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to $qAPPTC$ with silent step and guarded linear recursion.*

Proof. It follows the following three facts:

1. in a guarded linear recursive specification, right-hand sides of its recursive equations can be adapted to the form by applications of the axioms in $qAPPTC$ and replacing recursion variables by the right-hand sides of their recursive equations;
2. probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} are all congruences with respect to all operators of $qAPPTC$, while probabilistic truly concurrent bisimulation equivalences \sim_{pp} , \sim_{ps} , \sim_{php} and \sim_{phhp} imply the corresponding probabilistic rooted branching truly concurrent bisimulations \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} , so probabilistic rooted branching truly concurrent bisimulations \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to all operators of $qAPPTC$;
3. While \mathbb{E} is extended to $\mathbb{E} \cup \{\tau\}$, and G is extended to $G \cup \{\tau\}$, it can be proved that probabilistic rooted branching truly concurrent bisimulations \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to all operators of $qAPPTC$, we omit it.

\square

We design the axioms for the silent step τ in Table 51.

Theorem 5.20 (Elimination theorem of $qAPPTC$ with silent step and guarded linear recursion). *Each process term in $qAPPTC$ with silent step and guarded linear recursion is equal to a process term $\langle X_1 | E \rangle$ with E a guarded linear recursive specification.*

Proof. The same as that of $APPTC$, we omit the proof, please refer to [9] for details. \square

Theorem 5.21 (Soundness of $qAPPTC$ with silent step and guarded linear recursion). *Let x and y be $qAPPTC$ with silent step and guarded linear recursion terms. If $qAPPTC$ with silent step and guarded linear recursion $\vdash x = y$, then*

- (1) $x \approx_{prbs} y$.
- (2) $x \approx_{prbp} y$.
- (3) $x \approx_{prbhp} y$.
- (4) $x \approx_{prbhhp} y$.

Proof. (1) Since probabilistic rooted branching step bisimulation \approx_{prbs} is both an equivalent and a congruent relation with respect to $qAPPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 51 is sound modulo probabilistic rooted branching step bisimulation \approx_{prbs} . We leave them as exercises to the readers.

(2) Since probabilistic rooted branching pomset bisimulation \approx_{prbp} is both an equivalent and a congruent relation with respect to $qAPPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 51 is sound modulo probabilistic rooted branching pomset bisimulation \approx_{prbp} . We leave them as exercises to the readers.

(3) Since probabilistic rooted branching hp-bisimulation \approx_{prbhp} is both an equivalent and a congruent relation with respect to $qAPPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 51 is sound modulo probabilistic rooted branching hp-bisimulation \approx_{prbhp} . We leave them as exercises to the readers.

(4) Since probabilistic rooted branching hhp-bisimulation \approx_{prbhhp} is both an equivalent and a congruent relation with respect to $qAPPTC$ with silent step and guarded linear recursion, we only need to check if each axiom in Table 51 is sound modulo probabilistic rooted branching hhp-bisimulation \approx_{prbhhp} . We leave them as exercises to the readers. \square

Theorem 5.22 (Completeness of $qAPPTC$ with silent step and guarded linear recursion). *Let p and q be closed $qAPPTC$ with silent step and guarded linear recursion terms, then,*

- (1) *if $p \approx_{prbs} q$ then $p = q$.*
- (2) *if $p \approx_{prbp} q$ then $p = q$.*
- (3) *if $p \approx_{prbhp} q$ then $p = q$.*
- (3) *if $p \approx_{prbhhp} q$ then $p = q$.*

Proof. According to the definition of probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} , and \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} implies both the bisimilarities between p and q , and also the in the same quantum states. According to the completeness of APPTC with silent step and guarded linear recursion (please refer to [9] for details), we can get the completeness of $qAPPTC$ with silent step and guarded linear recursion. \square

The unary abstraction operator τ_I ($I \subseteq \mathbb{E} \cup G_{at}$) renames all atomic events or atomic guards in I into τ . $qAPPTC$ with silent step and abstraction operator is called $qAPPTC_\tau$. The transition rules of operator τ_I are shown in Table 52.

$\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle}{\langle \tau_I(x), \varrho \rangle \rightsquigarrow \langle \tau_I(x'), \varrho \rangle}$	
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle} \quad e \notin I$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{e} \langle \tau_I(x'), \varrho' \rangle} \quad e \notin I$
$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \surd, \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{\tau} \langle \surd, \tau(\varrho) \rangle} \quad e \in I$	$\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle}{\langle \tau_I(x), \varrho \rangle \xrightarrow{\tau} \langle \tau_I(x'), \tau(\varrho) \rangle} \quad e \in I$

Table 52: Transition rule of the abstraction operator

Theorem 5.23 (Conservativity of $qAPPTC_\tau$ with guarded linear recursion). *$qAPPTC_\tau$ with guarded linear recursion is a conservative extension of $qAPPTC$ with silent step and guarded linear recursion.*

Proof. Since the transition rules of $qAPPTC$ with silent step and guarded linear recursion are source-dependent, and the transition rules for abstraction operator in Table 52 contain only a fresh operator τ_I in their source, so the transition rules of $qAPPTC_\tau$ with guarded linear recursion is a conservative extension of those of $qAPPTC$ with silent step and guarded linear recursion. \square

Theorem 5.24 (Congruence theorem of $qAPPTC_\tau$ with guarded linear recursion). *Probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to $qAPPTC_\tau$ with guarded linear recursion.*

Proof. (1) It is easy to see that probabilistic rooted branching pomset bisimulation is an equivalent relation on $qAPPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{prbp} is preserved by the operators τ_I . It is trivial and we leave the proof as an exercise for the readers.

(2) It is easy to see that probabilistic rooted branching step bisimulation is an equivalent relation on $qAPPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{prbs} is preserved by the operators τ_I . It is trivial and we leave the proof as an exercise for the readers.

(3) It is easy to see that probabilistic rooted branching hp-bisimulation is an equivalent relation on $qAPPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{prbhp} is preserved by the operators τ_I . It is trivial and we leave the proof as an exercise for the readers.

(4) It is easy to see that probabilistic rooted branching hhp-bisimulation is an equivalent relation on $qAPPTC_\tau$ with guarded linear recursion terms, we only need to prove that \approx_{prbhhp} is preserved by the operators τ_I . It is trivial and we leave the proof as an exercise for the readers. \square

We design the axioms for the abstraction operator τ_I in Table 53.

Theorem 5.25 (Soundness of $qAPPTC_\tau$ with guarded linear recursion). *Let x and y be $qAPPTC_\tau$ with guarded linear recursion terms. If $qAPPTC_\tau$ with guarded linear recursion $\vdash x = y$, then*

No.	Axiom
<i>TI1</i>	$e \notin I \quad \tau_I(e) = e$
<i>TI2</i>	$e \in I \quad \tau_I(e) = \tau$
<i>TI3</i>	$\tau_I(\delta) = \delta$
<i>TI4</i>	$\tau_I(x + y) = \tau_I(x) + \tau_I(y)$
<i>PTI1</i>	$\tau_I(x \boxplus_\pi y) = \tau_I(x) \boxplus_\pi \tau_I(y)$
<i>TI5</i>	$\tau_I(x \cdot y) = \tau_I(x) \cdot \tau_I(y)$
<i>TI6</i>	$\tau_I(x \parallel y) = \tau_I(x) \parallel \tau_I(y)$

Table 53: Axioms of abstraction operator

- (1) $x \approx_{prbs} y$.
- (2) $x \approx_{prbp} y$.
- (3) $x \approx_{prbhp} y$.
- (4) $x \approx_{prbhhp} y$.

Proof. (1) Since probabilistic rooted branching step bisimulation \approx_{prbs} is both an equivalent and a congruent relation with respect to $qAPPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 53 is sound modulo probabilistic rooted branching step bisimulation \approx_{prbs} . We leave them as exercises to the readers.

(2) Since probabilistic rooted branching pomset bisimulation \approx_{prbp} is both an equivalent and a congruent relation with respect to $qAPPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 53 is sound modulo probabilistic rooted branching pomset bisimulation \approx_{prbp} . We leave them as exercises to the readers.

(3) Since probabilistic rooted branching hp-bisimulation \approx_{prbhp} is both an equivalent and a congruent relation with respect to $qAPPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 53 is sound modulo probabilistic rooted branching hp-bisimulation \approx_{prbhp} . We leave them as exercises to the readers.

(4) Since probabilistic rooted branching hhp-bisimulation \approx_{prbhhp} is both an equivalent and a congruent relation with respect to $qAPPTC_\tau$ with guarded linear recursion, we only need to check if each axiom in Table 53 is sound modulo probabilistic rooted branching hhp-bisimulation \approx_{prbhhp} . We leave them as exercises to the readers. \square

Though τ -loops are prohibited in guarded linear recursive specifications in a specifiable way, they can be constructed using the abstraction operator, for example, there exist τ -loops in the process term $\tau_{\{a\}}((X|X = aX))$. To avoid τ -loops caused by τ_I and ensure fairness, we introduce the following recursive verification rules as Table 54 shows, note that $i_1, \dots, i_m, j_1, \dots, j_n \in I \subseteq \mathbb{E} \setminus \{\tau\}$.

Theorem 5.26 (Soundness of VR_1, VR_2, VR_3). *VR_1, VR_2 and VR_3 are sound modulo probabilistic rooted branching truly concurrent bisimulation equivalences $\approx_{prbp}, \approx_{prbs}, \approx_{prbhp}$ and \approx_{prbhhp} .*

$$\begin{array}{l}
VR_1 \quad \frac{x = y + (i_1 \parallel \dots \parallel i_m) \cdot x, y = y + y}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(y)} \\
VR_2 \quad \frac{x = z \boxplus_\pi (u + (i_1 \parallel \dots \parallel i_m) \cdot x), z = z + u, z = z + z}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(z)} \\
VR_3 \quad \frac{x = z + (i_1 \parallel \dots \parallel i_m) \cdot y, y = z \boxplus_\pi (u + (j_1 \parallel \dots \parallel j_n) \cdot x), z = z + u, z = z + z}{\tau \cdot \tau_I(x) = \tau \cdot \tau_I(y') \text{ for } y' = z \boxplus_\pi (u + (i_1 \parallel \dots \parallel i_m) \cdot y')}
\end{array}$$

Table 54: Recursive verification rules

5.5 Quantum Measurement

In closed quantum systems, there is another basic quantum operation – quantum measurement, besides the unitary operator. Quantum measurements have a probabilistic nature.

There is a concrete but non-trivial problem in modeling quantum measurement.

Let the following process term represent quantum measurement during modeling phase,

$$\beta_1 \cdot t_1 \boxplus_{\pi_1} \beta_2 \cdot t_2 \boxplus_{\pi_2} \dots \boxplus_{\pi_{i-1}} \beta_i \cdot t_i$$

where $\sum_i \pi_i = 1$, $t_i \in \mathcal{B}(qBAPTC)$, β denotes a quantum measurement, and $\beta = \sum_i \lambda_i \beta_i$, β_i denotes the projection performed on the quantum system ϱ , $\pi_i = Tr(\beta_i \varrho)$, $\varrho_i = \beta_i \varrho \beta_i / \pi_i$.

The above term means that, firstly, we choose a projection β_i in a quantum measurement $\beta = \sum_i \lambda_i \beta_i$ probabilistically, then, we execute (perform) the projection β_i on the closed quantum system. This also adheres to the intuition on quantum mechanics.

We define B as the collection of all projections of all quantum measurements, and make the collection of atomic actions be $\mathbb{E} = \mathbb{E} \cup B$. We see that a projection $\beta_i \in B$ has the almost same semantics as a unitary operator $\alpha \in A$. So, we add the following (probabilistic and action) transition rules into those of $PQRA$.

$$\overline{\langle \beta_i, \varrho \rangle \rightsquigarrow \langle \check{\beta}_i, \varrho \rangle}$$

$$\overline{\langle \check{\beta}_i, \varrho \rangle \xrightarrow{\beta_i} \langle \surd, \varrho' \rangle}$$

Until now, $qAPPTC$ works again. The two main quantum operations in a closed quantum system – the unitary operator and the quantum measurement, are fully modeled in probabilistic process algebra.

5.6 Quantum Entanglement

As in section 3.5, The axiom system of the shadow constant \textcircled{S} is shown in Table 55.

The transition rules of constant \textcircled{S} are as Table 56 shows.

No.	Axiom
<i>SC1</i>	$\textcircled{\mathbb{S}} \cdot x = x$
<i>SC2</i>	$x \cdot \textcircled{\mathbb{S}} = x$
<i>SC3</i>	$e \parallel \textcircled{\mathbb{S}}^e = e$
<i>SC4</i>	$\textcircled{\mathbb{S}}^e \parallel e = e$
<i>SC5</i>	$e \parallel (\textcircled{\mathbb{S}}^e \cdot y) = e \cdot y$
<i>SC6</i>	$\textcircled{\mathbb{S}}^e \parallel (e \cdot y) = e \cdot y$
<i>SC7</i>	$(e \cdot x) \parallel \textcircled{\mathbb{S}}^e = e \cdot x$
<i>SC8</i>	$(\textcircled{\mathbb{S}}^e \cdot x) \parallel e = e \cdot x$
<i>SC9</i>	$(e \cdot x) \parallel (\textcircled{\mathbb{S}}^e \cdot y) = e \cdot (x \bowtie y)$
<i>SC10</i>	$(\textcircled{\mathbb{S}}^e \cdot x) \parallel (e \cdot y) = e \cdot (x \bowtie y)$

Table 55: Axioms of quantum entanglement

$$\begin{array}{c}
\overline{\langle \textcircled{\mathbb{S}}, \varrho \rangle \rightsquigarrow \langle \textcircled{\mathbb{S}}, \varrho \rangle} \\
\overline{\langle \textcircled{\mathbb{S}}, \varrho \rangle \rightarrow \langle \sqrt{}, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle x', \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{\mathbb{S}}^e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle x' \bowtie y', \varrho' \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{\mathbb{S}}^e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle} \\
\frac{\langle x, \varrho' \rangle \xrightarrow{\textcircled{\mathbb{S}}^e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle y', \varrho' \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle \quad \langle y, \varrho' \rangle \xrightarrow{\textcircled{\mathbb{S}}^e} \langle \sqrt{}, \varrho' \rangle}{\langle x \parallel y, \varrho \rangle \xrightarrow{e} \langle \sqrt{}, \varrho' \rangle}
\end{array}$$

Table 56: Transition rules of constant $\textcircled{\mathbb{S}}$

Theorem 5.27 (Elimination theorem of $qAPPTC_\tau$ with guarded linear recursion and shadow constant). *Let p be a closed $qAPPTC_\tau$ with guarded linear recursion and shadow constant term. Then there is a closed $qAPPTC$ term such that $qAPPTC_\tau$ with guarded linear recursion and shadow constant $\vdash p = q$.*

Proof. We leave the proof to the readers as an excise. \square

Theorem 5.28 (Conservativity of $qAPPTC_\tau$ with guarded linear recursion and shadow constant). *$qAPPTC_\tau$ with guarded linear recursion and shadow constant is a conservative extension of $qAPPTC_\tau$ with guarded linear recursion.*

Proof. We leave the proof to the readers as an excise. \square

Theorem 5.29 (Congruence theorem of $qAPPTC_\tau$ with guarded linear recursion and shadow constant). *Probabilistic rooted branching truly concurrent bisimulation equivalences \approx_{prbp} , \approx_{prbs} , \approx_{prbhp} and \approx_{prbhhp} are all congruences with respect to $qAPPTC_\tau$ with guarded linear recursion and shadow constant.*

Proof. We leave the proof to the readers as an excise. \square

Theorem 5.30 (Soundness of $qAPPTC_\tau$ with guarded linear recursion and shadow constant). *Let p and q be closed $qAPPTC_\tau$ with guarded linear recursion and shadow constant terms. If $qAPPTC_\tau$ with guarded linear recursion and shadow constant $\vdash x = y$, then*

1. $x \approx_{prbs} y$;
2. $x \approx_{prbp} y$;
3. $x \approx_{prbhp} y$;
4. $x \approx_{prbhhp} y$.

Proof. We leave the proof to the readers as an excise. \square

Theorem 5.31 (Completeness of $qAPPTC_\tau$ with guarded linear recursion and shadow constant). *Let p and q are closed $qAPPTC_\tau$ with guarded linear recursion and shadow constant terms, then,*

1. *if $p \approx_{prbs} q$ then $p = q$;*
2. *if $p \approx_{prbp} q$ then $p = q$;*
3. *if $p \approx_{prbhp} q$ then $p = q$;*
4. *if $p \approx_{prbhhp} q$ then $p = q$.*

Proof. We leave the proof to the readers as an excise. \square

$$\begin{array}{c}
\frac{}{\langle e', \varrho \rangle \rightsquigarrow \langle \check{e}, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle}{\langle x \cdot y, \varrho \rangle \rightsquigarrow \langle x' \cdot y, \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle \quad \langle y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle}{\langle x + y, \varrho \rangle \rightsquigarrow \langle x' + y', \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle}{\langle x \boxplus_{\pi} y, \varrho \rangle \rightsquigarrow \langle x', \varrho \rangle} \quad \frac{\langle y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle}{\langle x \boxplus_{\pi} y, \varrho \rangle \rightsquigarrow \langle y', \varrho \rangle} \\
\frac{}{\langle \check{e}', \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle} \text{ if } \varrho \in \text{effect}(e, \varrho) \\
\frac{\langle x, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle} \quad \frac{\langle x, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle} \\
\frac{\langle y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle} \quad \frac{\langle y, \varrho \rangle \xrightarrow{e'} \langle y', \varrho \rangle}{\langle x + y, \varrho \rangle \xrightarrow{e'} \langle y', \varrho \rangle} \\
\frac{\langle x, \varrho \rangle \xrightarrow{e'} \langle \sqrt{}, \varrho \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e'} \langle y, \varrho \rangle} \quad \frac{\langle x, \varrho \rangle \xrightarrow{e'} \langle x', \varrho \rangle}{\langle x \cdot y, \varrho \rangle \xrightarrow{e'} \langle x' \cdot y, \varrho \rangle}
\end{array}$$

Table 57: Transition rules of BAPTC under quantum configuration

5.7 Unification of Quantum and Classical Computing for Closed Quantum Systems

We give the transition rules under quantum configuration for traditional atomic actions (events) $e' \in \mathbb{E}$ as Table 57 shows.

And the axioms for traditional actions are the same as those of qBAPTC. And it is natural can be extended to qAPPTC, recursion and abstraction. So, quantum and classical computing are unified under the framework of qAPPTC for closed quantum systems.

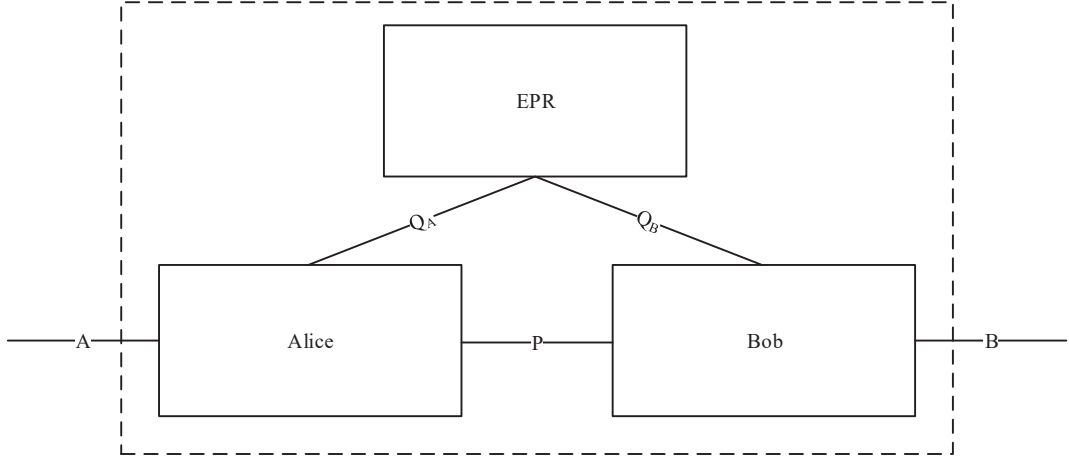


Figure 12: Quantum teleportation protocol.

6 Applications of qAPPTC

Quantum and classical computing in closed systems are unified with qAPPTC, which have the same equational logic and the same quantum configuration based operational semantics. The unification can be used widely in verification for the behaviors of quantum and classical computing mixed systems. In this chapter, we show its usage in verification of the quantum communication protocols.

6.1 Verification of Quantum Teleportation Protocol

Quantum teleportation [41] is a famous quantum protocol in quantum information theory to teleport an unknown quantum state by sending only classical information, provided that the sender and the receiver, Alice and Bob, shared an entangled state in advance. Firstly, we introduce the basic quantum teleportation protocol briefly, which is illustrated in Figure 12. In this section, we show how to process quantum entanglement in an implicit way.

1. EPR generates 2-qubits entangled EPR pair $q = q_1 \otimes q_2$, and he sends q_1 to Alice through quantum channel Q_A and q_2 to Bob through quantum channel Q_B ;
2. Alice receives q_1 , after some preparations, she measures on q_1 , and sends the measurement results x to Bob through classical channel P ;
3. Bob receives q_2 from EPR, and also the classical information x from Alice. According to x , he chooses specific Pauli transformation on q_2 .

We re-introduce the basic quantum teleportation protocol in an abstract way with more technical details as Figure 12 illustrates.

Now, we assume the generation of 2-qubits q through two unitary operators $Set[q]$ and $H[q]$. EPR sends q_1 to Alice through the quantum channel Q_A by quantum communicating action

$send_{Q_A}(q_1)$ and Alice receives q_1 through Q_A by quantum communicating action $receive_{Q_A}(q_1)$. Similarly, for Bob, those are $send_{Q_B}(q_2)$ and $receive_{Q_B}(q_2)$. After Alice receives q_1 , she does some preparations, including a unitary transformation $CNOT$ and a Hadamard transformation H , then Alice do measurement $M = \sum_{i=0}^3 M_i$, and sends measurement results x to Bob through the public classical channel P by classical communicating action $send_P(x)$, and Bob receives x through channel P by classical communicating action $receive_P(x)$. According to x , Bob performs specific Pauli transformations σ_x on q_2 . Let Alice, Bob and EPR be a system ABE and let interactions between Alice, Bob and EPR be internal actions. ABE receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$. Note that the entangled EPR pair $q = q_1 \otimes q_2$ is within ABE , so quantum entanglement can be processed implicitly.

Then the state transitions of EPR can be described by PQRA as follows.

$$\begin{aligned} E &= Set[q] \cdot E_1 \\ E_1 &= H[q] \cdot E_2 \\ E_2 &= send_{Q_A}(q_1) \cdot E_3 \\ E_3 &= send_{Q_B}(q_2) \cdot E \end{aligned}$$

And the state transitions of Alice can be described by PQRA as follows.

$$\begin{aligned} A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\ A_1 &= receive_{Q_A}(q_1) \cdot A_2 \\ A_2 &= CNOT \cdot A_3 \\ A_3 &= H \cdot A_4 \\ A_4 &= (M_0 \cdot send_P(0) \boxplus_{\frac{1}{4}} M_1 \cdot send_P(1) \boxplus_{\frac{1}{4}} M_2 \cdot send_P(2) \boxplus_{\frac{1}{4}} M_3 \cdot send_P(3)) \cdot A \end{aligned}$$

where Δ_i is the collection of the input data.

And the state transitions of Bob can be described by PQRA as follows.

$$\begin{aligned} B &= receive_{Q_B}(q_2) \cdot B_1 \\ B_1 &= (receive_P(0) \cdot \sigma_0 \boxplus_{\frac{1}{4}} receive_P(1) \cdot \sigma_1 \boxplus_{\frac{1}{4}} receive_P(2) \cdot \sigma_2 \boxplus_{\frac{1}{4}} receive_P(3) \cdot \sigma_3) \cdot B_2 \\ B_2 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B \end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(\text{send}_{Q_A}(q_1), \text{receive}_{Q_A}(q_1)) &\triangleq c_{Q_A}(q_1) \\
\gamma(\text{send}_{Q_B}(q_2), \text{receive}_{Q_B}(q_2)) &\triangleq c_{Q_B}(q_2) \\
\gamma(\text{send}_P(0), \text{receive}_P(0)) &\triangleq c_P(0) \\
\gamma(\text{send}_P(1), \text{receive}_P(1)) &\triangleq c_P(1) \\
\gamma(\text{send}_P(2), \text{receive}_P(2)) &\triangleq c_P(2) \\
\gamma(\text{send}_P(3), \text{receive}_P(3)) &\triangleq c_P(3)
\end{aligned}$$

Let A , B and E in parallel, then the system ABE can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B \parallel E)))$$

where $H = \{\text{send}_{Q_A}(q_1), \text{receive}_{Q_A}(q_1), \text{send}_{Q_B}(q_2), \text{receive}_{Q_B}(q_2), \text{send}_P(0), \text{receive}_P(0), \text{send}_P(1), \text{receive}_P(1), \text{send}_P(2), \text{receive}_P(2), \text{send}_P(3), \text{receive}_P(3)\}$ and $I = \{\text{Set}[q], H[q], CNOT, H, M_0, M_1, M_2, M_3, \sigma_0, \sigma_1, \sigma_2, \sigma_3, c_{Q_A}(q_1), c_{Q_B}(q_2), c_P(0), c_P(1), c_P(2), c_P(3)\}$.

Then we get the following conclusion.

Theorem 6.1. *The basic quantum teleportation protocol $\tau_I(\partial_H(\Theta(A \parallel B \parallel E)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B \parallel E))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B \parallel E)))$. So, the basic quantum teleportation protocol $\tau_I(\partial_H(\Theta(A \parallel B \parallel E)))$ exhibits desired external behaviors. \square

6.2 Verification of BB84 Protocol

The BB84 protocol [30] is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic BB84 protocol briefly, which is illustrated in Figure 13.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a ;
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a ;
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob;
4. Bob receives q and randomly generates a string of bits B_b with size n ;
5. Bob measures each qubit of q according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n ;
6. Bob sends his measurement bases B_b to Alice through a public channel P ;

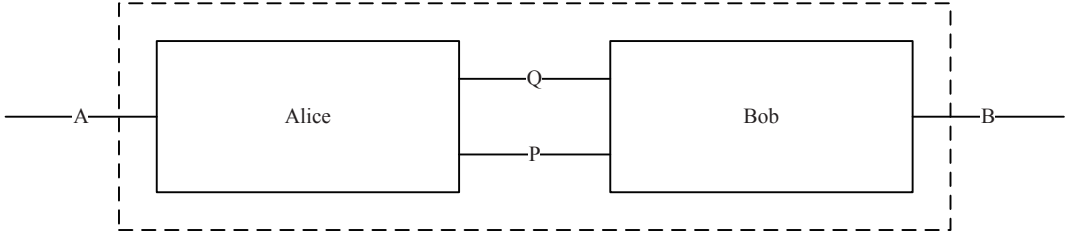


Figure 13: BB84 protocol.

7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a ;
8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

We re-introduce the basic BB84 protocol in an abstract way with more technical details as Figure 13 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a] = \sum_{i=0}^{2n-1} Rand[q; B_a]_i$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a] = \sum_{i=0}^{2n-1} Rand[q; K_a]_i$, $Rand[q'; B_b] = \sum_{i=0}^{2n-1} Rand[q'; B_b]_i$. $M[q; K_b] = \sum_{i=0}^{2n-1} M[q; K_b]_i$ denotes the Bob's measurement on q . The generation of n qubits q through two unitary operators $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public classical channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transitions of Alice can be described by PQRA as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; B_a]_i \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_P(B_b) \cdot A_7 \\
A_7 &= send_P(B_a) \cdot A_8 \\
A_8 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transitions of Bob can be described by PQRA as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B_b]_i \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \bowtie B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{Rand[q; B_a]_i, Rand[q; K_a]_i, Set_{K_a}[q], H_{B_a}[q], Rand[q'; B_b]_i, M[q; K_b]_i, c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 6.2. *The basic BB84 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic BB84 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

6.3 Verification of E91 Protocol

With support of Entanglement merge \bowtie , PQRA can be used to verify quantum protocols utilizing entanglement explicitly. E91 protocol[31] is the first quantum protocol which utilizes entanglement. E91 protocol is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic E91 protocol briefly, which is illustrated in Figure 14.

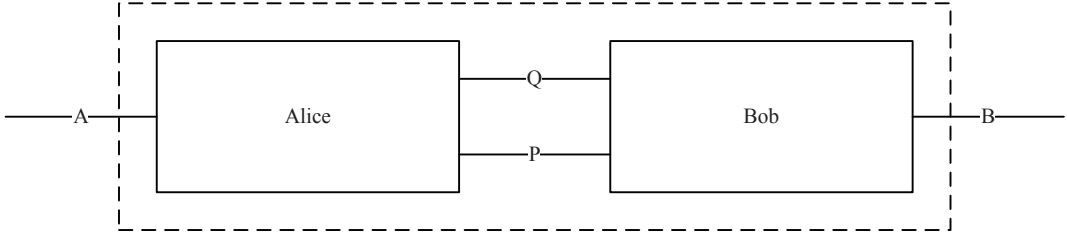


Figure 14: E91 protocol.

1. Alice generates a string of EPR pairs q with size n , i.e., $2n$ particles, and sends a string of qubits q_b from each EPR pair with n to Bob through a quantum channel Q , remains the other string of qubits q_a from each pair with size n ;
2. Alice create two string of bits with size n randomly, denoted as B_a and K_a ;
3. Bob receives q_b and randomly generates a string of bits B_b with size n ;
4. Alice measures each qubit of q_a according to a basis by bits of B_a . And the measurement results would be K_a , which is also with size n ;
5. Bob measures each qubit of q_b according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n ;
6. Bob sends his measurement bases B_b to Alice through a public channel P ;
7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a ;
8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

We re-introduce the basic E91 protocol in an abstract way with more technical details as Figure 14 illustrates.

Now, $M[q_a; K_a] = \sum_{i=0}^{2n-1} M[q_a; K_a]_i$ denotes the Alice's measurement operation of q_a , and $\textcircled{S}_{M[q_a; K_a]} = \sum_{i=0}^{2n-1} \textcircled{S}_{M[q_a; K_a]_i}$ denotes the responding shadow constant; $M[q_b; K_b] = \sum_{i=0}^{2n-1} M[q_b; K_b]_i$ denotes the Bob's measurement operation of q_b , and $\textcircled{S}_{M[q_b; K_b]} = \sum_{i=0}^{2n-1} \textcircled{S}_{M[q_b; K_b]_i}$ denotes the responding shadow constant. Alice sends q_b to Bob through the quantum channel Q by quantum communicating action $send_Q(q_b)$ and Bob receives q_b through Q by quantum communicating action $receive_Q(q_b)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transitions of Alice can be described by PQRA as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= send_Q(q_b) \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q_a; K_a]_i \cdot A_3 \\
A_3 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} \textcircled{S}_{M[q_b; K_b]_i} \cdot A_4 \\
A_4 &= receive_P(B_b) \cdot A_5 \\
A_5 &= send_P(B_a) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transitions of Bob can be described by PQRA as follows.

$$\begin{aligned}
B &= receive_Q(q_b) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} \textcircled{S}_{M[q_a; K_a]_i} \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q_b; K_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. The quantum operation and its shadow constant pair will lead entanglement occur, otherwise, a deadlock δ will occur. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q_b), receive_Q(q_b)) &\triangleq c_Q(q_b) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q_b), receive_Q(q_b), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a), M[q_a; K_a]_i, \textcircled{S}_{M[q_a; K_a]_i}, M[q_b; K_b]_i, \textcircled{S}_{M[q_b; K_b]_i}\}$ and $I = \{c_Q(q_b), c_P(B_b), c_P(B_a), M[q_a; K_a], M[q_b; K_b], cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

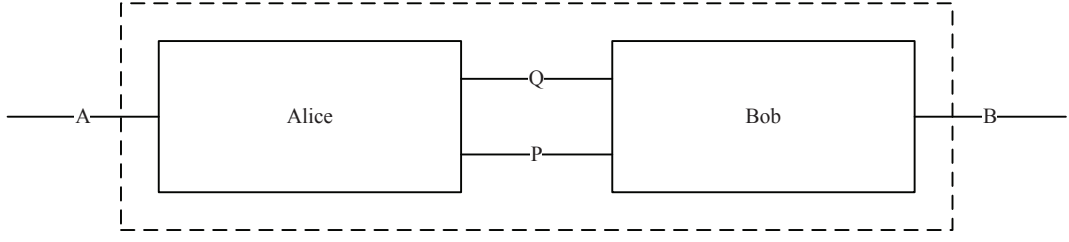


Figure 15: The B92 protocol.

Theorem 6.3. *The basic E91 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic E91 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

6.4 Verification of B92 Protocol

The famous B92 protocol[32] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the B92 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The B92 protocol is used to create a private key between two parities, Alice and Bob. B92 is a protocol of quantum key distribution (QKD) which uses polarized photons as information carriers. Firstly, we introduce the basic B92 protocol briefly, which is illustrated in Figure 15.

1. Alice create a string of bits with size n randomly, denoted as A .
2. Alice generates a string of qubits q with size n , carried by polarized photons. If $A_i = 0$, the i th qubit is $|0\rangle$; else if $A_i = 1$, the i th qubit is $|+\rangle$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B with size n .
5. If $B_i = 0$, Bob chooses the basis \oplus ; else if $B_i = 1$, Bob chooses the basis \otimes . Bob measures each qubit of q according to the above basses. And Bob builds a String of bits T , if the measurement produces $|0\rangle$ or $|+\rangle$, then $T_i = 0$; else if the measurement produces $|1\rangle$ or $|-\rangle$, then $T_i = 1$, which is also with size n .
6. Bob sends T to Alice through a public channel P .
7. Alice and Bob determine that at which position the bit strings A and B are remained for which $T_i = 1$. In absence of Eve, $A_i = 1 - B_i$, a shared raw key $K_{a,b}$ is formed by A_i .

We re-introduce the basic B92 protocol in an abstract way with more technical details as Figure 15 illustrates.

Now, we assume a special measurement operation $Rand[q; A] = \sum_{i=0}^{2^n-1} Rand[q; A]_i$ which create a string of n random bits A from the q quantum system, and the same as $Rand[q'; B] = \sum_{i=0}^{2^n-1} Rand[q'; B]_i$. $M[q; T] = \sum_{i=0}^{2^n-1} M[q; T]_i$ denotes the Bob's measurement operation of q .

The generation of n qubits q through a unitary operator $Set_A[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends T to Alice through the public channel P by classical communicating action $send_P(T)$ and Alice receives T through channel P by classical communicating action $receive_P(T)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, T, A, B)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; A]_i \cdot A_2 \\
A_2 &= Set_A[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= receive_P(T) \cdot A_5 \\
A_5 &= cmp(K_{a,b}, T, A, B) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B]_i \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; T]_i \cdot B_3 \\
B_3 &= send_P(T) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, T, A, B) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(T), receive_P(T)) &\triangleq c_P(T)
\end{aligned}$$

(2)

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(T), receive_P(T)\}$ and $I = \{\boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; A]_i, Set_A[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; T]_i, c_Q(q), c_P(T), cmp(K_{a,b}, T, A, B)\}$.

Then we get the following conclusion.

Theorem 6.4. *The basic B92 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic B92 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.5 Verification of DPS Protocol

The famous DPS protocol[33] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the DPS protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The DPS protocol is used to create a private key between two parties, Alice and Bob. DPS is a protocol of quantum key distribution (QKD) which uses pulses of a photon which has nonorthogonal four states. Firstly, we introduce the basic DPS protocol briefly, which is illustrated in Figure 16.

1. Alice generates a string of qubits q with size n , carried by a series of single photons possibly at four time instances.
2. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
3. Bob receives q by detectors clicking at the second or third time instance, and records the time into T with size n and which detector clicks into D with size n .
4. Bob sends T to Alice through a public channel P .
5. Alice receives T . From T and her modulation data, Alice knows which detector clicked in Bob's site, i.e. D .
6. Alice and Bob have an identical bit string, provided that the first detector click represents "0" and the other detector represents "1", then a shared raw key $K_{a,b}$ is formed.

We re-introduce the basic DPS protocol in an abstract way with more technical details as Figure 16 illustrates.

Now, we assume $M[q; T] = \sum_{i=0}^{2n-1} M[q; T]_i$ denotes the Bob's measurement operation of q . The generation of n qubits q through a unitary operator $Set_A[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends T to Alice through the public channel P by classical communicating action $send_P(T)$ and Alice receives T through channel P by classical communicating action $receive_P(T)$. Alice and Bob generate the private key $K_{a,b}$

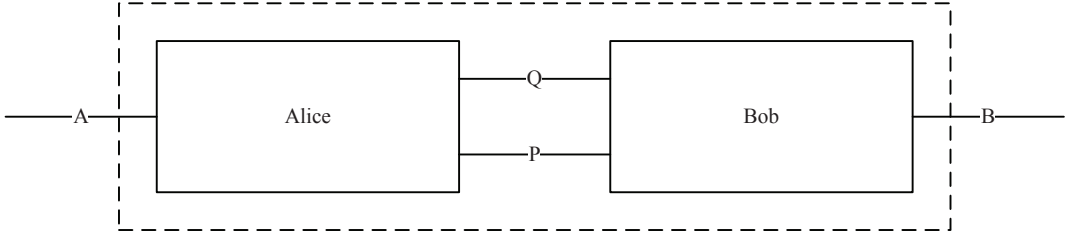


Figure 16: The DPS protocol.

by a classical comparison action $cmp(K_{a,b}, D)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Set_A[q] \cdot A_2 \\
A_2 &= send_Q(q) \cdot A_3 \\
A_3 &= receive_P(T) \cdot A_4 \\
A_4 &= cmp(K_{a,b}, D) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2^n}, i=0}^{2^n-1} M[q; T]_i \cdot B_2 \\
B_2 &= send_P(T) \cdot B_3 \\
B_3 &= cmp(K_{a,b}, D) \cdot B_4 \\
B_4 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(T), receive_P(T)) &\triangleq c_P(T)
\end{aligned}$$

(3)

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(T), receive_P(T)\}$ and $I = \{Set_A[q], \bigoplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; T]_i, c_Q(q), c_P(T), cmp(K_{a,b}, D)\}$.

Then we get the following conclusion.

Theorem 6.5. *The basic DPS protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic DPS protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.6 Verification of BBM92 Protocol

The famous BBM92 protocol[34] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the BBM92 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The BBM92 protocol is used to create a private key between two parties, Alice and Bob. BBM92 is a protocol of quantum key distribution (QKD) which uses EPR pairs as information carriers. Firstly, we introduce the basic BBM92 protocol briefly, which is illustrated in Figure 17.

1. Alice generates a string of EPR pairs q with size n , i.e., $2n$ particles, and sends a string of qubits q_b from each EPR pair with n to Bob through a quantum channel Q , remains the other string of qubits q_a from each pair with size n .
2. Alice create a string of bits with size n randomly, denoted as B_a .
3. Bob receives q_b and randomly generates a string of bits B_b with size n .
4. Alice measures each qubit of q_a according to bits of B_a , if $B_{a_i} = 0$, then uses x axis (\rightarrow); else if $B_{a_i} = 1$, then uses z axis (\uparrow).
5. Bob measures each qubit of q_b according to bits of B_b , if $B_{b_i} = 0$, then uses x axis (\rightarrow); else if $B_{b_i} = 1$, then uses z axis (\uparrow).
6. Bob sends his measurement axis choices B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her axis choices B_a to Bob through channel P , and Bob receives B_a .
8. Alice and Bob agree to discard all instances in which they happened to measure along different axes, as well as instances in which measurements fails because of imperfect quantum efficiency of the detectors. Then the remaining instances can be used to generate a private key $K_{a,b}$.

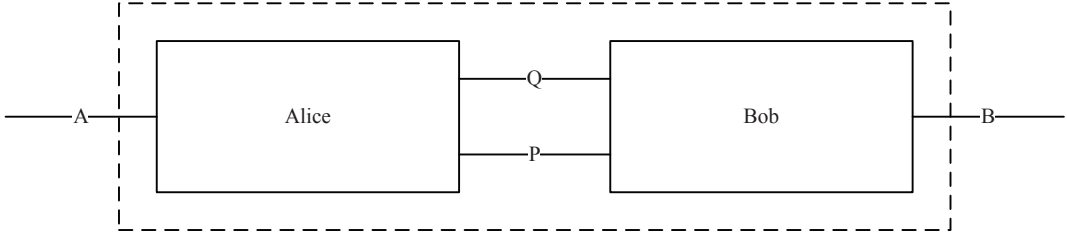


Figure 17: The BBM92 protocol.

We re-introduce the basic BBM92 protocol in an abstract way with more technical details as Figure 17 illustrates.

Now, $M[q_a; B_a] = \sum_{i=0}^{2^n-1} M[q_a; K_a]_i$ denotes the Alice's measurement operation of q_a , and $\textcircled{S}_{M[q_a; B_a]} = \sum_{i=0}^{2^n-1} \textcircled{S}_{M[q_a; B_a]_i}$ denotes the responding shadow constant; $M[q_b; B_b] = \sum_{i=0}^{2^n-1} M[q_b; B_b]_i$ denotes the Bob's measurement operation of q_b , and $\textcircled{S}_{M[q_b; B_b]} = \sum_{i=0}^{2^n-1} \textcircled{S}_{M[q_b; B_b]_i}$ denotes the responding shadow constant. Alice sends q_b to Bob through the quantum channel Q by quantum communicating action $send_Q(q_b)$ and Bob receives q_b through Q by quantum communicating action $receive_Q(q_b)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= send_Q(q_b) \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2^n}, i=0}^{2^n-1} M[q_a; B_a]_i \cdot A_3 \\
A_3 &= \boxplus_{\frac{1}{2^n}, i=0}^{2^n-1} \textcircled{S}_{M[q_b; B_b]_i} \cdot A_4 \\
A_4 &= receive_P(B_b) \cdot A_5 \\
A_5 &= send_P(B_a) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q_b) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} (\bigotimes_{M[q_a; B_a]_i} \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q_b; B_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. The quantum measurement and its shadow constant pair will lead entanglement occur, otherwise, a deadlock δ will occur. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q_b), receive_Q(q_b)) &\triangleq c_Q(q_b) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q_b), receive_Q(q_b), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a), \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q_a; B_a]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} (\bigotimes_{M[q_a; B_a]_i}, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q_b; B_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} (\bigotimes_{M[q_b; B_b]_i} \}$

and $I = \{c_Q(q_b), c_P(B_b), c_P(B_a), M[q_a; B_a], M[q_b; B_b], cmp(K_{a,b}, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 6.6. *The basic BBM92 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic BBM92 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.7 Verification of SARG04 Protocol

The famous SARG04 protocol[35] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the SARG04 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

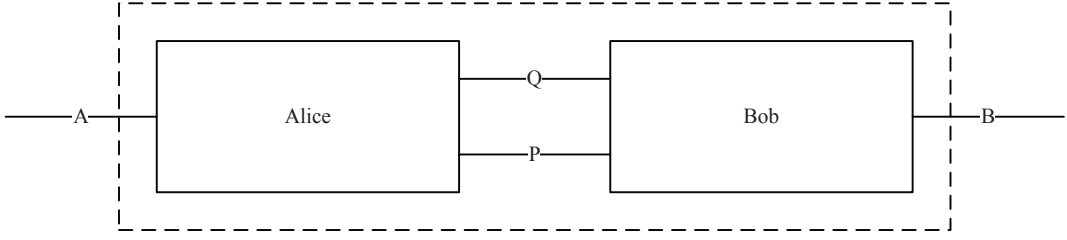


Figure 18: The SARG04 protocol.

The SARG04 protocol is used to create a private key between two parties, Alice and Bob. SARG04 is a protocol of quantum key distribution (QKD) which refines the BB84 protocol against PNS (Photon Number Splitting) attacks. The main innovations are encoding bits in nonorthogonal states and the classical sifting procedure. Firstly, we introduce the basic SARG04 protocol briefly, which is illustrated in Figure 18.

1. Alice create a string of bits with size n randomly, denoted as K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit of q has four nonorthogonal states, it is $|\pm x\rangle$ if $K_a = 0$; it is $|\pm z\rangle$ if $K_a = 1$. And she records the corresponding one of the four pairs of nonorthogonal states into B_a with size $2n$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Alice sends B_a through a public channel P .
5. Bob measures each qubit of q σ_x or σ_z . And he records the unambiguous discriminations into K_b with a raw size $n/4$, and the unambiguous discrimination information into B_b with size n .
6. Bob sends B_b to Alice through the public channel P .
7. Alice and Bob determine that at which position the bit should be remained. Then the remaining bits of K_a and K_b is the private key $K_{a,b}$.

We re-introduce the basic SARG04 protocol in an abstract way with more technical details as Figure 18 illustrates.

Now, we assume a special measurement operation $Rand[q; K_a] = \sum_{i=0}^{2n-1} Rand[q; K_a]_i$ which create a string of n random bits K_a from the q quantum system. $M[q; K_b] = \sum_{i=0}^{2n-1} M[q; K_b]_i$ denotes the Bob's measurement operation of q . The generation of n qubits q through a unitary operator $Set_{K_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_2 \\
A_2 &= Set_{K_a}[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= send_P(B_a) \cdot A_5 \\
A_5 &= receive_P(B_b) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(B_a) \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{\boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i, Set_{K_a}[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i, c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

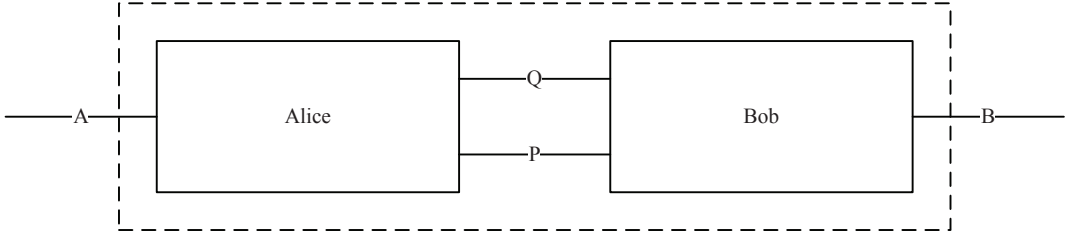


Figure 19: The COW protocol.

Theorem 6.7. *The basic SARG04 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic SARG04 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

6.8 Verification of COW Protocol

The famous COW protocol[36] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the COW protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The COW protocol is used to create a private key between two parties, Alice and Bob. COW is a protocol of quantum key distribution (QKD) which is practical. Firstly, we introduce the basic COW protocol briefly, which is illustrated in Figure 19.

1. Alice generates a string of qubits q with size n , and the i th qubit of q is "0" with probability $\frac{1-f}{2}$, "1" with probability $\frac{1+f}{2}$ and the decoy sequence with probability f .
2. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
3. Alice sends A of the items corresponding to a decoy sequence through a public channel P .
4. Bob removes all the detections at times $2A-1$ and $2A$ from his raw key and looks whether detector D_{2M} has ever fired at time $2A$.
5. Bob sends B of the times $2A+1$ in which he had a detector in D_{2M} to Alice through the public channel P .
6. Alice receives B and verifies if some of these items corresponding to a bit sequence "1,0".
7. Bob sends C of the items that he has detected through the public channel P .
8. Alice and Bob run error correction and privacy amplification on these bits, and the private key $K_{a,b}$ is established.

We re-introduce the basic COW protocol in an abstract way with more technical details as Figure 19 illustrates.

Now, we assume The generation of n qubits q through a unitary operator $Set[q]$. $M[q] = \sum_{i=0}^{2n-1} M[q]_i$ denotes the Bob's measurement operation of q . Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Alice sends A to Alice through the public channel P by classical communicating action $send_P(A)$ and Alice receives A through channel P by classical communicating action $receive_P(A)$, and the same as $send_P(B)$ and $receive_P(B)$, and $send_P(C)$ and $receive_P(C)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b})$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= Set[q] \cdot A_2 \\
A_2 &= send_Q(q) \cdot A_3 \\
A_3 &= send_P(A) \cdot A_4 \\
A_4 &= receive_P(B) \cdot A_5 \\
A_5 &= receive_P(C) \cdot A_6 \\
A_6 &= cmp(K_{a,b}) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(A) \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q]_i \cdot B_3 \\
B_3 &= send_P(B) \cdot B_4 \\
B_4 &= send_P(C) \cdot B_5 \\
B_5 &= cmp(K_{a,b}) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(\text{send}_Q(q), \text{receive}_Q(q)) &\triangleq c_Q(q) \\
\gamma(\text{send}_P(A), \text{receive}_P(A)) &\triangleq c_P(A) \\
\gamma(\text{send}_P(B), \text{receive}_P(B)) &\triangleq c_P(B) \\
\gamma(\text{send}_P(C), \text{receive}_P(C)) &\triangleq c_P(C)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{\text{send}_Q(q), \text{receive}_Q(q), \text{send}_P(A), \text{receive}_P(A), \text{send}_P(B), \text{receive}_P(B), \text{send}_P(C), \text{receive}_P(C)\}$ and $I = \{\text{Set}[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q]_i, c_Q(q), c_P(A), c_P(B), c_P(C), \text{cmp}(K_{a,b})\}$.

Then we get the following conclusion.

Theorem 6.8. *The basic COW protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic COW protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.9 Verification of SSP Protocol

The famous SSP protocol[37] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the SSP protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The SSP protocol is used to create a private key between two parties, Alice and Bob. SSP is a protocol of quantum key distribution (QKD) which uses six states. Firstly, we introduce the basic SSP protocol briefly, which is illustrated in Figure 20.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is one of the six states $\pm x$, $\pm y$ and $\pm z$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b , i.e., x , y or z basis. And the measurement results would be K_b , which is also with size n .
6. Bob sends his measurement bases B_b to Alice through a public channel P .
7. Once receiving B_b , Alice sends her bases B_a to Bob through channel P , and Bob receives B_a .

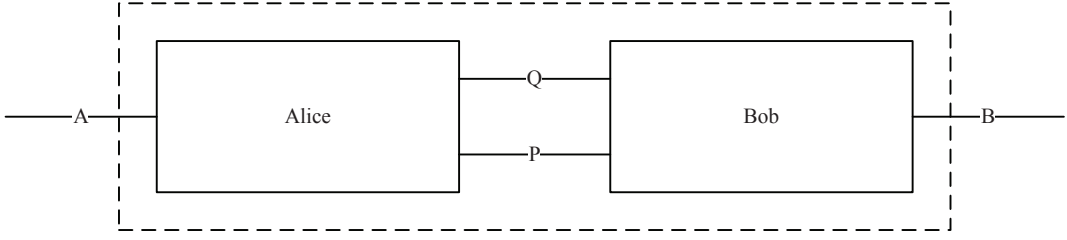


Figure 20: The SSP protocol.

8. Alice and Bob determine that at which position the bit strings B_a and B_b are equal, and they discard the mismatched bits of B_a and B_b . Then the remaining bits of K_a and K_b , denoted as K'_a and K'_b with $K_{a,b} = K'_a = K'_b$.

We re-introduce the basic SSP protocol in an abstract way with more technical details as Figure 20 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a] = \sum_{i=0}^{2n-1} Rand[q; B_a]_i$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a] = \sum_{i=0}^{2n-1} Rand[q; K_a]_i$, $Rand[q'; B_b] = \sum_{i=0}^{2n-1} Rand[q'; B_b]_i$. $M[q; K_b] = \sum_{i=0}^{2n-1} M[q; K_b]_i$ denotes the Bob's measurement operation of q . The generation of n qubits q through two unitary operators $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; B_a]_i \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_P(B_b) \cdot A_7 \\
A_7 &= send_P(B_a) \cdot A_8 \\
A_8 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B_b]_i \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= receive_P(B_a) \cdot B_5 \\
B_5 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_6 \\
B_6 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{\boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; B_a]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i, Set_{K_a}[q], H_{B_a}[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i, c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 6.9. *The basic SSP protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic SSP protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.10 Verification of S09 Protocol

The famous S09 protocol[38] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the S09 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

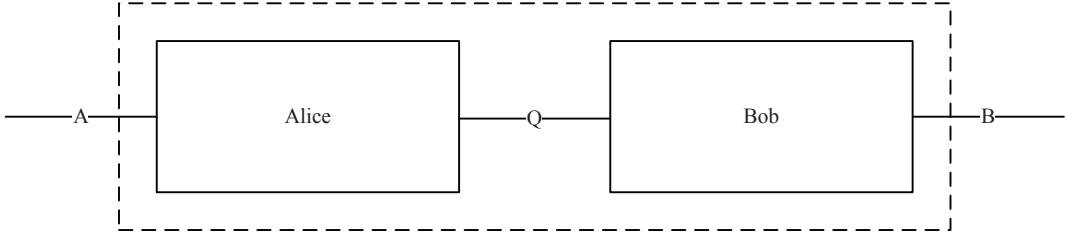


Figure 21: The S09 protocol.

The S09 protocol is used to create a private key between two parties, Alice and Bob, by use of pure quantum information. Firstly, we introduce the basic S09 protocol briefly, which is illustrated in Figure 21.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a .
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b . After the measurement, the state of q evolves into q' .
6. Bob sends q' to Alice through the quantum channel Q .
7. Alice measures each qubit of q' to generate a string C .
8. Alice sums $C_i \oplus B_{a_i}$ to get the private key $K_{a,b} = B_b$.

We re-introduce the basic S09 protocol in an abstract way with more technical details as Figure 21 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a] = \sum_{i=0}^{2^n-1} Rand[q; B_a]_i$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a] = \sum_{i=0}^{2^n-1} Rand[q; K_a]_i$, $Rand[q'; B_b] = \sum_{i=0}^{2^n-1} Rand[q'; B_b]_i$. $M[q; B_b] = \sum_{i=0}^{2^n-1} M[q; B_b]_i$ denotes the Bob's measurement operation of q , and the same as $M[q'; C] = \sum_{i=0}^{2^n-1} M[q'; C]_i$. The generation of n qubits q through two unitary operators $Set_{K_a}[q]$ and $H_{B_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$, and the same as $send_Q(q')$ and $receive_Q(q')$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, B_b)$. We omit the sum classical \oplus actions without of loss of generality. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; B_a]_i \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= receive_Q(q') \cdot A_7 \\
A_7 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q'; C]_i \cdot A_8 \\
A_8 &= cmp(K_{a,b}, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B_b]_i \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; B_b]_i \cdot B_3 \\
B_3 &= send_Q(q') \cdot B_4 \\
B_4 &= cmp(K_{a,b}, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_Q(q'), receive_Q(q')) &\triangleq c_Q(q')
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_Q(q'), receive_Q(q')\}$ and $I = \{\boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; B_a]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q; K_a]_i, Set_{K_a}[q], H_{B_a}[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; B_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; B_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} Rand[q'; C]_i, c_Q(q), c_Q(q'), cmp(K_{a,b}, B_b)\}$.

Then we get the following conclusion.

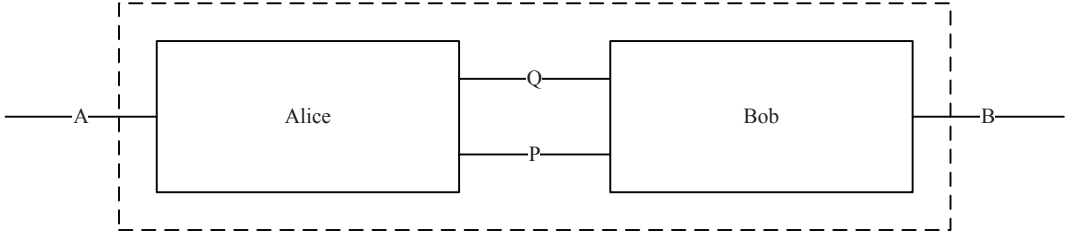


Figure 22: The KMB09 protocol.

Theorem 6.10. *The basic S09 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \bowtie B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \bowtie B)))$. So, the basic S09 protocol $\tau_I(\partial_H(\Theta(A \bowtie B)))$ exhibits desired external behaviors. \square

6.11 Verification of KMB09 Protocol

The famous KMB09 protocol[39] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the KMB09 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The KMB09 protocol is used to create a private key between two parties, Alice and Bob. KMB09 is a protocol of quantum key distribution (QKD) which refines the BB84 protocol against PNS (Photon Number Splitting) attacks. The main innovations are encoding bits in nonorthogonal states and the classical sifting procedure. Firstly, we introduce the basic KMB09 protocol briefly, which is illustrated in Figure 22.

1. Alice create a string of bits with size n randomly, denoted as K_a , and randomly assigns each bit value a random index $i = 1, 2, \dots, N$ into B_a .
2. Alice generates a string of qubits q with size n , accordingly either in $|e_i\rangle$ or $|f_i\rangle$.
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Alice sends B_a through a public channel P .
5. Bob measures each qubit of q by randomly switching the measurement basis between e and f . And he records the unambiguous discriminations into K_b , and the unambiguous discrimination information into B_b .
6. Bob sends B_b to Alice through the public channel P .
7. Alice and Bob determine that at which position the bit should be remained. Then the remaining bits of K_a and K_b is the private key $K_{a,b}$.

We re-introduce the basic KMB09 protocol in an abstract way with more technical details as Figure 22 illustrates.

Now, we assume a special measurement operation $Rand[q; K_a] = \sum_{i=0}^{2^n-1} Rand[q; K_a]_i$ which create a string of n random bits K_a from the q quantum system. $M[q; K_b] = \sum_{i=0}^{2^n-1} M[q; K_b]_i$

denotes the Bob's measurement operation of q . The generation of n qubits q through a unitary operator $Set_{K_a}[q]$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_2 \\
A_2 &= Set_{K_a}[q] \cdot A_3 \\
A_3 &= send_Q(q) \cdot A_4 \\
A_4 &= send_P(B_a) \cdot A_5 \\
A_5 &= receive_P(B_b) \cdot A_6 \\
A_6 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= receive_P(B_a) \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} M[q; K_b]_i \cdot B_3 \\
B_3 &= send_P(B_b) \cdot B_4 \\
B_4 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_5 \\
B_5 &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(send_Q(q), receive_Q(q)) &\triangleq c_Q(q) \\
\gamma(send_P(B_b), receive_P(B_b)) &\triangleq c_P(B_b) \\
\gamma(send_P(B_a), receive_P(B_a)) &\triangleq c_P(B_a)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{send_Q(q), receive_Q(q), send_P(B_b), receive_P(B_b), send_P(B_a), receive_P(B_a)\}$ and $I = \{\boxplus_{\frac{1}{2^n}, i=0}^{2n-1} Rand[q; K_a]_i, Set_{K_a}[q], \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} M[q; K_b]_i, c_Q(q), c_P(B_b), c_P(B_a), cmp(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 6.11. *The basic KMB09 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} receive_A(D_i) \parallel send_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic KMB09 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

6.12 Verification of S13 Protocol

The famous S13 protocol[40] is a quantum key distribution protocol, in which quantum information and classical information are mixed. We take an example of the S13 protocol to illustrate the usage of probabilistic quantum process algebra in verification of quantum protocols.

The S13 protocol is used to create a private key between two parties, Alice and Bob. Firstly, we introduce the basic S13 protocol briefly, which is illustrated in Figure 23.

1. Alice create two string of bits with size n randomly, denoted as B_a and K_a .
2. Alice generates a string of qubits q with size n , and the i th qubit in q is $|x_y\rangle$, where x is the i th bit of B_a and y is the i th bit of K_a .
3. Alice sends q to Bob through a quantum channel Q between Alice and Bob.
4. Bob receives q and randomly generates a string of bits B_b with size n .
5. Bob measures each qubit of q according to a basis by bits of B_b . And the measurement results would be K_b , which is also with size n .
6. Alice sends a random binary string C to Bob through the public channel P .
7. Alice sums $B_{a_i} \oplus C_i$ to obtain T and generates other random string of binary values J . From the elements occupying a concrete position, i , of the preceding strings, Alice get the new states of q' , and sends it to Bob through the quantum channel Q .
8. Bob sums $1 \oplus B_{b_i}$ to obtain the string of binary basis N and measures q' according to these bases, and generating D .
9. Alice sums $K_{a_i} \oplus J_i$ to obtain the binary string Y and sends it to Bob through the public channel P .
10. Bob encrypts B_b to obtain U and sends to Alice through the public channel P .

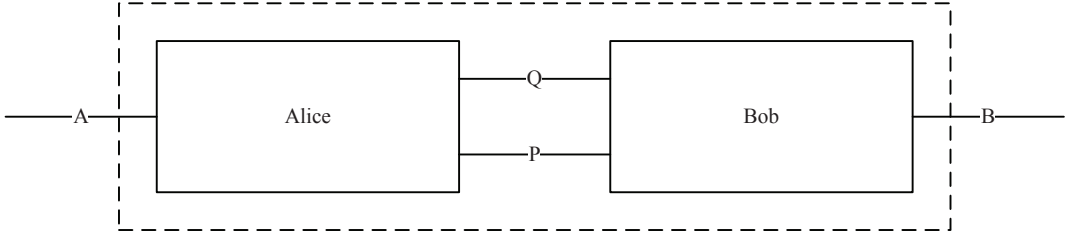


Figure 23: The S13 protocol.

11. Alice decrypts U to obtain B_b . She sums $B_{a_i} \oplus B_{b_i}$ to obtain L and sends L to Bob through the public channel P .
12. Bob sums $B_{b_i} \oplus L_i$ to get the private key $K_{a,b}$.

We re-introduce the basic S13 protocol in an abstract way with more technical details as Figure 23 illustrates.

Now, we assume a special measurement operation $Rand[q; B_a] = \sum_{i=0}^{2^n-1} Rand[q; B_a]_i$ which create a string of n random bits B_a from the q quantum system, and the same as $Rand[q; K_a] = \sum_{i=0}^{2^n-1} Rand[q; K_a]_i$, $Rand[q'; B_b] = \sum_{i=0}^{2^n-1} Rand[q'; B_b]_i$. $M[q; K_b] = \sum_{i=0}^{2^n-1} M[q; K_b]_i$ denotes the Bob's measurement operation of q , and the same as $M[q'; D] = \sum_{i=0}^{2^n-1} M[q'; D]_i$. The generation of n qubits q through two unitary operators $Set_{K_a}[q]$ and $H_{B_a}[q]$, and the same as $Set_T[q']$. Alice sends q to Bob through the quantum channel Q by quantum communicating action $send_Q(q)$ and Bob receives q through Q by quantum communicating action $receive_Q(q)$, and the same as $send_Q(q')$ and $receive_Q(q')$. Bob sends B_b to Alice through the public channel P by classical communicating action $send_P(B_b)$ and Alice receives B_b through channel P by classical communicating action $receive_P(B_b)$, and the same as $send_P(B_a)$ and $receive_P(B_a)$, $send_P(C)$ and $receive_P(C)$, $send_P(Y)$ and $receive_P(Y)$, $send_P(U)$ and $receive_P(U)$, $send_P(L)$ and $receive_P(L)$. Alice and Bob generate the private key $K_{a,b}$ by a classical comparison action $cmp(K_{a,b}, K_a, K_b, B_a, B_b)$. We omit the sum classical \oplus actions without of loss of generality. Let Alice and Bob be a system AB and let interactions between Alice and Bob be internal actions. AB receives external input D_i through channel A by communicating action $receive_A(D_i)$ and sends results D_o through channel B by communicating action $send_B(D_o)$.

Then the state transition of Alice can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
A &= \sum_{D_i \in \Delta_i} receive_A(D_i) \cdot A_1 \\
A_1 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} Rand[q; B_a]_i \cdot A_2 \\
A_2 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} Rand[q; K_a]_i \cdot A_3 \\
A_3 &= Set_{K_a}[q] \cdot A_4 \\
A_4 &= H_{B_a}[q] \cdot A_5 \\
A_5 &= send_Q(q) \cdot A_6 \\
A_6 &= send_P(C) \cdot A_7 \\
A_7 &= send_Q(q') \cdot A_8 \\
A_8 &= send_P(Y) \cdot A_9 \\
A_9 &= receive_P(U) \cdot A_{10} \\
A_{10} &= send_P(L) \cdot A_{11} \\
A_{11} &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot A
\end{aligned}$$

where Δ_i is the collection of the input data.

And the state transition of Bob can be described by probabilistic quantum process algebra as follows.

$$\begin{aligned}
B &= receive_Q(q) \cdot B_1 \\
B_1 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} Rand[q'; B_b]_i \cdot B_2 \\
B_2 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} M[q; K_b]_i \cdot B_3 \\
B_3 &= receive_P(C) \cdot B_4 \\
B_4 &= receive_Q(q') \cdot B_5 \\
B_5 &= \boxplus_{\frac{1}{2^n}, i=0}^{2n-1} M[q'; D]_i \cdot B_6 \\
B_6 &= receive_P(Y) \cdot B_7 \\
B_7 &= send_P(U) \cdot B_8 \\
B_8 &= receive_P(L) \cdot B_9 \\
B_9 &= cmp(K_{a,b}, K_a, K_b, B_a, B_b) \cdot B_{10} \\
B_{10} &= \sum_{D_o \in \Delta_o} send_B(D_o) \cdot B
\end{aligned}$$

where Δ_o is the collection of the output data.

The send action and receive action of the same data through the same channel can communicate each other, otherwise, a deadlock δ will be caused. We define the following communication functions.

$$\begin{aligned}
\gamma(\text{send}_Q(q), \text{receive}_Q(q)) &\triangleq c_Q(q) \\
\gamma(\text{send}_Q(q'), \text{receive}_Q(q')) &\triangleq c_Q(q') \\
\gamma(\text{send}_P(C), \text{receive}_P(C)) &\triangleq c_P(C) \\
\gamma(\text{send}_P(Y), \text{receive}_P(Y)) &\triangleq c_P(Y) \\
\gamma(\text{send}_P(U), \text{receive}_P(U)) &\triangleq c_P(U) \\
\gamma(\text{send}_P(L), \text{receive}_P(L)) &\triangleq c_P(L)
\end{aligned}$$

Let A and B in parallel, then the system AB can be represented by the following process term.

$$\tau_I(\partial_H(\Theta(A \parallel B)))$$

where $H = \{\text{send}_Q(q), \text{receive}_Q(q), \text{send}_Q(q'), \text{receive}_Q(q'), \text{send}_P(C), \text{receive}_P(C), \text{send}_P(Y), \text{receive}_P(Y), \text{send}_P(U), \text{receive}_P(U), \text{send}_P(L), \text{receive}_P(L)\}$

and $I = \{\boxplus_{\frac{1}{2n}, i=0}^{2n-1} \text{Rand}[q; B_a]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} \text{Rand}[q; K_a]_i, \text{Set}_{K_a}[q], H_{B_a}[q], \boxplus_{\frac{1}{2n}, i=0}^{2n-1} \text{Rand}[q'; B_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q; K_b]_i, \boxplus_{\frac{1}{2n}, i=0}^{2n-1} M[q'; D]_i, c_Q(q), c_P(C), c_Q(q'), c_P(Y), c_P(U), c_P(L), \text{cmp}(K_{a,b}, K_a, K_b, B_a, B_b)\}$.

Then we get the following conclusion.

Theorem 6.12. *The basic S13 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors.*

Proof. We can get $\tau_I(\partial_H(\Theta(A \parallel B))) = \sum_{D_i \in \Delta_i} \sum_{D_o \in \Delta_o} \text{receive}_A(D_i) \parallel \text{send}_B(D_o) \parallel \tau_I(\partial_H(\Theta(A \parallel B)))$. So, the basic S13 protocol $\tau_I(\partial_H(\Theta(A \parallel B)))$ exhibits desired external behaviors. \square

References

- [1] R. Milner. (1989). *Communication and concurrency*. Printice Hall.
- [2] R. Milner. (1980). *A calculus of communicating systems*. LNCS 92, Springer.
- [3] W. Fokkink. (2007). *Introduction to process algebra* 2nd ed. Springer-Verlag.
- [4] R. Milner, J. Parrow, and D. Walker. (1992). A Calculus of Mobile Processes, Part I. *Information and Computation*, 100(1):1-40.
- [5] R. Milner, J. Parrow, and D. Walker. (1992). A calculus of mobile processes, Part II. *Information and Computation*, 100(1):41-77.
- [6] Y. Wang. (2017). A calculus for true concurrency. Manuscript, arxiv: 1703.00159.
- [7] Y. Wang. (2016). Algebraic laws for true concurrency. Manuscript, arXiv: 1611.09035.
- [8] Y. Wang. (2017). A calculus of truly concurrent mobile processes. Manuscript, arXiv: 1704.07774.
- [9] Y. Wang. (2021). Probabilistic Process Algebra for True Concurrency. Manuscript, arXiv: 2107.08453.
- [10] S. Andova. (2002). Probabilistic process algebra. *Annals of Operations Research* 128(2002):204-219.
- [11] S. Andova, J. Baeten, T. Willemse. (2006). A Complete Axiomatisation of Branching Bisimulation for Probabilistic Systems with an Application in Protocol Verification. *International Conference on Concurrency Theory*. Springer Berlin Heidelberg.
- [12] S. Andova, S. Georgievska. (2009). On Compositionality, Efficiency, and Applicability of Abstraction in Probabilistic Systems. *Conference on Current Trends in Theory and Practice of Computer Science*. Springer-Verlag.
- [13] Y. Feng and R. Y. Duan and Z. F. Ji and M. S. Ying. (2007). Probabilistic bisimulations for quantum processes. *Information and Computation*, 205(2007): 1608–1639.
- [14] S. J. Gay and R. Nagarajan. (2005). Communicating quantum processes. *Proceedings of the 32nd ACM Symposium on Principles of Programming Languages*, Long Beach, California, USA, ACM Press, 2005: 145–157.
- [15] S. J. Gay and R. Nagarajan. (2006). Typechecking communicating quantum processes. *Mathematical Structures in Computer Science*, 2006, 16(2006): 375–406.
- [16] P. Jorrand and M. Lalire. (2005). Toward a quantum process algebra. *Proceedings of the 1st ACM Conference on Computing Frontiers*, Ischia, Italy, ACM Press, 2005: 111–119.
- [17] P. Jorrand and M. Lalire. (2005). From quantum physics to programming languages: a process algebraic approach. *Lecture Notes in Computer Science*, 2005, 3566(2005): 1–16.

- [18] M. Lalire. (2006). Relations among quantum processes: Bisimilarity and congruence. *Mathematical Structures in Computer Science*, 2006, 16(2006): 407–428.
- [19] M. Lalire and P. Jorrand. (2004). A process algebraic approach to concurrent and distributed quantum computation: operational semantics. *Proceedings of the 2nd International Workshop on Quantum Programming Languages*, TUCS General Publications, 2004: 109–126.
- [20] M. Ying and Y. Feng and R. Duan and Z. Ji. (2009). An algebra of quantum processes. *ACM Transactions on Computational Logic (TOCL)*, 2009, 10(3): 1–36.
- [21] Y. Feng and R. Duan and M. Ying. (2011). Bisimulations for quantum processes. *Proceedings of the 38th ACM Symposium on Principles of Programming Languages (POPL 11)*, ACM Press, 2011: 523–534.
- [22] Y. Deng and Y. Feng. (2012). Open bisimulation for quantum processes. Manuscript, <http://arxiv.org/abs/1201.0416>, 2012.
- [23] Y. Feng and Y. Deng and M. Ying. (2012). Symbolic bisimulation for quantum processes. Manuscript, <http://arxiv.org/pdf/1202.3484>, 2012.
- [24] M.A Nielsen and I. L Chuang. (2000). *Quantum Computation and Quantum Information*. Cambridge University Press, 2000.
- [25] R. Duncan. (2006). *Types for Quantum Computing*. Ph.D. Dissertation, Oxford University, 2006.
- [26] Y. Wang. (2016). Probabilistic Process Algebra to Unifying Quantum and Classical Computing in Closed Systems. *arXiv:1610.02500*.
- [27] Y. Wang. (2014). Entanglement in Quantum Process Algebra. *arXiv:1404.0665*.
- [28] Y. Wang. (2014). An Axiomatization for Quantum Processes to Unifying Quantum and Classical Computing. *arXiv:1311.2960*.
- [29] F. Moller. (1990). The importance of the left merge operator in process algebras. In M.S. Paterson, ed., *Proceedings 17th Colloquium on Automata, Languages and Programming (ICALP'90)*, Warwick, LNCS 443, 752–764. Springer.
- [30] C. H. Bennett and G. Brassard. (1984). Quantum cryptography: Public-key distribution and coin tossing. *Proceedings of the IEEE International Conference on Computer, Systems and Signal Processing*, 1984, 175–179.
- [31] A. K. Ekert. (1991). Quantum cryptography based on Bell’s theorem. *Phys. Rev. Lett.*, 1991, 67(6):661–663.
- [32] C. H. Bennett. (1992). Quantum cryptography using any two nonorthogonal states. *Phys. Rev. Lett.* 68 (21), 3121–3124.
- [33] K. Inoue, E. Woks and Y. Yamamoto. (2002). Differential phase shift quantum key distribution., *Phys. Rev. Lett.* 89 037902.

- [34] C. H. Bennett, G. Brassard, N. D. Mermin. (1992). Quantum cryptography without Bell's Theorem. *Phys. Rev. Lett.* 68 (5), 557–559.
- [35] V. Scarani, A. Acín, G. Ribordy, and N. Gisin. (2004). Quantum Cryptography Protocols Robust against Photon Number Splitting Attacks for Weak Laser Pulse Implementations. *Phys. Rev. Lett.* 92 (5), 057901-1–057901-4.
- [36] N. Gisin, G. Ribordy, H. Zbinden, et al. (2004). Towards practical and fast Quantum Cryptography. <http://arxiv.org/abs/quant-ph/0411022v1>.
- [37] H. Bechmann-Pasquinucci, N. Gisin. (1999). Incoherent and coherent eavesdropping in the six-state protocol of quantum cryptography. *Phys. Rev. A.* 59 (6), 4238–4248.
- [38] E. H. SERNA. (2009). Quantum Key Distribution Protocol With Private-Public Key. <http://arxiv.org/abs/0908.2146v4>.
- [39] M. M. Khan, M. Murphy, A. Beige. (2009). High error-rate quantum key distribution for long-distance communication. <http://arxiv.org/abs/0901.3909v4>.
- [40] E. H. SERNA. (2013). Quantum Key Distribution From A Random Seed. <http://arxiv.org/abs/1311.1582v2>.
- [41] C. H. Bennett, G. Brassard, C. Crepeau, R. Jozsa, A. Peres, and W. Wootters. (1993). Teleporting an unknown quantum state via dual classical and epr channels. *Physical Review Letters*, 70:1895–1899.