

# Parallelization of Sequential Quantum Channel Discrimination in the Non-Asymptotic Regime

Bjarne Bergh<sup>\*†</sup>   Nilanjana Datta<sup>\*</sup>   Robert Salzmann<sup>\*</sup>   Mark M. Wilde<sup>‡§</sup>

June 17, 2022

We investigate the performance of parallel and sequential quantum channel discrimination strategies for a finite number of channel uses. It has recently been shown that, in the asymmetric setting with asymptotically vanishing type I error probability, sequential strategies are asymptotically not more powerful than parallel ones. We extend this result to the non-asymptotic regime with finitely many channel uses, by explicitly constructing a parallel strategy for any given sequential strategy, and bounding the difference in their performances, measured in terms of the decay rate of the type II error probability per channel use.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Preliminaries, Notation, and Previous Results</b>	<b>3</b>
2.1	Notation . . . . .	3
2.2	Quantum Information Measures . . . . .	4
2.3	Quantum State Discrimination . . . . .	5
2.4	Quantum Channel Discrimination . . . . .	6
<b>3</b>	<b>Parallelizing an <math>n</math>-Shot Sequential Protocol</b>	<b>7</b>
3.1	A Simple One-Shot Version of the Chain Rule . . . . .	10
3.2	Non-Asymptotic Bounds for the Smooth Max-Relative Entropy . . . . .	12
3.3	Proof of our main result (Theorem 6) . . . . .	13
<b>4</b>	<b>A Simple Example</b>	<b>16</b>
<b>5</b>	<b>Discussion and Outlook</b>	<b>19</b>
<b>6</b>	<b>References</b>	<b>20</b>
<b>A</b>	<b>Proofs of AEP Bounds</b>	<b>24</b>
A.1	Proof of Lemma 9 (Petz–Rényi Continuity Bound in $\alpha$ ) . . . . .	24
A.2	Proof of Lemma 11 (AEP Convergence Bound) . . . . .	25

<sup>\*</sup>Department of Applied Mathematics and Theoretical Physics, University of Cambridge, United Kingdom

<sup>†</sup>Corresponding author: bb536@cam.ac.uk

<sup>‡</sup>Hearne Institute for Theoretical Physics, Department of Physics and Astronomy, and Center for Computation and Technology, Louisiana State University, Baton Rouge, Louisiana 70803, USA

<sup>§</sup>School of Electrical and Computer Engineering, Cornell University, Ithaca, New York 14850, USA

# 1 Introduction

Binary quantum state discrimination is one of the oldest and most studied tasks in quantum information theory [Hel69, Hol72]. The task involves determining the state of a quantum system, given the side information that it is in one of two possible states. This is done by performing suitable measurements on the state. This task has been studied in both the  $n$ -shot regime, in which a finite number ( $n$ ) of identical copies of the unknown state are available, and in the asymptotic limit in which one assumes that an infinite number of copies are available (i.e.  $n \rightarrow \infty$ ). The task of binary state discrimination, which can be viewed as that of binary hypothesis testing for quantum states, is a fundamental primitive of quantum information theory since many other information processing tasks can be reduced to it. Known results for this problem now include optimal decision strategies and the behavior of the error probabilities of misidentification in both these finite and asymptotic regimes [Hel69, Kho79, HP91, ON00, Nag06, Aud<sup>+</sup>07, Hay07, Aud<sup>+</sup>08, NS09, AMV12, BK15]. There are generally two possible errors that can be incurred: the system is inferred to be in the second state when it is actually in the first (*type I error*) or vice versa (*type II error*). There are two different settings in which the state discrimination task is usually studied: in the *symmetric setting*, the probabilities of these two errors are treated on an equal footing, while in the *asymmetric setting*, one minimizes the probability of type II error under the constraint that the type I error is below a given threshold.

Similar in nature, but a lot less understood, is the task of binary quantum channel discrimination: given an unknown quantum channel as a black box and the side information that it is one of two possible channels, the task is to determine the channel's identity [CDP08, DFY09, Hay09, Har<sup>+</sup>10]. The additional complexity here comes from the fact that, on top of finding the best measurement to perform on the output of the channel, we also have to figure out which quantum states to send as input to the channel. Say we are given access to  $n$  copies of the channel (i.e. we are given  $n$  identical black boxes, each of which can be used once); then there are different strategies (sometimes also called protocols) in which we could set up our decision experiment – the so-called *parallel* and *sequential (or adaptive)* strategies. In a parallel strategy one prepares a joint state, usually entangled between the input systems of all the  $n$  copies of the channel and an additional reference (or memory) system. This state is then fed as input to all the  $n$  channels at once (with the state of the reference system being left undisturbed). Finally, a binary positive operator-valued measure (POVM) is performed on the joint state at the output of the channels and the reference system in order to arrive at a decision for the channel's identity. In a sequential strategy, on the other hand, one prepares a state of the input system of a single copy of the channel (again usually entangled with a reference system) which is fed into the first copy of the channel, with the state of the reference system being left undisturbed. The input to the next use of the channel is then chosen depending on the output of the first channel and the state of our reference system. This is done, most generally, by subjecting the latter to an arbitrary quantum operation (or channel), which we call a preparation operation. This step is repeated for each successive use of the channel until all the  $n$  black-boxes have been used. Then a binary POVM is performed on the joint state of the output of the last use of the channel and the reference system. See Figure 1 for a depiction of an adaptive or sequential strategy.

One particularly interesting question is whether and to what degree sequential (or adaptive) strategies give an advantage over parallel ones. Note that any parallel strategy can be written as a sequential strategy by taking all but one channel input as part of the reference system, and then choosing each preparation operation such that it extracts the next part of the joint input state for the next channel use and replaces it by the output of the previous channel use. However, the converse is not true, and so sequential strategies are more general. Parallel strategies are conceptually a lot simpler than sequential ones – aside from the measurement, everything is specified just by the joint input state – in contrast to sequential strategies, in which after each channel use we can perform an arbitrary quantum operation to prepare the input to the next use of the channel. It is thus interesting to determine to what degree parallel strategies can still be optimal. It is known that in certain cases sequential strategies can give an advantage over parallel ones. In [Har<sup>+</sup>10] the authors constructed

an example in which a sequential strategy with only two channel uses could be used to discriminate the channels with certainty, which is not possible with a parallel strategy, even if arbitrarily many channel uses are allowed.

Interestingly, *asymptotically*, there are multiple known cases in which sequential strategies give no advantage over parallel ones, i.e. the optimal exponential decay rate of the error probability per channel use is the same in the asymptotic limit. For example, this is the case both in the symmetric and asymmetric settings when the channels are classical [Hay09] or classical-quantum [Wil+20, SHW21]. For arbitrary quantum channels, the recently shown chain rule for the quantum relative entropy [Fan+20] and the characterization of asymmetric channel discrimination in terms of amortized relative entropy [Wil+20, WW19b], also implies that in the asymmetric setting, in the asymptotic limit where we also require the type I error to vanish, sequential strategies give no advantage over parallel ones (i.e. the optimal asymptotic exponential decay rate of the type II error per channel use is the same for parallel and sequential strategies; see section 2 below for more details). This is in contrast to the symmetric setting in which the example of [SHW21] shows that there always is an advantage of sequential strategies, also in the asymptotic limit.

In this paper, our aim is to move from these purely asymptotic results to statements comparing sequential and parallel strategies for finite  $n$ . In our main result (Corollary 4 and Theorem 6) we relate the type I and type II errors of an arbitrary sequential strategy with those of a suitably chosen parallel strategy. Specifically, given a sequential strategy with  $n$  channel uses, we construct a parallel strategy with  $m$  channel uses (where  $m$  can be chosen at will), such that for arbitrary fixed type I errors of the two strategies, we find an explicit bound on the difference between their type II error decay rates. This difference goes to zero in a suitably chosen asymptotic limit  $m, n \rightarrow \infty$  if also the type I error vanishes, hence also implying the known asymptotic equivalence in the asymmetric case. Our result answers the following interesting question which is of practical relevance: *Given a sequential strategy involving  $n$  uses of the channel, if one instead employs a parallel strategy with  $m$  channel uses, how much worse are the errors going to be?*

On the way to proving our main theorem, we also prove the following two technical results: First, a slightly refined bound on the difference between the Petz–Rényi relative entropy  $D_\alpha$  and the Umegaki relative entropy  $D$  (Lemma 9), and secondly, a bound on the convergence speed in the asymptotic equipartition property of the smoothed max-relative entropy (Lemma 11), which turns out to be better suited to our application than previous results (see Remark 12 and Remark 13 for a detailed explanation of the differences).

We start by introducing all of the required notation and previous results in Section 2. Then we state and prove our main theorem (Theorem 6) in Section 3. Section 4 illustrates our result with a simple example.

## 2 Preliminaries, Notation, and Previous Results

### 2.1 Notation

We write  $\mathcal{H}$  for a complex finite-dimensional Hilbert space, and  $\mathcal{B}(\mathcal{H})$  for the set of linear operators acting on  $\mathcal{H}$ . We write  $\mathcal{P}(\mathcal{H})$  for the set of positive semi-definite operators acting on  $\mathcal{H}$ . For  $A, B \in \mathcal{P}(\mathcal{H})$  we further write  $A \ll B$  if  $\text{supp}(A) \subseteq \text{supp}(B)$  and  $A \not\ll B$  if  $\text{supp}(A) \not\subseteq \text{supp}(B)$ . Let  $\mathcal{D}(\mathcal{H})$  denote the set of density matrices, i.e., the set of positive semi-definite operators with trace one. A quantum channel (in this paper usually denoted as  $\mathcal{E}$  or  $\mathcal{F}$ ) is a completely positive trace preserving map between density operators. We will label different quantum systems by capital Roman letters ( $A, B, C$ , etc.) and often use these letters interchangeably with the corresponding Hilbert space or set of density matrices (i.e., we write  $\rho \in \mathcal{D}(A)$  instead of  $\rho \in \mathcal{D}(\mathcal{H}_A)$  and  $\mathcal{E} : A \rightarrow B$  instead of  $\mathcal{E} : \mathcal{D}(\mathcal{H}_A) \rightarrow \mathcal{D}(\mathcal{H}_B)$ ). We write  $\log$  for the logarithm to the base two.

## 2.2 Quantum Information Measures

For  $\rho \in \mathcal{D}(\mathcal{H})$  and  $\sigma \in \mathcal{P}(\mathcal{H})$  the (Umegaki) quantum relative entropy is defined as [Ume62]

$$D(\rho\|\sigma) := \text{Tr}(\rho(\log \rho - \log \sigma)), \quad (1)$$

if  $\rho \ll \sigma$  and  $D(\rho\|\sigma) := \infty$  if  $\rho \not\ll \sigma$ . One of its most important properties is the data-processing inequality [Lin75], which states that for every quantum channel  $\mathcal{E}$ :

$$D(\rho\|\sigma) \geq D(\mathcal{E}(\rho)\|\mathcal{E}(\sigma)). \quad (2)$$

A self-contained proof can be found e.g. in [KW20]. More generally, we call a function of  $\rho$  and  $\sigma$  a divergence if it satisfies the data-processing inequality.

Below we also make use of the binary entropy, which is the Shannon entropy of a classical random variable that takes two possible values. It is uniquely specified by the probability  $p \in [0, 1]$  of one of the values and is given by

$$h(p) := -p \log p - (1-p) \log(1-p). \quad (3)$$

It satisfies

$$0 \leq h(p) \leq 1 \quad \forall p \in [0, 1]. \quad (4)$$

### 2.2.1 Fidelity and Sine Distance

For two quantum states  $\rho, \sigma \in \mathcal{D}(\mathcal{H})$ , we define the fidelity as [Uhl76]

$$F(\rho, \sigma) := \text{Tr} \left( \sqrt{\sqrt{\sigma} \rho \sqrt{\sigma}} \right). \quad (5)$$

Note that this is sometimes also called the square root fidelity due to different conventions on whether to include a square or not. We define the sine distance as [Ras02, Ras03, GLN05, Ras06]

$$P(\rho, \sigma) := \sqrt{1 - F(\rho, \sigma)^2}, \quad (6)$$

which satisfies the properties of a metric (especially the triangle inequality) and also the data-processing inequality (see, e.g., [KW20]). This quantity is also known as the purified distance.

### 2.2.2 (Smoothed) Max-Divergence

For  $\rho \in \mathcal{D}(\mathcal{H})$  and  $\sigma \in \mathcal{P}(\mathcal{H})$ , define the quantum max-divergence (or the max-relative entropy) as [Dat09]

$$D_{\max}(\rho\|\sigma) := \log \inf \{ \lambda \in \mathbb{R} \mid \rho \leq \lambda \sigma \}. \quad (7)$$

The quantum max-divergence also satisfies the data-processing inequality [Dat09]. Let

$$B_{\varepsilon}^{\circ}(\rho) := \{ \tilde{\rho} \in \mathcal{D}(\mathcal{H}) \mid P(\rho, \tilde{\rho}) \leq \varepsilon \} \quad (8)$$

be the  $\varepsilon$ -ball of *normalized* states around  $\rho$  in sine distance. Then, we define the smoothed max-divergence as [Dat09]

$$D_{\max}^{\varepsilon}(\rho\|\sigma) := D_{\max}^{\varepsilon, \circ}(\rho\|\sigma) = \inf_{\tilde{\rho} \in B_{\varepsilon}^{\circ}(\rho)} D_{\max}(\tilde{\rho}\|\sigma). \quad (9)$$

Note that this is sometimes defined differently in the literature, where one allows the infimum to also include sub-normalized states.

### 2.2.3 Rényi Divergences

Let  $\rho \in \mathcal{D}(\mathcal{H})$  and  $\sigma \in \mathcal{P}(\mathcal{H})$  be two operators such that  $\rho \ll \sigma$ . The definitions below can sometimes also be extended with finite values to the case where  $\rho \not\ll \sigma$  (see the references below or also [KW20]), however this is not going to be relevant for our work. For every  $\alpha \in [0, 1) \cup (1, 2]$  define the *Petz-Rényi divergence* as [Pet86]:

$$D_\alpha(\rho\|\sigma) := \frac{1}{\alpha - 1} \log \text{Tr}(\rho^\alpha \sigma^{1-\alpha}). \quad (10)$$

Similarly, for every  $\alpha \in (0, 1) \cup (1, 2]$  define the *geometric Rényi divergence* as [Mat13]:

$$\widehat{D}_\alpha(\rho\|\sigma) := \frac{1}{\alpha - 1} \log \text{Tr}\left(\sigma^{\frac{1}{2}}(\sigma^{-\frac{1}{2}}\rho\sigma^{-\frac{1}{2}})^\alpha\sigma^{\frac{1}{2}}\right). \quad (11)$$

It was shown in [Mat13] that the geometric Rényi divergence is the largest Rényi divergence for every  $\alpha \in (0, 1) \cup (1, 2]$ , and so

$$D_\alpha(\rho\|\sigma) \leq \widehat{D}_\alpha(\rho\|\sigma). \quad (12)$$

### 2.2.4 Channel Divergences

For every given divergence  $\mathbf{D}$  for states, one can define an associated channel divergence [Led+18] by performing a (stabilized) maximization over all input states, i.e. with  $\mathcal{E}, \mathcal{F} : A \rightarrow B$  being quantum channels

$$\mathbf{D}(\mathcal{E}\|\mathcal{F}) := \sup_{\rho_{RA} \in \mathcal{D}(R \otimes A)} \mathbf{D}((\text{id}_R \otimes \mathcal{E})(\rho) \| (\text{id}_R \otimes \mathcal{F})(\rho)). \quad (13)$$

Since  $\mathbf{D}$  satisfies the data-processing inequality by definition, the supremum can be restricted to pure states such that the reference system  $R$  is isomorphic to the channel input system  $A$ .

Specifically relevant later will be the max channel divergence, which has the following simple representation (see [Dia+18, Definition 19] and [Wil+20, Lemma 12]):

$$D_{\max}(\mathcal{E}\|\mathcal{F}) := \sup_{\psi_{RA}} D_{\max}((\text{id}_R \otimes \mathcal{E})(\psi) \| (\text{id}_R \otimes \mathcal{F})(\psi)) = D_{\max}((\text{id}_R \otimes \mathcal{E})(\Phi) \| (\text{id}_R \otimes \mathcal{F})(\Phi)), \quad (14)$$

where  $R \simeq A$  and  $\Phi = \Phi_{RA}$  is a maximally entangled state. Hence, the max channel divergence is easily computable as a semidefinite program (SDP).

## 2.3 Quantum State Discrimination

In binary quantum state discrimination, a quantum system with Hilbert space  $\mathcal{H}$ , is prepared in one of two states  $\rho$  or  $\sigma$ , and the objective is to perform a binary POVM  $\{\Pi, \mathbb{1} - \Pi\}$  (where  $\mathbb{1}$  denotes the identity operator acting on  $\mathcal{H}$  and  $\Pi \in \mathcal{B}(\mathcal{H})$  satisfying  $0 \leq \Pi \leq \mathbb{1}$ ) in order to guess which state was prepared (see [BK15] for a review). Performing this measurement comes with the possibility of making an error of mis-identification. Generally one defines the type I and type II error probabilities, respectively, as

$$\alpha(\Pi, \rho, \sigma) := \text{Tr}((\mathbb{1} - \Pi)\rho), \quad (15)$$

$$\beta(\Pi, \rho, \sigma) := \text{Tr}(\Pi\sigma). \quad (16)$$

In the rest of the paper, we refer to the above simply as the type I and type II errors. It is easy to see from the definition that different choices of  $\Pi$  lead to different trade-offs between the type I and type II errors.

In the asymmetric setting, we are interested in finding the optimal type II error while keeping the type I error below a threshold (usually denoted as  $\varepsilon$ ). This optimal type II error is then given as

$$\beta_\varepsilon(\rho\|\sigma) := \min_{\substack{0 \leq \Pi \leq \mathbb{1} \\ \text{Tr}(\Pi\rho) \geq 1-\varepsilon}} \text{Tr}(\Pi\sigma). \quad (17)$$

The negative logarithm of this optimal type II error is called the hypothesis testing relative entropy [BD10, BD11, WR12]:

$$D_H^\varepsilon(\rho\|\sigma) := -\log \beta_\varepsilon(\rho\|\sigma). \quad (18)$$

It is also known as the smooth min-relative entropy [AJW19, WW19a]. The hypothesis testing relative entropy satisfies the data-processing inequality [WR12] and can be related to other entropic quantities. We will make use of the following known relations:

**Lemma 1** (Upper bound on  $D_H^\varepsilon$  [WR12]). *Let  $\rho, \sigma \in \mathcal{D}(\mathcal{H})$  be quantum states. Then for all  $\varepsilon \in [0, 1)$*

$$D_H^\varepsilon(\rho\|\sigma) \leq \frac{1}{1-\varepsilon} (D(\rho\|\sigma) + h(\varepsilon)), \quad (19)$$

where  $h(\varepsilon)$  is the binary entropy function.

**Lemma 2** (Relation to smoothed max-divergence [Ans<sup>+</sup>19, Theorem 4]). *Let  $\rho \in \mathcal{D}(\mathcal{H})$  and  $\sigma \in \mathcal{P}(\mathcal{H})$ . Then, for  $\varepsilon \in (0, 1)$  and  $\delta \in (0, 1 - \varepsilon^2)$ :*

$$D_H^{1-\varepsilon^2-\delta}(\rho\|\sigma) - \log\left(\frac{4(1-\varepsilon^2)}{\delta^2}\right) \leq D_{\max}^\varepsilon(\rho\|\sigma) \leq D_H^{1-\varepsilon^2}(\rho\|\sigma) - \log(1-\varepsilon^2). \quad (20)$$

**Remark 3.** Note that [Ans<sup>+</sup>19] defines the smoothed max-divergence using sub-normalized smoothing; however, the proof of this lemma goes through also when restricting to normalized states. Note also that the arXiv version of [Ans<sup>+</sup>19] has a typo in the admissible range of  $\delta$ , which is corrected in the published version.

## 2.4 Quantum Channel Discrimination

Let  $\mathcal{E}$  and  $\mathcal{F}$  be two quantum channels, each taking system  $A$  to system  $B$ . In the discrimination setting we will generally use inputs to the channels that are entangled with a reference system. To simplify notation we will usually *not* make the identity channel on the reference system explicit. Hence, if  $\rho_{RA} \in \mathcal{D}(R \otimes A)$  is a state, we will write

$$\mathcal{E}(\rho) := \mathcal{E}_{A \rightarrow B}(\rho_{RA}) = (\text{id}_R \otimes \mathcal{E}_{A \rightarrow B})(\rho_{RA}), \quad (21)$$

and similarly also for  $\mathcal{F}$ .

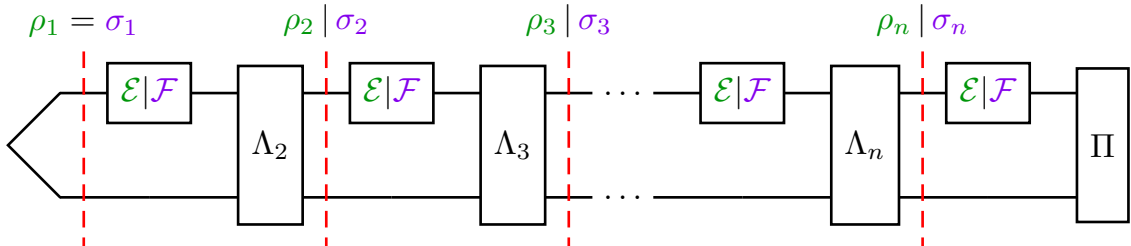


Figure 1: Illustration of a general sequential protocol with  $n$  uses of the black-box channel. The top row makes use of the given blackbox  $\mathcal{E}|\mathcal{F}$ , which is either  $\mathcal{E}$  or  $\mathcal{F}$ , while the bottom row depicts the memory system  $R$ . At various stages in the protocol, the green states  $\rho$  occur if the channel is  $\mathcal{E}$  and the purple states  $\sigma$  occur if the channel is  $\mathcal{F}$ .

The most general channel discrimination protocol will choose input states based on the outputs of previous channel uses. This is called a sequential protocol. A general sequential channel discrimination protocol with  $n$  uses of the black-box channel ( $\mathcal{E}$  or  $\mathcal{F}$ ), can be fully specified by an initial state  $\rho_1 = \sigma_1 \in \mathcal{D}(R \otimes A)$ , a set of  $n - 1$  CPTP maps  $\Lambda_i : R \otimes B \rightarrow R \otimes A$ , that transform the state

before it is fed into the next black-box channel, and a final binary POVM  $\{\Pi, \mathbb{1} - \Pi\}$  on  $R \otimes B$ . We will assume the size of reference system  $R$  to be fixed and identical throughout the protocol (this is without loss of generality). The protocol consists of alternating applications of the black-box channel and the preparation CPTP maps  $\Lambda_i$  (see [Figure 1](#)). We define:

$$\rho_i := \Lambda_i(\mathcal{E}(\rho_{i-1})), \quad \sigma_i := \Lambda_i(\mathcal{F}(\sigma_{i-1})), \quad \text{for } i \in \{2, \dots, n\}, \quad (22)$$

and so the final state before the action of the POVM will be  $\mathcal{E}(\rho_n)$  if the channel is  $\mathcal{E}$  and  $\mathcal{F}(\sigma_n)$  if the channel is  $\mathcal{F}$ . The distinguishability of the channels then comes down to the distinguishability of the two states  $\mathcal{E}(\rho_n)$  and  $\mathcal{F}(\sigma_n)$ . We will be focussing again on the asymmetric setting, with the main object of study being the hypothesis testing relative entropy  $D_H^\varepsilon(\mathcal{E}(\rho_n) \parallel \mathcal{F}(\sigma_n))$ . We write the optimal sequential type II error rate for a given finite number of channel uses  $n$  as [\[CMW16\]](#)

$$\sup_{\rho_1, \{\Lambda_i\}_i} \frac{1}{n} D_H^\varepsilon(\mathcal{E}(\rho_n) \parallel \mathcal{F}(\sigma_n)) \quad (23)$$

where the supremum is over every initial input state  $\rho_1 = \sigma_1$  and all subsequent input preparation CPTP maps  $\{\Lambda_i\}_{i=2}^n$ . It was shown in [\[KW21, Prop. 3\]](#) that this is computable as a semi-definite program.

### 2.4.1 Asymptotic Equivalence of Sequential and Parallel Strategies

It has been shown recently [\[Wil+20, WW19b\]](#) that asymptotically, when the number of channel uses goes to infinity, the best exponential decay rate of the type II error (per channel use) such that the type I error still goes to zero is given by the amortized Umegaki channel divergence, i.e.

$$\lim_{\varepsilon \rightarrow 0} \lim_{n \rightarrow \infty} \sup_{\rho_1, \{\Lambda_i\}_i} \frac{1}{n} D_H^\varepsilon(\mathcal{E}(\rho_n) \parallel \mathcal{F}(\sigma_n)) = D^A(\mathcal{E} \parallel \mathcal{F}) \quad (24)$$

where

$$D^A(\mathcal{E} \parallel \mathcal{F}) := \sup_{\rho, \sigma \in \mathcal{D}(R \otimes A)} [D(\mathcal{E}(\rho) \parallel \mathcal{F}(\sigma)) - D(\rho \parallel \sigma)]. \quad (25)$$

Note that the dimension of the reference system  $R$  in this last supremum can be arbitrarily large.

The chain rule from [\[Fan+20\]](#) states that this amortized divergence is in fact equal to the regularized channel divergence, i.e.

$$D^A(\mathcal{E} \parallel \mathcal{F}) = D^{\text{reg}}(\mathcal{E} \parallel \mathcal{F}) := \lim_{n \rightarrow \infty} \frac{1}{n} \sup_{\nu \in \mathcal{D}(R^{\otimes n} \otimes A^{\otimes n})} D(\mathcal{E}^{\otimes n}(\nu) \parallel \mathcal{F}^{\otimes n}(\nu)), \quad (26)$$

the latter of which can be achieved by parallel protocols, as a consequence of [\[WW19b, Theorem 3\]](#). Note that the reference system  $R$  in the latter optimization can be chosen isomorphic to  $A$ . Hence, asymptotically (and in the regime in which the type I error goes to zero) sequential strategies offer no advantage over parallel ones. We provide a finite  $n$  version of this statement, by giving explicit bounds on how much the error probabilities of sequential and parallel strategies can differ for a finite number of channel uses.

## 3 Parallelizing an $n$ -Shot Sequential Protocol

We state our main result in two forms, first in a simple manner that illustrates the main idea and structure of the result, and secondly a more detailed theorem that gives the best possible bound and states in detail what one can choose as a parallel input state.

Remember that there is a tradeoff in minimizing the type I and type II errors. In the context of a strategy, for a given type I error  $\alpha$  we will write the best achievable type II error as  $\beta(\alpha)$ . We are

especially interested in the exponential decay rate of the type II error with the number of channel uses, i.e. if some strategy involving  $n$  uses of the channel has type II error  $\beta(\alpha)$ , we are interested in the quantity  $-\frac{1}{n} \log(\beta(\alpha))$ . Our main result compares this error decay rate per channel use between sequential and parallel strategies:

**Corollary 4** (Main result, simple version). *Let  $\mathcal{E}, \mathcal{F} : A \rightarrow B$  be two quantum channels such that  $D_{\max}(\mathcal{E} \parallel \mathcal{F}) < \infty$ . Let there be a sequential discrimination protocol with  $n$  channel uses, that – for an arbitrary type I error  $\alpha_S$  – achieves type II error  $\beta_S(\alpha_S)$ . Then, there exists a parallel protocol with  $m$  channel uses and with a type II error function  $\beta_P(\alpha_P)$  such that for all  $\alpha_S$  and  $\alpha_P$  the type II error rates per channel use obey the following relation:*

$$-\frac{1}{m} \log(\beta_P(\alpha_P)) \geq -\frac{1-\alpha_S}{n} \log(\beta_S(\alpha_S)) - \frac{Cn}{\sqrt{m}} \log\left(\frac{8}{\alpha_P}\right) - \frac{1}{n}. \quad (27)$$

That is, the type II error rate of the parallel protocol is essentially as least as good as the sequential one modulo an additional error term, which decays as  $m \rightarrow \infty$ . We have

$$C := 7 \log\left(2^{D_2(\mathcal{E} \parallel \mathcal{F})} + 2\right) \leq 7 \log\left(2^{D_{\max}(\mathcal{E} \parallel \mathcal{F})} + 2\right). \quad (28)$$

**Remark 5.** If we take the limit  $m \rightarrow \infty$  in (27), then  $n \rightarrow \infty$ , and finally  $\alpha_S \rightarrow 0$  and  $\alpha_P \rightarrow 0$  (note that of course the state  $\nu$  will change with  $n, m, \alpha_S$  and  $\alpha_P$ ), we find that asymptotically the parallel strategy has better or at least equal type II error decay than the sequential one, and hence our result also implies the known result that, asymptotically (and with  $\alpha \rightarrow 0$ ), sequential strategies offer no advantage over parallel ones.

The following is the more refined version of our result, with a tighter bound and a description of the parallel input state:

**Theorem 6** (Main result, technical version). *Let  $\mathcal{E}, \mathcal{F} : A \rightarrow B$  be quantum channels such that  $D_{\max}(\mathcal{E} \parallel \mathcal{F}) < \infty$ . Given any sequential protocol with  $n$  channel uses and associated states  $\rho_i, \sigma_i \in \mathcal{D}(R_S \otimes A)$ ,  $i = 1, \dots, n$  (see above for the definition of this notation), define  $\ell \in \{1, \dots, n\}$  as the step in the protocol where the distinguishability increases the most, i.e.*

$$\ell := \arg \max_{k=1, \dots, n} \left[ D(\mathcal{E}(\rho_k) \parallel \mathcal{F}(\sigma_k)) - D(\rho_k \parallel \sigma_k) \right]. \quad (29)$$

Then, for all  $\alpha_P \in (0, 1]$ ,  $\alpha_S \in [0, 1]$ , and  $m \in \mathbb{N}$ , there exists a state  $\nu \in \mathcal{D}(R^{\otimes m} \otimes A^{\otimes m})$  such that

$$\begin{aligned} \frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu) \parallel \mathcal{F}^{\otimes m}(\nu)) &\geq \frac{1-\alpha_S}{n} D_H^{\alpha_S}(\mathcal{E}(\rho_n) \parallel \mathcal{F}(\sigma_n)) - \frac{c'_\ell}{\sqrt{m}} \left[ \log\left(\frac{4}{\alpha_P}\right) + K \right] \\ &\quad - \frac{1}{m} \left[ \log\left(\frac{1}{\alpha_P}\right) - \log\left(1 - \frac{\alpha_P}{4}\right) \right] - \frac{h(\alpha_S)}{n}. \end{aligned} \quad (30)$$

where

$$K := \frac{\ln(2) \log^2(3)}{8} \cosh\left(\frac{\log(3)}{2}\right) \leq 0.29 \quad (31)$$

and  $c'_\ell$  depends on the pair of channels  $\mathcal{E}, \mathcal{F}$  and can be bounded as follows

$$c'_\ell := \frac{4}{\log(3)} \inf_{\gamma_1, \gamma_2 \in (0, 1]} [c_{\gamma_1}(\mathcal{E}(\rho_\ell) \parallel \mathcal{F}(\sigma_\ell)) + c_{\gamma_2}(\rho_\ell \parallel \sigma_\ell)] \quad (32)$$

$$\leq \frac{8\ell}{\log(3)} \inf_{\gamma \in (0, 1]} \widehat{c}_\gamma(\mathcal{E} \parallel \mathcal{F}) \quad (33)$$

$$\leq \frac{8n}{\log(3)} \inf_{\gamma \in (0, 1]} \widehat{c}_\gamma(\mathcal{E} \parallel \mathcal{F}). \quad (34)$$



where

$$c_\gamma(\rho\|\sigma) := \frac{1}{\gamma} \log\left(2^{\gamma D_{1+\gamma}(\rho\|\sigma)} + 2^{-\gamma D_{1-\gamma}(\rho\|\sigma)} + 1\right), \quad (35)$$

$$\hat{c}_\gamma(\mathcal{E}\|\mathcal{F}) := \frac{1}{\gamma} \log\left(2^{\gamma \hat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F})} + 2\right). \quad (36)$$

Moreover, if

$$m \geq \log\left(\frac{4}{\alpha_P}\right) \left(\frac{4}{\log(3)\sqrt{2\ln(2)}}\right)^2 \quad (37)$$

then we have the following tighter bound

$$\begin{aligned} \frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) &\geq \frac{1-\alpha_S}{n} D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) - \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{4}{\alpha_P}\right)} \\ &\quad - \frac{1}{m} \left[ \log\left(\frac{1}{\alpha_P}\right) - \log\left(1 - \frac{\alpha_P}{4}\right) \right] - \frac{h(\alpha_S)}{n}. \end{aligned} \quad (38)$$

where  $c_\ell$  is defined in a similar way as  $c'_\ell$  but with different numerical constants  $K_1$  and  $K_2$ :

$$K_1 := 2\sqrt{2\ln(2) \cosh\left(\frac{\log(3)}{2}\right)} \leq 2.72 \quad K_2 := 2\sqrt{2\ln(2)} \leq 2.36. \quad (39)$$

$$c_\ell := \inf_{\gamma_1, \gamma_2 \in (0,1]} [K_1 c_{\gamma_1}(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) + K_2 c_{\gamma_2}(\rho_\ell\|\sigma_\ell)] \quad (40)$$

$$\leq \ell(K_1 + K_2) \inf_{\gamma \in (0,1]} \hat{c}_\gamma(\mathcal{E}\|\mathcal{F}) \quad (41)$$

$$\leq n(K_1 + K_2) \inf_{\gamma \in (0,1]} \hat{c}_\gamma(\mathcal{E}\|\mathcal{F}). \quad (42)$$

The parallel input state  $\nu$  can be chosen as either:

- The optimizer in the smoothing of the max-divergence  $D_{\max}^\varepsilon(\rho_l^{\otimes m}\|\sigma_l^{\otimes m})$ , where  $\varepsilon = \frac{1}{2}(1 - \sqrt{1 - \alpha_P})$ , i.e.:

$$\nu = \tilde{\nu}_{R_S^m A^m} := \arg \min_{\tilde{\rho} \in B_\varepsilon^\circ(\rho_\ell^{\otimes m})} D_{\max}(\tilde{\rho}\|\sigma_\ell^{\otimes m}). \quad (43)$$

Note that the reference system  $R_S$  depends on the sequential protocol and can be arbitrarily large, and hence also  $\tilde{\nu}$  might have an arbitrarily large reference system.

- The canonical (or any other) purification of the  $A^m$ -marginal  $\tilde{\nu}_{A^m} = \text{Tr}_{R_S^m}(\tilde{\nu}_{R_S^m A^m})$ . That is, we can choose  $\nu = |\psi_{R^m A^m}\rangle\langle\psi_{R^m A^m}|$ , with

$$|\psi_{R^m A^m}\rangle = \mathbb{1}_{R^m} \otimes \sqrt{\tilde{\nu}_{A^m}} |\Phi_{R^m A^m}\rangle \quad (44)$$

where  $R$  is isomorphic to  $A$  and  $|\Phi_{R^m A^m}\rangle$  is an unnormalized maximally entangled state.

**Remark 7.** The constraint  $D_{\max}(\mathcal{E}\|\mathcal{F}) < \infty$  is necessary in general, as the example of [Har<sup>+</sup>10, SHW21] shows that one can otherwise construct channels  $\mathcal{E}$ ,  $\mathcal{F}$  and a sequential strategy with only two channel uses, such that for all  $\alpha_S \in [0, 1]$

$$D_H^{\alpha_S}(\mathcal{E}(\rho_2)\|\mathcal{F}(\sigma_2)) = \infty, \quad (45)$$

whereas for all  $m$ , one can find a sufficiently small  $\alpha_P$  such that for all  $\nu \in \mathcal{D}(R \otimes A^{\otimes m})$

$$D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) < \infty. \quad (46)$$

Hence a relation like (38) cannot hold in this case. Note that, even in this example, the Stein exponent, i.e. the optimal exponential decay rate of the type II error such that the type I error still goes to zero, is still identical for the parallel and sequential strategies, as it is infinite also for the optimal parallel strategy. This follows from

$$D_{\max}(\mathcal{E}\|\mathcal{F}) = \infty \quad \Rightarrow \quad D(\mathcal{E}\|\mathcal{F}) = D^{\text{reg}}(\mathcal{E}\|\mathcal{F}) = \infty. \quad (47)$$

The remainder of this section proves [Theorem 6](#). The general idea of the proof will be the following: We will start by moving from the hypothesis testing relative entropy of the sequential strategy to normal relative entropy using [Lemma 1](#). Then, we will see that by using an amortization argument (equations (74)–(77) below), we can bound the performance of the sequential strategy by the performance of just one of its steps, the step where the distinguishability of the two states (that occur if the channel is either  $\mathcal{E}$  or  $\mathcal{F}$ ) increases the most. We then consider  $m$  parallel copies of this step, and construct a parallel input state using a chain rule for the smoothed max relative entropy ([Lemma 8](#)), see [Figure 2](#) below for an illustration of this step. The smoothed max relative entropies can be related to the normal relative entropies we used in the amortization argument by non-asymptotic bounds we present in [Lemma 11](#). Finally we connect to hypothesis testing relative entropy of a parallel protocol using [Lemma 2](#).

The following two subsections present lemmas we will use as part of our proof of [Theorem 6](#).

### 3.1 A Simple One-Shot Version of the Chain Rule

The following is a variant of [[Fan<sup>+</sup>20](#), Prop. 3.2], where smoothing the max-divergence only over normalized states and restricting to the case of a single input system makes things considerably simpler.

**Lemma 8.** *Let  $\mathcal{E}$  and  $\mathcal{F}$  be arbitrary quantum channels from system  $A$  to system  $B$ , and let  $\rho \in \mathcal{D}(A)$ ,  $\sigma \in \mathcal{P}(B)$ . Then for all  $\varepsilon, \varepsilon' \in [0, 1]$  there exists a state  $\nu \in B_{\varepsilon}^{\circ}(\rho)$  such that*

$$D_{\max}^{\varepsilon+\varepsilon'}(\mathcal{E}(\rho)\|\mathcal{F}(\sigma)) \leq D_{\max}^{\varepsilon}(\rho\|\sigma) + D_{\max}^{\varepsilon'}(\mathcal{E}(\nu)\|\mathcal{F}(\nu)). \quad (48)$$

Moreover,  $\nu$  can be chosen as

$$\nu = \arg \min_{\tilde{\rho} \in B_{\varepsilon}^{\circ}(\rho)} D_{\max}(\tilde{\rho}\|\sigma). \quad (49)$$

*Proof.* Let  $\nu \in B_{\varepsilon}^{\circ}(\rho)$  be an optimizer in  $D_{\max}^{\varepsilon}(\rho\|\sigma)$ , i.e.

$$\nu \leq 2^{D_{\max}^{\varepsilon}(\rho\|\sigma)} \sigma. \quad (50)$$

Since  $\mathcal{F}$  is a positive map this implies

$$\mathcal{F}(\nu) \leq 2^{D_{\max}^{\varepsilon}(\rho\|\sigma)} \mathcal{F}(\sigma). \quad (51)$$

Furthermore, let  $\tau \in B_{\varepsilon'}^{\circ}(\mathcal{E}(\nu))$  be an optimizer such that

$$\tau \leq 2^{D_{\max}^{\varepsilon'}(\mathcal{E}(\nu)\|\mathcal{F}(\nu))} \mathcal{F}(\nu). \quad (52)$$

Combining the last two equations we get

$$\tau \leq 2^{D_{\max}^{\varepsilon'}(\mathcal{E}(\nu)\|\mathcal{F}(\nu)) + D_{\max}^{\varepsilon}(\rho\|\sigma)} \mathcal{F}(\sigma). \quad (53)$$

It remains to show that  $P(\tau, \mathcal{E}(\rho)) \leq \varepsilon + \varepsilon'$  (where  $P$  is the sine distance). This follows from

$$P(\tau, \mathcal{E}(\rho)) \leq P(\tau, \mathcal{E}(\nu)) + P(\mathcal{E}(\nu), \mathcal{E}(\rho)) \leq \varepsilon' + P(\nu, \rho) \leq \varepsilon' + \varepsilon. \quad (54)$$

where we used the triangle inequality and the data-processing inequality for the sine distance (see e.g. [[KW20](#)]).  $\square$

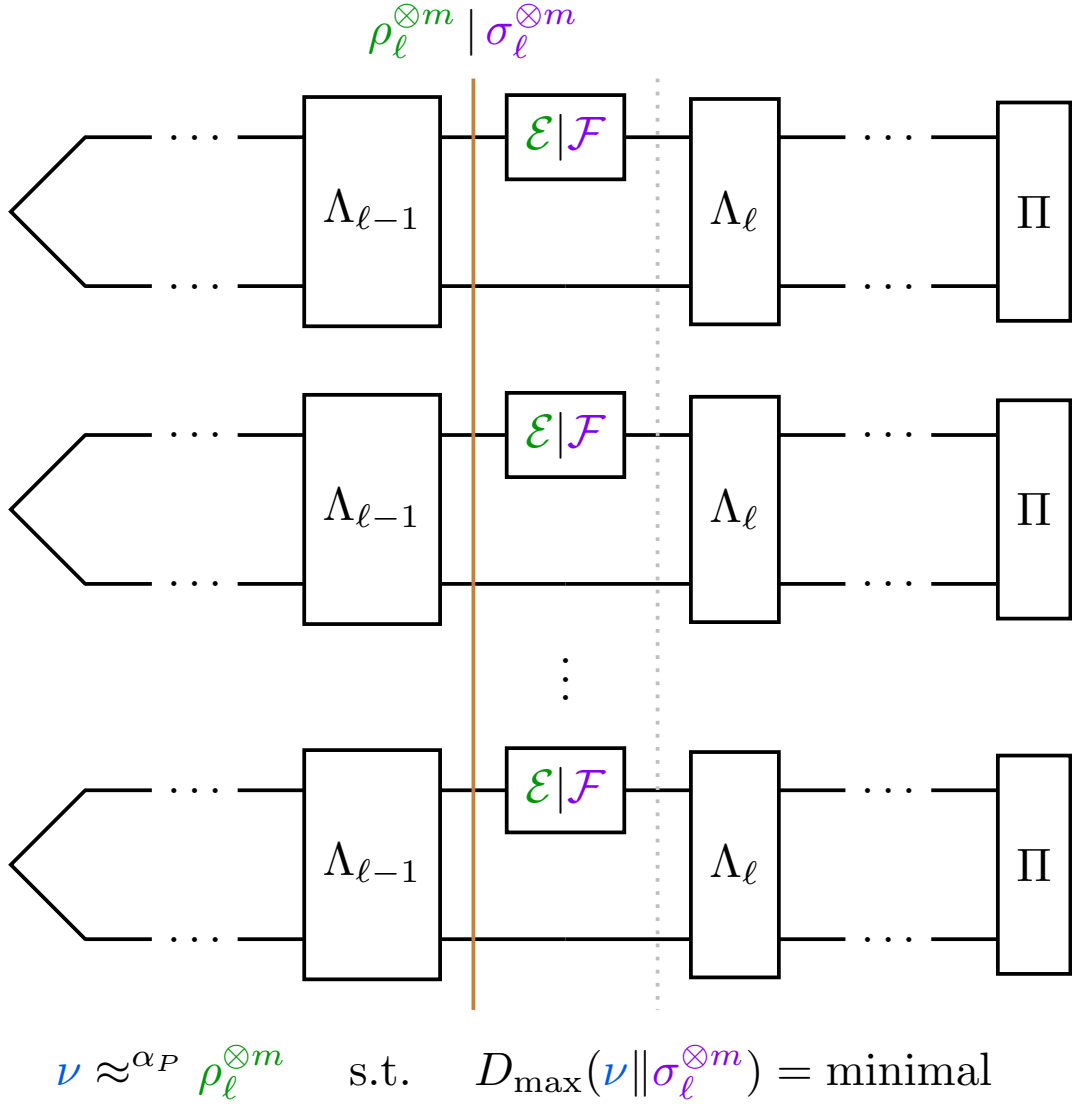


Figure 2: Illustration of a key step in our proof, the construction of the parallel input state. We start by picking a single step  $\ell \in \{1, \dots, n\}$  out of the sequential protocol, where the distinguishability increase  $D(\mathcal{E}(\rho_\ell) || \mathcal{F}(\sigma_\ell)) - D(\rho_\ell || \sigma_\ell)$  is maximal (this corresponds to the step from the orange to the dotted grey line in the diagram). Now consider  $m$  copies of the sequential strategy in parallel. We construct our parallel input state  $\nu$  starting from  $m$  copies of the input state of the sequential strategy at this step  $\ell$  if the channel was  $\mathcal{E}$  (this is  $\rho_\ell^{\otimes m}$ ).  $\nu$  is then smoothed a bit to reduce its distance to  $\sigma_\ell^{\otimes m}$  (which is the input state that we would have if the channel was  $\mathcal{F}$ ). The degree to which we smooth depends on the type I error  $\alpha_P$  we want to achieve with the parallel strategy. Having a small type I error means that the state  $\nu$  is very close to  $\rho_\ell^{\otimes m}$ , whereas allowing for a larger type I error will move the state closer to  $\sigma_\ell^{\otimes m}$ .

### 3.2 Non-Asymptotic Bounds for the Smooth Max-Relative Entropy

The asymptotic equipartition property [TCR09] states that

$$\lim_{n \rightarrow \infty} \frac{1}{n} D_{\max}^{\varepsilon}(\rho^{\otimes n} \parallel \sigma^{\otimes n}) = D(\rho \parallel \sigma) \quad \forall \varepsilon \in (0, 1). \quad (55)$$

For our proof of [Theorem 6](#) we will require a bound on the speed of this convergence. Results in this direction have appeared before in the literature, however none of the previous results turn out to be directly applicable for our purposes (see [Remark 12](#) and [Remark 13](#) below). To prove our result we follow the established path using quantum Rényi divergences. One key ingredient is a bound on the distance between the Petz–Rényi divergence and relative entropy, where the following is a slight refinement of [[Tom12](#), Lemma 6.3]:

**Lemma 9.** *Let  $\rho, \sigma \in \mathcal{D}(\mathcal{H})$  be quantum states. For  $\gamma \in (0, 1]$ , define*

$$c_{\gamma}(\rho \parallel \sigma) := \frac{1}{\gamma} \log \left( 2^{\gamma D_{1+\gamma}(\rho \parallel \sigma)} + 2^{-\gamma D_{1-\gamma}(\rho \parallel \sigma)} + 1 \right). \quad (56)$$

Then, for all  $\gamma \in (0, 1]$  and  $\delta \in (0, \frac{\gamma}{2}]$ :

$$D_{1+\delta}(\rho \parallel \sigma) \leq D(\rho \parallel \sigma) + \ln(2) \delta (c_{\gamma}(\rho \parallel \sigma))^2 \quad (57)$$

$$\leq D(\rho \parallel \sigma) + \delta (c_{\gamma}(\rho \parallel \sigma))^2 \quad (58)$$

Furthermore, if  $D(\rho \parallel \sigma) < \infty$ , then for all  $\gamma \in (0, 1]$  and  $\delta \in (0, \frac{\gamma}{2}]$

$$D_{1-\delta}(\rho \parallel \sigma) \geq D(\rho \parallel \sigma) - \ln(2) \delta (c_{\gamma}(\rho \parallel \sigma))^2 \cosh(\ln(2) \delta c_{\gamma}(\rho \parallel \sigma)). \quad (59)$$

and for all  $\delta \in (0, \frac{\log 3}{2c_{\gamma}(\rho \parallel \sigma)}]$ :

$$D_{1-\delta}(\rho \parallel \sigma) \geq D(\rho \parallel \sigma) - \ln(2) \cosh(\log(3)/2) \delta (c_{\gamma}(\rho \parallel \sigma))^2 \quad (60)$$

$$\geq D(\rho \parallel \sigma) - \delta (c_{\gamma}(\rho \parallel \sigma))^2. \quad (61)$$

The proof of this lemma appears in [Appendix A.1](#).

**Remark 10.** The previously known bound [[Tom12](#), Lemma 6.3] states only an analogue of (58) and follows from [Lemma 9](#) after setting  $\gamma = 1/2$ . Note that in its analogue of (58), [[Tom12](#), Lemma 6.3] also has a stronger constraint on the range of  $\delta$ , which turns out not to be necessary.

Using [Lemma 9](#) we can then establish a bound on the convergence speed in the asymptotic equipartition property:

**Lemma 11.** *Let  $\rho, \sigma \in \mathcal{D}(\mathcal{H})$  be quantum states, and for  $\gamma \in (0, 1]$ , take  $c_{\gamma}(\rho \parallel \sigma)$  as in (56). Then, for all  $\varepsilon \in (0, 1]$  and  $n \in \mathbb{N}$ :*

$$\frac{1}{n} D_{\max}^{\varepsilon}(\rho^{\otimes n} \parallel \sigma^{\otimes n}) \geq D(\rho \parallel \sigma) - \frac{c_{\gamma}(\rho \parallel \sigma)}{\sqrt{n}} \left[ \frac{\ln(2) \log(3)}{2} \cosh\left(\frac{\log(3)}{2}\right) + \frac{4}{\log(3)} \log\left(\frac{1}{1-\varepsilon}\right) \right], \quad (62)$$

$$\frac{1}{n} D_{\max}^{\varepsilon}(\rho^{\otimes n} \parallel \sigma^{\otimes n}) \leq D(\rho \parallel \sigma) + \frac{c_{\gamma}(\rho \parallel \sigma)}{\sqrt{n}} \left[ \frac{\ln(2) \log(3)}{2} + \frac{4}{\log(3)} \log\left(\frac{1}{\varepsilon}\right) \right] + \frac{1}{n} \log\left(\frac{1}{1-\varepsilon^2}\right), \quad (63)$$

which implies

$$\frac{1}{n} D_{\max}^{\varepsilon}(\rho^{\otimes n} \parallel \sigma^{\otimes n}) \geq D(\rho \parallel \sigma) - \frac{4c_{\gamma}(\rho \parallel \sigma)}{\sqrt{n}} \log\left(\frac{2}{1-\varepsilon}\right), \quad (64)$$

$$\frac{1}{n} D_{\max}^{\varepsilon}(\rho^{\otimes n} \parallel \sigma^{\otimes n}) \leq D(\rho \parallel \sigma) + \frac{4c_{\gamma}(\rho \parallel \sigma)}{\sqrt{n}} \log\left(\frac{2}{\varepsilon}\right) + \frac{1}{n} \log\left(\frac{1}{1-\varepsilon^2}\right). \quad (65)$$

These bounds can be tightened by adding a condition on  $n$  to be large enough. Define first the numerical constants

$$K_1 = 2\sqrt{2\ln(2)\cosh\left(\frac{\log(3)}{2}\right)} \leq 2.72, \quad K_2 = 2\sqrt{2\ln(2)} \leq 2.36. \quad (66)$$

Then, if

$$n \geq \log\left(\frac{1}{1-\varepsilon}\right) \left(\frac{8}{\log(3)K_1}\right)^2, \quad (67)$$

we have the stronger bound

$$\frac{1}{n}D_{\max}^\varepsilon(\rho^{\otimes n}\|\sigma^{\otimes n}) \geq D(\rho\|\sigma) - \frac{K_1}{\sqrt{n}}c_\gamma(\rho\|\sigma)\sqrt{\log\left(\frac{1}{1-\varepsilon}\right)}, \quad (68)$$

and similarly, if

$$n \geq \log\left(\frac{1}{\varepsilon}\right) \left(\frac{8}{\gamma c_\gamma(\rho\|\sigma)K_2}\right)^2, \quad (69)$$

it holds that

$$\frac{1}{n}D_{\max}^\varepsilon(\rho^{\otimes n}\|\sigma^{\otimes n}) \leq D(\rho\|\sigma) + \frac{K_2}{\sqrt{n}}c_\gamma(\rho\|\sigma)\sqrt{\log\left(\frac{1}{\varepsilon}\right)} + \frac{1}{n}\log\left(\frac{1}{1-\varepsilon^2}\right). \quad (70)$$

Remember that  $\gamma c_\gamma(\rho\|\sigma) \geq \log(3)$ , and hence (69) is also always satisfied if

$$n \geq \log\left(\frac{1}{\varepsilon}\right) \left(\frac{8}{\log(3)K_2}\right)^2. \quad (71)$$

The proof of this lemma appears in appendix A.2.

**Remark 12.** Our Lemma 11 can be seen an extension of [Tom12, Theorem 6.4], where a similar bound to (70) is shown (however with a worse constant and different smoothing convention). An equivalent of (68) is shown in [Tom12] only for the smoothed conditional min entropy and not for the (more general) smoothed max-relative entropy.

**Remark 13.** Another already existing bound of the AEP convergence is the so-called second order expansion [TH13], which gives a tight asymptotic characterization also of the second-order  $\sqrt{n}$  term in the convergence to the relative entropy. There, the second-order term is shown to be proportional to the square root of the relative entropy variance

$$V(\rho\|\sigma) := \text{Tr}(\rho(\log(\rho) - \log(\sigma) - D(\rho\|\sigma))^2). \quad (72)$$

Later in the proof of Theorem 6, we want to apply these convergence bounds to the case in which  $\rho = \rho_n$  and  $\sigma = \sigma_n$  are the states in a sequential protocol, and we would like to obtain a bound on the convergence parameter in  $n$ . We will see that by using chain rules for the geometric relative Rényi entropy (or the max relative entropy) we will be able to show that  $c_\gamma(\rho_n\|\sigma_n) = \mathcal{O}(n)$ , while we are not aware of any way of obtaining such a bound for  $V(\rho_n\|\sigma_n)$ , and hence cannot directly use second order asymptotics.

### 3.3 Proof of our main result (Theorem 6)

*Proof.* We start by applying Lemma 1 to  $D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n))$ :

$$\frac{1}{n}D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) \leq \frac{1}{n}\frac{1}{1-\alpha_S}(D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) + h(\alpha_S)). \quad (73)$$

Note now that we can write

$$D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) = D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) - D(\rho_n\|\sigma_n) + D(\rho_n\|\sigma_n) \quad (74)$$

$$= D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) - D(\rho_n\|\sigma_n) + D(\Lambda_n(\mathcal{E}(\rho_{n-1}))\|\Lambda_n(\mathcal{F}(\sigma_{n-1}))) \quad (75)$$

$$\leq D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) - D(\rho_n\|\sigma_n) + D(\mathcal{E}(\rho_{n-1})\|\mathcal{F}(\sigma_{n-1})) \quad (76)$$

$$\leq \dots \leq \sum_{k=1}^n \left[ D(\mathcal{E}(\rho_k)\|\mathcal{F}(\sigma_k)) - D(\rho_k\|\sigma_k) \right] \quad (77)$$

where we used the definition of  $\rho_k$  and  $\sigma_k$ , the data-processing inequality, and the fact that  $\rho_1 = \sigma_1$ . Let us use the index  $\ell$  for the step in the sequential protocol where this amortized difference is the largest, i.e.

$$\ell = \arg \max_{k \in \{1, \dots, n\}} \left[ D(\mathcal{E}(\rho_k)\|\mathcal{F}(\sigma_k)) - D(\rho_k\|\sigma_k) \right]. \quad (78)$$

Then,

$$\frac{1}{n} D(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) \leq D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell). \quad (79)$$

We can convert this to smoothed max-relative entropies by using [Lemma 11](#). We will proceed with the bound requiring a condition on  $m$  (or  $n$  as it is called in [Lemma 11](#)); the  $m$ -independent bound is achieved in complete analogy by just taking the alternative statements from [Lemma 11](#). We get:

$$\begin{aligned} D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell) &\leq \frac{1}{m} \left( D_{\max}^{\varepsilon_1}(\mathcal{E}^{\otimes m}(\rho_\ell^{\otimes m})\|\mathcal{F}^{\otimes m}(\sigma_\ell^{\otimes m})) - D_{\max}^{\varepsilon_2}(\rho_\ell^{\otimes m}\|\sigma_\ell^{\otimes m}) \right) \\ &+ \frac{1}{\sqrt{m}} \left[ K_1 c_{\gamma_1}(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) \sqrt{\log\left(\frac{1}{1-\varepsilon_1}\right)} + K_2 c_{\gamma_2}(\rho_\ell\|\sigma_\ell) \sqrt{\log\left(\frac{1}{\varepsilon_2}\right)} \right] + \frac{1}{m} \log\left(\frac{1}{1-\varepsilon_2^2}\right) \end{aligned} \quad (80)$$

where  $\gamma_1, \gamma_2 \in (0, 1]$  and  $\varepsilon_1, \varepsilon_2 \in (0, 1)$  are arbitrary. It will be very convenient to choose  $1 - \varepsilon_1 = \varepsilon_2 =: \varepsilon$ , which is almost optimal as  $K_1 \approx K_2$  and  $c_{\gamma}(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) \approx c_{\gamma}(\rho_\ell\|\sigma_\ell)$  for large  $\ell$  (which is the regime we are most interested in). Then,

$$\begin{aligned} D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell) &\leq \frac{1}{m} \left( D_{\max}^{1-\varepsilon}(\mathcal{E}^{\otimes m}(\rho_\ell^{\otimes m})\|\mathcal{F}^{\otimes m}(\sigma_\ell^{\otimes m})) - D_{\max}^{\varepsilon}(\rho_\ell^{\otimes m}\|\sigma_\ell^{\otimes m}) \right) \\ &+ \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{1}{\varepsilon}\right)} + \frac{1}{m} \log\left(\frac{1}{1-\varepsilon^2}\right) \end{aligned} \quad (81)$$

where

$$c_\ell := \inf_{\gamma_1, \gamma_2 \in (0, 1]} \left[ K_1 c_{\gamma_1}(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) + K_2 c_{\gamma_2}(\rho_\ell\|\sigma_\ell) \right] \quad (82)$$

and the conditions on  $m$  from [Lemma 11](#) will be satisfied if

$$m \geq \log\left(\frac{1}{\varepsilon}\right) \left( \frac{8}{\log(3)K_2} \right)^2. \quad (83)$$

Taking  $\varepsilon \leq 1/2$ , we can apply [Lemma 8](#) to (81). We then get a state  $\tilde{\nu} \in B_\varepsilon^\circ(\rho_\ell^{\otimes m})$  such that:

$$D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell) \leq \frac{1}{m} D_{\max}^{1-2\varepsilon}(\mathcal{E}^{\otimes m}(\tilde{\nu})\|\mathcal{F}^{\otimes m}(\tilde{\nu})) + \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{1}{\varepsilon}\right)} + \frac{1}{m} \log\left(\frac{1}{1-\varepsilon^2}\right) \quad (84)$$

Note that  $\tilde{\nu} = \tilde{\nu}_{R_S^m A^m} \in \mathcal{D}(R_S^{\otimes m} \otimes A^{\otimes m})$  is the first of the two possible choices for  $\nu$  given in [Theorem 6](#). For the other one, let  $\tilde{\nu}_{R' R_S^m A^m}$  be a purification of  $\tilde{\nu}_{R_S^m A^m}$ , and hence also a purification

of  $\tilde{\nu}_{A^m}$ . As the smoothed max-divergence satisfies the data-processing inequality (see e.g. [KW20, Prop. 4.60]) we have

$$D_{\max}^{1-2\varepsilon}(\mathcal{E}^{\otimes m}(\tilde{\nu}_{R_S^m A^m})\|\mathcal{F}^{\otimes m}(\tilde{\nu}_{R_S^m A^m})) \leq D_{\max}^{1-2\varepsilon}(\mathcal{E}^{\otimes m}(\tilde{\nu}_{R' R_S^m A^m})\|\mathcal{F}^{\otimes m}(\tilde{\nu}_{R' R_S^m A^m})). \quad (85)$$

Now, let  $\nu$  be the canonical purification of  $\tilde{\nu}_{A^m}$ , as specified in [Theorem 6](#). Since all purifications are equivalent up to an isometry on the purifying system (see, e.g., [KW20]) on which the channels  $\mathcal{E}^{\otimes m}$  and  $\mathcal{F}^{\otimes m}$  act as an identity, and since the smoothed max-divergence is invariant under isometries, we have

$$D_{\max}^{1-2\varepsilon}(\mathcal{E}^{\otimes m}(\tilde{\nu}_{R' R_S^m A^m})\|\mathcal{F}^{\otimes m}(\tilde{\nu}_{R' R_S^m A^m})) = D_{\max}^{1-2\varepsilon}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)). \quad (86)$$

We will proceed with  $\nu$  as the chosen state, but note that everything works analogously by choosing  $\tilde{\nu}$ . We now further apply the upper bound from [Lemma 2](#) to find:

$$\begin{aligned} D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell) &\leq \frac{1}{m} D_H^{1-(1-2\varepsilon)^2}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) \\ &\quad + \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{1}{\varepsilon}\right)} + \frac{1}{m} \left[ \log\left(\frac{1}{1-\varepsilon^2}\right) + \log\left(\frac{1}{1-(1-2\varepsilon)^2}\right) \right]. \end{aligned} \quad (87)$$

To get our desired expression we set  $\alpha_P := 1 - (1 - 2\varepsilon)^2$ , or equivalently  $\varepsilon = \frac{1}{2}(1 - \sqrt{1 - \alpha_P})$ . Using the estimates

$$\frac{1 - \sqrt{1 - \alpha_P}}{2} \geq \frac{\alpha_P}{4} \quad (88)$$

and

$$1 - \varepsilon^2 = \frac{1 + \sqrt{1 - \alpha_P}}{2} + \frac{\alpha_P}{4} \geq 1 - \frac{\alpha_P}{4}, \quad (89)$$

we arrive at the expression

$$\begin{aligned} D(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) - D(\rho_\ell\|\sigma_\ell) &\leq \frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) \\ &\quad + \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{4}{\alpha_P}\right)} + \frac{1}{m} \left[ \log\left(\frac{1}{\alpha_P}\right) - \log\left(1 - \frac{\alpha_P}{4}\right) \right], \end{aligned} \quad (90)$$

which we can insert into [\(79\)](#) and then [\(73\)](#) to get

$$\begin{aligned} \frac{1}{n} D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) &\leq \frac{1}{1 - \alpha_S} \left[ \frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) + \frac{c_\ell}{\sqrt{m}} \sqrt{\log\left(\frac{4}{\alpha_P}\right)} \right. \\ &\quad \left. + \frac{1}{m} \left[ \log\left(\frac{1}{\alpha_P}\right) - \log\left(1 - \frac{\alpha_P}{4}\right) \right] + \frac{h(\alpha_S)}{n} \right], \end{aligned} \quad (91)$$

which leads to the desired statement in [\(38\)](#).

For the bounds on  $c_\ell$ , we start with

$$c_\gamma(\mathcal{E}(\rho_l)\|\mathcal{F}(\sigma_l)) = \frac{1}{\gamma} \log\left(2^{\gamma D_{1+\gamma}(\mathcal{E}(\rho_l)\|\mathcal{F}(\sigma_l))} + 2^{-\gamma D_{1-\gamma}(\mathcal{E}(\rho_l)\|\mathcal{F}(\sigma_l))} + 1\right) \quad (92)$$

$$\leq \frac{1}{\gamma} \log\left(2^{\gamma \widehat{D}_{1+\gamma}(\mathcal{E}(\rho_l)\|\mathcal{F}(\sigma_l))} + 2\right). \quad (93)$$

Now, by repeated use of the chain rule for the geometric Rényi divergence relative entropy [FF21a, Thm 3.4] we get

$$\widehat{D}_{1+\gamma}(\mathcal{E}(\rho_\ell)\|\mathcal{F}(\sigma_\ell)) \leq \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F}) + \widehat{D}_{1+\gamma}(\rho_\ell\|\sigma_\ell) \quad (94)$$

$$= \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F}) + \widehat{D}_{1+\gamma}(\Lambda_i(\mathcal{E}(\rho_{\ell-1}))\|\Lambda_i(\mathcal{F}(\sigma_{\ell-1}))) \quad (95)$$

$$\leq \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F}) + \widehat{D}_{1+\gamma}(\mathcal{E}(\rho_{\ell-1})\|\mathcal{F}(\sigma_{\ell-1})) \quad (96)$$

$$\leq \dots \leq \ell \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F}). \quad (97)$$

Defining the corresponding channel quantity

$$\widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}) := \frac{1}{\gamma} \left( 2^{\gamma \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F})} + 2 \right) \quad (98)$$

we find that

$$c_\gamma(\mathcal{E}(\rho_l)\|\mathcal{F}(\sigma_l)) \leq \frac{1}{\gamma} \log \left( 2^{\ell \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F})} + 2 \right) \leq \frac{\ell}{\gamma} \log \left( 2^{\widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F})} + 2 \right) = \ell \widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}). \quad (99)$$

Using the same argument we find that also  $\widehat{D}_{1+\gamma}(\rho_k\|\sigma_k) \leq \ell \widehat{D}_{1+\gamma}(\mathcal{E}\|\mathcal{F})$  and hence also

$$c_\gamma(\rho_l\|\sigma_l) \leq \ell \widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}). \quad (100)$$

Thus,

$$c_\ell \leq \ell(K_1 + K_2) \inf_{\gamma \in (0,1]} \widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}) \leq n(K_1 + K_2) \inf_{\gamma \in (0,1]} \widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}). \quad (101)$$

□

### 3.3.1 Proof of Corollary 4

*Proof.* Corollary 4 follows from (30) by making the following estimates

$$h(\alpha_S) \leq 1 \quad (102)$$

$$K \leq 1 \quad (103)$$

$$c'_\ell \leq \frac{8n}{\log(3)} \widehat{c}_2(\mathcal{E}\|\mathcal{F}) \approx 5.05 n \widehat{c}_1(\mathcal{E}\|\mathcal{F}) \leq 6 n \widehat{c}_1(\mathcal{E}\|\mathcal{F}) \quad (104)$$

$$-\log \left( 1 - \frac{\alpha_P}{4} \right) \leq 1 \quad (105)$$

Combining all of these we can bound the error term by

$$\frac{6n}{\sqrt{m}} \widehat{c}_1(\mathcal{E}\|\mathcal{F}) \log \left( \frac{8}{\alpha_P} \right) + \frac{1}{m} \log \left( \frac{2}{\alpha_P} \right) + \frac{1}{n} \leq \frac{7n}{\sqrt{m}} \widehat{c}_1(\mathcal{E}\|\mathcal{F}) \log \left( \frac{8}{\alpha_P} \right) + \frac{1}{n} \quad (106)$$

where we used that  $\widehat{c}_\gamma(\mathcal{E}\|\mathcal{F}) \geq 1$  for all  $\gamma \in (0, 1]$ . Note finally that  $\widehat{D}_2(\mathcal{E}\|\mathcal{F}) = D_2(\mathcal{E}\|\mathcal{F}) \leq D_{\max}(\mathcal{E}\|\mathcal{F})$ , which leads to the desired expression of  $C$  in (27). □

## 4 A Simple Example

The following simple example illustrates the separation between parallel and sequential strategies for finite number of channel uses and the use of our bound. It is inspired by the already mentioned example from [Har<sup>+</sup>10, SHW21] that shows a separation between sequential and parallel channel discrimination when treating errors symmetrically. As mentioned in Remark 7, their example has



$D_{\max}(\mathcal{E}||\mathcal{F}) = \infty$  and hence our theorem does not immediately apply, which is why we have to smooth  $\mathcal{F}$  a little bit first.

Define the channels  $\mathcal{E}, \mathcal{F} : \mathcal{B}(\mathbb{C}^2 \otimes \mathbb{C}^2) \rightarrow \mathcal{B}(\mathbb{C}^2)$ :

$$\mathcal{E}(\rho \otimes \omega) := |0\rangle\langle 0| \langle 0|\omega|0\rangle + |0\rangle\langle 0| \langle 0|\rho|0\rangle \langle 1|\omega|1\rangle + \frac{1}{2} \langle 11|\rho \otimes \omega|11\rangle \quad (107)$$

$$\mathcal{F}(\rho \otimes \omega) := (1 - \varepsilon) \left[ |+\rangle\langle +| \langle 0|\omega|0\rangle + |1\rangle\langle 1| \langle +|\rho|+\rangle \langle 1|\omega|1\rangle + \frac{1}{2} \langle -1|\rho \otimes \omega| -1\rangle \right] + \varepsilon \frac{1}{2} \text{Tr}[\rho \otimes \omega]. \quad (108)$$

It is easy to see that

$$\mathcal{E}(\mathcal{E}(|00\rangle\langle 00|) \otimes |1\rangle\langle 1|) = |0\rangle\langle 0|, \quad (109)$$

$$\mathcal{F}(\mathcal{F}(|00\rangle\langle 00|) \otimes |1\rangle\langle 1|) = (1 - \delta(\varepsilon)) |1\rangle\langle 1| + \delta(\varepsilon) |0\rangle\langle 0|. \quad (110)$$

where  $\delta(\varepsilon) = 1/4(3\varepsilon - \varepsilon^2)$  such that crucially  $\delta(0) = 0$ . Hence, for  $\varepsilon = 0$  the above gives a sequential strategy that makes the channels perfectly distinguishable with just two channel uses. For all  $\varepsilon \in (0, 1)$ , we will have  $D_{\max}(\mathcal{E}||\mathcal{F}) < \infty$  and can apply our theorem. The above sequential strategy has  $\rho_1 = \sigma_1 = |00\rangle\langle 00|$  and  $\rho_2 = |01\rangle\langle 01|$ ,  $\sigma_2 = (1 - \varepsilon/2) |1\rangle\langle 1| + \varepsilon/2 |1\rangle\langle -1|$ . Interestingly

$$D(\mathcal{E}(\rho_1)||\mathcal{F}(\sigma_1)) - D(\rho_1||\sigma_1) = D(|0\rangle\langle 0| || (1 - \varepsilon/2) |+\rangle\langle +| + \varepsilon/2 |-\rangle\langle -|) \quad (111)$$

$$= -\frac{1}{2} \left[ \log\left(\frac{\varepsilon}{2}\right) + \log\left(1 - \frac{\varepsilon}{2}\right) \right], \quad (112)$$

$$D(\mathcal{E}(\rho_2)||\mathcal{F}(\sigma_2)) - D(\rho_2||\sigma_2) = \log(\delta(\varepsilon)) + \frac{1}{2} \left[ \log\left(\frac{\varepsilon}{2}\right) + \log\left(1 - \frac{\varepsilon}{2}\right) \right], \quad (113)$$

where one finds that the first one is always larger and so it is actually the first step that increases the distinguishability the most (when measured in terms of relative entropy). Hence we have  $\ell = 1$  in [Theorem 6](#). Also, as  $\rho_1 = \sigma_1$  our parallel input state in [Theorem 6](#) will just be  $\nu = \rho_1^{\otimes m}$  as this is what achieves the minimum in the smoothed max-divergence (for all  $\varepsilon'$ )

$$D_{\max}^{\varepsilon'}(\rho_1^{\otimes m} || \sigma_1^{\otimes m}) = 0. \quad (114)$$

To illustrate our theorem, we want to compare the given sequential strategy to the parallel one from our theorem; i.e. we want to compare the two quantities

$$\frac{1}{2} D_H^0(\mathcal{E}(\rho_2)||\mathcal{F}(\sigma_2)) = -\frac{1}{2} \log(\delta(\varepsilon)), \quad (115)$$

$$\frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)||\mathcal{F}^{\otimes m}(\nu)) = \frac{1}{m} D_H^{\alpha_P}((\mathcal{E}(\rho_1))^{\otimes m} || (\mathcal{F}(\rho_1))^{\otimes m}). \quad (116)$$

While the hypothesis testing relative entropy  $D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)||\mathcal{F}^{\otimes m}(\nu))$  can in principle be calculated as an SDP, the calculation is not feasible for large  $m$ . Instead we can obtain upper and lower bounds on it based on the second order asymptotics of the convergence to the relative entropy  $D(\mathcal{E}(\rho_1)||\mathcal{F}(\rho_1))$  [[Li14](#)] (this only works here because our input state is a tensor product). Define  $\rho = \mathcal{E}(\rho_1)$ ,  $\sigma = \mathcal{F}(\rho_1)$ . Then [[Li14](#), Thm. 5]:

$$\frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)||\mathcal{F}^{\otimes m}(\nu)) \geq D(\rho||\sigma) + \sqrt{\frac{V}{n}} \Phi^{-1}\left(\alpha_P - \frac{1}{\sqrt{n}} \frac{CT^3}{\sqrt{V^3}}\right), \quad (117)$$

$$\frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)||\mathcal{F}^{\otimes m}(\nu)) \leq D(\rho||\sigma) + \sqrt{\frac{V}{n}} \Phi^{-1}\left(\alpha_P + \frac{1}{\sqrt{n}} \left(\frac{CT^3}{\sqrt{V^3}} + 2\right)\right), \quad (118)$$

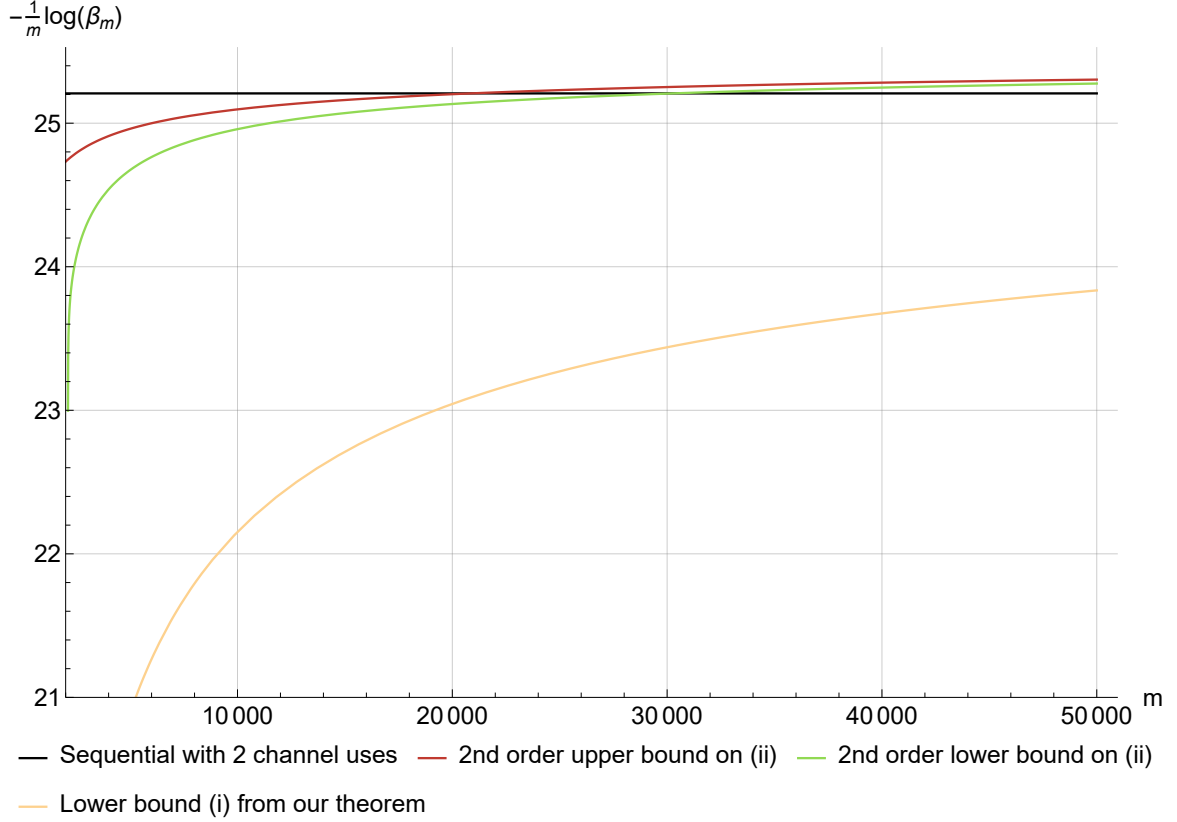


Figure 3: Illustration of the performances of a pair of a simple sequential and parallel strategy for a specific pair of channels (see (107) and (108) for the definitions of the channels  $\mathcal{E}$  and  $\mathcal{F}$ , respectively). We compare a fixed sequential strategy (constant black line) to (i) our lower bound on the performance of a parallel strategy (yellow line) and (ii) the actual performance of a parallel strategy (red and green lines), which are plotted as functions of the number of parallel channel uses  $m$ . The black line shows the value of (115), i.e. the type II error exponent for the given sequential strategy with two channel uses and type I error  $\alpha_S = 0$ . The yellow line shows the lower bound on the parallel strategy from our theorem (i.e. the right-hand side of (38)), choosing  $\alpha_P = 2^{-5}$ . For this specific example we can calculate the parallel input state  $\nu$  of our theorem, and while we cannot explicitly find the optimal POVM and corresponding type II error (i.e. we cannot explicitly calculate the left-hand side of (38)), we can bound it from above and below using second order asymptotics of the hypothesis testing relative entropy, which is shown in the red and green lines, corresponding to the values of (118) and (117). We see that for small  $m$  the sequential strategy is better, whereas it is not optimal for large  $m$  and hence is eventually surpassed by the parallel strategy.

where  $\Phi^{-1}$  is the inverse of the cumulative distribution function of the standard normal distribution,  $C \leq 0.4784$ , and

$$V = V(\rho\|\sigma) = \text{Tr}[\rho(\log \rho - \log \sigma - D(\rho\|\sigma))^2], \quad (119)$$

$$T^3 = T^3(\rho\|\sigma) = \sum_{i,j} \lambda_i |\langle x_i | y_j \rangle|^2 |\log(\lambda_i) - \log(\mu_j) - D(\rho\|\sigma)|^3 \quad (120)$$

for spectral decompositions  $\rho = \sum_i \lambda_i |x_i\rangle\langle x_i|$  and  $\sigma = \sum_j \mu_j |y_j\rangle\langle y_j|$ .

**Figure 3** depicts the quantities appearing in our theorem with the above definitions of  $\mathcal{E}$  and  $\mathcal{F}$ , choosing  $\varepsilon = 2^{-50}$ ,  $\alpha_S = 0$ , and  $\alpha_P = 2^{-5}$ . For  $c_\ell$  in **Theorem 6** we used (40) with a numerical optimization over  $\gamma_1$ . One finds that there is a region of  $m$  for which the sequential strategy is better, and the parallel one is lower bounded fairly tightly by our bound. The given sequential strategy involves only two channel uses, and is not necessarily optimal; hence it eventually gets surpassed by the parallel one for large  $m$ .

## 5 Discussion and Outlook

In this final section, we discuss several pathways in which our result could be improved or extended, potentially addressing different open problems in quantum channel discrimination.

First of all, one might hope to be able to remove the factor of  $1 - \alpha_S$  appearing in (38), perhaps at the cost of an additional error term proportional to  $\log(1 - \alpha_S)$ . If this additional error term decays in  $m$  and  $n$  (say, as long as  $\alpha_S$  is bounded away from one), this would prove the strong converse property for quantum channel discrimination. To see this, assume we would be able to show something along the lines of the following equation:

$$\frac{1}{m} D_H^{\alpha_P}(\mathcal{E}^{\otimes m}(\nu)\|\mathcal{F}^{\otimes m}(\nu)) \stackrel{?}{\geq} \frac{1}{n} D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)) - \frac{C_1 n}{\sqrt{m}} \log\left(\frac{8}{\alpha_P}\right) - \frac{C_2}{n} \log\left(\frac{1}{1 - \alpha_S}\right) \quad (121)$$

Now, fixing any  $\alpha_S \in (0, 1)$  and taking limits (in this order)  $m \rightarrow \infty, n \rightarrow \infty, \alpha_P \rightarrow 0$ , we find that for an arbitrary  $\alpha_S \in (0, 1)$

$$D^{\text{reg}}(\mathcal{E}\|\mathcal{F}) = \lim_{\alpha_P \rightarrow 0} \lim_{n \rightarrow \infty} D_H^{\alpha_P}(\mathcal{E}^{\otimes n}\|\mathcal{F}^{\otimes n}) \stackrel{?}{\geq} \limsup_{n \rightarrow \infty} \frac{1}{n} D_H^{\alpha_S}(\mathcal{E}(\rho_n)\|\mathcal{F}(\sigma_n)), \quad (122)$$

i.e. allowing a finite type I error  $\alpha_S \in (0, 1)$  does not improve the best achievable type II error rate. This is precisely the strong converse property. Establishing the strong converse property for quantum channel discrimination is an important and very interesting open problem, which despite serious efforts is still unsolved. Significant progress has been made in [FF21b], and another recent attempt was made in [FGW22].

One might hope to obtain such a variant of our bound without the factor  $1 - \alpha_S$ , by – instead of transitioning from hypothesis testing entropy to relative entropy in (73) – moving to an  $\alpha$ -Rényi relative entropy instead and subsequently employing the known relations between Rényi relative entropies and smoothed max-relative entropies. It turns out that this will at some point require bounding the difference between Rényi relative entropies of order  $1 - \alpha$  and  $1 + \alpha$ . This is possible using **Lemma 9**, however at the cost of an error term  $(c_\gamma(\rho_n\|\sigma_n))^2$ , which will scale quadratically in  $n$ . As this does not pick up any dependence in  $m$ , such an approach will not lead to anything useful in the asymptotic limit, and is hence unsuccessful.

One further interesting question deals with the relation between  $\ell$  and  $n$  in **Theorem 6**. One might hope that an optimal sequential strategy achieves the maximum possible distinguishability gain per channel use, i.e.

$$D^A(\mathcal{E}\|\mathcal{F}) = \sup_{\rho, \sigma \in \mathcal{D}(R \otimes A)} D(\mathcal{E}(\rho)\|\mathcal{F}(\sigma)) - D(\rho\|\sigma), \quad (123)$$

after some finite number of channel uses, or at least comes very close to it. If that was the case, one could bound  $\ell$  by a constant and would remove the dependence on  $n$  in (27). However, note that the supremum in (123) goes over arbitrarily large reference systems  $R$  and hence does not need to be achieved, and we are not aware of any bounds on the system size  $R$  to get close to the optimum value. Alternatively, since  $D^A(\mathcal{E}\|\mathcal{F}) = D^{\text{reg}}(\mathcal{E}\|\mathcal{F})$  also a bound on the speed of convergence of the regularized channel divergence would do, which we are however also not aware of (Ref. [FF21b] proves such a bound for the sandwiched Rényi divergence, which unfortunately cannot be extended straightforwardly to relative entropy). Hence, for now we have to assume that  $\ell$  can in general be  $n$ , and that to adequately simulate a sequential strategy with  $n$  channel uses, one might need to employ more than  $n^2$  parallel channel uses to keep the error term in our bound small.

While our result becomes quite powerful in the asymmetric asymptotic setting, Theorem 6 can in principle be applied for any combination of type I and II errors. Hence, it could be interesting to apply it to scenarios where the type I error decays with  $m$ , say as  $\alpha_P = 2^{-km}$  for some constant  $k$ . In this case, one would want to apply (38), to have at least a chance of the error term being bounded, however – depending on  $k$  – the corresponding condition (37) might not always be fulfilled. It would be interesting to see whether this condition on  $m$  could perhaps be relaxed, to allow for a wider range of  $k$  in this specific scenario.

As mentioned already in Remark 13, our bounds could be significantly tightened if we were able to employ second order expansions, which however requires controlling the variance of the relative entropy  $V(\rho_n\|\sigma_n)$  in  $n$ , which we are unable to do. This seems to be again related to the strong converse problem, as second order expansions for the hypothesis testing relative entropy imply the strong converse property. Already for the parallel case, if one was able to show

$$V(\mathcal{E}^{\otimes n}(\nu)\|\mathcal{F}^{\otimes n}(\nu)) = \mathcal{O}(n) \quad (124)$$

where  $\nu \in \mathcal{D}(R^{\otimes n} \otimes A^{\otimes n})$  is any joint input state, this would be a very significant step towards proving the strong converse for quantum channel discrimination. Conversely, examples where this scales faster than linearly in  $n$  are quite likely to lend themselves to counterexamples for the strong converse property. We are not aware of any such examples: we leave this question open for further investigation.

Finally, we believe that it should be possible to generalize our result to the infinite dimensional setting with only minor modifications. This requires quite a bit of care to ensure that all of the previous results we employ also hold in infinite dimensions. However, all proofs performed explicitly in this paper generalize with minor modifications.

*Acknowledgements*—Bjarne Bergh acknowledges support from the UK Engineering and Physical Sciences Research Council (EPSRC) under grant number EP/V52024X/1. Robert Salzmänn acknowledges support from the Cambridge Commonwealth, European and International Trust. Mark M. Wilde acknowledges support from the National Science Foundation under grant no. 1907615.

## 6 References

- [AJW19] Anurag Anshu, Rahul Jain, and Naqeeb Ahmad Warsi. “One Shot Entanglement Assisted Classical and Quantum Communication over Noisy Quantum Channels: A Hypothesis Testing and Convex Split Approach”. In: *IEEE Transactions on Information Theory* 65.2 (Feb. 2019), pp. 1287–1306. DOI: [10.1109/TIT.2018.2851297](https://doi.org/10.1109/TIT.2018.2851297). arXiv: [1702.01940](https://arxiv.org/abs/1702.01940).
- [AMV12] Koenraad M. R. Audenaert, Milan Mosonyi, and Frank Verstraete. “Quantum State Discrimination Bounds for Finite Sample Size”. In: *Journal of Mathematical Physics* 53.12 (Dec. 2012), p. 122205. DOI: [10.1063/1.4768252](https://doi.org/10.1063/1.4768252). arXiv: [1204.0711](https://arxiv.org/abs/1204.0711).

- [Ans<sup>+</sup>19] Anurag Anshu, Mario Berta, Rahul Jain, and Marco Tomamichel. “A Minimax Approach to One-Shot Entropy Inequalities”. In: *Journal of Mathematical Physics* 60.12 (Dec. 1, 2019), p. 122201. DOI: [10.1063/1.5126723](https://doi.org/10.1063/1.5126723). arXiv: [1906.00333](https://arxiv.org/abs/1906.00333).
- [Aud<sup>+</sup>07] K. M. R. Audenaert, J. Calsamiglia, R. Muñoz-Tapia, E. Bagan, Ll. Masanes, A. Acín, and F. Verstraete. “Discriminating States: The Quantum Chernoff Bound”. In: *Physical Review Letters* 98.16 (Apr. 17, 2007), p. 160501. DOI: [10.1103/PhysRevLett.98.160501](https://doi.org/10.1103/PhysRevLett.98.160501). arXiv: [quant-ph/0610027](https://arxiv.org/abs/quant-ph/0610027).
- [Aud<sup>+</sup>08] K. M. R. Audenaert, M. Nussbaum, A. Szkola, and F. Verstraete. “Asymptotic Error Rates in Quantum Hypothesis Testing”. In: *Communications in Mathematical Physics* 279.1 (Apr. 2008), pp. 251–283. DOI: [10.1007/s00220-008-0417-5](https://doi.org/10.1007/s00220-008-0417-5). arXiv: [0708.4282](https://arxiv.org/abs/0708.4282).
- [BD10] Francesco Buscemi and Nilanjana Datta. “The Quantum Capacity of Channels with Arbitrarily Correlated Noise”. In: *IEEE Transactions on Information Theory* 56.3 (Mar. 2010), pp. 1447–1460. DOI: [10.1109/TIT.2009.2039166](https://doi.org/10.1109/TIT.2009.2039166). arXiv: [0902.0158](https://arxiv.org/abs/0902.0158).
- [BD11] Fernando G. S. L. Brandao and Nilanjana Datta. “One-Shot Rates for Entanglement Manipulation Under Non-entangling Maps”. In: *IEEE Transactions on Information Theory* 57.3 (Mar. 2011), pp. 1754–1760. DOI: [10.1109/TIT.2011.2104531](https://doi.org/10.1109/TIT.2011.2104531). arXiv: [0905.2673](https://arxiv.org/abs/0905.2673).
- [BK15] Joonwoo Bae and Leong-Chuan Kwek. “Quantum State Discrimination and Its Applications”. In: *Journal of Physics A: Mathematical and Theoretical* 48.8 (Feb. 27, 2015), p. 083001. DOI: [10.1088/1751-8113/48/8/083001](https://doi.org/10.1088/1751-8113/48/8/083001). arXiv: [1707.02571](https://arxiv.org/abs/1707.02571).
- [CDP08] Giulio Chiribella, Giacomo M. D’Ariano, and Paolo Perinotti. “Memory Effects in Quantum Channel Discrimination”. In: *Physical Review Letters* 101.18 (Oct. 27, 2008), p. 180501. DOI: [10.1103/PhysRevLett.101.180501](https://doi.org/10.1103/PhysRevLett.101.180501). arXiv: [0803.3237](https://arxiv.org/abs/0803.3237).
- [CMW16] Tom Cooney, Milán Mosonyi, and Mark M. Wilde. “Strong Converse Exponents for a Quantum Channel Discrimination Problem and Quantum-Feedback-Assisted Communication”. In: *Communications in Mathematical Physics* 344.3 (June 1, 2016), pp. 797–829. DOI: [10.1007/s00220-016-2645-4](https://doi.org/10.1007/s00220-016-2645-4). arXiv: [1408.3373](https://arxiv.org/abs/1408.3373).
- [Dat09] Nilanjana Datta. “Min- and Max- Relative Entropies and a New Entanglement Monotone”. In: *IEEE Transactions on Information Theory* 55.6 (June 2009), pp. 2816–2826. DOI: [10.1109/TIT.2009.2018325](https://doi.org/10.1109/TIT.2009.2018325). arXiv: [0803.2770](https://arxiv.org/abs/0803.2770).
- [DFY09] Runyao Duan, Yuan Feng, and Mingsheng Ying. “Perfect Distinguishability of Quantum Operations”. In: *Physical Review Letters* 103.21 (Nov. 20, 2009), p. 210501. DOI: [10.1103/PhysRevLett.103.210501](https://doi.org/10.1103/PhysRevLett.103.210501).
- [Día<sup>+</sup>18] María García Díaz, Kun Fang, Xin Wang, Matteo Rosati, Michalis Skotiniotis, John Calsamiglia, and Andreas Winter. “Using and Reusing Coherence to Realize Quantum Processes”. In: *Quantum* 2 (Oct. 19, 2018), p. 100. DOI: [10.22331/q-2018-10-19-100](https://doi.org/10.22331/q-2018-10-19-100). arXiv: [1805.04045](https://arxiv.org/abs/1805.04045).
- [Fan<sup>+</sup>20] Kun Fang, Omar Fawzi, Renato Renner, and David Sutter. “A Chain Rule for the Quantum Relative Entropy”. In: *Physical Review Letters* 124.10 (Mar. 10, 2020), p. 100501. DOI: [10.1103/PhysRevLett.124.100501](https://doi.org/10.1103/PhysRevLett.124.100501). arXiv: [1909.05826](https://arxiv.org/abs/1909.05826).
- [FF21a] Kun Fang and Hamza Fawzi. “Geometric Rényi Divergence and Its Applications in Quantum Channel Capacities”. In: *Communications in Mathematical Physics* 384.3 (June 2021), pp. 1615–1677. DOI: [10.1007/s00220-021-04064-4](https://doi.org/10.1007/s00220-021-04064-4). arXiv: [1909.05758](https://arxiv.org/abs/1909.05758).

- [FF21b] Hamza Fawzi and Omar Fawzi. “Defining Quantum Divergences via Convex Optimization”. In: *Quantum* 5 (Jan. 26, 2021), p. 387. DOI: [10.22331/q-2021-01-26-387](https://doi.org/10.22331/q-2021-01-26-387). arXiv: [2007.12576](https://arxiv.org/abs/2007.12576).
- [FGW22] Kun Fang, Gilad Gour, and Xin Wang. *Towards the Ultimate Limits of Quantum Channel Discrimination*. Mar. 1, 2022. arXiv: [2110.14842](https://arxiv.org/abs/2110.14842).
- [GLN05] Alexei Gilchrist, Nathan K. Langford, and Michael A. Nielsen. “Distance Measures to Compare Real and Ideal Quantum Processes”. In: *Physical Review A* 71.6 (June 13, 2005), p. 062310. DOI: [10.1103/PhysRevA.71.062310](https://doi.org/10.1103/PhysRevA.71.062310). arXiv: [quant-ph/0408063](https://arxiv.org/abs/quant-ph/0408063).
- [Har<sup>+</sup>10] Aram W. Harrow, Avinatan Hassidim, Debbie W. Leung, and John Watrous. “Adaptive versus Nonadaptive Strategies for Quantum Channel Discrimination”. In: *Physical Review A* 81.3 (Mar. 31, 2010), p. 032339. DOI: [10.1103/PhysRevA.81.032339](https://doi.org/10.1103/PhysRevA.81.032339).
- [Hay07] Masahito Hayashi. “Error Exponent in Asymmetric Quantum Hypothesis Testing and Its Application to Classical-Quantum Channel Coding”. In: *Physical Review A* 76.6 (Dec. 5, 2007), p. 062301. DOI: [10.1103/PhysRevA.76.062301](https://doi.org/10.1103/PhysRevA.76.062301). arXiv: [quant-ph/0611013](https://arxiv.org/abs/quant-ph/0611013).
- [Hay09] Masahito Hayashi. “Discrimination of Two Channels by Adaptive Methods and Its Application to Quantum System”. In: *IEEE Transactions on Information Theory* 55.8 (Aug. 2009), pp. 3807–3820. DOI: [10.1109/TIT.2009.2023726](https://doi.org/10.1109/TIT.2009.2023726). arXiv: [0804.0686](https://arxiv.org/abs/0804.0686).
- [Hel69] Carl W. Helstrom. “Quantum Detection and Estimation Theory”. In: *Journal of Statistical Physics* 1.2 (June 1, 1969), pp. 231–252. DOI: [10.1007/BF01007479](https://doi.org/10.1007/BF01007479).
- [Hol72] A. S. Holevo. “An Analogue of Statistical Decision Theory and Noncommutative Probability Theory”. In: *Trudy Moskovskogo Matematicheskogo Obščestva* 26 (1972), pp. 133–149. URL: <https://mathscinet.ams.org/mathscinet-getitem?mr=0365809>.
- [HP91] Fumio Hiai and Dénes Petz. “The Proper Formula for Relative Entropy and Its Asymptotics in Quantum Probability”. In: *Communications in Mathematical Physics* 143.1 (Dec. 1, 1991), pp. 99–114. DOI: [10.1007/BF02100287](https://doi.org/10.1007/BF02100287).
- [Kho79] A. S. Kholevo. “On Asymptotically Optimal Hypothesis Testing in Quantum Statistics”. In: *Theory of Probability & Its Applications* 23.2 (Mar. 1979), pp. 411–415. DOI: [10.1137/1123048](https://doi.org/10.1137/1123048).
- [KW20] Sumeet Khatri and Mark M. Wilde. “Principles of Quantum Communication Theory: A Modern Approach”. Nov. 9, 2020. arXiv: [2011.04672](https://arxiv.org/abs/2011.04672).
- [KW21] Vishal Katariya and Mark M. Wilde. “Evaluating the Advantage of Adaptive Strategies for Quantum Channel Distinguishability”. In: *Physical Review A* 104.5 (Nov. 8, 2021), p. 052406. DOI: [10.1103/PhysRevA.104.052406](https://doi.org/10.1103/PhysRevA.104.052406). arXiv: [2001.05376](https://arxiv.org/abs/2001.05376).
- [Led<sup>+</sup>18] Felix Leditzky, Eneet Kaur, Nilanjana Datta, and Mark M. Wilde. “Approaches for Approximate Additivity of the Holevo Information of Quantum Channels”. In: *Physical Review A* 97.1 (Jan. 25, 2018), p. 012332. DOI: [10.1103/PhysRevA.97.012332](https://doi.org/10.1103/PhysRevA.97.012332). arXiv: [1709.01111](https://arxiv.org/abs/1709.01111).
- [Li14] Ke Li. “Second-Order Asymptotics for Quantum Hypothesis Testing”. In: *The Annals of Statistics* 42.1 (Feb. 1, 2014). DOI: [10.1214/13-AOS1185](https://doi.org/10.1214/13-AOS1185). arXiv: [1208.1400](https://arxiv.org/abs/1208.1400).
- [Lin75] Göran Lindblad. “Completely Positive Maps and Entropy Inequalities”. In: *Communications in Mathematical Physics* 40.2 (June 1, 1975), pp. 147–151. DOI: [10.1007/BF01609396](https://doi.org/10.1007/BF01609396).
- [Mat13] Keiji Matsumoto. “A New Quantum Version of F-Divergence”. Nov. 19, 2013. arXiv: [1311.4722](https://arxiv.org/abs/1311.4722).

- [Nag06] Hiroshi Nagaoka. “The Converse Part of The Theorem for Quantum Hoeffding Bound”. Nov. 29, 2006. arXiv: [quant-ph/0611289](https://arxiv.org/abs/quant-ph/0611289).
- [NS09] Michael Nussbaum and Arleta Szkoła. “The Chernoff Lower Bound for Symmetric Quantum Hypothesis Testing”. In: *The Annals of Statistics* 37.2 (Apr. 1, 2009). DOI: [10.1214/08-AOS593](https://doi.org/10.1214/08-AOS593). arXiv: [quant-ph/0607216](https://arxiv.org/abs/quant-ph/0607216).
- [ON00] T. Ogawa and H. Nagaoka. “Strong Converse and Stein’s Lemma in Quantum Hypothesis Testing”. In: *IEEE Transactions on Information Theory* 46.7 (Nov. 2000), pp. 2428–2433. DOI: [10.1109/18.887855](https://doi.org/10.1109/18.887855). arXiv: [quant-ph/9906090](https://arxiv.org/abs/quant-ph/9906090).
- [Pet86] Dénes Petz. “Quasi-Entropies for Finite Quantum Systems”. In: *Reports on Mathematical Physics* 23.1 (Feb. 1, 1986), pp. 57–65. DOI: [10.1016/0034-4877\(86\)90067-4](https://doi.org/10.1016/0034-4877(86)90067-4).
- [Ras02] A. E. Rastegin. “Relative Error of State-Dependent Cloning”. In: *Physical Review A* 66.4 (Oct. 10, 2002), p. 042304. DOI: [10.1103/PhysRevA.66.042304](https://doi.org/10.1103/PhysRevA.66.042304).
- [Ras03] A. E. Rastegin. “A Lower Bound on the Relative Error of Mixed-State Cloning and Related Operations”. In: *Journal of Optics B: Quantum and Semiclassical Optics* 5.6 (Oct. 2003), S647–S650. DOI: [10.1088/1464-4266/5/6/017](https://doi.org/10.1088/1464-4266/5/6/017).
- [Ras06] A. E. Rastegin. *Sine Distance for Quantum States*. Feb. 14, 2006. arXiv: [quant-ph/0602112](https://arxiv.org/abs/quant-ph/0602112).
- [SHW21] Farzin Salek, Masahito Hayashi, and Andreas Winter. “When Are Adaptive Strategies in Asymptotic Quantum Channel Discrimination Useful?” June 14, 2021. arXiv: [2011.06569](https://arxiv.org/abs/2011.06569).
- [TCR09] Marco Tomamichel, Roger Colbeck, and Renato Renner. “A Fully Quantum Asymptotic Equipartition Property”. In: *IEEE Transactions on Information Theory* 55.12 (Dec. 2009), pp. 5840–5847. DOI: [10.1109/TIT.2009.2032797](https://doi.org/10.1109/TIT.2009.2032797). arXiv: [0811.1221](https://arxiv.org/abs/0811.1221).
- [TH13] Marco Tomamichel and Masahito Hayashi. “A Hierarchy of Information Quantities for Finite Block Length Analysis of Quantum Tasks”. In: *IEEE Transactions on Information Theory* 59.11 (Nov. 2013), pp. 7693–7710. DOI: [10.1109/TIT.2013.2276628](https://doi.org/10.1109/TIT.2013.2276628).
- [Tom12] Marco Tomamichel. “A Framework for Non-Asymptotic Quantum Information Theory”. Doctoral Thesis. ETH Zurich, 2012. arXiv: [1203.2142](https://arxiv.org/abs/1203.2142).
- [Uhl76] A. Uhlmann. “The “Transition Probability” in the State Space of a  $*$ -Algebra”. In: *Reports on Mathematical Physics* 9.2 (Apr. 1, 1976), pp. 273–279. DOI: [10.1016/0034-4877\(76\)90060-4](https://doi.org/10.1016/0034-4877(76)90060-4).
- [Ume62] Hisaharu Umegaki. “Conditional Expectation in an Operator Algebra. IV. Entropy and Information”. In: *Kodai Mathematical Seminar Reports* 14.2 (Jan. 1962), pp. 59–85. DOI: [10.2996/kmj/1138844604](https://doi.org/10.2996/kmj/1138844604).
- [Wil<sup>+</sup>20] Mark M. Wilde, Mario Berta, Christoph Hirche, and Eneet Kaur. “Amortized Channel Divergence for Asymptotic Quantum Channel Discrimination”. In: *Letters in Mathematical Physics* 110.8 (Aug. 2020), pp. 2277–2336. DOI: [10.1007/s11005-020-01297-7](https://doi.org/10.1007/s11005-020-01297-7). arXiv: [1808.01498](https://arxiv.org/abs/1808.01498).
- [WR12] Ligong Wang and Renato Renner. “One-Shot Classical-Quantum Capacity and Hypothesis Testing”. In: *Physical Review Letters* 108.20 (May 15, 2012), p. 200501. DOI: [10.1103/PhysRevLett.108.200501](https://doi.org/10.1103/PhysRevLett.108.200501). arXiv: [1007.5456](https://arxiv.org/abs/1007.5456).
- [WW19a] Xin Wang and Mark M. Wilde. “Resource Theory of Asymmetric Distinguishability”. In: *Physical Review Research* 1.3 (Dec. 11, 2019), p. 033170. DOI: [10.1103/PhysRevResearch.1.033170](https://doi.org/10.1103/PhysRevResearch.1.033170). arXiv: [1905.11629](https://arxiv.org/abs/1905.11629).

[WW19b] Xin Wang and Mark M. Wilde. “Resource Theory of Asymmetric Distinguishability for Quantum Channels”. In: *Physical Review Research* 1.3 (Dec. 11, 2019), p. 033169. DOI: [10.1103/PhysRevResearch.1.033169](https://doi.org/10.1103/PhysRevResearch.1.033169). arXiv: [1907.06306](https://arxiv.org/abs/1907.06306).

## A Proofs of AEP Bounds

### A.1 Proof of Lemma 9 (Petz–Rényi Continuity Bound in $\alpha$ )

*Proof of Lemma 9.* Note first that for (57), where we did not explicitly require  $D(\rho\|\sigma) < \infty$ , we can restrict to that case, as otherwise also  $D_{1+\delta}(\rho\|\sigma) = \infty$  and the statement is trivial. Hence, we can assume  $\sigma$  to be invertible (otherwise restrict to the subspace where  $\sigma$  is supported). Define the operator  $X = \rho \otimes (\sigma^{-1})^T$ , and the canonical purification of  $\rho$  on  $\mathcal{H} \otimes \mathcal{H}$ :

$$|\phi\rangle = \sum_i \sqrt{\rho} |i\rangle \otimes |i\rangle \quad (125)$$

where  $|i\rangle$  is an orthonormal basis of  $\mathcal{H}$ . Then, for all  $\delta \in [-1, 1]$ :

$$D_{1+\delta}(\rho\|\sigma) = \frac{1}{\delta} \log(\langle \phi | X^\delta | \phi \rangle) \quad (126)$$

and

$$D(\rho\|\sigma) = \langle \phi | \log(X) | \phi \rangle. \quad (127)$$

For all  $t > 0$  and  $\delta \in \mathbb{R}$ , the first term in the expansion of  $t^\delta$  around  $\delta = 0$  is  $\delta \ln(t)$ . Hence let us write  $t^\delta = 1 + \delta \ln(t) + r_\delta(t)$  where  $r_\delta(t) := t^\delta - \delta \ln(t) - 1$ . Since  $e^x \geq 1 + x$  for all  $x \in \mathbb{R}$  we see that

$$r_\delta(t) = t^\delta - \delta \ln(t) - 1 \leq t^\delta + e^{-\delta \ln(t)} - 2 \quad (128)$$

$$= e^{\delta \ln(t)} + e^{-\delta \ln(t)} - 2 \quad (129)$$

$$= 2(\cosh(\delta \ln(t)) - 1) =: s_\delta(t) \quad (130)$$

It is easy to see that  $s_{-\delta}(t) = s_\delta(t)$  and  $s_\delta(t) = s_{\gamma\delta}(t^{1/\gamma})$  for all  $\gamma \in \mathbb{R}$ . Also, it is easy to verify that  $s_\delta(t)$  is monotonically increasing in  $t$  for  $t \geq 1$  and concave in  $t$  if  $\delta \leq \frac{1}{2}$  and  $t \geq 3$ . For all  $t \geq 0$ , either  $t$  or  $1/t$  will be larger than or equal to one, and so we can always use the monotonicity to write

$$s_\delta(t) = s_\delta\left(\frac{1}{t}\right) \leq s_\delta\left(t + \frac{1}{t}\right). \quad (131)$$

Using this, we get for all  $t \geq 0$  and  $\gamma \in (0, 1]$

$$s_\delta(t) = s_{\delta/\gamma}(t^\gamma) \leq s_{\delta/\gamma}(t^\gamma + t^{-\gamma}) \leq s_{\delta/\gamma}(t^\gamma + t^{-\gamma} + 1). \quad (132)$$

It is easy to see that real function  $x + 1/x$  has a global minimum for  $x > 0$  at  $x = 1$  and hence the argument at the right hand side is guaranteed to be larger than 3. Hence we can use the concavity of  $s_{\delta/\gamma}$  to write

$$\langle \phi | s_\delta(X) | \phi \rangle \leq \langle \phi | s_{\delta/\gamma}(X^\gamma + X^{-\gamma} + \mathbb{1}) | \phi \rangle \leq s_{\delta/\gamma}(\langle \phi | X^\gamma + X^{-\gamma} + \mathbb{1} | \phi \rangle) = s_{\delta/\gamma}(2^{\gamma c_\gamma(\rho\|\sigma)}) \quad (133)$$

where the inequality step is a well-known property of concave functions (Jensen’s inequality). Finally, we use Taylor’s theorem with the Lagrange form of the remainder to bound

$$s_\delta(t) = s_0(t) + \frac{d}{d\delta} s_\delta(t) \Big|_{\delta=0} \delta + \frac{1}{2} \frac{d^2}{d\delta^2} s_\delta(t) \Big|_{\delta=\xi} \delta^2 \quad (134)$$

$$= \delta^2 (\ln(t))^2 \cosh(\xi \ln(t)) \leq \delta^2 (\ln(t))^2 \cosh(\delta \ln(t)), \quad (135)$$



for all  $t \geq 0$  and some  $\xi \in (0, \delta)$ , where we have used that  $s_0(t) = \frac{d}{d\delta} s_\delta(t)|_{\delta=0} = 0$ . Hence,

$$\langle \phi | s_\delta(X) | \phi \rangle \leq s_{\delta/\gamma}(2^{\gamma c_\gamma(\rho\|\sigma)}) \leq (\delta \ln(2) c_\gamma(\rho\|\sigma))^2 \cosh(\delta \ln(2) c_\gamma(\rho\|\sigma)). \quad (136)$$

To finally prove our claims, let us start with the case where  $\delta > 0$ . Then,

$$D_{1+\delta}(\rho\|\sigma) = \frac{1}{\delta} \log(\langle \phi | X^\delta | \phi \rangle) = \frac{1}{\delta} \log(1 + \delta \ln(2) \langle \phi | \log(X) | \phi \rangle + \langle \phi | r_\delta(X) | \phi \rangle) \quad (137)$$

$$= \frac{1}{\delta} \log(1 + \delta \ln(2) D(\rho\|\sigma) + \langle \phi | r_\delta(X) | \phi \rangle) \quad (138)$$

$$\leq \frac{1}{\delta} \log(1 + \delta \ln(2) D(\rho\|\sigma) + \langle \phi | s_\delta(X) | \phi \rangle) \quad (139)$$

$$= \frac{1}{\delta} \log(1 + \delta \ln(2) D(\rho\|\sigma)) + \frac{1}{\delta} \log\left(1 + \frac{\langle \phi | s_\delta(X) | \phi \rangle}{1 + \delta \ln(2) D(\rho\|\sigma)}\right) \quad (140)$$

$$\leq D(\rho\|\sigma) + \frac{1}{\delta} \log(1 + \langle \phi | s_\delta(X) | \phi \rangle) \quad (141)$$

$$\leq D(\rho\|\sigma) + \frac{1}{\delta} \log(1 + (\delta \ln(2) c_\gamma(\rho\|\sigma))^2 \cosh(\delta \ln(2) c_\gamma(\rho\|\sigma))) \quad (142)$$

$$\leq D(\rho\|\sigma) + \delta \ln(2) (c_\gamma(\rho\|\sigma))^2 \quad (143)$$

where the third to last inequality uses  $\log(1+x) \leq \frac{x}{\ln(2)}$  and (for the second term) the fact that  $\delta$  is positive. The final inequality follows from the fact that  $k^2 - \ln(1+k^2 \cosh(k))$  is monotonically increasing in  $k$  and hence positive.

If  $\delta < 0$ , the issue arises that  $1 + \delta \ln(2) D(\rho\|\sigma)$  no longer has to be greater than 1 (it might in fact be negative) and so we have to apply a slightly different argument. Starting analogously, we get

$$D_{1+\delta}(\rho\|\sigma) = \frac{1}{\delta} \log(1 + \delta \ln(2) D(\rho\|\sigma) + \langle \phi | r_\delta(X) | \phi \rangle) \quad (144)$$

$$\geq \frac{1}{\delta} \log(1 + \delta \ln(2) D(\rho\|\sigma) + \langle \phi | s_\delta(X) | \phi \rangle) \quad (145)$$

$$\geq D(\rho\|\sigma) + \frac{1}{\delta \ln(2)} \langle \phi | s_\delta(X) | \phi \rangle \quad (146)$$

$$\geq D(\rho\|\sigma) + \delta \ln(2) (c_\gamma(\rho\|\sigma))^2 \cosh(\delta \ln(2) c_\gamma(\rho\|\sigma)) \quad (147)$$

where we used  $\log(1+x) \leq \frac{x}{\ln(2)}$  in the third inequality. Finally, if we assume that  $|\delta| \leq \frac{\log 3}{2c_\gamma(\rho\|\sigma)}$ , then  $\ln(2) \cosh(\ln(3)/2) < 1$  and so we get

$$D_{1+\delta}(\rho\|\sigma) \geq D(\rho\|\sigma) + \delta (c_\gamma(\rho\|\sigma))^2. \quad (148)$$

Note that since  $c_\gamma(\rho\|\sigma) \geq \frac{\log(3)}{\gamma}$  the condition  $|\delta| \leq \gamma/2$  is automatically fulfilled.  $\square$

## A.2 Proof of Lemma 11 (AEP Convergence Bound)

*Proof of Lemma 11.* We start with the proof of (68). We use [WW19a, Prop. 4], which states that for all  $\alpha \in [0, 1)$  and any  $\varepsilon \in [0, 1)$

$$D_{\max}^\varepsilon(\rho\|\sigma) \geq D_\alpha(\rho\|\sigma) + \frac{2}{\alpha-1} \log\left(\frac{1}{1-\varepsilon}\right). \quad (149)$$

Note that the statement in [WW19a] is given for smoothing in trace-distance, but since the trace distance is always less than the sine distance, for fixed  $\varepsilon$  the trace-distance-smoothed max-divergence is smoothed over a larger ball, and hence also always smaller, which is why the statement for the

purified-distance-smoothed max-divergence is implied. We apply this to  $\rho^{\otimes n}$  and  $\sigma^{\otimes n}$  and use the additivity of the Petz-Rényi relative entropy to get:

$$\frac{1}{n}D_{\max}^{\varepsilon}(\rho^{\otimes n}\|\sigma^{\otimes n}) \geq D_{\alpha}(\rho\|\sigma) + \frac{1}{n} \frac{2}{\alpha - 1} \log\left(\frac{1}{1 - \varepsilon}\right) \quad (150)$$

Now, we combine this with (60) of Lemma 9 to get

$$\frac{1}{n}D_{\max}^{\varepsilon}(\rho^{\otimes n}\|\sigma^{\otimes n}) \geq D(\rho\|\sigma) + \ln(2) \cosh\left(\frac{\log(3)}{2}\right) c_{\gamma}(\rho\|\sigma)^2 (\alpha - 1) + \frac{1}{n} \frac{2}{\alpha - 1} \log\left(\frac{1}{1 - \varepsilon}\right) \quad (151)$$

together with the condition  $0 \leq 1 - \alpha \leq \frac{\log 3}{2c_{\gamma}(\rho\|\sigma)}$ . We are now free to choose  $\alpha$  to optimize the right-hand side. It is easy to see that the right-hand side will be maximal if both terms are equal, which is achieved for

$$1 - \alpha = \sqrt{\frac{2 \log\left(\frac{1}{1 - \varepsilon}\right)}{n \ln(2) \cosh\left(\frac{\log(3)}{2}\right) c_{\gamma}(\rho\|\sigma)^2}} = \frac{4}{K_1 c_{\gamma}(\rho\|\sigma)} \sqrt{\frac{\log\left(\frac{1}{1 - \varepsilon}\right)}{n}} \quad (152)$$

Hence we get

$$\frac{1}{n}D_{\max}^{\varepsilon}(\rho^{\otimes n}\|\sigma^{\otimes n}) \geq D(\rho\|\sigma) - \frac{K_1}{\sqrt{n}} c_{\gamma}(\rho\|\sigma) \sqrt{\log\left(\frac{1}{1 - \varepsilon}\right)} \quad (153)$$

together with the condition

$$n \geq \log\left(\frac{1}{1 - \varepsilon}\right) \left(\frac{4}{K_1 \log(3)}\right)^2. \quad (154)$$

In order to get an expression without a condition on  $n$  we have to choose a different  $\alpha$ . Choosing

$$1 - \alpha = \frac{\log(3)}{2c_{\gamma}(\rho\|\sigma)\sqrt{n}} \quad (155)$$

satisfies the condition on  $1 - \alpha$  for all  $n$  and gives:

$$\frac{1}{n}D_{\max}^{\varepsilon}(\rho^{\otimes n}\|\sigma^{\otimes n}) \geq D(\rho\|\sigma) - \frac{c_{\gamma}(\rho\|\sigma)}{\sqrt{n}} \left[ \frac{\ln(2) \log(3)}{2} \cosh\left(\frac{\log(3)}{2}\right) + \frac{4}{\log(3)} \log\left(\frac{1}{1 - \varepsilon}\right) \right]. \quad (156)$$

The simplification (64) follows from  $\log(3) > 1$  and

$$\frac{\ln(2) \log(3)}{2} \cosh\left(\frac{\log(3)}{2}\right) < 1. \quad (157)$$

The second equation (70) is proved very analogously. We start again with a relation to a Rényi entropy for  $\alpha > 1$  [KW20, Prop. 4.61]:

$$D_{\max}^{\varepsilon}(\rho\|\sigma) \leq D_{\alpha}(\rho\|\sigma) + \frac{2}{\alpha - 1} \log\left(\frac{1}{\varepsilon}\right) + \log\left(\frac{1}{1 - \varepsilon^2}\right). \quad (158)$$

Note that [KW20, Prop. 4.61] uses the sandwiched Rényi divergence, which however is always less than the Petz, and hence the above statement is implied. We again apply this to  $n$  tensor powers of  $\rho$  and  $\sigma$  and combine it with (57) from Lemma 9 to obtain:

$$\frac{1}{n}D_{\max}^{\varepsilon}(\rho^{\otimes n}\|\sigma^{\otimes n}) \leq D(\rho\|\sigma) + \ln(2) c_{\gamma}(\rho\|\sigma)^2 (\alpha - 1) + \frac{2}{n(\alpha - 1)} \log\left(\frac{1}{\varepsilon}\right) + \frac{1}{n} \log\left(\frac{1}{1 - \varepsilon^2}\right) \quad (159)$$

together with the condition

$$\alpha - 1 \leq \frac{\gamma}{2}. \quad (160)$$

The right hand side is minimized again for

$$\alpha - 1 = \sqrt{\frac{2 \ln(2) \log(\frac{1}{\varepsilon})}{n c_\gamma(\rho \|\sigma)^2}} = \frac{4}{K_2 c_\gamma(\rho \|\sigma)} \sqrt{\frac{\log(\frac{1}{\varepsilon})}{n}} \quad (161)$$

which gives

$$\frac{1}{n} D_{\max}^\varepsilon(\rho^{\otimes n} \|\sigma^{\otimes n}) \leq D(\rho \|\sigma) + \frac{K_2}{\sqrt{n}} c_\gamma(\rho \|\sigma) \sqrt{\log\left(\frac{1}{\varepsilon}\right)} + \frac{1}{n} \log\left(\frac{1}{1 - \varepsilon^2}\right) \quad (162)$$

as well as the condition

$$n \geq \log\left(\frac{1}{\varepsilon}\right) \left(\frac{8}{\gamma c_\gamma(\rho \|\sigma) K_2}\right)^2. \quad (163)$$

Alternatively, choosing

$$\alpha - 1 = \frac{\log(3)}{2 c_\gamma(\rho \|\sigma) \sqrt{n}} \quad (164)$$

will again give (63), and the simplified form (65) follows by the same argument that  $\log(3) > 1$  and

$$\frac{\ln(2) \log(3)}{2} < 1. \quad (165)$$

This concludes the proof.  $\square$