

Upper bounds for relative entropy of entanglement based on active learning

Shi-Yao Hou,^{1,2} Chenfeng Cao,² D. L. Zhou,^{3,4,5,6} and Bei Zeng^{2,*}

¹College of Physics and Electronic Engineering, Center for Computational Sciences, Sichuan Normal University, Chengdu 610068, China

²Department of Physics, The Hong Kong University of Science and Technology, Clear Water Bay, Kowloon, Hong Kong, China

³Institute of Physics, Beijing National Laboratory for Condensed Matter Physics, Chinese Academy of Sciences, Beijing 100190, China

⁴School of Physical Sciences, University of Chinese Academy of Sciences, Beijing 100049, China

⁵CAS Central of Excellence in Topological Quantum Computation, Beijing 100190, China

⁶Songshan Lake Materials Laboratory, Dongguan, Guangdong 523808, China

(Dated: October 10, 2021)

Quantifying entanglement for multipartite quantum state is a crucial task in many aspects of quantum information theory. Among all the entanglement measures, relative entropy of entanglement E_R is an outstanding quantity due to its clear geometric meaning, easy compatibility with different system sizes, and various applications in many other related quantity calculations. Lower bounds of E_R were previously found based on distance to the set of positive partial transpose states. We propose a method to calculate upper bounds of E_R based on active learning, a subfield in machine learning, to generate an approximation of the set of separable states. We apply our method to calculate E_R for composite systems of various sizes, and compare with the previous known lower bounds, obtaining promising results. Our method adds a reliable tool for entanglement measure calculation and deepens our understanding for the structure of separable states.

I. INTRODUCTION

Quantum entanglement is a kind of correlation that is beyond any possible classical probabilistic correlation [1]. Entanglement has played a crucial role in almost all aspects of quantum information theory, such as quantum channel capacity [2], quantum algorithm [3], quantum error correction [4] and quantum sensing [5]. In recent years, entanglement also becomes a central concept in the interdisciplinary field of quantum information theory, condensed matter physics, and quantum gravity [6, 7].

For any given (multipartite) quantum state ρ , one fundamental question one would like to know is whether ρ is entangled or not, and a further question, how much ρ is entangled [8]. Entanglement measures are quantities providing such kind of information. Normally, an entanglement measure $E(\rho)$ satisfies some natural assumptions such as invariance under local unitary operations, and non-increasing under general local operations [9, 10].

Among many entanglement measures, relative entropy of entanglement E_R is one important quantity [11]. For any quantum state ρ , $E_R(\rho)$ naturally measures “how far” ρ is from the set of separable states. As illustrated in Fig. 1, inside the quantum state space, for an entangled state, which is represented by A or B , the relative entropy of entanglement is the *distance* of the state to the set of separable states (denoted by SEP in the figure). Or equivalently, the task of finding $E_R(\rho)$ is to look for a state in SEP (A' or B') to minimize *distance* to the entangled state ρ (A or B). Besides having a good geo-

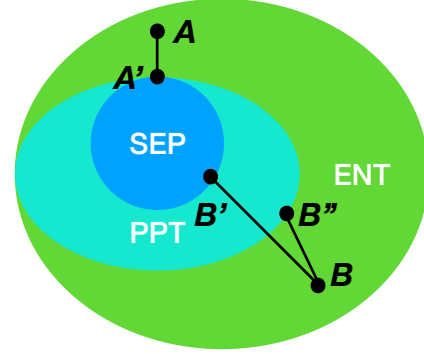


FIG. 1: Demonstration of the quantum state space. SEP represents the set of separable states, PPT represents the set of states with positive partial transpose, and ENT represents the set of entangled states. A and B represents the state ρ for which the relative entropy of entanglement is to be calculated. For the state A , the boundary state σ satisfies the PPT criterion. However, for the state B , the boundary state B' does not satisfy the PPT criterion. Therefore, the relative entropy of entanglement calculated using PPT states is smaller than the actual relative entropy of entanglement.

metric interpretation, $E_R(\rho)$ is also known to be compatible for multipart systems, providing an upper bound for entanglement distillation [12, 13], and connected to the study of many other aspects in quantum information theory, such as the use of relative entropy in some information-theoretic quantities [11, 14].

Calculation of $E_R(\rho)$ is an optimization problem over the set of separable states [15]. If you can characterize the set, then the calculation of $E_R(\rho)$ can be solved by semi-definite programming. However, such a set of separable states is notoriously hard to characterize, despite known to be convex [1]. On the other hand, the set of

*zengb@ust.hk

states with positive partial transpose (PPT) is much easier to characterize [16]. Calculating “how far” the state ρ is from the set of PPT states in terms of relative entropy can then be formulated as a certain kind of Semi-Definite Programming (SDP) [17, 18]. This then gives a lower bound of $E_R(\rho)$, as illustrated in Fig. 1. As we know, the set of separable states (SEP in Fig. 1) is a subset of the set of PPT states (PPT in Fig. 1). Therefore, for some states, such as the state B , the closest state in PPT is B'' , while the closest state in SEP is B' . Consequently, the distance of BB' is smaller than BB'' , hence the point B'' gives a lower bound for $E_R(\rho)$.

In order to get an upper bound of $E_R(\rho)$, we will need to approximate the set of separable states from inside. Notice that the extreme points of the set of separable states, which is convex, are simply pure product states. Intuitively, we can use, e.g. the convex hull approximation (CHA) as described in [19] to generate such an approximation. However, since the set of separable states has a much larger dimension than the set of its extreme points, how to select the extreme points is a difficult task – simple random sampling does not lead to good approximation [19].

To overcome the above-mentioned difficulty, we propose to use the a method based on active learning. Active learning, also called query learning, or optimal experiment design, is one subfield in machine learning. In general, most supervised learning algorithms require a large amount of data. However, for many problems, the data are unlabelled, or labelling of the data is an expensive task. Actively learning can be used to dynamically label useful data during the training process [20–22]. In our case, as a prior knowledge, we know some points on the boundary of the set of separable states e.g. we can start from some extreme points and some linear combination of them. How accurate the approximation depends on the sampling of those points. In other words, some of those points on the boundary are *useful* and some are *useless*. Whether a point is useful or useless depends on the actual state ρ given, hence unlabelled. We can then use active learning to select these points and improve our approximation to the set of all separable states.

We apply our method to calculate $E_R(\rho)$ for composite systems of various sizes, and compare our results with the previous lower bounds given by SDP. We consider bipartite system of dimension $d_A \otimes d_B$. In the case of $d_A d_B \leq 6$, where the set of PPT is the same as that of SEP [16], our results are very close to the former results based on PPT. In the case of $d_A d_B > 6$, our method gives an upper bound, which is always larger than the value given by PPT, and in many cases we believe that our value is closer to the actual value of $E_R(\rho)$. Our results add a new tool for entanglement measure calculation and deepen our understanding about the difference between the set structures of SEP and PPT.

We organize our paper as follows: in Sec II, we discuss our method based on active learning. In Sec III, we show

our results in different situations: firstly for two kinds of states (Werner states and isotropic states), for which we know the analytical form of their relative entropy of entanglement, to compare and check the validity of our algorithm; secondly for a special case of states that are bound entangled (i.e. entangled state that are PPT), we calculate their relative entropy of entanglement, to demonstrate that our method gives better estimation for the true value of the method of PPT; finally for different dimensions, we generate random states and calculate their relative entropy of entanglement, to demonstrate the power of our method for giving new understandings of the difference between SEP and PPT. In Sec IV, we summarize our results and discuss some future directions.

II. METHOD BASED ON ACTIVE LEARNING

In this section, we discuss our algorithm for calculating the upper bounds of relative entropy of entanglement based on active learning. We start to recall some basic properties of $E_R(\rho)$, then discuss the active learning method and its application for calculating the upper bound of $E_R(\rho)$.

A. Relative entropy of entanglement

For a given bipartite system AB with Hilbert space $\mathcal{H}_A \otimes \mathcal{H}_B$, a state ρ_{AB} is separable if it can be written in a convex combination

$$\rho_{AB} = \sum_i \lambda_i \rho_A^{(i)} \otimes \rho_B^{(i)}, \quad (2.1)$$

where ρ_A and ρ_B are states in Hilbert space \mathcal{H}_A and \mathcal{H}_B , respectively. The set of all separable states, denoted by SEP, is a convex set, given by its definition. The extreme points of SEP are given by the states of the form $\rho_A \otimes \rho_B$, where ρ_A and ρ_B are arbitrary pure states.

Denote the convex set of SEP as \mathcal{D} . For any given bipartite state ρ , the relative entropy of entanglement $E_R(\rho)$ is given by finding a state $\tau \in \mathcal{D}$ that minimizes the relative entropy between ρ and τ . That is,

$$E_R(\rho) = \min_{\sigma} S(\rho||\sigma) = \min_{\sigma \in \mathcal{D}} \text{Tr}(\rho \log \rho - \rho \log \sigma) \quad (2.2)$$

where σ is a state in \mathcal{D} . However, finding σ to minimize $S(\rho||\sigma)$ is a difficult task, mainly due to the fact that characterizing the set of SEP is hard [23, 24]. In practice, even for systems with dimension $d_A d_B > 6$, it is already hard to find whether a given state is separable or not [25].

$E_R(\rho)$ could be seen as a *distance* between the state ρ and the set of SEP. Finding the *distance* means finding a point from the set which is the closest to the state. As shown in Fig. 1, for a state ρ_A represented by the point

A , the task is to find the point A' (representing the state $\sigma_{A'}$), to minimize

$$E_R(\rho_A) = \text{Tr}(\rho \log \rho_A - \rho \log \sigma_{A'}). \quad (2.3)$$

With respect to the set of separable states \mathcal{D} , the problem could be formulated as the following problem.

$$\min \text{Tr}(\rho(\log \rho - \log \sigma)) \quad \text{s.t.} \quad \sigma \in \mathcal{D}, \quad (2.4)$$

$$\text{i.e.} \quad \sigma = \sum_i \lambda_i \sigma_i, \sum_i \lambda_i = 1, \lambda_i \geq 0, \quad (2.5)$$

where σ_i s are product states. Notice that the function `quantum_rel_entr(X,Y)` provided in CVXQUAD [26] can give a good approximation of the true minimum of the relative entropy. Therefore, the above-mentioned optimization problem could be solved using semi-definite programming (SDP). We can use, e.g. the CVX package to perform the task of SDP [27, 28].

However, the characterization of the set of SEP is known to be very difficult, so does the calculation of $E_R(\rho)$. It has been proposed to approximate the set of SEP by the set of states with positive partial transpose (denoted by PPT) [17], which is easier to characterize. However, it is well known that the set PPT is strictly larger than the set of SEP for $d_A d_B > 6$. Hence the method based on PPT gives a lower bound for $E_R(\rho)$, and does not give any information for bound entangled states. In order to obtain a better approximation for $E_R(\rho)$, one would then need a better approximation to the set of SEP from the inside.

B. Active learning

Supervised learning has achieved great success in the past decades. However, sometimes only a small part or even none in the data set is labelled due to high labelling cost. Active learning method can dynamically label useful data during the training process. Take classification task as an example, suppose we have a small labeled dataset and a large unlabeled dataset. The algorithm is as follows:

- 1 Train the classifier with the labelled dataset. If the full dataset is unlabelled, using the oracle to label this dataset first and train the classifier.
- 2 Calculate the final accuracy.
- 3 Select data points close to the boundary from the unlabelled dataset, label these samples through an oracle and add it to the labelled training dataset.
- 4 Repeat step 1 to 3 until it reaches the desired accuracy.

In some scenarios, active learning requires only $O(\log(k))$ labeled data samples to achieve the same performance as passive learning with k labeled samples

[20–22]. We can therefore expect an exponential speed-up of active learning compared with passive learning considering the similarity between our problem and those cases. As the quantum system size n increase, we need to sample exponential random product states to estimate the upper bounds of relative entropy of entanglement. But for active learning, $O(n)$ samples is probably enough. Therefore, the method based on active learning is scalable and can be applied to larger systems.

C. Algorithm based on active learning

We now develop an algorithm to estimate the set of separable states. We know that the extreme points of SEP are given by all the pure product states of the form

$$\rho_{sp} = |i\rangle\langle i| \otimes |j\rangle\langle j| \quad (2.6)$$

with $|i\rangle$ and $|j\rangle$ are arbitrary pure states in \mathcal{H}_A and \mathcal{H}_B , respectively. We then randomly sample a set of these extreme points $\{\sigma_1, \sigma_2, \dots, \sigma_n\}$, then form a convex hull \mathcal{C} . \mathcal{C} then gives an approximation (i.e. the convex hull approximation, CHA) of \mathcal{D} from inside. Thus the result is an upper bound. The result will be in the form of

$$\sigma = \sum_i c_i \sigma_i. \quad (2.7)$$

Intuitively, we can then build a classifier based on CHA using supervised learning by constructing and training a deep neural network (DNN), to characterize the set of separable states. However, this does not result in a good approximation as discussed in [19]. Or in other words, simple random sampling does not lead to good approximation. This is due to the fact that the set of separable states has a much larger dimension than the set of its extreme points. Consequently, how to select the extreme points becomes a difficult task.

Notice that the contribution of different c_i s are different. For example, In Fig. 2, we can see that the final σ is a linear combination of σ_1 and σ_4 . States σ_2 and σ_3 has no contribution to σ . In this example, those points on the boundary without much contribution could be moved arbitrarily on the arc right to σ_1 and σ_4 without any effect on the final result, while if σ_1 and σ_4 move, the result would be significantly changed. Therefore, σ_1 and σ_4 could be labelled as *useful* points, while σ_2 and σ_3 could be labelled as *useless* points and can be discarded.

However, the boundary of the set of separable states is way much more complicated than just a circle. Moreover, whether a point is useful does not remain unchanged, e.g. if we choose a point on the left of σ_1 , then σ_1 becomes useless. Since the extreme points are labelled as either *useful* or *useless*, a natural way is to use the method of active learning.

Now we are ready to describe our algorithm based on active learning. First we could randomly generate some

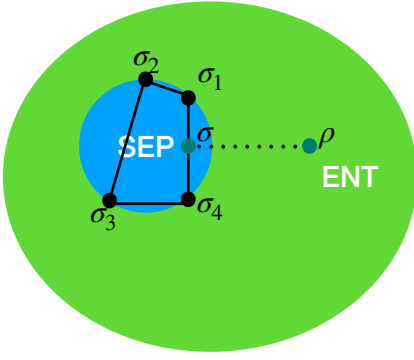


FIG. 2: Demonstration of the algorithm. We randomly sample $\sigma_1, \sigma_2, \dots, \sigma_n$, and form a convex hull. Then use SDP to find σ . Based on the initial results, abandon σ_1 s that are too far from the obtained σ . Sample more σ_i s, use SDP to find a new σ . Repeat until the results can no longer be improved.

points σ_i in the form of

$$\sigma_i = |i\rangle\langle i| \otimes |j\rangle\langle j|, \quad (2.8)$$

where $|i\rangle$ and $|j\rangle$ are pure states randomly generated in \mathcal{H}_A and \mathcal{H}_B . With these extreme points, we can construct a convex hull. On this convex hull, we perform SDP to minimize $E_R(\rho_A) = \text{Tr}(\rho \log \rho_A - \rho \log \sigma_{A'})$ and found a state

$$\sigma = \sum_i c_i \sigma_i. \quad (2.9)$$

Here we can set a threshold ϵ , for those σ_i s, of which the corresponding $c_i \geq \epsilon$, we can say these points contribute significantly to the result and can be labelled as *useful*. For those σ_i s of which the corresponding $c_i < \epsilon$, we can say these points has little contribution, hence *useless* and to be discarded. Therefore, the SDP process works as the query or oracle in active learning. Take Fig. 2 as an example, obviously, the solution is

$$\sigma = c_1 \sigma_1 + c_2 \sigma_2. \quad (2.10)$$

c_3 and c_4 corresponding σ_3 and σ_4 are both 0. Therefore, σ_1 and σ_2 are labelled as *useful*, while σ_3 and σ_4 are labelled as *useless* and discarded. Then, if we want to obtain a better result, we can sample points near σ_1 and σ_2 and perform SDP again. Sampling near a state $|i\rangle$ can be done by

$$|i'\rangle = U|i\rangle, \quad (2.11)$$

where the unitary operation

$$U = e^{-iH\delta}, \quad (2.12)$$

with H being a randomly generated Hamiltonian and δ being a small number (time interval). Then we can perform the queries on the new samples again. By doing

sampling and queries iteratively we can get a relative result.

D. Effectiveness of active learning

As an example, we show how our algorithm based on active learning approaches an upper bound for the relative entropy of entanglement $E_R(\rho)$. In Fig. 3, we demonstrate $E_R(\rho)$ during the iterations of active learning for state $|00\rangle + |11\rangle + |12\rangle$ with the dimension of \mathcal{H}_A and \mathcal{H}_B being 2 and 3, respectively. For such a state, the set of states with PPT is exactly the same as the set of separable states. The relative entropy of such a state obtained from PPT is 0.918, which could be seen as the true value. From Fig. 3, we can see that initially, just by sampling the points randomly, we obtain a result of 1.01, which is quite larger than the ideal value. However, by using active learning, after 10-20 iterations, the result get to close to the ideal value. By using active learning, we get a good approximation of the relative entropy of entanglement by a small number of queries and iterations, by avoiding the full labelling of all the extreme points, which is impossible.

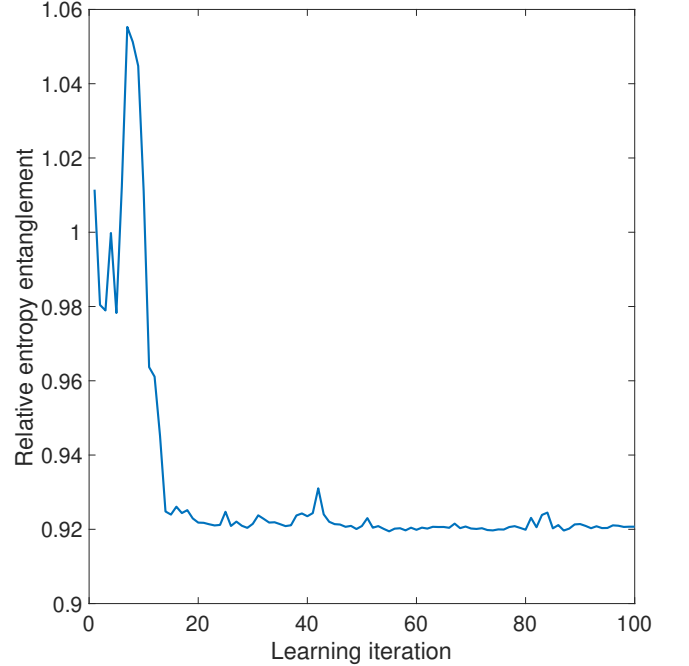


FIG. 3: Effect of active learning. The result becomes more accurate during the iterations.

III. RESULTS

In this section, we apply our method to various situations of interest. We focus on bipartite systems of dimension $d_A d_B$. We take three steps: firstly we apply our method to calculate $E_R(\rho)$ for states whose relative entropy of entanglement is analytically known, and compare our results with both the analytical value and the value given by the PPT method. Then we take a step further to evaluate $E_R(\rho)$ for a set of example of bound entangle states, where the PPT method cannot give useful information for $E_R(\rho)$, and demonstrate that our bound likely give a good approximation for the real value of $E_R(\rho)$. Finally, we apply our method to randomly generated states for different values of $d_A d_B$, to show that the difference between the set of SEP and the set of PPT, for $d_A d_B > 6$.

In our numerical experiment of calculating E_R based on active learning, we choose the number of σ_i 's to be 2000 and the number of iterations for finding a better σ to be 50. We tested our algorithm on a workstation with Intel Xeon E5-2698 CPU and 256 GB memory. The relationship between the average time cost for a random density matrix and the local dimensions is shown in Table I. According to our test, a majority of the portion of the time cost is due to the generation of random σ_i 's in each iteration.

TABLE I: Typical time cost for different system size

$d_A \otimes d_B$	Time (s)
$2 \otimes 2$	81.5
$2 \otimes 3$	159.6
$2 \otimes 4$	338.8
$3 \otimes 3$	453.0
$3 \otimes 4$	1092.2
$4 \otimes 4$	2795.5

A. States with analytically known E_R

To demonstrate the validity of our algorithm for calculating the upper bound of E_R , we first look at two kind of states whose E_R are analytically known.

We start with the famous Werner states for $d \otimes d$ dimensional bipartite systems, which are states invariant under any unitary transform with the form $U \otimes U$ [29]. There are several ways for parametrizing these states. Here, we use the following form to write a Werner states as

$$\rho_W(\alpha) = \frac{1}{d^2 - d\alpha}(I_{d^2} - \alpha F), \quad (3.1)$$

where d is the dimension, and $F = \sum_{ij} |ij\rangle\langle ij|$ (which is actually a swap operator).

Whether a Werner state is entangled is determined by

the parameter α , and can be given by the PPT criterion. That is, if a Werner state has positive partial transpose, then it is separable, otherwise it is entangled. Therefore, when calculating E_R for Werner states, optimization over either the set of SEP or PPT should give the same result.

It is known that for $2 \otimes 2$ Werner states, the state is separable if $\alpha \leq 1/2$ and entangled if $\alpha > 1/2$. For $3 \otimes 3$ Werner states, the state is separable if $\alpha \leq 1/3$ and entangled if $\alpha > 1/3$ [29].

Due to the symmetry, E_R for Werner states can be calculated analytically, which is given by [30]

$$E_R(\rho_W) = e_R(\text{tr}(\rho_W F)), \quad (3.2)$$

where $F = \sum_{ij} |ij\rangle\langle ij|$, and e_R is the function

$$e_R(f) = \log(2) - S\left(\frac{1+f}{2}, \frac{1-f}{2}\right), \quad (3.3)$$

with $S(p_1, p_2, \dots, p_n) = -\sum_k p_k \log p_k$. In other words, for Werner state, the relative entropy of entanglement could be calculated by selecting σ as the "boundary" Werner state. That is, for $2 \otimes 2$ Werner state, $\sigma = \rho_W(1/2)$ and for $3 \otimes 3$ Werner state, $\sigma = \rho_W(1/3)$.

We performed the calculation of E_R on $2 \otimes 2$ and $3 \otimes 3$ Werner states with three different methods: value from analytical formula, method based on PPT optimization, and our method based on active learning. The results are shown in Fig. 4.

As shown in Fig. 4, our approach using active learning as the approximation of \mathcal{D} works perfectly for Werner states. The results of our approach, as well as the previous method based on PPT, agree well with the analytical results for different dimensions, see Fig. 4(a) and Fig. 4(b).

Notice that, which is shown in the middle small figure in Fig. 4(a), the results of our approach are slightly larger than that of PPT, to a scale of 0.01% of the actual analytical value. The reason is that our approach approximates the set \mathcal{D} from inside and in fact calculates a upper bound. Therefore our results are always slightly larger than that is given by the PPT method.

We then further look at isotropic states, which is a family of $d \otimes d$ dimension bipartite quantum states that are invariant under any unitary transform with the form $U \otimes U^*$ [31]. The parametrized form of isotropic states is given by

$$\rho_i(\alpha) = \frac{1-\alpha}{d^2} I_{d^2} + \alpha |\psi_+\rangle\langle\psi_+|, \quad (3.4)$$

where d is the dimension, and $|\psi_+\rangle = \frac{1}{\sqrt{d}} \sum_j |jj\rangle$, which is actually a standard maximally entangled state.

Similar to the case of Werner states, whether an isotropic state is entangled is determined by the parameter α , and can also be given by the PPT criterion. Therefore, when calculating E_R for Werner states, optimiza-

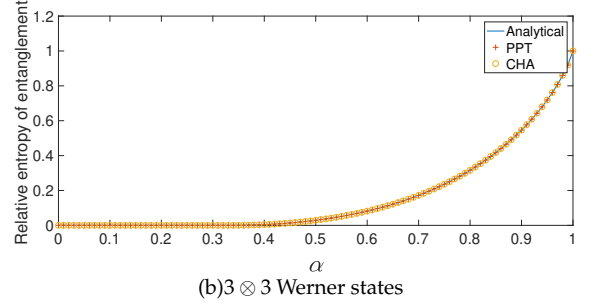
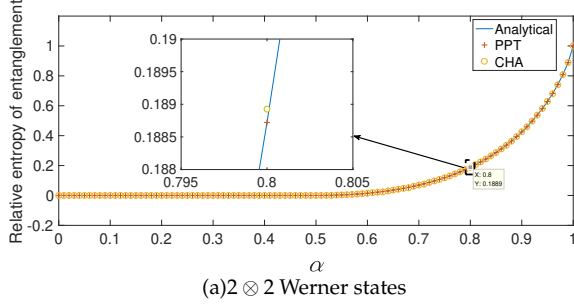


FIG. 4: Results of the relative entropy of entanglement calculated using PPT and active learning for 2- and 3-dimension Werner states. The red crosses are the results of PPT and the orange circle are the results of active learning, with the blue line as the analytical results

tion over either the set of SEP or PPT should give the same result.

It is known that for both 2×2 and 3×3 isotropic states, the state is separable if $\alpha \leq 1/3$ and entangled if $\alpha > 1/3$. With good symmetry, the result of relative entropy of entanglement of a certain isotropic state can be calculated analytically [32]. For an isotropic state ρ_i , let $\hat{f} = \text{tr}(\rho_i \hat{F})$ with $\hat{F} = \sum_{ij} |ii\rangle\langle jj|$. Then E_R is given by

$$E_R(\rho_i) = \log(2) - \left(1 - \frac{\hat{f}}{d}\right) \log(d-1) - S\left(\frac{\hat{f}}{d}, 1 - \frac{\hat{f}}{d}\right). \quad (3.5)$$

Similarly to Werner states, the calculation of relative entropy of entanglement of isotropic states could be carried out by choosing σ as the boundary state, i.e. $\sigma = \rho_i(1/3)$.

We performed the calculation of the relative entropy of entanglements on 2×2 and 3×3 isotropic states with different methods: value from analytical formula, method based on PPT optimization, and our method based on active learning. The results are shown in Fig. 5.

Similar to the results of Werner states, our approach using active learning as the approximation of \mathcal{D} works well for isotropic states. The results of our approach, as well as SDP using PPT, agree well with the analytical results for different dimensions, as shown in Fig. 4(a) and Fig. 4(b).

B. Example for bound entangled states

We now apply our algorithm to find upper bound of E_R for bound entangled state, which are entangled states with positive partial transpose. In this case, the method based on PPT will just give a value zero for a lower bound of E_R , which in fact fails to give any information of E_R . Our method based on active learning, instead, gives an upper bound for E_R , which in many cases can give results close to the true value of E_R .

We consider the following example, where a set of two-qutrit pure states $\{|v_1\rangle, \dots, |v_5\rangle\}$ form the well known unextendible product basis [33]:

$$\begin{aligned} |v_1\rangle &= (|00\rangle - |01\rangle)/\sqrt{2}, \\ |v_2\rangle &= (|21\rangle - |22\rangle)/\sqrt{2}, \\ |v_3\rangle &= (|02\rangle - |12\rangle)/\sqrt{2}, \\ |v_4\rangle &= (|10\rangle - |20\rangle)/\sqrt{2}, \\ |v_5\rangle &= (|0\rangle + |1\rangle + |2\rangle)^{\otimes 2}/3. \end{aligned} \quad (3.6)$$

It is known that

$$\rho_{\text{tiles}} = (\mathbb{I} - \sum_{i=1}^5 |v_i\rangle\langle v_i|)/4 \quad (3.7)$$

is a bound entangled state. Therefore, the calculation of E_R for ρ_{tiles} based on the PPT method returns the value zero.

Consider the following set of states with parameter α :

$$\rho_t(\alpha) = \alpha \rho_{\text{tiles}} + \frac{1-\alpha}{9} I. \quad (3.8)$$

It is known that the critical point for whether $\rho_t(\alpha)$ is entangled or not is $\alpha \approx 0.8649$ [19].

We calculated E_R for $\rho_t(\alpha)$ using based on active learning, and the results are shown in Fig. 6. In the middle small figure of Fig. 6, we see that the relative entropy entanglement goes from zero to non-zero value from around 0.86, which agree well with critical value $\alpha \approx 0.8649$. These results demonstrate the effectiveness of the active learning approach for finding upper bounds of E_R that is close to the true values.

C. Random States

We apply our algorithm to find upper bounds of E_R for bipartite system of various dimensions of d_A, d_B , and compare with the lower bounds based on the PPT

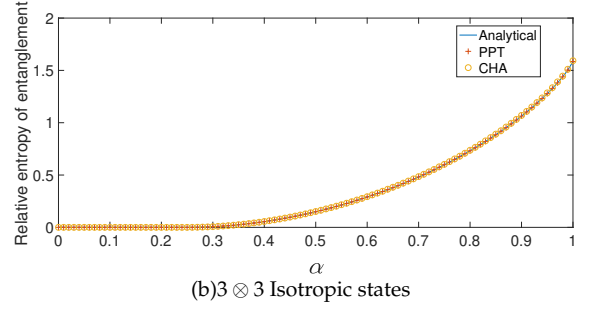
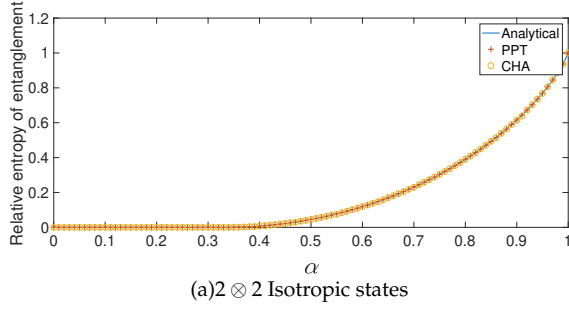


FIG. 5: Results of the relative entropy of entanglement calculated using PPT and active learning for 2- and 3-dimension isotropic state. The red crosses are the results of PPT and the orange circle are the results of active learning, with the blue lines as the analytical results

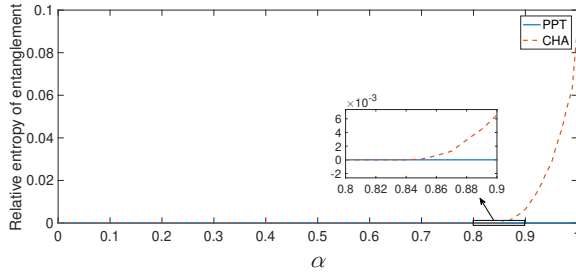


FIG. 6: Results of E_R for $\rho_t(\alpha)$. Calculation using PPT will give the results of zero (blue line), while that using active learning will give a non-zero relative entropy of entanglement (orange line), which we think is closer to the actual one.

method.

We consider 4 cases, with dimensions $2 \otimes 2$, $2 \otimes 3$, $2 \otimes 4$, and $3 \otimes 3$. For each case, we randomly generated 50 entangled states using a similar method discussed in [19]). We then calculate the upper bound of E_R based on the active learning method, and the lower bound of E_R based on the PPT method. All the results are shown in Fig. 7.

Since for $d_A d_B \leq 6$, the set of SEP is the same as the set of PPT, the upper bound and lower bound should be very close to each other. This is indeed what we see for the case of $2 \otimes 2$ and $2 \otimes 3$, as shown in Fig. 7(a) and Fig. 7(b). For most cases, the two bound coincide to give the true value of E_R . For some states, the results of active learning is slightly larger than that of PPT. The results clearly meet the predictions of our theoretical analysis, demonstrating the effectiveness of our method.

For $d_A d_B > 6$, the set of SEP is strictly smaller than that of PPT. For random states, one would expect gap between the upper bounds given by active learning and the lower bounds given by PPT. This indeed what we see in the cases of $2 \otimes 4$ and $3 \otimes 3$, as shown in Fig. 7(c), Fig. 7(d), Fig. 7(e), and Fig. 7(f).

In the cases of $2 \otimes 4$ and $3 \otimes 3$, we see that for most states, the results of active learning is still very close to that of PPT. However, for some states, the results of ac-

tive learning is significantly larger than that of PPT. And the gap is in fact larger in the case of $3 \otimes 3$ compared to the case of $2 \otimes 4$. In the cases of $3 \otimes 4$ and $4 \otimes 4$, for almost all states sampled, the upper bounds of E_R calculated from active learning are larger than that of PPT. These observations agree with the previous observation on the volume of SEP compared to PPT [34, 35]. With the values of upper bound of E_R , our results also provide new tools to study such volume and deepen our understanding of the difference between SEP and PPT.

IV. DISCUSSION

In this work, we propose a reliable method for calculating upper bounds for relative entropy of entanglement, based on active learning to generate an approximation for the set of separable states. We apply our method to calculate the upper bounds of the measure for the composite system of various sizes, and compare to the previous known lower bounds, obtaining promising results. Since the active learning approach is a powerful general idea to approximate convex set from inside, our method is naturally generalizable for obtaining upper bounds for any quantity of interest with optimization over convex set, especially in the case that extreme points of these sets are relatively easy to sample. We hope that our work adds new understanding on the structure of separable states, provides further information on the difference between the set of separable states and PPT states in various dimensions, and sheds light on the calculation of relevant quantities based on optimization over convex sets.

Acknowledgement

We thank Sirui Lu for helpful discussions. S.-Y.H is supported by National Natural Science Foundation of China under Grant No. 11847154. D.L.Zhou is supported from NSF of China (Grant No.11775300), the National Key Research and Development Program of

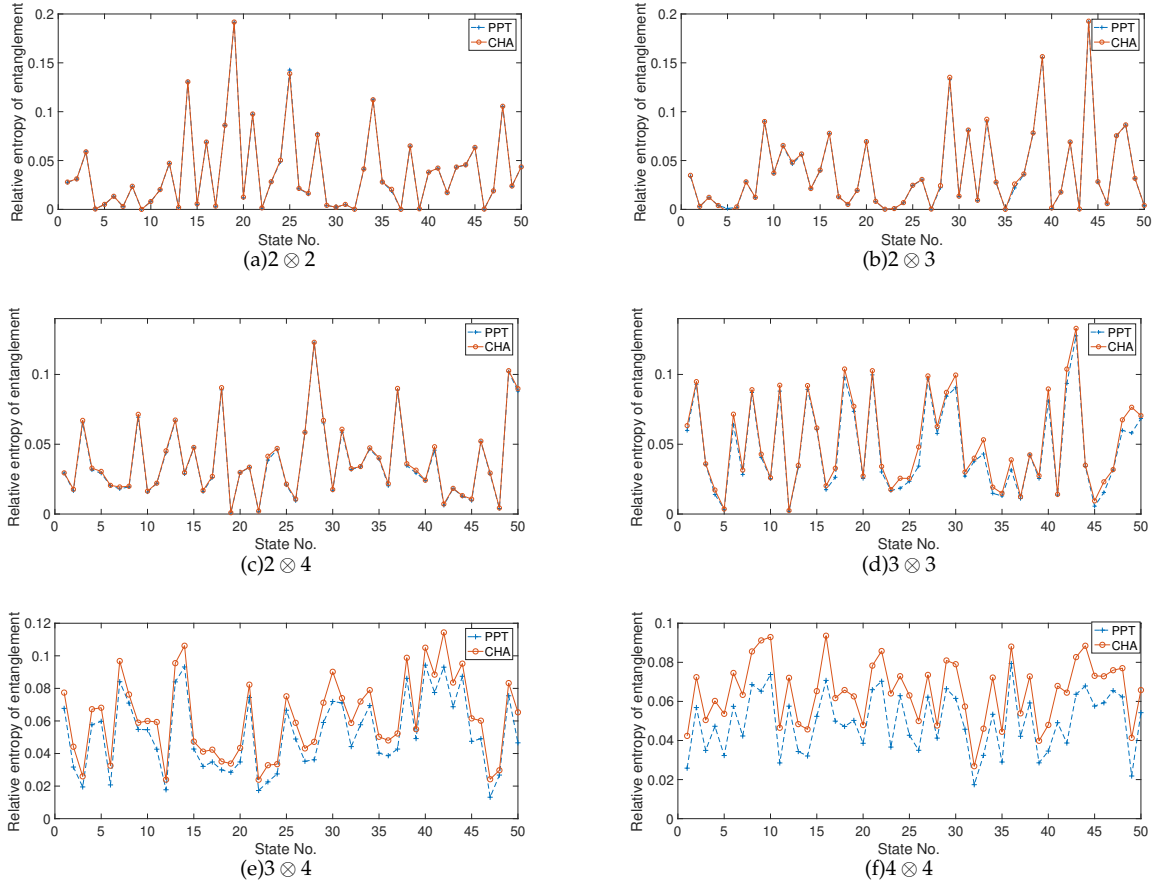


FIG. 7: Results for random entangled states.

China (2016YFA0300603), and the Strategic Priority Research Program of Chinese Academy of Sciences No.

XDB28000000.

-
- [1] R. Horodecki, P. Horodecki, M. Horodecki, and K. Horodecki, *Reviews of modern physics* **81**, 865 (2009).
 - [2] S. Lloyd, *Physical Review A* **55**, 1613 (1997).
 - [3] E. Farhi, J. Goldstone, S. Gutmann, J. Lapan, A. Lundgren, and D. Preda, *Science* **292**, 472 (2001).
 - [4] C. H. Bennett, D. P. DiVincenzo, J. A. Smolin, and W. K. Wootters, *Physical Review A* **54**, 3824 (1996).
 - [5] S. D. Huver, C. F. Wildfeuer, and J. P. Dowling, *Physical Review A* **78**, 063828 (2008).
 - [6] B. Zeng, X. Chen, D.-L. Zhou, and X.-G. Wen, *Quantum Information Meets Quantum Matter: From Quantum Entanglement to Topological Phases of Many-Body Systems* (Springer, 2019).
 - [7] A. Almheiri, X. Dong, and D. Harlow, *Journal of High Energy Physics* **2015**, 163 (2015).
 - [8] O. Ghne and G. Tth, *Physics Reports* **474**, 1 (2009).
 - [9] V. Vedral, M. B. Plenio, M. A. Rippin, and P. L. Knight, *Physical Review Letters* **78**, 2275 (1997).
 - [10] V. Vedral and M. B. Plenio, *Physical Review A* **57**, 1619 (1998).
 - [11] V. Vedral, *Reviews of Modern Physics* **74**, 197 (2002).
 - [12] M. Horodecki, P. Horodecki, and R. Horodecki, *Physical Review Letters* **84**, 2014 (2000).
 - [13] E. M. Rains, *IEEE Transactions on Information Theory* **47**, 2921 (2001).
 - [14] L. Henderson and V. Vedral, *Physical review letters* **84**, 2263 (2000).
 - [15] M. W. Girard, G. Gour, and S. Friedland, *Journal of Physics A: Mathematical and Theoretical* **47**, 505302 (2014).
 - [16] P. Horodecki, *Physics Letters A* **232**, 333 (1997).
 - [17] H. Fawzi and O. Fawzi, *Journal of Physics A: Mathematical and Theoretical* **51**, 154003 (2018), URL <https://doi.org/10.1088/2F1751-8121/2Faab285>.
 - [18] A. Miranowicz and A. Grudka, *Journal of Optics B: Quantum and Semiclassical Optics* **6**, 542 (2004).
 - [19] S. Lu, S. Huang, K. Li, J. Li, J. Chen, D. Lu, Z. Ji, Y. Shen, D. Zhou, and B. Zeng, *Phys. Rev. A* **98**, 012315 (2018), URL <https://link.aps.org/doi/10.1103/PhysRevA.98.012315>.

- [20] R. M. Castro and R. D. Nowak, IEEE Transactions on Information Theory **54**, 2339 (2008).
- [21] Y. Freund, H. S. Seung, E. Shamir, and N. Tishby, Machine learning **28**, 133 (1997).
- [22] M.-F. Balcan, A. Beygelzimer, and J. Langford, Journal of Computer and System Sciences **75**, 78 (2009).
- [23] L. Gurvits, in *Proceedings of the thirty-fifth annual ACM symposium on Theory of computing* (ACM, 2003), pp. 10–19.
- [24] P. B. Slater, arXiv preprint quant-ph/1905.09228 (2019).
- [25] N. Johnston, *Entanglement detection* (2014).
- [26] H. Fawzi, J. Saunderson, and P. A. Parrilo, Foundations of Computational Mathematics (2018), package cvxquad at <https://github.com/hfawzi/cvxquad>.
- [27] M. Grant and S. Boyd, *CVX: Matlab software for disciplined convex programming, version 2.1*, <http://cvxr.com/cvx> (2014).
- [28] M. Grant and S. Boyd, in *Recent Advances in Learning and Control*, edited by V. Blondel, S. Boyd, and H. Kimura (Springer-Verlag Limited, 2008), Lecture Notes in Control and Information Sciences, pp. 95–110, http://stanford.edu/~boyd/graph_dcp.html.
- [29] R. F. Werner, Phys. Rev. A **40**, 4277 (1989), URL <https://link.aps.org/doi/10.1103/PhysRevA.40.4277>.
- [30] K. G. H. Vollbrecht and R. F. Werner, Physical Review A **64**, 062307 (2001).
- [31] M. Horodecki and P. Horodecki, Phys. Rev. A **59**, 4206 (1999), URL <https://link.aps.org/doi/10.1103/PhysRevA.59.4206>.
- [32] E. M. Rains, Phys. Rev. A **60**, 179 (1999), URL <https://link.aps.org/doi/10.1103/PhysRevA.60.179>.
- [33] C. H. Bennett, D. P. DiVincenzo, T. Mor, P. W. Shor, J. A. Smolin, and B. M. Terhal, Physical Review Letters **82**, 5385 (1999).
- [34] K. Życzkowski, P. Horodecki, A. Sanpera, and M. Lewenstein, Phys. Rev. A **58**, 883 (1998), URL <https://link.aps.org/doi/10.1103/PhysRevA.58.883>.
- [35] K. Życzkowski, Phys. Rev. A **60**, 3496 (1999), URL <https://link.aps.org/doi/10.1103/PhysRevA.60.3496>.