

Distributed Bayesian Filtering using Logarithmic Opinion Pool for Dynamic Sensor Networks [★]

Saptarshi Bandyopadhyay ^a, Soon-Jo Chung ^{b,1},

^a*Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91109, USA*

^b*Graduate Aerospace Laboratories, California Institute of Technology, Pasadena, CA 91125, USA*

Abstract

The discrete-time Distributed Bayesian Filtering (DBF) algorithm is presented for the problem of tracking a target dynamic model using a time-varying network of heterogeneous sensing agents. In the DBF algorithm, the sensing agents combine their normalized likelihood functions in a distributed manner using the logarithmic opinion pool and the dynamic average consensus algorithm. We show that each agent's estimated likelihood function globally exponentially converges to an error ball centered on the joint likelihood function of the centralized multi-sensor Bayesian filtering algorithm. We rigorously characterize the convergence, stability, and robustness properties of the DBF algorithm. Moreover, we provide an explicit bound on the time step size of the DBF algorithm that depends on the time-scale of the target dynamics, the desired convergence error bound, and the modeling and communication error bounds. Furthermore, the DBF algorithm for linear-Gaussian models is cast into a modified form of the Kalman information filter. The performance and robust properties of the DBF algorithm are validated using numerical simulations.

1 Introduction

A network of time-varying, heterogeneous sensing agents could use a distributed estimation algorithm to estimate the states of the target dynamics in a distributed manner. Potential applications include environment and pollution monitoring, analyzing communication and social networks, and tracking mobile targets on Earth or in space. In this paper, we present a new, discrete-time distributed estimation algorithm based on the logarithmic opinion pool that guarantees bounded convergence to the Bayesian-optimal probability distribution of the states of the target dynamics.

Discrete-time distributed estimation algorithms can be broadly classified into three categories based on their representation of the states of the target dynamics. Algorithms in the first category only estimate the mean and the covariance matrix of the target's states (Speyer 1979, Borkar & Varaiya 1982, Chen et al. 2002, Kamgarpour & Tomlin 2008, Olfati-Saber 2009, Battistelli

et al. 2015, Rashedi et al. 2016). These algorithms usually deal with linearized target dynamics and measurement models, and also neglect information captured by the higher-order moments of the estimated probability distribution of the target's states. The second category aims to reach an agreement across the sensor network over a discrete set of hypotheses about the states of the target (Pavlin et al. 2010, Jadbabaie et al. 2012, Nedić et al. 2017). Although these algorithms use the entire information in the estimated probability distribution of the target's states, they are only applicable in cases where the target's states can be represented by a discrete (finite) set of hypotheses. Therefore, these algorithms are not suitable for estimation over continuous domains.

The third category of algorithms estimates the posterior probability distribution of the states of the target (Bailey et al. 2012, Ahmed et al. 2013, Fraser et al. 2012, Hlinka et al. 2012, 2014, Battistelli & Chisci 2014, Bandyopadhyay & Chung 2014a,b). This category forms the most general class of distributed estimation algorithms because these algorithms can be used for estimation over continuous state domains, and can incorporate nonlinear target dynamics, heterogeneous nonlinear measurement models, and non-Gaussian uncertainties. These algorithms also use the entire information (i.e., not just the mean and the covariance matrix) in the estimated probability distribution of the target's states. In light of these advantages, this paper focuses on the

[★] S. Bandyopadhyay and S.-J. Chung were supported in part by the AFOSR grant (FA95501210193) and the NSF grant (IIS-1253758).

Email addresses:

Saptarshi.Bandyopadhyay@jpl.nasa.gov (Saptarshi Bandyopadhyay), sjchung@caltech.edu (Soon-Jo Chung).

¹ Corresponding author. Tel.: +1 626 395 6294.

development of a distributed estimation algorithm that belongs to this third category.

In third-category algorithms, the agents exchange their local probability distributions with their neighboring agents and combine them using fusion or diffusive coupling rules to estimate the aggregate probability distribution. Schemes for combining probability distributions in a distributed manner, like the Linear Opinion Pool (LinOP) and the Logarithmic Opinion Pool (LogOP), were first studied in the statistics literature (DeGroot 1960, Bacharach 1979, French 1981). The LogOP scheme is deemed ideal for this purpose because of its favorable properties (Genest & Zidek 1986). We now focus on distributed estimation algorithms that use the LogOP scheme. The first such algorithm is proposed in (Bailey et al. 2012). In particular, (Ahmed et al. 2013) generates information-theoretically-optimal weights for the LogOP scheme. Combining probability distributions within the exponential family (i.e., probability distributions that can be expressed as exponential functions) is discussed in (Fraser et al. 2012, Hlinka et al. 2012). In the distributed estimation algorithm presented in (Battistelli & Chisci 2014) as well as in our prior work (Bandyopadhyay & Chung 2014a,b), the distributed sensing agents combine their local posterior probability distributions using the consensus algorithm, where the multiple consensus loops within each time step are executed much faster than the original time steps of the Bayesian filter.

Moreover, (Battistelli & Chisci 2014, Bandyopadhyay & Chung 2014a,b) show that each agent’s estimated probability distribution of the target’s states converges around the pdf that minimizes the sum of Kullback–Leibler (KL) divergences from all the posterior probability distributions of the target’s states. Similar algorithms for combining local likelihood functions using the consensus algorithm are proposed in (Hlinka et al. 2012, 2014). But the number of consensus loops within each estimator time step grows very fast with the number of agents due to the convergence properties of the consensus algorithm (Olshevsky & Tsitsiklis 2009). Hence, such algorithms are not feasible if the time-scale of the target dynamics is comparatively fast. This connection between the time-scale of the target dynamics and the time step size of the distributed estimation algorithm has not been explored in the literature.

If all the agents are perfectly connected on a complete communication graph (i.e., each agent could communicate instantaneously with every other agent without any loss of information in the communication links), then the agents can exchange their local likelihood functions and use the centralized multi-sensor Bayesian filtering algorithm to estimate the Bayesian-optimal posterior probability distribution of the target’s states. An open question is how to design a distributed estimation algorithm for a time-varying, heterogeneous sensor network on a communication graph that is much sparser than a complete graph so that each agent’s estimate converges to this Bayesian-optimal posterior probability distribu-

tion of the target’s states. Furthermore, we assume that the time-varying communication network topology is periodically strongly connected and each agent can only communicate once with its neighboring agents during each time instant.

In this paper, we present the Distributed Bayesian Filtering (DBF) algorithm to address this open question. During each time instant, the agents exchange their normalized likelihood functions with their neighboring agents only once and then combine them using our fusion rule. Our fusion rule for combining arbitrary probability distributions relies on the LogOP scheme and the dynamic average consensus algorithm (Olfati-Saber & Murray 2004, Jadbabaie et al. 2003, Olshevsky & Tsitsiklis 2009, Zhu & Martínez 2010). We show that after finite time instants, the estimated likelihood function of each agent converges to an error ball centered on the joint likelihood function of the centralized multi-sensor Bayesian filtering algorithm. We also provide an explicit upper bound on the time step size of the DBF algorithm that depends on the time-scale of the target dynamics and the convergence error bound. Moreover, we analyze the effect of communication and modeling errors on the DBF algorithm. If the target dynamics are linear-Gaussian models, we show that the DBF algorithm can be simplified to the modified (Kalman) information filter. Finally, we show that the distributed estimation algorithms in (Hlinka et al. 2012, 2014) are special cases of the DBF algorithm.

Furthermore, (Battistelli & Chisci 2014) analyzed their algorithm using linear-Gaussian models while (Fraser et al. 2012) focused on probability distributions within the exponential family. In contrast, we present a rigorous proof technique, which was first introduced in our prior work (Bandyopadhyay & Chung 2014a,b), for the LogOP scheme that is applicable for general probability distributions.

This paper is organized as follows. Section 2 presents some preliminaries and the problem statement. The LogOP scheme and some general convergence results are presented in Section 3. The DBF algorithm and its special cases are presented in Section 4. Results of numerical simulations are presented in Section 5 and the paper is concluded in Section 6.

2 Preliminaries and Problem Statement

Let \mathbb{N} and \mathbb{R} represent the sets of positive integers and real numbers respectively. The state space of the target’s states \mathcal{X} is a closed set in \mathbb{R}^{n_x} , where n_x is the dimension of the states of the target. Let \mathcal{X} be the Borel σ -algebra for \mathcal{X} . A probability space is defined by the three-tuple $\{\mathcal{X}, \mathcal{X}, \mathbb{P}\}$, where \mathbb{P} is a complete, σ -additive probability measure on all \mathcal{X} . Let $p(\mathbf{x}) = \frac{d\mathbb{P}(\mathbf{x})}{d\mu(\mathbf{x})}$ denote the Radon–Nikodým density of the probability distribution $\mathbb{P}(\mathbf{x})$ with respect to a measure $\mu(\mathbf{x})$. If $\mathbf{x} \in \mathcal{X}$ is continuous and $\mu(\mathbf{x})$ is a Lebesgue measure, $p(\mathbf{x})$ is the probability density function (pdf) (Chen 2003). Therefore,

the probability of an event $\mathcal{A} \in \mathcal{X}$ can be written as the Lebesgue–Stieltjes integral $\mathbb{P}(\mathcal{A}) = \int_{\mathcal{A}} p(\mathbf{x}) d\mu(\mathbf{x})$. In this paper, we only deal with the continuous case where the function $p(\cdot)$ represents the pdf and $\mu(\cdot)$ is the Lebesgue measure. Let $\Phi(\mathcal{X})$ represent the set of all pdfs over the state space \mathcal{X} . The L_1 distance and the KL divergence between the pdfs $\mathcal{P}, \mathcal{Q} \in \Phi(\mathcal{X})$ are denoted by $D_{L_1}(\mathcal{P}, \mathcal{Q}) = \int_{\mathcal{X}} |\mathcal{P}(\mathbf{x}) - \mathcal{Q}(\mathbf{x})| d\mu(\mathbf{x})$ and $D_{\text{KL}}(\mathcal{P}||\mathcal{Q}) = \int_{\mathcal{X}} \mathcal{P}(\mathbf{x}) \log\left(\frac{\mathcal{P}(\mathbf{x})}{\mathcal{Q}(\mathbf{x})}\right) d\mu(\mathbf{x})$ respectively. Also, $\exp(\cdot)$ is the natural exponential function.

2.1 Target Dynamics and Measurement Models

Let \mathbf{x}_k represent the true states of the target at the k^{th} time instant, where $\mathbf{x}_k \in \mathcal{X}$ for all $k \in \mathbb{N}$. The dynamics of the target in discrete time is given by:

$$\mathbf{x}_{k+1} = \mathbf{f}_k(\mathbf{x}_k, \mathbf{w}_k, \Delta), \forall k \in \mathbb{N}, \quad (1)$$

where $\mathbf{f}_k : \mathbb{R}^{n_x} \times \mathbb{R}^{n_w} \rightarrow \mathbb{R}^{n_x}$ is a possibly nonlinear time-varying function of the state \mathbf{x}_k , Δ is the discretization time step size, \mathbf{w}_k is an independent and identically distributed (i.i.d.) process noise, and n_w is the dimension of the process noise vector, respectively.

Consider a network of N heterogeneous sensing agents simultaneously tracking (1). Let \mathbf{y}_k^i denote the measurement taken by the i^{th} agent at the k^{th} time instant:

$$\mathbf{y}_k^i = \mathbf{h}_k^i(\mathbf{x}_k, \mathbf{v}_k^i), \forall i \in \mathcal{V} = \{1, \dots, N\}, \forall k \in \mathbb{N}, \quad (2)$$

where $\mathbf{h}_k^i : \mathbb{R}^{n_x} \times \mathbb{R}^{n_{vi}} \rightarrow \mathbb{R}^{n_{yi}}$ is a possibly nonlinear time-varying function of the state \mathbf{x}_k and an i.i.d. measurement noise \mathbf{v}_k^i , where n_{yi} and n_{vi} are dimensions of the measurement and measurement noise vectors respectively. The measurements are conditionally independent given the target's states. We assume that the target dynamics (1) and measurement models (2) are known.

2.2 Bayesian Filtering Algorithm

Each agent uses the Bayesian filtering algorithm to estimate the pdf of the states of the target (Pearl 1988, Chen 2003). Let $\mathbf{x}_{k|k-1}$ and $\mathbf{x}_{k|k}$ represent the predicted and updated states of the target at the k^{th} time instant. Let the pdfs $\mathcal{S}_k^i = p(\mathbf{x}_{k|k-1}) \in \Phi(\mathcal{X})$ and $\mathcal{W}_k^i = p(\mathbf{x}_{k|k}) = p(\mathbf{x}_{k|k-1}|\mathbf{y}_k^i) \in \Phi(\mathcal{X})$ denote the i^{th} agent's prior and posterior pdfs of the target's states at the k^{th} time instant.

During the prediction step, the prior pdf $\mathcal{S}_k^i = p(\mathbf{x}_{k|k-1})$ is obtained from the previous posterior pdf $\mathcal{W}_{k-1}^i = p(\mathbf{x}_{k-1|k-1})$ using the Chapman–Kolmogorov equation (Chen 2003):

$$\mathcal{S}_k^i = \int_{\mathcal{X}} p(\mathbf{x}_{k|k-1}|\mathbf{x}_{k-1|k-1}) \mathcal{W}_{k-1}^i d\mu(\mathbf{x}_{k-1|k-1}), \quad (3)$$

where the probabilistic model of the state evolution $p(\mathbf{x}_{k|k-1}|\mathbf{x}_{k-1|k-1})$ is obtained from the known target dynamics model (1). We assume that the prior pdf is available at the start of the estimation process.

The new measurement \mathbf{y}_k^i is used to compute the posterior pdf $\mathcal{W}_k^i = p(\mathbf{x}_{k|k}) = p(\mathbf{x}_{k|k-1}|\mathbf{y}_k^i)$ during the update step using the Bayes' rule (Chen 2003):

$$\mathcal{W}_k^i = \frac{p(\mathbf{y}_k^i|\mathbf{x}_{k|k-1}) \mathcal{S}_k^i}{\int_{\mathcal{X}} p(\mathbf{y}_k^i|\mathbf{x}_{k|k-1}) \mathcal{S}_k^i d\mu(\mathbf{x}_{k|k-1})}. \quad (4)$$

The likelihood function $p(\mathbf{y}_k^i|\mathbf{x}_{k|k-1})$ is obtained from the i^{th} agent's known measurement model (2). Let the pdf $\mathcal{L}_k^i = \frac{p(\mathbf{y}_k^i|\mathbf{x}_{k|k-1})}{\int_{\mathcal{X}} p(\mathbf{y}_k^i|\mathbf{x}_{k|k-1}) d\mu(\mathbf{x}_{k|k-1})} \in \Phi(\mathcal{X})$ represent the normalized likelihood function. Therefore, (4) is equivalent to $\mathcal{W}_k^i = \frac{\mathcal{L}_k^i \mathcal{S}_k^i}{\int_{\mathcal{X}} \mathcal{L}_k^i \mathcal{S}_k^i d\mu(\mathbf{x}_{k|k-1})}$.

If all the sensing agents are connected on a complete communication graph, the agents can exchange their likelihood functions. Each agent can use the centralized multi-sensor Bayesian filtering algorithm to compute the centralized posterior pdf of the target's states $\mathcal{W}_k^{C,i} = p(\mathbf{x}_{k|k}) = p(\mathbf{x}_{k|k-1}|\mathbf{y}_k^1, \dots, \mathbf{y}_k^N) \in \Phi(\mathcal{X})$ using the Bayes' rule (Durrant-Whyte & Henderson 2008):

$$\mathcal{W}_k^{C,i} = \frac{\mathcal{L}_k^C \mathcal{S}_k^i}{\int_{\mathcal{X}} \mathcal{L}_k^C \mathcal{S}_k^i d\mu(\mathbf{x}_{k|k-1})}, \quad (5)$$

where $\mathcal{L}_k^C = \frac{\prod_{j=1}^N \mathcal{L}_k^j}{\int_{\mathcal{X}} \prod_{j=1}^N \mathcal{L}_k^j d\mu(\mathbf{x}_{k|k-1})}$ is the normalized joint likelihood function.

Bayesian filtering is optimal because this posterior pdf $\mathcal{W}_k^{C,i}$ integrates and uses all the available information expressed by probabilities (Chen 2003). Moreover, an optimal state estimate with respect to any criterion can be computed from this posterior pdf $\mathcal{W}_k^{C,i}$. The minimum mean-square error (MMSE) estimate and the maximum a posteriori (MAP) estimate are given by $\hat{\mathbf{x}}_{k|k}^{MMSE} = \int_{\mathcal{X}} \mathbf{x} \mathcal{W}_k^{C,i} d\mu(\mathbf{x})$ and $\hat{\mathbf{x}}_{k|k}^{MAP} = \arg \max_{\mathbf{x} \in \mathcal{X}} \mathcal{W}_k^{C,i}$ respectively (Gordon et al. 2004). Other potential criteria for optimality, such as maximum likelihood, minimum conditional KL divergence, and minimum free energy, are discussed in (Chen 2003, Gordon et al. 2004). The main advantage of the original Bayesian filtering formulation is that no approximation is needed during the filtering process; i.e., the complete information about the dynamics and uncertainties of the model can be incorporated in the filtering algorithm. However, direct implementation of Bayesian filtering (3)–(4) is computationally expensive. Practical implementation of these algorithms, in their most general form, is achieved using particle filtering (Pearl 1988, Arulampalam et al. 2002) and Bayesian programming (Lebeltel et al. 2004, Chen 2005).

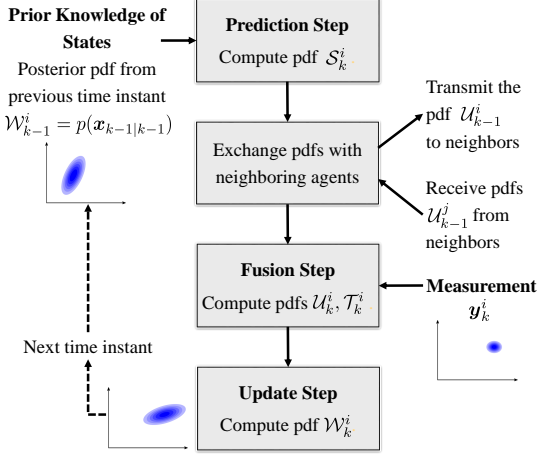


Fig. 1. Flowchart of the DBF algorithm (for the i^{th} agent at the k^{th} time instant)

2.3 Problem Statement

Let the pdf $\mathcal{P}_k^i \in \Phi(\mathcal{X})$ denote the estimated joint likelihood function of the i^{th} agent at the k^{th} time instant. The aim is to design a discrete-time distributed estimation algorithm, over the communication network topology described in Section 2.4, so that each agent's \mathcal{T}_k^i converges to the normalized joint likelihood function \mathcal{L}_k^C , where the convergence error is given by:

$$D_{L_1}(\mathcal{T}_k^i, \mathcal{L}_k^C) \leq (1 + \eta)\delta, \quad \forall k \geq \kappa, \forall i \in \mathcal{V}, \quad (6)$$

$$\lim_{k \rightarrow \infty} D_{L_1}(\mathcal{T}_k^i, \mathcal{L}_k^C) \leq \delta, \quad \forall i \in \mathcal{V}. \quad (7)$$

where $\eta \in (0, 1)$ and $\delta \in (\delta_{\min}, \frac{2}{1+\eta})$ denote positive constants, and δ_{\min} is a function of the smallest achievable time step size Δ_{\min} , which is a practical constraint of the sensor network.

The DBF algorithm, shown in Fig. 1 and Algorithm 1, achieves this objective. Note that the agents exchange their estimated pdfs with their neighboring agents only once during each time instant before the fusion step (in contrast with prior work (Battistelli & Chisci 2014, Bandyopadhyay & Chung 2014a,b)).

2.4 Communication Network Topology

The time-varying communication network topology of the sensor network is denoted by the directed graph $\mathcal{G}_k = (\mathcal{V}, \mathcal{E}_k)$. The edge $(i, j) \in \mathcal{E}_k$ if and only if the i^{th} agent receives information from the j^{th} agent at the k^{th} time instant. The inclusive neighbors of the i^{th} agent are denoted by $\mathcal{J}_k^i = \{j \in \mathcal{V} : (i, j) \in \mathcal{E}_k\} \cup \{i\}$. The matrix $\mathcal{A}_k \in \mathbb{R}^{N \times N}$ represents the adjacency matrix of \mathcal{G}_k , where $\mathcal{A}_k[i, j] \neq 0$ if and only if $j \in \mathcal{J}_k^i$.

Assumption 1 (Olshevsky & Tsitsiklis 2009, Zhu & Martínez 2010) *The digraph $\mathcal{G}_k = (\mathcal{V}, \mathcal{E}_k)$ and its adjacency matrix \mathcal{A}_k satisfy the following properties:*

- (i) *There exists some positive integer $\mathfrak{b} \in \mathbb{N}$ such that the directed graph $(\mathcal{V}, \mathcal{E}_k \cup \mathcal{E}_{k+1} \cup \dots \cup \mathcal{E}_{k+\mathfrak{b}-1})$ is strongly connected for all time instants $k \in \mathbb{N}$.*
- (ii) *The matrix \mathcal{A}_k is doubly stochastic, i.e., $\mathbf{1}^T \mathcal{A}_k = \mathbf{1}^T$ and $\mathcal{A}_k \mathbf{1} = \mathbf{1}$ for all $k \in \mathbb{N}$, where $\mathbf{1} = [1, 1, \dots, 1]^T$.*
- (iii) *The matrix product $\mathcal{A}_{k, k+\mathfrak{b}-1}$ is defined as $\mathcal{A}_{k, k+\mathfrak{b}-1} = (\prod_{\tau=k}^{k+\mathfrak{b}-1} \mathcal{A}_\tau)$. There exists a constant $\gamma \in (0, \frac{1}{2})$ such that each element $\mathcal{A}_{k, k+\mathfrak{b}-1}[i, j] \in [\gamma, 1] \cup \{0\}$ for all $i, j \in \mathcal{V}$ and $k \in \mathbb{N}$. Therefore, the digraph \mathcal{G}_k is periodically strongly connected and the matrix \mathcal{A}_k is non-degenerate and balanced. Note that if $\mathfrak{b} = 1$, the digraph \mathcal{G}_k is strongly connected at all time instants $k \in \mathbb{N}$.*

3 Logarithmic Opinion Pool and Convergence

Let the pdf $\mathcal{P}_k^i \in \Phi(\mathcal{X})$ denote the i^{th} agent's pdf at the k^{th} time instant. The LinOP and LogOP schemes for combining the pdfs \mathcal{P}_k^i are given by (Bacharach 1979):

$$\mathcal{P}_k^{\text{LinOP}}(\mathbf{x}) = \sum_{i=1}^N \alpha_k^i \mathcal{P}_k^i(\mathbf{x}), \quad (8)$$

$$\mathcal{P}_k^{\text{LogOP}}(\mathbf{x}) = \frac{\prod_{i=1}^N (\mathcal{P}_k^i(\mathbf{x}))^{\alpha_k^i}}{\int_{\mathcal{X}} \prod_{i=1}^N (\mathcal{P}_k^i(\bar{\mathbf{x}}))^{\alpha_k^i} d\mu(\bar{\mathbf{x}})}, \quad (9)$$

where the weights α_k^i are such that $\sum_{i=1}^N \alpha_k^i = 1$ and the integral in the denominator of (9) is finite. Thus, the combined pdf obtained using LinOP and LogOP gives the weighted algebraic and geometric averages of the individual pdfs respectively. As shown in Fig. 2, the combined pdf obtained using LogOP typically preserves the multimodal or unimodal nature of the original individual pdfs (Genest & Zidek 1986). The most compelling reason for using the LogOP scheme is that it is externally Bayesian; i.e., the LogOP combination step commutes with the process of updating the pdfs by multiplying with a commonly agreed likelihood pdf $\mathcal{L}_k \in \Phi(\mathcal{X})$:

$$\frac{\mathcal{L}_k \mathcal{P}_k^{\text{LogOP}}}{\int_{\mathcal{X}} \mathcal{L}_k \mathcal{P}_k^{\text{LogOP}} d\mu(\tilde{\mathbf{x}})} = \frac{\prod_{i=1}^N \left(\frac{\mathcal{L}_k \mathcal{P}_k^i}{\int_{\mathcal{X}} \mathcal{L}_k \mathcal{P}_k^i d\mu(\tilde{\mathbf{x}})} \right)^{\alpha_k^i}}{\int_{\mathcal{X}} \prod_{i=1}^N \left(\frac{\mathcal{L}_k \mathcal{P}_k^i}{\int_{\mathcal{X}} \mathcal{L}_k \mathcal{P}_k^i d\mu(\tilde{\mathbf{x}})} \right)^{\alpha_k^i} d\mu(\tilde{\mathbf{x}})}.$$

Therefore, the LogOP scheme is ideal for combining pdfs in distributed estimation algorithms. Due to the multiplicative nature of the LogOP scheme, each agent has veto power (Genest & Zidek 1986). That is, if $\mathcal{P}_k^i(\mathbf{x}) = 0$ for some $\mathbf{x} \in \mathcal{X}$ and some agent $i \in \mathcal{V}$ with $\alpha_k^i > 0$, then $\mathcal{P}_k^{\text{LogOP}}(\mathbf{x}) = 0$ in the combined pdf irrespective of the pdfs of the other agents. In order to avoid this veto condition, we enforce the following assumption which has been used in the literature.

Assumption 2 (Nedić et al. 2017, Genest & Zidek 1986) (Nonzero Probability Property) *In this paper, all pdfs are strictly positive everywhere in the closed set \mathcal{X} .*

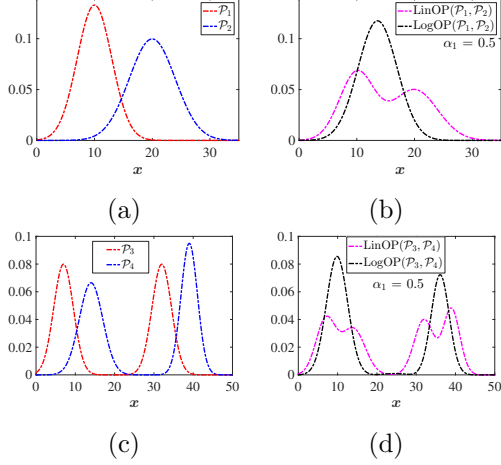


Fig. 2. The pdfs in (a) and (c) are combined using LinOP and LogOP in (b) and (d). Note that the LogOP solution preserves the modal nature of the original pdfs.

In order to analyze the LogOP scheme with general probability distributions that satisfy Assumption 2, we use the following functions.

Definition 1 Under Assumption 2, for any constant $\psi \in \mathcal{X}$, we have $\mathcal{P}_k^i(\psi) > 0$, $\forall i \in \mathcal{V}$ and $\mathcal{P}_k^{\text{LogOP}}(\psi) > 0$. Using simple algebraic manipulation of (9), we get (Gillardoni & Clayton 1993):

$$\mathcal{P}_k^{\text{LogOP}}(\mathbf{x}) := \log \left[\frac{\mathcal{P}_k^{\text{LogOP}}(\mathbf{x})}{\mathcal{P}_k^{\text{LogOP}}(\psi)} \right] = \sum_{i=1}^N \alpha_k^i \mathcal{P}_k^i(\mathbf{x}), \quad (10)$$

$$\text{where } \mathcal{P}_k^i(\mathbf{x}) := \log \left[\frac{\mathcal{P}_k^i(\mathbf{x})}{\mathcal{P}_k^i(\psi)} \right], \forall i \in \mathcal{V}. \quad (11)$$

Thus, we have represented the LogOP scheme (9) as a linear equation using these functions $\mathcal{P}_k^i(\mathbf{x})$ and $\mathcal{P}_k^{\text{LogOP}}(\mathbf{x})$, and removed the effect of the normalizing constants.

We now state some useful convergence results using the functions in Definition 1. See Appendix for the proofs.

Definition 2 (Pointwise Convergence) The pdf \mathcal{P}_k^i converges pointwise to the pdf $\mathcal{P}^* \in \Phi(\mathcal{X})$, if and only if $\lim_{k \rightarrow \infty} \mathcal{P}_k^i(\mathbf{x}) = \mathcal{P}^*(\mathbf{x})$ for all $\mathbf{x} \in \mathcal{X}$.

Lemma 1 If the pdfs \mathcal{P} , \mathcal{Q} satisfy Assumption 2, then there exists $\psi \in \mathcal{X}$ such that $\mathcal{P}(\psi) = \mathcal{Q}(\psi)$.

Lemma 2 If the function \mathcal{P}_k^i (11) converges pointwise to the function $\mathcal{P}^* := \log \left[\frac{\mathcal{P}^*(\mathbf{x})}{\mathcal{P}^*(\psi)} \right]$, then the corresponding pdf \mathcal{P}_k^i also converges pointwise to the pdf \mathcal{P}^* .

Definition 3 (Convergence in TV) The measure $\mu_{\mathcal{P}_k^i}$ is defined as the measure induced by the pdf \mathcal{P}_k^i on \mathcal{X} ,

where $\mu_{\mathcal{P}_k^i}(\mathcal{A}) = \int_{\mathcal{A}} \mathcal{P}_k^i d\mu(\mathbf{x})$ for any event $\mathcal{A} \in \mathcal{X}$. Similarly, let $\mu_{\mathcal{P}^*}$ denote the measure induced by the pdf \mathcal{P}^* on \mathcal{X} . The TV distance is defined as $\|\mu_{\mathcal{P}_k^i} - \mu_{\mathcal{P}^*}\|_{\text{TV}} := \sup_{\mathcal{A} \in \mathcal{X}} |\mu_{\mathcal{P}_k^i}(\mathcal{A}) - \mu_{\mathcal{P}^*}(\mathcal{A})|$. The measure $\mu_{\mathcal{P}_k^i}$ converges to the measure $\mu_{\mathcal{P}^*}$ in TV, if and only if $\|\lim_{k \rightarrow \infty} \mu_{\mathcal{P}_k^i} - \mu_{\mathcal{P}^*}\|_{\text{TV}} = 0$.

Lemma 3 If the pdf \mathcal{P}_k^i converges pointwise to the pdf \mathcal{P}^* , then the measure $\mu_{\mathcal{P}_k^i}$ converges in TV to the measure $\mu_{\mathcal{P}^*}$. Moreover, $\|\mu_{\mathcal{P}_k^i} - \mu_{\mathcal{P}^*}\|_{\text{TV}} = \frac{1}{2} D_{L_1}(\mathcal{P}_k^i, \mathcal{P}^*)$.

Another reason for using the LogOP scheme is that it minimizes the information lost during the combination process, where the information loss is measured using the KL divergence.

Lemma 4 (Battistelli & Chisci 2014, Bandyopadhyay & Chung 2014a) The pdf $\mathcal{P}_k^{\text{KL}} \in \Phi(\mathcal{X})$ that globally minimizes the sum of KL divergences with the pdfs \mathcal{P}_k^i for all agents is given by:

$$\mathcal{P}_k^{\text{KL}} = \arg \min_{\rho \in \Phi(\mathcal{X})} \sum_{i=1}^N D_{\text{KL}}(\rho \| \mathcal{P}_k^i) = \frac{\prod_{i=1}^N (\mathcal{P}_k^i)^{\frac{1}{N}}}{\int_{\mathcal{X}} \prod_{i=1}^N (\mathcal{P}_k^i)^{\frac{1}{N}} d\mu(\bar{\mathbf{x}})}.$$

Note that the pdf $\mathcal{P}_k^{\text{KL}}$ is equivalent to the pdf $\mathcal{P}_k^{\text{LogOP}}$ (9) obtained using the LogOP scheme with weights $\alpha_k^i = \frac{1}{N}$ for all agents.

The proof of Lemma 4 is given in our prior work (Bandyopadhyay & Chung 2014a). Note that the normalized joint likelihood function \mathcal{L}_k^C is also given by:

$$\mathcal{L}_k^C = \frac{\prod_{j=1}^N \mathcal{L}_k^j}{\int_{\mathcal{X}} \prod_{j=1}^N \mathcal{L}_k^j d\mu(\bar{\mathbf{x}})} = \frac{(\mathcal{L}_k^{\text{KL}})^N}{\int_{\mathcal{X}} (\mathcal{L}_k^{\text{KL}})^N d\mu(\bar{\mathbf{x}})}, \quad (12)$$

$$\text{where } \mathcal{L}_k^{\text{KL}} = \frac{\prod_{j=1}^N (\mathcal{L}_k^j)^{\frac{1}{N}}}{\int_{\mathcal{X}} \prod_{j=1}^N (\mathcal{L}_k^j)^{\frac{1}{N}} d\mu(\bar{\mathbf{x}})}. \quad (13)$$

We show that the DBF algorithm also estimates the pdf $\mathcal{L}_k^{\text{KL}}$ (13) in a distributed manner.

4 Distributed Bayesian Filtering Algorithm

In this section, we present the main DBF algorithm, its convergence and robustness properties, and its extensions. We first state an assumption on the time-varying nature of the pdfs \mathcal{L}_k^i for all agents that directly link the target dynamics and measurement models with the time step size of the distributed estimation algorithm.

Assumption 3 For any time step size $\Delta > 0$, there exists a time-invariant constant $\theta_L > 0$ such that for all agents $i \in \mathcal{V} = \{1, \dots, N\}$:

$$e^{-\Delta\theta_L} \leq \frac{\mathcal{L}_k^i(\mathbf{x})}{\mathcal{L}_{k-1}^i(\mathbf{x})} \leq e^{\Delta\theta_L}, \forall \mathbf{x} \in \mathcal{X}, \forall k \in \mathbb{N}. \quad (14)$$

The necessary conditions for satisfying (14) are given by $D_{\text{KL}}(\mathcal{L}_k^i \|\mathcal{L}_{k-1}^i) \leq \Delta\theta_L$ and $D_{\text{KL}}(\mathcal{L}_{k-1}^i \|\mathcal{L}_k^i) \leq \Delta\theta_L$.

We now state the DBF algorithm, whose steps are shown in Fig. 1. Let the pdf $\mathcal{U}_k^i \in \Phi(\mathcal{X})$ denote the estimated KL-divergence-minimizing pdf of the i^{th} agent at the k^{th} time instant. The pdf \mathcal{T}_k^i is defined in Section 2.3. Under Assumptions 1–3, the pseudo-code of the DBF algorithm is given in Algorithm 1.

Algorithm 1. Distributed Bayesian Filtering Algorithm

1. (i^{th} agent's steps at k^{th} time instant)
2. Compute prior pdf $\mathcal{S}_k^i = p(\mathbf{x}_{k|k-1})$ using (3).
3. Obtain local measurement \mathbf{y}_k^i .
4. Compute normalized likelihood function \mathcal{L}_k^i .
5. Receive pdfs \mathcal{U}_{k-1}^j from agents $j \in \mathcal{J}_k^i$.
6. Compute pdfs \mathcal{U}_k^i and \mathcal{T}_k^i as follows:

$$\mathcal{U}_k^i = \frac{\Lambda \mathcal{L}_k^i (\mathcal{L}_{k-1}^i)^{-1}}{\int_{\mathcal{X}} \Lambda \mathcal{L}_k^i (\mathcal{L}_{k-1}^i)^{-1} d\mu(\bar{\mathbf{x}})}, \quad \forall k \geq 2, \quad (15)$$

where $\Lambda = \prod_{j \in \mathcal{J}_k^i} (\mathcal{U}_{k-1}^j)^{\mathcal{A}_k[i,j]}$, and $\mathcal{U}_1^i = \mathcal{L}_1^i$ if $k = 1$.

$$\mathcal{T}_k^i = \frac{(\mathcal{U}_k^i)^N}{\int_{\mathcal{X}} (\mathcal{U}_k^i)^N d\mu(\bar{\mathbf{x}})}. \quad (16)$$

7. Compute posterior pdf $\mathcal{W}_k^i = p(\mathbf{x}_{k|k})$ as follows:

$$\mathcal{W}_k^i = p(\mathbf{x}_{k|k}) = \frac{\mathcal{T}_k^i \mathcal{S}_k^i}{\int_{\mathcal{X}} \mathcal{T}_k^i \mathcal{S}_k^i d\mu(\bar{\mathbf{x}})}. \quad (17)$$

The following theorem shows that the DBF algorithm satisfies the problem statement (6)–(7) in Section 2.3. Here, $\eta \in (0, 1)$ and $\delta \in (\delta_{\min}, \frac{2}{1+\eta})$ are positive constants defined in Section 2.3, \mathbf{b} is the periodicity of the communication network topology, $\gamma \in (0, \frac{1}{2})$ is the smallest positive element in $\mathcal{A}_{k,k+\mathbf{b}-1}$ defined in Assumption 1, and θ_L is defined in Assumption 3.

Theorem 5 Under Assumptions 1–3, if all the agents execute the DBF algorithm (Algorithm 1) and the time step size Δ for (14) for Algorithm 1 is defined as

$$\Delta = \frac{(1 - \sigma_m) \log(\delta + 1)}{2\mathbf{b}N(N-1)\sqrt{N}\theta_L}, \quad (18)$$

then the steady-state convergence error between the pdf \mathcal{T}_k^i (16) and the pdf \mathcal{L}_k^C (12) is bounded by $\delta \in (\delta_{\min}, \frac{2}{1+\eta})$:

$$\lim_{k \rightarrow \infty} \max_{i \in \mathcal{V} = \{1, \dots, N\}} D_{L_1}(\mathcal{T}_k^i, \mathcal{L}_k^C) \leq \delta, \quad (19)$$

$$\delta_{\min} = \exp\left(\frac{\Delta_{\min} 2\mathbf{b}N(N-1)\sqrt{N}\theta_L}{1 - \sigma_m}\right) - 1. \quad (20)$$

Furthermore, the convergence error between the pdfs \mathcal{T}_k^i (16) and \mathcal{L}_k^C (12) after κ time instants is bounded as:

$$\max_{i \in \mathcal{V} = \{1, \dots, N\}} D_{L_1}(\mathcal{T}_k^i, \mathcal{L}_k^C) \leq (1 + \eta)\delta, \quad \forall k \geq \kappa, \quad (21)$$

where, if $\mathfrak{D}_1 = 2 \log\left(\max_{\ell, j \in \mathcal{V}} \max_{\mathbf{x} \in \mathcal{X}} \frac{\mathcal{L}_1^\ell(\mathbf{x})}{\mathcal{L}_1^j(\mathbf{x})}\right) \leq \frac{\log(\delta+1)}{N^{\frac{3}{2}}}$, $\kappa = 1$. Otherwise,

$$\kappa = \left\lceil \frac{\mathbf{b}(N-1)}{\log \sigma_m} \log \left(\frac{\log\left(\frac{(1+\eta)\delta+1}{\delta+1}\right)}{\log\left(\frac{e^{N^{\frac{3}{2}} \mathfrak{D}_1}}{\delta+1}\right)} \right) \right\rceil + 1. \quad (22)$$

Here, $\sigma_m = \max_{k \in \mathbb{N}} \sigma_{N-1}(\mathcal{A}_{k,k+\mathbf{b}(N-1)-1})$, where σ_{N-1} denotes the second largest singular value of the matrix, and σ_m is upper bounded by:

$$\sigma_m \leq \left(1 - \frac{4(\gamma - \gamma^N)}{(1 - \gamma)} \sin^2 \frac{\pi}{2N}\right)^{\frac{1}{2}} < 1. \quad (23)$$

The TV error between the measures induced by the pdfs \mathcal{T}_k^i and \mathcal{L}_k^C is bounded by:

$$\max_{i \in \mathcal{V}} \|\mu_{\mathcal{T}_k^i} - \mu_{\mathcal{L}_k^C}\|_{\text{TV}} \leq \frac{(1 + \eta)\delta}{2}, \quad \forall k \geq \kappa, \quad (24)$$

$$\lim_{k \rightarrow \infty} \max_{i \in \mathcal{V}} \|\mu_{\mathcal{T}_k^i} - \mu_{\mathcal{L}_k^C}\|_{\text{TV}} \leq \frac{\delta}{2}. \quad (25)$$

Proof: Using Definition 1, we define $\mathcal{L}_k^{\text{KL}}(\mathbf{x}) = \log \left[\frac{\mathcal{L}_k^{\text{KL}}(\mathbf{x})}{\mathcal{L}_k^{\text{KL}}(\psi)} \right]$, $\mathcal{L}_k^C(\mathbf{x}) = \log \left[\frac{\mathcal{L}_k^C(\mathbf{x})}{\mathcal{L}_k^C(\psi)} \right]$, $\mathcal{L}_k^i(\mathbf{x}) = \log \left[\frac{\mathcal{L}_k^i(\mathbf{x})}{\mathcal{L}_k^i(\psi)} \right]$, $\mathcal{U}_k^i(\mathbf{x}) = \log \left[\frac{\mathcal{U}_k^i(\mathbf{x})}{\mathcal{U}_k^i(\psi)} \right]$, and $\mathcal{T}_k^i(\mathbf{x}) = \log \left[\frac{\mathcal{T}_k^i(\mathbf{x})}{\mathcal{T}_k^i(\psi)} \right]$ for all $i \in \mathcal{V}$. Since these functions are defined for all $\mathbf{x} \in \mathcal{X}$, we henceforth drop the term (\mathbf{x}) for brevity.

Step 1. We first show that the pdf \mathcal{U}_k^i (15) converges to the pdf $\mathcal{L}_k^{\text{KL}}$ (13). Equation (15) can be re-written using these functions as:

$$\mathcal{U}_k^i = \begin{cases} \mathcal{L}_1^i & \text{if } k = 1 \\ \sum_{j=1}^N \mathcal{A}_k[i, j] \mathcal{U}_{k-1}^j + \mathcal{L}_k^i - \mathcal{L}_{k-1}^i & \text{if } k \geq 2 \end{cases}, \quad (26)$$

because $\mathcal{A}_k[i, j] = 0$ if $j \notin \mathcal{J}_k^i$, as defined in Section 2.4. Since \mathcal{A}_k is doubly stochastic, (26) satisfies the conservation property:

$$\begin{aligned} \sum_{i=1}^N \mathcal{U}_k^i &= \sum_{i=1}^N \sum_{j=1}^N \mathcal{A}_k[i, j] \mathcal{U}_{k-1}^j + \sum_{i=1}^N (\mathcal{L}_k^i - \mathcal{L}_{k-1}^i), \\ &= \sum_{i=1}^N \left(\sum_{j=1}^N \mathcal{A}_k[j, i] \right) \mathcal{U}_{k-1}^i + \sum_{i=1}^N (\mathcal{L}_k^i - \mathcal{L}_{k-1}^i), \\ &= \sum_{i=1}^N (\mathcal{U}_1^i - \mathcal{L}_1^i) + \sum_{i=1}^N \mathcal{L}_k^i = N \mathcal{L}_k^{\text{KL}}. \end{aligned} \quad (27)$$

Note that $\mathcal{L}_k^{\text{KL}} = \frac{1}{N} \sum_{i=1}^N \mathcal{L}_k^i$ follows from (13). This shows that if the functions \mathcal{U}_k^i converge towards each other, then they will converge to the function $\mathcal{L}_k^{\text{KL}}$. Let us define the error vector \mathbf{e}_k as:

$$\mathbf{e}_k = \left[\mathcal{U}_k^1 - \mathcal{L}_k^{\text{KL}}, \dots, \mathcal{U}_k^i - \mathcal{L}_k^{\text{KL}}, \dots, \mathcal{U}_k^N - \mathcal{L}_k^{\text{KL}} \right]^T.$$

The evolution of the error vector \mathbf{e}_k is given by:

$$\mathbf{e}_k = \mathcal{A}_k \mathbf{e}_{k-1} + \mathbf{\Omega}_{k,k}, \quad \forall k \geq 2, \quad (28)$$

$$\text{where } \mathbf{\Omega}_{k,k} = \left(\mathbf{I} - \frac{\mathbf{1}\mathbf{1}^T}{N} \right) \begin{bmatrix} \mathcal{L}_k^1 - \mathcal{L}_{k-1}^1 \\ \vdots \\ \mathcal{L}_k^N - \mathcal{L}_{k-1}^N \end{bmatrix}.$$

The overall evolution of the error vector \mathbf{e}_k after $\mathbf{b} \in \mathbb{N}$ time instants is given by:

$$\mathbf{e}_{k+\mathbf{b}-1} = \mathcal{A}_{k,k+\mathbf{b}-1} \mathbf{e}_{k-1} + \mathbf{\Omega}_{k,k+\mathbf{b}-1}, \quad (29)$$

where $\mathcal{A}_{k,k+\mathbf{b}-1}$ is defined in Assumption 1 and for $\mathbf{b} \geq 2$:

$$\mathbf{\Omega}_{k,k+\mathbf{b}-1} = \sum_{\tau=k}^{k+\mathbf{b}-2} (\mathcal{A}_{\tau+1,k+\mathbf{b}-1} \mathbf{\Omega}_{\tau,\tau}) + \mathbf{\Omega}_{k+\mathbf{b}-1,k+\mathbf{b}-1}.$$

Note that $\mathbf{1}^T \mathbf{e}_k = 0$ because of (27) and $\mathbf{1}^T \mathbf{\Omega}_{k,k+\mathbf{b}-1} = 0$ because $\mathbf{1}^T \left(\mathbf{I} - \frac{\mathbf{1}\mathbf{1}^T}{N} \right) = 0$. Therefore, we investigate the convergence of \mathbf{e}_k along all directions that are orthogonal to $\mathbf{1}^T$. It follows from Assumption 1 that the matrix $\mathcal{A}_{k,k+\mathbf{b}-1}$ is irreducible. Therefore, the matrix $\mathcal{A}_{k,k+\mathbf{b}-1}$ is primitive (Horn & Johnson 1985, Lemma 8.5.4, pp. 516) and $|\lambda_{N-1}(\mathcal{A}_{k,k+\mathbf{b}-1})| < 1$, where λ_{N-1} denotes the second largest modulus of eigenvalues of the matrix and $|\cdot|$ represents the complex modulus. Let $V_{\text{tr}} = \left[\frac{1}{\sqrt{N}} \mathbf{1}, V_s \right]$ be the orthonormal matrix of eigenvectors of the symmetric primitive matrix $\mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}}$. By spectral decomposition (Chung et al. 2013), we get:

$$V_{\text{tr}}^T \mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}} V_{\text{tr}} = \begin{bmatrix} \mathbf{0}_{(N-1) \times 1} & \mathbf{0}^{1 \times (N-1)} \\ V_s^T \mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}} V_s & \end{bmatrix},$$

where $\frac{1}{N} \mathbf{1}^T \mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}} \mathbf{1} = 1$, $\frac{1}{\sqrt{N}} \mathbf{1}^T \mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}} V_s = \mathbf{0}^{1 \times (N-1)}$, and $V_s^T \mathcal{A}_{1,\mathbf{b}}^T \mathcal{A}_{1,\mathbf{b}} \frac{1}{\sqrt{N}} \mathbf{1} = \mathbf{0}^{(N-1) \times 1}$ are used. Since the eigenvectors are orthonormal, we have $V_s V_s^T + \frac{1}{N} \mathbf{1}\mathbf{1}^T = \mathbf{I}$. Left-multiplying (29) with V_s^T gives:

$$\begin{aligned} V_s^T \mathbf{e}_{k+\mathbf{b}-1} &= V_s^T \mathbf{\Omega}_{k,k+\mathbf{b}-1} \\ &\quad + V_s^T \mathcal{A}_{k,k+\mathbf{b}-1} (V_s V_s^T + \frac{1}{N} \mathbf{1}\mathbf{1}^T) \mathbf{e}_{k-1}, \\ &= V_s^T \mathbf{\Omega}_{k,k+\mathbf{b}-1} + V_s^T \mathcal{A}_{k,k+\mathbf{b}-1} V_s V_s^T \mathbf{e}_{k-1}. \end{aligned} \quad (30)$$

We first investigate the stability of this system without the disturbance term $V_s^T \mathbf{\Omega}_{k,k+\mathbf{b}-1}$ in (30). Let $\|V_s^T \mathbf{e}_{k+\mathbf{b}-1}\|_2$ be a candidate Lyapunov function for this system. Therefore, we get:

$$\begin{aligned} \|V_s^T \mathbf{e}_{k+\mathbf{b}-1}\|_2 &\leq \|V_s^T \mathcal{A}_{k,k+\mathbf{b}-1} V_s\|_2 \|V_s^T \mathbf{e}_{k-1}\|_2 \\ &\leq \sigma_{\max}(\mathcal{A}_{k,k+\mathbf{b}-1} V_s) \|V_s^T \mathbf{e}_{k-1}\|_2, \\ &= \sigma_{N-1}(\mathcal{A}_{k,k+\mathbf{b}-1}) \|V_s^T \mathbf{e}_{k-1}\|_2, \end{aligned}$$

where σ_{\max} and σ_{N-1} denotes the largest and the second largest singular value, respectively. Since V_s^T is orthonormal (i.e., $V_s^T V_s = \mathbf{I}$) and also orthogonal to $\mathbf{1}^T$ (i.e., $V_s^T \mathbf{1} = \mathbf{0}$) and the matrix $\mathcal{A}_{k,k+\mathbf{b}-1}^T \mathcal{A}_{k,k+\mathbf{b}-1}$ is primitive, we have $\sigma_{\max}(\mathcal{A}_{k,k+\mathbf{b}-1} V_s) = \sigma_{N-1}(\mathcal{A}_{k,k+\mathbf{b}-1}) < 1$. Therefore, the error vector $V_s^T \mathbf{e}_k$ is globally exponentially stable in absence of the disturbance term.

Since the matrix $\mathcal{A}_{k,k+\mathbf{b}-1}$ is irreducible, the matrix $\mathcal{A}_{k,k+\mathbf{b}(N-1)-1}$ is a positive matrix because the maximum path length between any two agents is less than or equal to $\mathbf{b}(N-1)$ (Bandyopadhyay et al. 2017). Hence the measure of irreducibility of the matrix $\mathcal{A}_{k,k+\mathbf{b}(N-1)-1}^T \mathcal{A}_{k,k+\mathbf{b}(N-1)-1}$ is lower bounded by $\frac{\gamma - \gamma^N}{1 - \gamma}$, and we have $\sigma_{N-1}(\mathcal{A}_{k,k+\mathbf{b}(N-1)-1}) \leq \left(1 - \frac{4(\gamma - \gamma^N)}{(1 - \gamma)} \sin^2 \frac{\pi}{2N} \right)^{\frac{1}{2}} < 1$ (Fiedler 1972). Therefore, σ_m is given by (23). Moreover, it follows from Assumption 3 that $\left\| \left[\mathcal{L}_k^1 - \mathcal{L}_{k-1}^1, \dots, \mathcal{L}_k^N - \mathcal{L}_{k-1}^N \right]^T \right\|_2 \leq 2\sqrt{N}\Delta\theta_L$ because $|\mathcal{L}_k^i - \mathcal{L}_{k-1}^i| \leq 2\Delta\theta_L$. Therefore, we have:

$$\|V_s^T \mathbf{\Omega}_{k,k+\mathbf{b}(N-1)-1}\|_2 \leq 2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L.$$

Hence, in the presence of the disturbance term, we get:

$$\begin{aligned} \|V_s^T \mathbf{e}_{k+\mathbf{b}(N-1)-1}\|_2 &\leq \|V_s^T \mathbf{\Omega}_{k,k+\mathbf{b}(N-1)-1}\|_2 \\ &\quad + \sigma_{N-1}(\mathcal{A}_{k,k+\mathbf{b}(N-1)-1}) \|V_s^T \mathbf{e}_{k-1}\|_2, \\ &\leq \sigma_m \|V_s^T \mathbf{e}_{k-1}\|_2 + 2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L. \end{aligned} \quad (31)$$

Using the discrete Gronwall lemma (Stuart & Humphries 1998, pp. 9) we obtain:

$$\begin{aligned} \|V_s^T \mathbf{e}_k\|_2 &\leq \sigma_m^{\left\lfloor \frac{k-1}{\mathbf{b}(N-1)} \right\rfloor} \|V_s^T \mathbf{e}_1\|_2 \\ &\quad + \frac{1 - \sigma_m^{\left\lfloor \frac{k-1}{\mathbf{b}(N-1)} \right\rfloor}}{1 - \sigma_m} 2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L. \end{aligned} \quad (32)$$

Moreover, $\|V_s^T \mathbf{e}_1(\mathbf{x})\|_2 \leq \sqrt{N}\mathfrak{D}_1$, where \mathfrak{D}_1 is defined above (22). Therefore, it follows that for all $\mathbf{x} \in \mathcal{X}$:

$$\max_{i \in \mathcal{V}} |\mathcal{U}_k^i(\mathbf{x}) - \mathcal{L}_k^{\text{KL}}(\mathbf{x})| \leq \Xi_k, \quad \forall k \in \mathbb{N}, \quad (33)$$

$$\begin{aligned} \text{where } \Xi_k &= \left(\sqrt{N}\mathfrak{D}_1 - \frac{2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L}{1 - \sigma_m} \right) \sigma_m^{\left\lfloor \frac{k-1}{\mathbf{b}(N-1)} \right\rfloor} \\ &\quad + \frac{2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L}{1 - \sigma_m}. \end{aligned} \quad (34)$$

Thus, the error between \mathcal{U}_k^i and $\mathcal{L}_k^{\text{KL}}$ is bounded by Ξ_k , which depends on time instant k .

Step 2. We now prove that \mathcal{T}_k^i (16) converges to \mathcal{L}_k^C (12). For all $\mathbf{x} \in \mathcal{X}$, (12) and (16) can be re-written as:

$$\mathcal{L}_k^C(\mathbf{x}) = N\mathcal{L}_k^{\text{KL}}(\mathbf{x}), \quad \mathcal{T}_k^i(\mathbf{x}) = N\mathcal{U}_k^i(\mathbf{x}), \quad \forall i \in \mathcal{V}.$$

Therefore, by using (33), we can obtain:

$$\max_{i \in \mathcal{V}} |\mathcal{T}_k^i(\mathbf{x}) - \mathcal{L}_k^C(\mathbf{x})| \leq N\Xi_k, \quad \forall k \in \mathbb{N}, \quad (35)$$

$$\max_{i \in \mathcal{V}} \left| \log \left[\frac{\mathcal{T}_k^i(\mathbf{x})}{\mathcal{T}_k^i(\boldsymbol{\psi})} \right] - \log \left[\frac{\mathcal{L}_k^C(\mathbf{x})}{\mathcal{L}_k^C(\boldsymbol{\psi})} \right] \right| \leq N\Xi_k, \quad \forall k \in \mathbb{N}.$$

Using Lemma 1, we select $\boldsymbol{\psi} \in \mathcal{X}$ such that $\mathcal{T}_k^i(\boldsymbol{\psi}) = \mathcal{L}_k^C(\boldsymbol{\psi})$. Therefore,

$$\begin{aligned} \max_{i \in \mathcal{V}} \left| \log \left[\frac{\mathcal{T}_k^i(\mathbf{x})}{\mathcal{L}_k^C(\mathbf{x})} \right] \right| &\leq N\Xi_k, \quad \forall k \in \mathbb{N}, \\ e^{-N\Xi_k} &\leq \max_{i \in \mathcal{V}} \left(\frac{\mathcal{T}_k^i(\mathbf{x})}{\mathcal{L}_k^C(\mathbf{x})} \right) \leq e^{N\Xi_k}, \quad \forall k \in \mathbb{N}. \end{aligned}$$

$$\max_{i \in \mathcal{V}} |\mathcal{T}_k^i(\mathbf{x}) - \mathcal{L}_k^C(\mathbf{x})| \leq \mathcal{L}_k^C(\mathbf{x}) (e^{N\Xi_k} - 1), \quad \forall k \in \mathbb{N}.$$

Since $\mathbf{x} \in \mathcal{X}$ can be any point, therefore:

$$\begin{aligned} \max_{i \in \mathcal{V}} D_{L_1}(\mathcal{T}_k^i, \mathcal{L}_k^C) &= \max_{i \in \mathcal{V}} \int_{\mathcal{X}} |\mathcal{T}_k^i - \mathcal{L}_k^C| d\mu(\mathbf{x}) \\ &\leq (e^{N\Xi_k} - 1) \int_{\mathcal{X}} \mathcal{L}_k^C d\mu(\mathbf{x}) = (e^{N\Xi_k} - 1), \quad \forall k \in \mathbb{N}. \end{aligned}$$

Hence the convergence error is bounded by $(e^{N\Xi_k} - 1)$.

It follows from (19)–(21) that $(e^{N\Xi_k} - 1) \leq (1 + \eta)\delta$ for all $k \geq \kappa$ and $\lim_{k \rightarrow \infty} (e^{N\Xi_k} - 1) \leq \delta$. The time step size Δ (18) is found using the steady-state error term:

$$\exp \left(N \frac{2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L}{1 - \sigma_m} \right) - 1 = \delta. \quad (36)$$

δ_{\min} (20) is obtained by substituting Δ_{\min} into (36).

If $\sqrt{N}\mathfrak{D}_1 \leq \frac{2\mathbf{b}(N-1)\sqrt{N}\Delta\theta_L}{1 - \sigma_m}$, then $(e^{N\Xi_k} - 1) \leq (1 + \eta)\delta$ for all $k \in \mathbb{N}$. Therefore, if $\mathfrak{D}_1 \leq \frac{\log(\delta+1)}{N^{\frac{3}{2}}}$, then

$\kappa = 1$. Otherwise, for $\mathfrak{D}_1 > \frac{\log(\delta+1)}{N^{\frac{3}{2}}}$, κ (22) is computed using $(e^{N\Xi_k} - 1) \leq (1 + \eta)\delta$. The constraint on TV error follows from Lemma 3. Our exponential stability proof is substantially different from the asymptotic-convergence proof in (Zhu & Martínez 2010). ■

Remark 1 A key advantage of the DBF algorithm is that it does not require all the sensors to observe the target. If an agent does not observe the target, then it sets its normalized likelihood function as the uniform distribution, i.e., $\mathcal{L}_k^i(\mathbf{x}) = 1$. Then this agent's likelihood function does not influence the joint likelihood function and the estimated pdfs because of the geometric nature of the fusion rule. Moreover, the DBF algorithm avoids double counting because the summation of weights from all paths is a constant due to the weights in the adjacency matrix \mathcal{A}_k . Theorem 5 explicitly bounds the time step size Δ of the distributed estimation algorithm with the time-scale

of the target dynamics. But the effectiveness of the DBF algorithm is predicated on Assumption 3. Moreover, the upper bound on the time step size Δ_{\max} (18) decreases with increasing number of agents N .

The following corollary provides sharper bounds for the special case of a static, strongly-connected communication network topology.

Corollary 6 If the communication network topology is time-invariant and strongly-connected, the time step size Δ (18), δ_{\min} (20), and κ (22) in Theorem 5 are given by:

$$\Delta = \frac{(1 - \sigma_{N-1}(\mathcal{A})) \log(\delta + 1)}{2N\sqrt{N}\theta_L}, \quad (37)$$

$$\delta_{\min} = \exp \left(\frac{\Delta_{\min} 2N\sqrt{N}\theta_L}{1 - \sigma_{N-1}(\mathcal{A})} \right) - 1, \quad (38)$$

$$\kappa = \left\lceil \frac{1}{\log \sigma_{N-1}(\mathcal{A})} \log \left(\frac{\log \left(\frac{(1+\eta)\delta+1}{\delta+1} \right)}{\log \left(\frac{e^{N^{\frac{3}{2}}\mathfrak{D}_1}}{\delta+1} \right)} \right) \right\rceil + 1, \quad (39)$$

where \mathcal{A} is the time-invariant adjacency matrix.

Proof: In this case, (31) is written as:

$$\|V_s^T \mathbf{e}_k\|_2 \leq \sigma_{N-1}(\mathcal{A}) \|V_s^T \mathbf{e}_{k-1}\|_2 + 2\sqrt{N}\Delta\theta_L.$$

Using the discrete Gronwall lemma (Stuart & Humphries 1998, pp. 9) we obtain:

$$\begin{aligned} \|V_s^T \mathbf{e}_k\|_2 &\leq (\sigma_{N-1}(\mathcal{A}))^{k-1} \|V_s^T \mathbf{e}_1\|_2 \\ &\quad + \frac{1 - (\sigma_{N-1}(\mathcal{A}))^{k-1}}{1 - \sigma_{N-1}(\mathcal{A})} 2\sqrt{N}\Delta\theta_L. \end{aligned} \quad (40)$$

Hence, we get $\max_{i \in \mathcal{V}} |\mathcal{U}_k^i(\mathbf{x}) - \mathcal{L}_k^{\text{KL}}(\mathbf{x})| \leq \Xi_k$ for all $k \in \mathbb{N}$, where

$$\Xi_k = (\sigma_{N-1}(\mathcal{A}))^{k-1} \sqrt{N}\mathfrak{D}_1 + \frac{1 - (\sigma_{N-1}(\mathcal{A}))^{k-1}}{1 - \sigma_{N-1}(\mathcal{A})} 2\sqrt{N}\Delta\theta_L.$$

We get Δ (37) and δ_{\min} (38) from $\lim_{k \rightarrow \infty} (e^{N\Xi_k} - 1) \leq \delta$ and κ (39) from $(e^{N\Xi_k} - 1) \leq (1 + \eta)\delta$ for all $k \geq \kappa$. ■

Note that Δ (37), δ_{\min} (38), and κ (39) in Corollary 6 can be obtained from Δ (18), δ_{\min} (20), and κ (22) in Theorem 5 by replacing $\mathbf{b}(N-1)$ with 1.

4.1 Robustness Analysis

The agents need to communicate their pdfs \mathcal{U}_{k-1}^i with their neighbors (see line 5 in Algorithm 1).

Remark 2 (Communication of pdfs) The information theoretic approach for communicating pdfs is studied in (Kramer & Savari 2007). If particle filters are used to

implement the Bayesian filter and combine the pdfs (Arulampalam et al. 2002), then the resampled particles represent the agent's estimated pdf. Hence communicating pdfs is equivalent to transmitting these resampled particles. Another approach involves approximating the pdf by a weighted sum of Gaussian pdfs (Anderson & Moore 2005, pp. 213) and then transmitting this approximate distribution. Several techniques for estimating the Gaussian parameters are discussed in the Gaussian mixture model literature (Kotecha & Djuric 2003, McLachlan & Basford 1988, Reynolds 2008).

Let the pdf $\hat{\mathcal{U}}_k^i \in \Phi(\mathcal{X})$ denote the pdf \mathcal{U}_k^i that is corrupted with communication errors. Similarly, let the pdf $\hat{\mathcal{L}}_k^i \in \Phi(\mathcal{X})$ represent the normalized likelihood function \mathcal{L}_k^i that is corrupted with modeling errors. We first state the assumptions on these errors and then state the main result of this section.

Assumption 4 *There exists time-invariant constants $\varepsilon_U \geq 0$ and $\varepsilon_L \geq 0$ such that for all agents $i \in \mathcal{V}$:*

$$e^{-\varepsilon_U} \leq \frac{\hat{\mathcal{U}}_k^i(\mathbf{x})}{\mathcal{U}_k^i(\mathbf{x})} \leq e^{\varepsilon_U}, \quad \forall \mathbf{x} \in \mathcal{X}, \forall k \in \mathbb{N}, \quad (41)$$

$$e^{-\varepsilon_L} \leq \frac{\hat{\mathcal{L}}_k^i(\mathbf{x})}{\mathcal{L}_k^i(\mathbf{x})} \leq e^{\varepsilon_L}, \quad \forall \mathbf{x} \in \mathcal{X}, \forall k \in \mathbb{N}. \quad (42)$$

Therefore, $|\mathcal{U}_k^i - \hat{\mathcal{U}}_k^i| \leq 2\varepsilon_U$ and $|\mathcal{L}_k^i - \hat{\mathcal{L}}_k^i| \leq 2\varepsilon_L$, where $\mathcal{U}_k^i(\mathbf{x}) = \log \left[\frac{\hat{\mathcal{U}}_k^i(\mathbf{x})}{\hat{\mathcal{U}}_k^i(\psi)} \right]$ and $\mathcal{L}_k^i(\mathbf{x}) = \log \left[\frac{\hat{\mathcal{L}}_k^i(\mathbf{x})}{\hat{\mathcal{L}}_k^i(\psi)} \right]$.

Corollary 7 *Under Assumptions 1–4, the time step size Δ (18) and δ_{\min} (20) in Theorem 5 is given by:*

$$\Delta = \frac{(1 - \sigma_m) \log(\delta + 1)}{2bN(N-1)\sqrt{N}\theta_L} - \frac{2\varepsilon_L + \varepsilon_U}{\theta_L}, \quad (43)$$

$$\delta_{\min} = e^{\left(\Delta_{\min} + \frac{2\varepsilon_L + \varepsilon_U}{\theta_L}\right) \left(\frac{2bN(N-1)\sqrt{N}\theta_L}{1 - \sigma_m}\right)} - 1, \quad (44)$$

where ε_U and ε_L are defined in Assumption 4.

Proof: Equation (15) can be written as:

$$\mathcal{U}_k^i = \begin{cases} \hat{\mathcal{L}}_1^i & \text{if } k = 1 \\ \sum_{j=1, j \neq i}^N \mathcal{A}_k[i, j] \mathcal{U}_{k-1}^j & \text{if } k \geq 2 \end{cases}, \quad (45)$$

Substituting the bounds from Assumption 4 gives:

$$|\mathcal{U}_1^i - \hat{\mathcal{L}}_1^i| \leq 2\varepsilon_L, \\ |\mathcal{U}_k^i - \sum_{j=1}^N \mathcal{A}_k[i, j] \mathcal{U}_{k-1}^j - \hat{\mathcal{L}}_k^i + \hat{\mathcal{L}}_{k-1}^i| \leq 2\varepsilon_U + 4\varepsilon_L.$$

The evolution of the error vector \mathbf{e}_k is now given by:

$$\mathbf{e}_k = \mathcal{A}_k \mathbf{e}_{k-1} + \hat{\mathbf{\Omega}}_{k,k}, \quad \forall k \geq 2, \quad (46)$$

where $\|\hat{\mathbf{\Omega}}_{k,k}\|_2 \leq \|\mathbf{\Omega}_{k,k}\|_2 + 2\sqrt{N}(\varepsilon_U + 2\varepsilon_L)$.

Similar to the proof of Theorem 5, we get:

$$\|V_s^T \mathbf{e}_k\|_2 \leq \sigma_m^{\left\lfloor \frac{k-1}{b(N-1)} \right\rfloor} \|V_s^T \mathbf{e}_1\|_2 \\ + \frac{1 - \sigma_m^{\left\lfloor \frac{k-1}{b(N-1)} \right\rfloor}}{1 - \sigma_m} 2b(N-1)\sqrt{N}(\Delta\theta_L + 2\varepsilon_L + \varepsilon_U).$$

Hence, we get $\max_{i \in \mathcal{V}} |\mathcal{U}_k^i(\mathbf{x}) - \mathcal{L}_k^{\text{KL}}(\mathbf{x})| \leq \Xi_k$ for all $k \in \mathbb{N}$, where

$$\Xi_k = \sigma_m^{\left\lfloor \frac{k-1}{b(N-1)} \right\rfloor} \sqrt{N} \mathfrak{D}_1 \\ + \frac{1 - \sigma_m^{\left\lfloor \frac{k-1}{b(N-1)} \right\rfloor}}{1 - \sigma_m} 2b(N-1)\sqrt{N}(\Delta\theta_L + 2\varepsilon_L + \varepsilon_U).$$

We get Δ (43) and δ_{\min} (44) from $\lim_{k \rightarrow \infty} (e^{N\Xi_k} - 1) \leq \delta$. We get the same κ (22) for this case. ■

It follows from Corollary 7 that in order to generate satisfactory estimates using the DBF algorithm, the bounds ε_U , ε_L should be substantially smaller than δ .

4.2 Distributed Kalman Information Filter

The DBF algorithm is applied to linear target dynamics and measurement models with additive Gaussian noise:

$$\mathbf{x}_{k+1} = \mathbf{F}_k \mathbf{x}_k + \mathbf{w}_k, \quad \forall k \in \mathbb{N}, \quad (47)$$

$$\mathbf{y}_k^i = \mathbf{H}_k^i \mathbf{x}_k + \mathbf{v}_k^i, \quad \forall k \in \mathbb{N}, \forall i \in \mathcal{V}, \quad (48)$$

where the process noise $\mathbf{w}_k = \mathcal{N}(\mathbf{0}, \mathbf{Q}_k)$ and the measurement noise $\mathbf{v}_k^i = \mathcal{N}(\mathbf{0}, \mathbf{R}_k^i)$ are zero mean multivariate normal distributions. Therefore, we adopt the information filter-based representation (Mutambara 1998, Fourati 2015). The pseudo-code of the distributed Kalman information filtering algorithm for linear-Gaussian models is given in Algorithm 2. The prior pdf $\mathcal{S}_k^i = \mathcal{N}(\hat{\mathbf{x}}_{k|k-1}^i, \mathbf{P}_{k|k-1}^i)$, the posterior pdf $\mathcal{W}_k^i = \mathcal{N}(\hat{\mathbf{x}}_{k|k}^i, \mathbf{P}_{k|k}^i)$, and the estimated pdfs $\mathcal{U}_k^i = \mathcal{N}((\mathbf{U}_k^i)^{-1} \mathbf{u}_k^i, (\mathbf{U}_k^i)^{-1})$, $\mathcal{T}_k^i = \mathcal{N}((\mathbf{T}_k^i)^{-1} \mathbf{t}_k^i, (\mathbf{T}_k^i)^{-1})$ are also multivariate normal distributions.

4.3 Multiple Consensus Loops within Each Time

In this section, we show that the proposed DBF algorithm can be easily extended to recursively combine local likelihood functions using multiple consensus loops within each time instant so that each agent's estimated likelihood function converges to the joint likelihood function \mathcal{L}_k^C (12). Then, the resultant DBF algorithm is equivalent to the Bayesian consensus algorithms in (Hlinka et al. 2012, 2014). Note that multiple consensus loops within each time step significantly reduces the

Algorithm 2. Distributed Kalman Information Filtering

1. (i^{th} agent's steps at k^{th} time instant)
2. Compute the prior pdf $S_k^i = \mathcal{N}(\hat{\mathbf{x}}_{k|k-1}^i, \mathbf{P}_{k|k-1}^i)$:
 $\hat{\mathbf{z}}_{k-1|k-1}^i = (\mathbf{P}_{k-1|k-1}^i)^{-1} \hat{\mathbf{x}}_{k-1|k-1}^i$,
 $\mathbf{Z}_{k-1|k-1}^i = (\mathbf{P}_{k-1|k-1}^i)^{-1}$,
 $\mathbf{M}_{k-1}^i = (\mathbf{F}_{k-1}^{-1})^T \mathbf{Z}_{k-1|k-1}^i \mathbf{F}_{k-1}^{-1}$,
 $\mathbf{Z}_{k|k-1}^i = (\mathbf{I} - \mathbf{M}_{k-1}^i (\mathbf{M}_{k-1}^i + \mathbf{Q}_{k-1}^{-1})^{-1}) \mathbf{M}_{k-1}^i$,
 $\hat{\mathbf{z}}_{k|k-1}^i = (\mathbf{I} - \mathbf{M}_{k-1}^i (\mathbf{M}_{k-1}^i + \mathbf{Q}_{k-1}^{-1})^{-1}) (\mathbf{F}_{k-1}^{-1})^T \hat{\mathbf{z}}_{k-1|k-1}^i$,
 $\mathbf{P}_{k|k-1}^i = (\mathbf{Z}_{k|k-1}^i)^{-1}$, $\hat{\mathbf{x}}_{k|k-1}^i = \mathbf{P}_{k|k-1}^i \hat{\mathbf{z}}_{k|k-1}^i$.
3. Obtain local measurement \mathbf{y}_k^i .
4. Receive pdfs \mathcal{U}_{k-1}^j from agents $j \in \mathcal{J}_k^i$.
5. Compute the pdfs \mathcal{U}_k^i and \mathcal{T}_k^i as follows:
 $\mathbf{i}_k^i = (\mathbf{H}_k^i)^T (\mathbf{R}_k^i)^{-1} \mathbf{y}_k^i$,
 $\mathbf{I}_k^i = (\mathbf{H}_k^i)^T (\mathbf{R}_k^i)^{-1} \mathbf{H}_k^i$,
 $\mathbf{u}_k^i = \begin{cases} \mathbf{i}_k^i & \text{if } k = 1 \\ \mathbf{i}_k^i - \mathbf{i}_{k-1}^i + \sum_{j \in \mathcal{J}_k^i} \mathcal{A}_k[i, j] \mathbf{u}_{k-1}^j, & \text{if } k \geq 2 \end{cases}$,
 $\mathbf{U}_k^i = \begin{cases} \mathbf{I}_k^i & \text{if } k = 1 \\ \mathbf{I}_k^i - \mathbf{I}_{k-1}^i + \sum_{j \in \mathcal{J}_k^i} \mathcal{A}_k[i, j] \mathbf{U}_{k-1}^j, & \text{if } k \geq 2 \end{cases}$,
 $\mathbf{t}_k^i = N \mathbf{u}_k^i$, $\mathbf{T}_k^i = N \mathbf{U}_k^i$,
6. Compute the posterior pdf $\mathcal{W}_k^i = \mathcal{N}(\hat{\mathbf{x}}_{k|k}^i, \mathbf{P}_{k|k}^i)$:
 $\hat{\mathbf{z}}_{k|k}^i = \hat{\mathbf{z}}_{k|k-1}^i + \mathbf{t}_k^i$, $\mathbf{Z}_{k|k}^i = \mathbf{Z}_{k|k-1}^i + \mathbf{T}_k^i$,
 $\mathbf{P}_{k|k}^i = (\mathbf{Z}_{k|k}^i)^{-1}$, $\hat{\mathbf{x}}_{k|k}^i = \mathbf{P}_{k|k}^i \hat{\mathbf{z}}_{k|k}^i$.

practicality of such algorithms. Let the pdfs $\mathcal{U}_{k,\nu}^i \in \Phi(\mathcal{X})$ and $\mathcal{T}_{k,\nu}^i \in \Phi(\mathcal{X})$ denote to the local pdfs of the i^{th} agent during the ν^{th} consensus loop at the k^{th} time instant. Since the pdf \mathcal{L}_k^i is not updated during the k^{th} time instant, we define the pdfs $\mathcal{L}_{k,\nu}^i = \mathcal{L}_k^i$ for all $\nu \in \mathbb{N}$. During the ν^{th} consensus loop, each agent updates its local pdfs $\mathcal{U}_{k,\nu}^i$ and $\mathcal{T}_{k,\nu}^i$ using the following fusion rule:

$$\mathcal{U}_{k,\nu}^i = \begin{cases} \mathcal{L}_{k,1}^i & \text{if } \nu = 1 \\ \frac{\prod_{j \in \mathcal{J}_k^i} (\mathcal{U}_{k,\nu-1}^j)^{\mathcal{A}_k[i,j]}}{\int_{\mathcal{X}} \prod_{j \in \mathcal{J}_k^i} (\mathcal{U}_{k,\nu-1}^j)^{\mathcal{A}_k[i,j]} d\mu(\mathbf{x})} & \text{if } \nu \geq 2 \end{cases}, \quad (49)$$

$$\mathcal{T}_k^i = \frac{(\mathcal{U}_{k,\nu}^i)^N}{\int_{\mathcal{X}} (\mathcal{U}_{k,\nu}^i)^N d\mu(\mathbf{x})}. \quad (50)$$

Theorem 8 (Bandyopadhyay & Chung 2014a,b) *Assuming \mathcal{G}_k is strongly connected, each agent's pdf $\mathcal{T}_{k,\nu}^i$ globally exponentially converges pointwise to \mathcal{L}_k^C (12). After n_{loop} consensus loops, the ℓ_2 norm of the error vector $\mathbf{e}_{k,\nu} := [D_{L_1}(\mathcal{T}_{k,\nu}^1, \mathcal{L}_k^C), \dots, D_{L_1}(\mathcal{T}_{k,\nu}^N, \mathcal{L}_k^C)]^T$ is bounded by $\|\mathbf{e}_{k,n_{\text{loop}}}\|_2 \leq (\sigma_{N-1}(\mathcal{A}_k))^{(n_{\text{loop}}-1)} 2\sqrt{N}$.*

The proof follows from Theorem 2 and 4 in (Bandyopadhyay & Chung 2014a). Thus, the distributed estimation algorithm in (Hlinka et al. 2012, 2014) is a special case of our DBF algorithm.

5 Numerical Simulations

In this section, we demonstrate the properties of the DBF algorithm using a benchmark example in Section 5.1 and a complex multi-agent estimation and control task in Section 5.2.

5.1 Benchmark Example

In this subsection, we compare the performance of the DBF algorithms with the centralized multi-sensor Bayesian filtering algorithms using the benchmark example studied in (Battistelli et al. 2015, Battistelli & Chisci 2014, Bar-Shalom et al. 2004). The target dynamics is modeled by a linear model:

$$\mathbf{x}_{k+1} = \begin{bmatrix} 1 & \Delta & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & \Delta \\ 0 & 0 & 0 & 1 \end{bmatrix} \mathbf{x}_k + \mathbf{w}_k, \text{ where } \mathbf{Q} = \begin{bmatrix} \frac{\Delta^3}{3} & \frac{\Delta^2}{2} & 0 & 0 \\ \frac{\Delta^2}{2} & \Delta & 0 & 0 \\ 0 & 0 & \frac{\Delta^3}{3} & \frac{\Delta^2}{2} \\ 0 & 0 & \frac{\Delta^2}{2} & \Delta \end{bmatrix}$$

is the covariance matrix of the process noise \mathbf{w}_k , Δ is the time step size, and the state vector \mathbf{x}_k denotes the position and velocity components along the coordinate axes, i.e., $\mathbf{x}_k = [x_k, \dot{x}_k, y_k, \dot{y}_k]^T$. As shown in Fig. 3, 50 sensing agents are distributed over the given region and are able to communicate with their neighboring agents. The undirected communication network topology is assumed to be time-invariant. Local-degree weights are used to compute the doubly stochastic adjacency matrix \mathcal{A}_k as:

$$\mathcal{A}_k[i, j] = \frac{1}{\max(d_i, d_j)}, \quad \forall j \in \mathcal{J}_k^i \text{ and } i \neq j,$$

$$\mathcal{A}_k[i, i] = 1 - \sum_{j \in \mathcal{V} \setminus \{i\}} \mathcal{A}_k[i, j],$$

where d_i denotes the degree of the i^{th} agent.

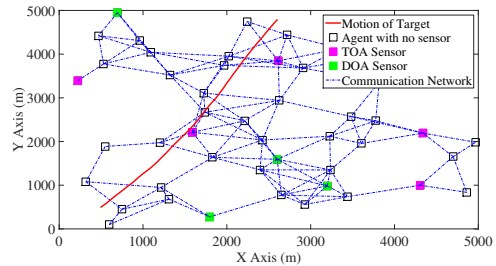


Fig. 3. The motion of the target, the position of sensing agents (5 TOA sensors, 5 DOA sensors, and 40 agents with no sensors), and their communication network topology.

In Scenario 1, five of these agents are equipped with non-linear position sensors that can measure their distance to the target using Time of Arrival (TOA) sensors. Another five agents are equipped with Direction of Arrival (DOA) sensors that can measure the bearing angle between the target and themselves. The remaining agents

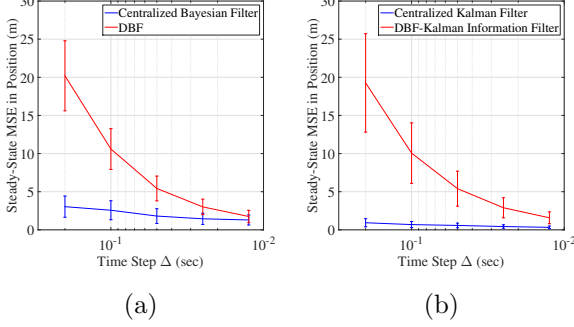


Fig. 4. Variation of steady-state MSE in position with respect to time step size Δ is shown for (a) the centralized Bayesian filtering algorithm and the DBF algorithm in Scenario 1 and (b) the centralized Kalman filtering algorithm and the DBF algorithm for linear-Gaussian models in Scenario 2.

do not have any sensors. The measurement models for these sensors are given by:

$$\mathbf{h}_k^i(\mathbf{x}_k, \mathbf{v}_k^i) = \begin{cases} \text{atan2}(x_k - x^i, y_k - y^i) + \mathbf{v}_{k,\text{DOA}}^i & \text{for DOA sensor} \\ \sqrt{(x_k - x^i)^2 + (y_k - y^i)^2} + \mathbf{v}_{k,\text{TOA}}^i & \text{for TOA sensor} \end{cases} \quad (51)$$

where (x^i, y^i) denotes the position of the i^{th} agent and atan2 is the 4-quadrant inverse tangent function. The DOA sensor's measurement noise $\mathbf{v}_{k,\text{DOA}}^i = \mathcal{N}(0, \sigma_\theta)$ has variance $\sigma_\theta = 2^\circ$ and the TOA sensor's measurement noise $\mathbf{v}_{k,\text{TOA}}^i = \mathcal{N}(0, \sigma_r)$ has variance $\sigma_r = 10$ m. Each agent executes the DBF algorithm in Algorithm 1 using particle filters with 10^4 particles. The comparison between the DBF algorithm and the centralized Bayesian filtering algorithm for varying time step sizes (Δ) is shown in Fig. 4(a). The same target motion, shown in Fig. 3, is used for all simulations. We see that the DBF algorithm's steady-state mean-square-error (MSE) in position converges to that of the centralized algorithm as the time step size Δ decreases (i.e., the steady-state MSE is smaller than 5 m if the time step size $\Delta \leq 0.05$ sec). Note that the MSE of the centralized algorithm does not change much with time step size because it is constrained by the measurement noise intensities. This shows that the performance of the DBF algorithm approaches the performance of the centralized Bayesian filter as the time step size is reduced. Moreover, Fig. 5 shows that the L_1 distances between the estimated likelihood functions and the joint likelihood function are bounded by δ . In Scenario 2, the same ten agents (having DOA or TOA sensors) have linear position sensors $\mathbf{h}_k^i(\mathbf{x}_k, \mathbf{v}_k^i) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \mathbf{x}_k + \mathbf{v}_{k,\text{lin}}^i$, with measurement noise $\mathbf{v}_{k,\text{lin}}^i = \mathcal{N}(\mathbf{0}, \mathbf{R}_k^i)$ and covariance matrix $\mathbf{R}_k^i = 15\mathbf{I}$. Here, each agent executes the distributed Kalman information filtering algorithm from Algorithm 2. Fig. 4(b) shows that the performance of the distributed Kalman information filtering algorithm approaches the performance of the centralized Kalman filtering algorithm as the time step size is reduced.

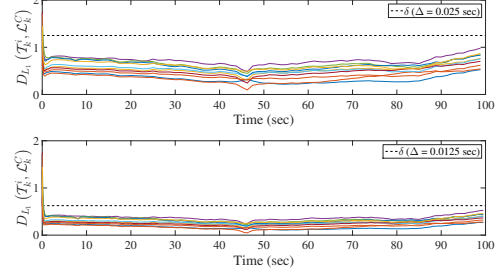


Fig. 5. The trajectories of the L_1 distances between the estimated likelihood functions and the joint likelihood function for the ten sensing agents are shown.

5.2 Relative Position Estimation for Formation

In this subsection, N agents estimate their relative positions using only range measurements, and then reconfigure to a N -sided regular polygon. Specifically, each agent can only measure the distance to its nearest two neighbors using a TOA sensor, whose measurement model is described in (51). Each agent simultaneously executes N DBF algorithms to estimate the relative positions of all the agents. The i^{th} agent's dynamics and control inputs are given by:

$$\begin{aligned} \mathbf{x}_{k+1}^i &= \mathbf{x}_k^i + \Delta \mathbf{u}_k^i, \\ \mathbf{u}_k^i &= \sum_{j \in \mathcal{N}_k^i} APF(\hat{\mathbf{x}}_k^{i,j}, \hat{\mathbf{x}}_k^{i,i}, d) + APF(\hat{\mathbf{x}}_k^{i,CM}, \hat{\mathbf{x}}_k^{i,i}, d_{CM}) \end{aligned}$$

where \mathcal{N}_k^i denotes the two nearest neighbors of the i^{th} agent and $\hat{\mathbf{x}}_k^{i,j}$ is the i^{th} agent's estimate of the j^{th} agent's position, which is obtained using the DBF algorithms. The agents use the artificial potential field (APF) based approach to maintain a distance d from their nearest neighbors: $APF(\hat{\mathbf{x}}_k^{i,j}, \hat{\mathbf{x}}_k^{i,i}, d) = \frac{(\hat{\mathbf{x}}_k^{i,j} - \hat{\mathbf{x}}_k^{i,i})}{r_k^{i,j}} \left(a r_k^{i,j} - \frac{a d^2}{r_k^{i,j}} \right)$, where $r_k^{i,j} = \|\hat{\mathbf{x}}_k^{i,j} - \hat{\mathbf{x}}_k^{i,i}\|_2$, and maintain a distance $d_{CM} = \frac{d}{2 \cos(\frac{\pi}{2} - \frac{\pi}{N})}$ from the estimated center of mass $\hat{\mathbf{x}}_k^{i,CM} = \frac{1}{N} \sum_{j=1}^N \hat{\mathbf{x}}_k^{i,j}$. In the propagation step of the DBF algorithm, the agents use their estimated positions to estimate the control input applied by other agents. Therefore, the estimation errors contribute to the process noise in the propagation step. During the fusion step at k^{th} time instant, the i^{th} agent communicates with the j^{th} agent if either $j \in \mathcal{N}_k^i$ or $i \in \mathcal{N}_k^j$. In these simulations, we use $a = 0.1$, $d = 1$ m, $\Delta = 0.1$ sec, and 10^3 particles to execute each DBF algorithm. At the start of the estimation process, the particles are selected from a uniform distribution over the state space $\mathcal{X} = [-N, N] \times [-N, N]$. The simulation results for multiple values of N are shown in Fig. 6. Since the agents only use relative measurements, the orientation of the final N -sided regular polygon in the global frame is not fixed. Therefore, we conclude that the N agents successfully estimate their relative positions using the DBF algorithms and achieve the

complex desired formations.

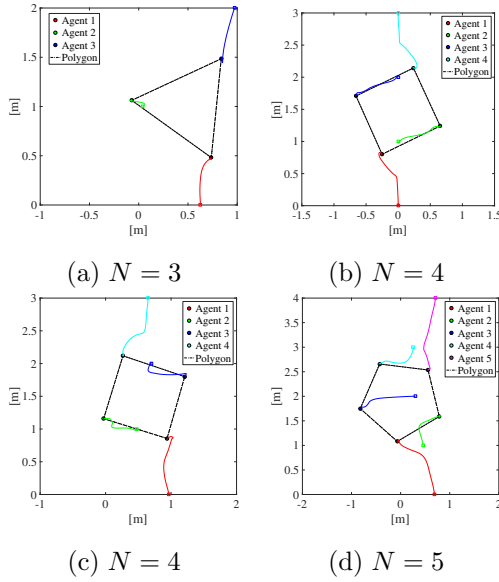


Fig. 6. The initial position (\square), the final position (\circ), the trajectories of all the agents, and the final regular polygon are shown for $N = 3, 4, 5$ agents.

6 Conclusions

In this paper, we presented a novel, discrete-time distributed estimation algorithm, namely the DBF algorithm, that ensures that each agent's estimated likelihood function converges to an error ball around the joint likelihood function of the centralized multi-sensor Bayesian filtering algorithm. We have rigorously proven the convergence properties of this algorithm. We have shown an explicit connection between the time step size of the distributed estimation algorithm and the time-scale of the target dynamics. We also presented the distributed Kalman information filtering algorithm for the special case of linear-Gaussian models. The properties of these algorithms are illustrated using complex numerical examples. We envisage that the novel proof techniques presented in this paper can also be used in other distributed estimation algorithms which rely on the Lo-OP scheme.

References

Ahmed, N., Schoenberg, J. & Campbell, M. (2013), Fast weighted exponential product rules for robust general multi-robot data fusion, in N. Roy, P. Newman & S. Srinivasa, eds, 'Robotics: Science and Systems VIII', MIT Press, pp. 9–16.

Anderson, B. D. O. & Moore, J. B. (2005), *Optimal Filtering*, Dover Publications, Mineola, New York.

Arulampalam, M. S., Maskell, S., Gordon, N. & Clapp, T. (2002), 'A tutorial on particle filters for online

nonlinear/non-Gaussian Bayesian tracking', *IEEE Trans. Signal Process.* **50**(2), 174–188.

Bacharach, M. (1979), 'Normal Bayesian dialogues', *J. Amer. Statistical Assoc.* **74**(368), 837 – 846.

Bailey, T., Julier, S. & Agamennoni, G. (2012), On conservative fusion of information with unknown non-Gaussian dependence, in 'Int. Conf. Information Fusion', Singapore, pp. 1876–1883.

Bandyopadhyay, S. & Chung, S.-J. (2014a), Distributed estimation using Bayesian consensus filtering, in 'Proc. Amer. Control Conf.', Portland, OR, pp. 634–641.

Bandyopadhyay, S. & Chung, S.-J. (2014b), 'Distributed estimation using Bayesian consensus filtering'. <https://arxiv.org/abs/1403.3117>.

Bandyopadhyay, S., Chung, S.-J. & Hadaegh, F. Y. (2017), 'Probabilistic and distributed control of a large-scale swarm of autonomous agents', *IEEE Trans. Robotics* **33**, 1103–1123.

Bar-Shalom, Y., Li, X. R. & Kirubarajan, T. (2004), *Estimation with Applications to Tracking and Navigation: Theory, Algorithms and Software*, John Wiley & Sons.

Battistelli, G. & Chisci, L. (2014), 'Kullback–Leibler average, consensus on probability densities, and distributed state estimation with guaranteed stability', *Automatica* **50**(3), 707–718.

Battistelli, G., Chisci, L., Mugnai, G., Farina, A. & Graziano, A. (2015), 'Consensus-based linear and nonlinear filtering', *IEEE Trans. Autom. Control* **60**(5), 1410–1415.

Borkar, V. & Varaiya, P. (1982), 'Asymptotic agreement in distributed estimation', *IEEE Trans. Autom. Control* **27**(3), 650 – 655.

Chen, L., Arambel, P. O. & Mehra, R. K. (2002), 'Estimation under unknown correlation: covariance intersection revisited', *IEEE Trans. Autom. Control* **47**(11), 1879–1882.

Chen, M.-H. (2005), Bayesian computation: From posterior densities to Bayes factors, marginal likelihoods, and posterior model probabilities, in D. K. Dey & C. R. Rao, eds, 'Bayesian Thinking, Modeling and Computation', Handbook of Statistics, Elsevier, Amsterdam, chapter 15, pp. 437 – 457.

Chen, Z. (2003), 'Bayesian filtering: From Kalman filters to particle filters, and beyond', *Statistics* **182**(1), 1–69.

Chung, S.-J., Bandyopadhyay, S., Chang, I. & Hadaegh, F. Y. (2013), 'Phase synchronization control of complex networks of Lagrangian systems on adaptive digraphs', *Automatica* **49**(5), 1148–1161.

DeGroot, M. H. (1960), 'Reaching a consensus', *J. Amer. Statistical Assoc.* **69**(345), 688 – 704.

Durrant-Whyte, H. & Henderson, T. C. (2008), *Springer Handbook of Robotics*, Springer, chapter Multisensor Data Fusion, pp. 585–610.

Durrett, R. (2005), *Probability: Theory and Examples*, Thomson Brooks.

Fiedler, M. (1972), 'Bounds for eigenvalues of doubly

- stochastic matrices', *Linear Algebra and Its Applications* **5**(3), 299–310.
- Fourati, H. (2015), *Multisensor Data Fusion: From Algorithms and Architectural Design to Applications*, Series: Devices, Circuits, and Systems, CRC Press, Taylor & Francis Group LLC.
- Fraser, C. S. R., Bertuccelli, L. F., Choi, H.-L. & How, J. P. (2012), 'A hyperparameter consensus method for agreement under uncertainty', *Automatica* **48**(2), 374 – 380.
- French, S. (1981), 'Consensus of opinion', *European J. Operational Research* **7**, 332 – 340.
- Genest, C. & Zidek, J. V. (1986), 'Combining probability distributions: A critique and an annotated bibliography', *Statistical Sci.* **1**(1), 114 – 135.
- Gilardoni, G. L. & Clayton, M. K. (1993), 'On reaching a consensus using DeGroot's iterative pooling', *Ann. Stat.* **21**(1), 391 – 401.
- Gordon, N., Ristic, B. & Arulampalam, S. (2004), *Beyond the Kalman Filter: Particle Filters for Tracking Applications*, Artech House, London.
- Hlinka, O., Hlawatsch, F. & Djuric, P. M. (2014), 'Consensus-based distributed particle filtering with distributed proposal adaptation', *IEEE Trans. Signal Process.* **62**(12), 3029–3041.
- Hlinka, O., Slučiak, O., Hlawatsch, F., Djuric, P. M. & Rupp, M. (2012), 'Likelihood consensus and its application to distributed particle filtering', *IEEE Trans. Signal Process.* **60**(8), 4334–4349.
- Horn, R. A. & Johnson, C. R. (1985), *Matrix Analysis*, Cambridge University Press, Cambridge, England.
- Jadbabaie, A., Lin, J. & Morse, A. S. (2003), 'Coordination of groups of mobile autonomous agents using nearest neighbor rules', *IEEE Trans. Autom. Control* **48**(6), 988 – 1001.
- Jadbabaie, A., Molavi, P., Sandroni, A. & Tahbaz-Salehi, A. (2012), 'Non-Bayesian social learning', *Games and Economic Behavior* **76**, 210–225.
- Kamgarpour, M. & Tomlin, C. (2008), 'Convergence properties of a decentralized Kalman filter', in 'IEEE Conf. Decision Control', IEEE, pp. 3205–3210.
- Kotecha, J. H. & Djuric, P. M. (2003), 'Gaussian sum particle filtering', *IEEE Trans. Signal Process.* **51**(10), 2602–2612.
- Kramer, G. & Savari, S. A. (2007), 'Communicating probability distributions', *IEEE Trans. Inf. Theory* **53**(2), 518–525.
- Lebeltel, O., Bessiere, P., Diard, J. & Mazer, E. (2004), 'Bayesian robot programming', *Autonomous Robots* **16**(1), 49–79.
- Levin, D. A., Peres, Y. & Wilmer, E. L. (2009), *Markov Chains and Mixing Times*, American Mathematical Soc.
- McLachlan, G. J. & Basford, K. E. (1988), *Mixture Models: Inference and Applications to Clustering*, M. Dekker, New York, N.Y.
- Mutambara, A. G. O. (1998), *Decentralized Estimation and Control for Multisensor Systems*, CRC press.
- Nedić, A., Olshevsky, A. & Uribe, C. A. (2017), 'Fast convergence rates for distributed non-Bayesian learning', *IEEE Transactions on Automatic Control* **62**(11), 5538–5553.
- Olfati-Saber, R. (2009), 'Kalman-consensus filter : Optimality, stability, and performance', in 'IEEE Conf. Decision Control', Shanghai, China, pp. 7036–7042.
- Olfati-Saber, R. & Murray, R. (2004), 'Consensus problems in networks of agents with switching topology and time-delays', *IEEE Trans. Autom. Control* **49**(9), 1520 – 1533.
- Olshevsky, A. & Tsitsiklis, J. N. (2009), 'Convergence speed in distributed consensus and averaging', *SIAM Journal on Control and Optimization* **48**(1), 33–55.
- Pavlin, G., Oude, P., Maris, M., Nunnink, J. & Hood, T. (2010), 'A multi-agent systems approach to distributed Bayesian information fusion', *Inform. Fusion* **11**, 267–282.
- Pearl, J. (1988), *Probabilistic Reasoning in Intelligent Systems: Networks of Plausible Inference*, Morgan Kaufmann, San Mateo, CA.
- Rashedi, M., Liu, J. & Huang, B. (2016), 'Communication delays and data losses in distributed adaptive high-gain ekf', *AIChE Journal* **62**(12), 4321–4333.
- Reynolds, D. A. (2008), 'Gaussian mixture models', *Encyclopedia of Biometric Recognition*.
- Speyer, J. (1979), 'Computation and transmission requirements for a decentralized linear-quadratic-Gaussian control problem', *IEEE Trans. Autom. Control* **24**(2), 266–269.
- Stuart, A. & Humphries, A. R. (1998), *Dynamical Systems and Numerical Analysis*, Cambridge University Press, Cambridge, England.
- Zhu, M. & Martínez, S. (2010), 'Discrete-time dynamic average consensus', *Automatica* **46**(2), 322–329.

A Proof of Lemma 1

If this claim is untrue, then either $0 < \mathcal{P}(\mathbf{x}) < \mathcal{Q}(\mathbf{x})$ or $0 < \mathcal{Q}(\mathbf{x}) < \mathcal{P}(\mathbf{x})$ for all $\mathbf{x} \in \mathcal{X}$. Hence either $\int_{\mathcal{X}} \mathcal{P}(\mathbf{x}) d\mu(\mathbf{x}) = 1 < \int_{\mathcal{X}} \mathcal{Q}(\mathbf{x}) d\mu(\mathbf{x})$ or $\int_{\mathcal{X}} \mathcal{Q}(\mathbf{x}) d\mu(\mathbf{x}) < \int_{\mathcal{X}} \mathcal{P}(\mathbf{x}) d\mu(\mathbf{x}) = 1$, which results in contradiction since $\int_{\mathcal{X}} \mathcal{Q}(\mathbf{x}) d\mu(\mathbf{x}) = 1$. Hence, such a $\psi \in \mathcal{X}$ must exist.

B Proof of Lemma 2

Since $\lim_{k \rightarrow \infty} \mathcal{P}_k^i(\mathbf{x}) = \mathcal{P}^*(\mathbf{x})$, we have $\lim_{k \rightarrow \infty} (\log \mathcal{P}_k^i(\mathbf{x}) - \log \mathcal{P}_k^i(\psi)) = \log \mathcal{P}^*(\mathbf{x}) - \log \mathcal{P}^*(\psi)$. From Lemma 1, substituting $\lim_{k \rightarrow \infty} \mathcal{P}_k^i(\psi) = \mathcal{P}^*(\psi)$ gives $\lim_{k \rightarrow \infty} \mathcal{P}_k^j(\mathbf{x}) = \mathcal{P}^*(\mathbf{x})$ since logarithm is a monotonic function.

C Proof of Lemma 3

It follows from Scheffé's theorem (Durrett 2005, pp. 84) that if the pdfs converge pointwise, then their induced measures converge in TV. The relationship between TV error and L_1 distance follows from (Levin et al. 2009, pp. 48).