

Sentence-Level BERT and Multi-Task Learning of Age and Gender in Social Media

Muhammad Abdul-Mageed¹ Chiyu Zhang¹ Arun Rajendran¹
AbdelRahim Elmadany¹ Michael Przystupa¹ Lyle Ungar²

¹Natural Language Processing Lab, University of British Columbia

²Computer and Information Science, University of Pennsylvania

¹muhammad.mageed@ubc.ca ²ungar@cis.upenn.edu

Abstract

Social media currently provide a window on our lives, making it possible to learn how people from different places, with different backgrounds, ages, and genders use language. In this work we exploit a newly-created Arabic dataset with ground truth *age* and *gender* labels to learn these attributes both individually and in a multi-task setting *at the sentence level*. Our models are based on variations of deep bidirectional neural networks. More specifically, we build models with gated recurrent units and bidirectional encoder representations from transformers (BERT). We show the utility of multi-task learning (MTL) on the two tasks and identify task-specific attention as a superior choice in this context. We also find that a single-task BERT model outperform our best MTL models on the two tasks. We report tweet-level accuracy of 51.43% for the age task (three-way) and 65.30% on the gender task (binary), both of which outperforms our baselines with a large margin. Our models are language-agnostic, and so can be applied to other languages.

1 Introduction

Wide use of social media has made it possible to collect large amounts of data from people belonging to various types of backgrounds. These data can then be used for developing natural language processing models capable of predicting user attributes such as location, gender, age, and personality type. While there has been multiple works on learning these tasks, most of them focus on single-task learning rather than trying to learn more than one task simultaneously. This is sub-optimal and different from how humans learn (Caruana, 1997).

In this work, we investigate the utility of multi-task learning (MTL), where more than one task

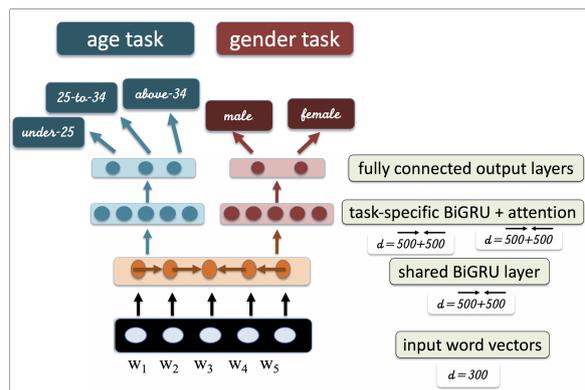


Figure 1: Illustration of our MTL network with shared hidden layers and a task-specific attention layer.

is learned simultaneously in a single model with an overall loss that is the sum of each independent task’s loss. We focus on learning the two tasks of age and gender at the *sentence level*, exploring a deep neural network paradigm where the model’s hidden layers are shared in the MTL setting with (1) a shared attention layer but also (2) with task-specific attention layers. An illustration of our MTL network with task-specific attention is presented in Figure 1.

In a related vein, recent progress in representation learning of natural language has resulted in a proliferation of methods. These include methods aimed at improving input to the neural network by learning better embeddings either exploiting parallel data in machine translation tasks (as in CoVe (McCann et al., 2017)) or by enhancing these embedding by exploiting bidirectional language models (as in ELMo (Peters et al., 2018)). Other approaches such as the Transformer model (Vaswani et al., 2017), which dispenses entirely with both the recurrence and convolution approaches dominant in neural networks, and its extensions such as the work of (Radford et al., 2018) and (Devlin et al., 2018) that leverage Transformers for pre-training.

These methods have hardly been used in Arabic NLP and hence it remains unclear what their utilities are and how it is that they can be best deployed for the language. Toward bridging this gap, we explore the benefit of using a specific type of Transformers based on bidirectional, masked language models (BERT) (Devlin et al., 2018).

Finally, we note that in spite of the Arabic world being a large region with a huge population (300M) and a wide use of social media, tools for understanding attributes of Arabic users online are still lacking. In spite of the important and worthy privacy concerns related to user online behavior, such tools can be valuable for making discoveries about whole communities and as means to facilitate humanitarian (as in disaster), educational (as in targeted mediated pedagogy), and safety causes (as in detecting hate speech and extremist ideology), to list a few. Our models offer a step forward toward building tools for online Arabic user modeling.

Overall, we make the following contributions: (1) We develop novel models targeting the two tasks of age and gender; (2) we investigate and establish the utility of multi-task learning on these two tasks, showing the advantage of task-specific attention (vs. shared attention, see Section 4.3); and (3) we carry out BERT-based modeling on the two tasks. The rest of the paper is organized as follows: In Section 2 we describe the dataset. In Section 3 we introduce our various methods. We present our experimental setup and our models in Section 4, and related works in Section 6. We conclude in Section 7.

2 Data

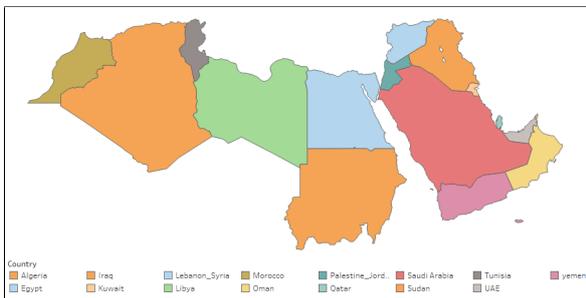


Figure 2: Arabic countries covered in the dataset.

We make use of Arap-Tweet (Zaghouani and Charfi, 2018), which we will refer to as *Arab-Tweet*. Arab-tweet is a dataset of tweets covering 11 Arabic regions from 17 different countries.¹ For each

¹Please note (Zaghouani and Charfi, 2018) mention the

region, data from 100 Twitter users were crawled. Users needed to have posted at least 2,000 and were selected based on an initial list of seed words characteristic of each region. The seed list included words such as برشة /barsha/ many for Tunisian Arabic and وايد /wayed/ many for Gulf Arabic. (Zaghouani and Charfi, 2018) employed human annotators to verify that users do belong to each respective region. Annotators also assigned gender labels from the set *male, female* and age group labels from the set *under-25, 25-to34, above-35* at the user-level, which in turn is assigned at tweet level. Tweets with less than 3 words and re-tweets were removed. Refer to (Zaghouani and Charfi, 2018) for details about how annotation was carried out. We provide a description of the data in Table 1. (Table 1 also provides class breakdown across our splits, as we explain in more detail in Section 4.1).² We note that (Zaghouani and Charfi, 2018) do not report classification models exploiting the data.

3 Methods

3.1 GRU

For comparison, we employ gated recurrent units (GRU) (Cho et al., 2014), a simplification of long-short term memory networks (LSTMs) (Hochreiter and Schmidhuber, 1997). Like LSTMs, GRUs can address the problem of long-range dependencies in recurrent neural networks. Unlike an LSTM, a GRU does not have a memory cell but makes use of an *update gate* $z^{(t)}$ and a *reset gate* $r^{(t)}$. The activation of GRU at time step t is a linear interpolation of the previous activation *hidden state* $h^{(t-1)}$ and the candidate activation *hidden state* $\tilde{h}^{(t)}$. The *update state* $z^{(t)}$ decides how much the unit updates its content. Essentially, the forget gate of an LSTM and an update gate of a GRU each acts as a manager of information flow where they allow the network to update its state by adding content from the current cell to that of a previous cell, rather than overwriting previous cell content (as is the case in vanilla RNNs).

3.2 Multi-Task Learning

In addition to attempting to learn each of the two tasks independently, we explore the utility of learning them together in a *multi-task learning* (MTL)

dataset covers 16 countries, but in the distribution we received we found the data cover 17 countries.

²We provide randomly sampled examples from the various age and gender categories in the supplementary material.

Data split	Under 25		25 until 34		35 and up		#tweets
	Female	Male	Female	Male	Female	Male	
TRAIN	215,950	213,249	207,184	248,769	174,511	226,132	1,285,795
DEV	27,076	26,551	25,750	31,111	21,942	28,294	160,724
TEST	26,878	26,422	25,905	31,211	21,991	28,318	160,725
ALL	269,904	266,222	258,839	311,091	218,444	282,744	1,607,244

Table 1: Distribution of age and gender classes in our data splits

framework. The main intuition behind MTL is that most real-world tasks are multi-task problems that humans learn together. Hence, when we treat problems as single-tasks, we might be sacrificing performance (Caruana, 1993). For related tasks, MTL helps achieve inductive transfer between these tasks by leveraging additional sources of information (from other tasks) to improve performance on a given task (current task). (Caruana, 1997). MTL also helps regularize models. The framework has been successfully employed to several NLP tasks such as machine translation and syntactic parsing (Luong et al., 2015) and syntactic chunking, POS tagging, and CCG supertagging (Søgaard and Goldberg, 2016).

In the single task scenario, an independent network is designed for each task. Each network is trained in isolation, with its own backpropagation. For example, Figure 3 is an illustration of our network for learning gender and a similar, independent network is devoted for learning age. In MTL, these tasks would be learned together in a single network with 2 different outputs, one for each task. The MTL network would have one or more hidden layers that are shared between all the tasks. Backpropagation is then applied in parallel on the 2 outputs. Figure 1 presented earlier is an illustration of an MTL network for learning age and gender, with 1 shared hidden layer.

In our current work, each of the two independent networks has its own loss function. Formally, let $\{x^{(i)}, y^{(i)}\}_{i=1}^N$ denote the training data, where $x^{(i)} \in \mathbb{R}^d$ is the input vector, $y^{(i)} \in \{1, \dots, C^{(y)}\}$ is the class label of the i -th data point, d is the dimensionality of the input vector, $C^{(y)}$ is the number of classes, and N is the number of data points. The cross-entropy function is calculated as:

$$\mathcal{L}(\theta) = - \sum_i \log P(y^{(i)} | x^{(i)}; \theta) \quad (1)$$

For gender, we calculate binary cross-entropy

with $y^{(i)} \in \{0 = \text{male}, 1 = \text{female}\}$, and in age we compute a categorical cross-entropy as $y^{(i)} \in \{0 = \text{under} - 25, 1 = 25 - \text{to} - 34, 2 = \text{above} - 34\}$. Our MTL loss can then be computed as:

$$\mathcal{L}(\theta_{MTL}) = (\mathcal{L}(\theta_{age}) + \mathcal{L}(\theta_{gender})) / 2 \quad (2)$$

We now introduce the Transformer (Vaswani et al., 2017), on which our attention mechanism is based. The Transformer is also the backbone of the BERT model (Devlin et al., 2018) that we employ as we will explain in Section 3.5.

3.3 Transformer

Vaswani et al. (2017) introduced the Transformer, which is based solely on attention, thus allowing for parallelizing the network and dispensing of recurrence and convolution. Similar to sequence transduction models such as Bahdanau et al. (2014); Cho et al. (2014); Sutskever et al. (2014), the Transformer is an encoder-decoder architecture. The encoder takes a sequence of symbol representations $x^{(1)} \dots x^{(n)}$, maps them into a sequence of continuous representations $z^{(1)} \dots z^{(n)}$ that are then used by the decoder to generate an output sequence $y^{(1)} \dots y^{(n)}$, one symbol at a time. This is performed using *self-attention*, where different positions of a single sequence are related to one another. The Transformer employs an attention mechanism based on a function that operates on *queries*, *keys*, and *values*. The attention function maps a query and a set of key-value pairs to an output, where the output is a weighted sum of the values. For each value, a weight is computed as a compatibility function of the query with the corresponding key.

We implement this attention method in our BiGRU models as an attention layer. As such, we still use a BiGRU architecture that is a variation of RNNs but that has the Transformer’s self-attention mechanism. In our BiGRUs, the query is the hidden state vector from the BiGRU and both the key

and value are the same output vector of the network. The query, key, and value have the same dimension $d_k = 500$. This particular version of attention is a scaled dot product of queries and keys (each of d_k) that is scaled by a factor of $\frac{1}{\sqrt{d_k}}$ on which a softmax is applied to acquire the weights on the values. The scaled dot product attention is computed as a set of queries, keys, and values in three matrices Q, K, and V, respectively, follows:

$$Attention(Q, K, V) = softmax\left(\frac{QK^T}{\sqrt{d_k}}\right)V \quad (3)$$

Encoder of the Transformer in (Vaswani et al., 2017) has 6 attention layers, each of which is composed of two sub-layers. The first sub-layer is a *multi-head attention* where, rather than performing a single attention function with queries, keys, and values, these are projected h times into linear, learned projections and ultimately concatenated. The second sub-layer is a simple, fully-connected feed-forward network (FFN), with two linear layers and a ReLU activation function in-between, that is applied to each position separately and identically. Decoder of the Transformer also employs 6 identical layers, similar to the encoder, yet with an extra/third sub-layer that performs multi-head attention over the encoder stack. More information about the Transformer can be found in Vaswani et al. (2017). In addition to Transformer self-attention, we also experiment with *supervised attention* based on mutual information, which we now introduce.

3.4 Supervised Attention.

We propose a novel method of supervised attention that uses implicit vocabulary list obtained from *mutual information (MI)*. MI is a measure of the similarity between two labels (e.g., “male” and “female” in the case of *gender*) of the same N objects (discrete features, or words in our case). Where $|U^i|$ is the number of the samples in class U^i and $|V^j|$ is the number of the samples in class V^j , the MI between clusterings U and V is given (in set

cardinality formulation) by: ³

$$MI(U, V) = \sum_{i=1}^{|U|} \sum_{j=1}^{|V|} \frac{|U^i \cap V^j|}{N} \log \frac{N|U^i \cap V^j|}{|U^i||V^j|} \quad (4)$$

We take the top 500 words based on mutual information score for each label and we use this list of words to perform the supervised attention. We employ the supervised attention for each of the labels using their respective lists. The gold attention weights are calculated based on the presence of the words from the list. For example, if we have four words in the sentence from the list, then our gold attention weights vector will have 0.25 (1/4) at the corresponding indexes. In absence of all words from the gold list, we follow (Liu et al., 2017) in using the regular attention mechanism, thus allowing our models to perform our multi-head attention. As mentioned earlier, we also use BERT (Devlin et al., 2018) to learn age and gender independently. We now introduce BERT.

3.5 BERT

BERT (Devlin et al., 2018) stands for **B**idirectional **E**ncoder **R**epresentations from **T**ransformers. BERT is an approach for pre-training language representations. BERT involves two unsupervised learning tasks, (1) *masked language models (Masked LM)* and (2) *next sentence prediction*. Since BERT uses bidirectional conditioning, a given percentage of random input tokens are masked and the model attempts to predict these masked tokens. This is the Masked LM task, where masked tokens are simply replaced by a string [MASK]. (Devlin et al., 2018) mask 15% of the tokens (the authors use WordPieces) and feed the final hidden vectors of these masked tokens to an output softmax over the vocabulary. The next sentence prediction task of BERT is also straightforward. The authors simply cast the task as binary classification. For a given sentence S, two sentences A and B are generated where A (positive class) is an actual sentence from the corpus and B is a randomly chosen sentence (negative class). Once trained on an unlabeled dataset, BERT can then be fine-tuned with supervised data for a downstream task (e.g.,

³We use scikit-learn to acquire MI over words. For more information, see: <https://scikit-learn.org/stable/modules/clustering.html#mutual-info-score>.

text classification, question answering). We now introduce our experiments.

4 Experiments

We detail how we split and pre-process our data and list our baselines and evaluation metrics here. We then present (i) our single-task models (Section 4.2), (ii) multi-task models (Section 4.3), and (iii) the BERT model (Section 4.4).

4.1 Data Splits, Baselines, and Evaluation

We shuffle the dataset and split it into 80% training (TRAIN), 10% development (DEV), and 10% test (TEST). The distribution of classes in our splits is in Table 1. For pre-processing, we reduce 2 or more consecutive repetitions of the same character into only 2 and remove diacritics. We have two baselines, (1) (*maj-base*), is the majority class in our TRAIN and (2) a small unidirectional GRU (*small-GRU*) with a single 500-units hidden layer. We train the small GRU with the same batch size = 8 and dropout = 0.5 as our bigger BiGRUs (see Section 4.2), but with no attention. We report our results in *accuracy*.

4.2 Single-Task BiGRUs

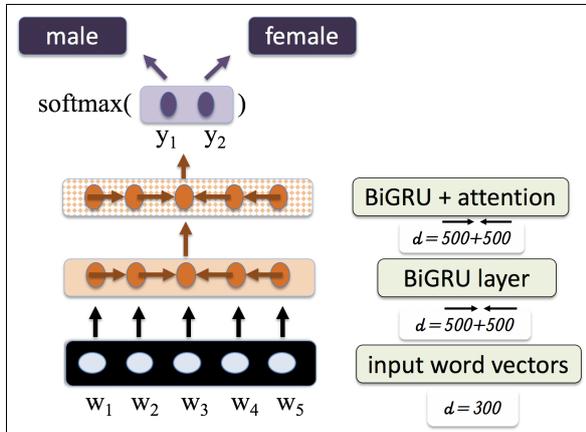


Figure 3: Illustration of our network architecture for gender classification (single task network)

We first design an independent network for each of the two tasks. We use the same network architecture across the 2 tasks. For each network, we experiment with 2 and 3 hidden BiGRU layers, each with 1,000 units (500 units in each direction).⁴ We add Transformer-style attention *only* to the last hidden

⁴We found the networks with 3 hidden layers to overfit and so we report only networks with 2 hidden layers in all our experiments.

layer. We trim each sequence at 30 words, and use a batch size of 8. Each word in the input sequence is represented as a vector of 300 dimensions learned directly from the data. Word vectors weights W are initialized with a standard normal distribution, with $\mu = 0$, and $\sigma = 1$, i.e., $W \sim N(0, 1)$. Figure 3 offers an illustration of the single-task network for gender. The network for age is similar, with the exception that its output layer has the 3 units (for the 3 age classes in the data). For optimization, we use Adam (Kingma and Ba, 2014) with a fixed learning rate of $1e - 3$. For regularization, we use dropout (Srivastava et al., 2014) with a value of 0.5 on each of the hidden layers. We run each network for 10 epochs, with early stopping, choosing the model that performs highest on DEV as our best model. We then run each best model on TEST, and report accuracy. Our best results on age are acquired with 3 epochs, and for gender with 2 epochs. Tables 2 and 3 presents our results on DEV and TEST respectively. (The tables also show results for our subsequent experiments with MTL and BERT on DEV and TEST). On TEST, Attn-BiGRU is 10.78% better than small-GRU for age and 8.30% higher than the majority class baseline for gender. We note that results on DEV are very close to those on TEST. We now describe our MTL experiments.

4.3 MTL BiGRUs for Age and Gender

Setting	Age	Gender
maj-base	35.53	53.47
small-GRU	36.13	53.39
Attn-BiGRU	<u>47.03</u>	<u>61.64</u>
MTL-common-attn	47.85	62.50
MTL-spec-attn	47.92	<u>63.09</u>
MTL-sprvsd-spec-attn	<u>48.23</u>	62.99
MTL-MI-spec-attn	47.90	<u>63.15</u>
BERT	50.95	65.31

Table 2: Model performance in accuracy on DEV. Baseline 1, maj-base, is the majority class in our TRAIN. Baseline 2, small-GRU is a unidirectional, 500-unit, one-layered GRU. For each block, best results that are higher than the baselines *and* the best results in preceding block(s) are underlined. Best result in each task is in **bold**. For single task models, best results for age are with 3 epochs and for gender with 2 epochs. For multi-task models, best accuracy is acquired with epochs between 3 and 6.⁵

To learn the two tasks simultaneously, we use a

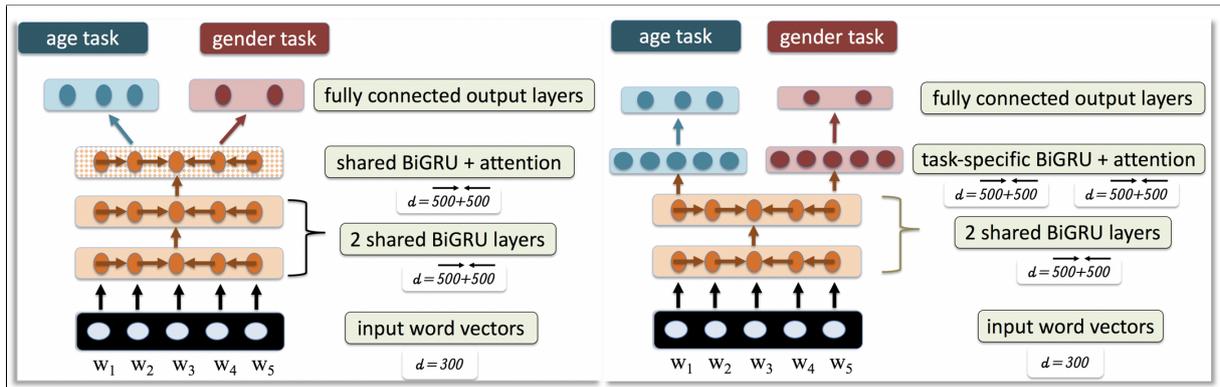


Figure 4: Illustration of our 3-Layered MTL networks. **Left:** Network with shared attention; **Right:** Network with task-specific attention. We visualize 2 shared BiGRU layers, to emphasize the idea of sharing hidden layers. Our best performance, however, is acquired with only 1 shared BiGRU layer at the bottom of each network, followed by another BiGRU layer (either shared or task-specific) on which attention is applied.

Setting	Age	Gender
maj-base	35.53	53.47
small-GRU	36.29	53.37
Attn-BiGRU	<u>47.07</u>	<u>61.77</u>
MTL-common-attn	47.82	62.36
MTL-spec-attn	47.99	<u>63.04</u>
MTL-sprvsd-spec-attn	<u>48.25</u>	62.81
MTL-MI-spec-attn	47.81	<u>63.13</u>
BERT	51.42	65.30

Table 3: Model performance in accuracy on TEST.

single network with 2 hidden layers each with the same dimensionality as the single-task networks (1,000 units in each layer).⁶ For comparison, we also use the same hyper-parameters as the single-task models for optimization with Adam, dropout regularization, and run for 10 epochs. We share the parameters of the first (bottom) hidden BiGRU layer across the three tasks. For the *attention BiGRU layer* (2nd layer), we have *three settings*:

(i) **Shared Attention:** In this setting, we share the attention BiGRU layer across the two tasks. As such, this network has all its layers shared across the two tasks. We refer to this network as *MTL-common-attn*. This architecture is aimed at investigating the utility of allowing the network to attend simultaneously to each of the two tasks.

(ii) **Task-Specific Attention:** For this network, while the first hidden layer(s) are shared, the last layer (attention layer) is task-specific (i.e., independent for each task). We will call this model *MTL-spec-attn*. The goal of this architecture is to

⁶We also experiment with a network with 3 hidden layers, but we find it sub-optimal and so we do not discuss it further.

Word	Eng	MTL-S
يسالونني	they ask me	0.169779
ياغالين	you dear (+plural)	0.164816
منيحا	beautiful (+fem)	0.164619
مساء	evening	0.161141
سيصادفك	you'll meet by chance	0.153956
بونسوار	good evening (French)	0.147900
سيصيبك	it'll befall you	0.147765
شلونكم	how are you (+plural)	0.146776
اميه	I want it	0.146680
ياعيون	you, darling	0.142256
ياصدفه	what a surprise	0.142011
انزين	we beautify	0.141639
صبحهم	good morning	0.139647
ياساتر	God protect	0.138652
ساتسم	I'll smile	0.138609

Table 4: Top 15 most highly weighted words based on average attention weights from our MTL-spec-attn (MTL-S) network for *gender*.

investigate the feasibility of allowing each task to specialize its own attention, while also sharing information (i.e., the bottom layer) with the other task.

(iii) **Supervised Task-Specific Attention:** We perform supervised attention based on mutual information (MI) with a list of 500 weighted words, as explained in Section 3.4. As Table 3 shows, for the two tasks, MTL is consistently better than single task learning (and our baselines). We observe that task-specific attention is superior to shared attention across the two tasks, in both DEV and

TEST. We also observe that supervised attention improves over regular self-attention for the age task (0.31% acc on DEV and 0.26% on TEST), but not for gender. This shows that while the MTL is useful, it is better to specialize the attention layer. It seems this specialized architecture allows the network to identify representations that are harder to disentangle in the shared attention setting.

MI-Based MTL: Rather than using frequency as a basis for choosing our input vocabulary, we experiment with using a vocabulary weighted by MI. More specifically, we use the top 100K MI-weighted words as our vocabulary in the embedding layer. For this setting, we only run our best MTL network from previous experiments (MTL with task-specific attention). We refer to this network as MTL-MI-spec-attn. We note that this network improves performance slightly over all our previous models on the gender task.

4.3.1 Interpreting Attention in MTL

We have established the effectiveness of attention in the context of our MTL networks. To further understand model behavior, we extract words most highly attended to by our MTL-spec-attn network for the gender task. Table 4 provides the top 15 examples among these words. Intuitively, these words seem relevant for distinguishing gender. We provide more samples of words attended to by our single and MTL models in the supplementary material, along with corresponding MI scores. We observe these words are assigned very low MI scores and are not top ranked by MI⁷, thereby highlighting how the neural network is capable of capturing nuances not necessarily identified by the statistical approach. We hypothesize this is partially because MI does not operate over distributed representations of words, but rather treat them as atomic symbols.⁸ For further probing into our model behavior, we provide an attention-based visualization of a number of hand-picked samples along with their English translations in the supplementary material.

⁷MI scores and neural model weights are not directly comparable, but we find words with higher weights from the MTL-spec-attn network to be more intuitive

⁸We provide more samples of words attended to by our single and MTL models in the supplementary material, along with corresponding MI scores.

4.4 BERT-Based Modeling

We use the BERT-Base, Multilingual Cased model released by the authors⁹ to model each of our two tasks. The model is trained on 104 languages, including Arabic, with 12 layer, 768 hidden units each, 12 attention heads, and has 110M parameters. The model has 119,547 word pieces shared across all the languages. For fine-tuning, we use a maximum sequence size of 30 words and a batch size of 32. We set the learning rate to 2e-5 and train for 15 epochs. From Tables 2 and 3, we can see that BERT performs consistently better than the two baselines on the two tasks, irrespective of the data split. On TEST, it improves with 15.13% acc. (for age) and 11.83% acc. (for gender) over the best baseline. BERT also outperforms our best MTL models. Also, BERT outperforms MTL-suprvsd-spec-attn on age with 3.17% acc and MTL-spec-attn on gender with 2.17% acc on TEST. These results demonstrate (i) the effectiveness of BERT on our two tasks, and (ii) the relative utility of our MTL models, which still perform well even though they do not need pre-training on a huge amount of data like BERT.

5 Model Evaluation on External Data

Tweet-Level Gender Evaluation: In order to test how our best model (BERT) will generalize to external data, we develop a new, additional dataset EXTERNAL only for the gender task. To acquire EXTERNAL, we manually label an in-house dataset of $\sim 2,124$ users from 20 Arab countries (including all countries in Arab-Tweet)¹⁰ with gender tags. EXTERNAL has data from 550 *female* users, 1,335 *male* users, and 239 users with *unknown* gender. For a balanced dataset, we only keep each gender at 550 users, for a total of 1,100 users contributing $\sim 1,320$ K tweets. We split EXTERNAL into DEV-EXT and TEST-EXT. We run BERT on each of these splits. We acquire 61.31% acc on DEV-EXT and 61.46% acc on TEST-EXT. We note these results are 4% and 3.84% acc *less* than our performance on Arab-Tweet DEV and TEST, respectively. We hypothesize this could be due to (i) diachronic degradation of language models (Jaidka et al., 2018), since EXTERNAL covers only up until the year 2017; but also (ii) EXTERNAL being harder and more diverse since, unlike

⁹<https://github.com/google-research/bert/blob/master/multilingual.md>.

¹⁰Users are manually assigned country tags in the data.

Arab-Tweet, it was not collected with a seed word approach.

6 Related Works

6.1 Arabic

Arabic is a collection of language varieties, including a standard variety that is referred to as modern standard Arabic (MSA). MSA is more popular in pan-Arabic media and formal communication (such as in educational settings) and literary and religious venues. Dialectal Arabic is used widely by Arabs in their daily lives. Arabic varieties differ at various linguistic levels, including phonological, morphological, lexical, and syntactic differences (Holes, 2004; Bassiouney, 2009; Palva, 2006). Traditionally, Arabic dialects have been categorized based on coarse-grained geographical divisions that cross country boundaries, e.g., (Habash, 2010; Versteegh, 2014). More recently, there has been interest in more fine-grained differences, e.g., (Mubarak and Darwish, 2014; Sadat et al., 2014; Abdul-Mageed et al., 2018; Salameh and Bouamor, 2018; Qwaider et al., 2018).

6.2 Author Profiling

Detecting sociological and psychological attributes of a user is usually referred to as *author profiling*. This typically involves tasks such as detecting author gender and age (see Section 6.3), personality (Schwartz et al., 2013; Matz et al., 2017; Bleidorn and Hopwood, 2018; Hinds and Joinson, 2019), political orientation (Colleoni et al., 2014; Preoŕiuc-Pietro et al., 2017), and moral traits (Johnson and Goldwasser, 2018; Pang et al., 2019). Related terms include *author attribution* and *forensic authorship analysis* (Wright, 2013), where efforts are focused on identifying the specific author of a given text. Text-based approaches to author profiling (e.g., (Gamon, 2004; Argamon, 2019)) are rooted in computational stylometry (Goswami et al., 2009; Verhoeven, 2018) and can be traced back to the work of Holmes (1998). From a linguistic perspective, this line of work is based on the concept of *idiolect*, the tenet that language is a property of the individual (Hudson, 1996; Barlow, 2013, 2018) as contrasted to the idea of language being the property of a speech community (Labov, 1989). Network-based approaches involve making use of online relations such as friendships, followings, mentions, and comments (Mitrou et al., 2014) for author profiling. Notably, the PAN au-

thor profiling shared task (Rangel et al., 2013, 2014; Rangel Pardo et al., 2015; Rangel et al., 2016, 2017) was launched to progress work in this area. A summary of the PAN work can be found in (Potthast et al., 2019)

6.3 Age and Gender

Several works have been conducted on English-based age and gender detection. These include (Rao et al., 2010; Flekova et al., 2016; Burger et al., 2011; Verhoeven et al., 2016; Daneshvar and Inkpen, 2018). Several of these works make use of text n-gram and topic models features (Schwartz et al., 2013; Sap et al., 2014). In addition, for age, many studies cast the as multi-class classification, with several age group categories (e.g., ages 10-19, 20-29, 30-39). Other works cast age as a regression (Nguyen et al., 2011) or it with classification (Chen et al., 2019). There are also works that target age and gender prediction from facial data (Levi and Hassner, 2015) or a mixture of text and image data (Vijayaraghavan et al., 2017). We also note that most of the literature is on English, with only few focusing on cross-lingual settings for gender (van der Goot et al., 2018), and age and personality (Verhoeven et al., 2016). Minimal works exist on other languages (Verhoeven, 2018). For Arabic, with the exception of some recent treatments (Rangel et al., 2017; Alrifai et al., 2017), there is not much work we know of that is focused on learning these tasks.

7 Conclusion

In this work, we reported our models targeting age and gender detection in Arabic social media. We have shown the utility of MTL, especially with task-specific attention, on the two learning tasks. Even though our models do not need to be pre-trained on huge amounts of data, as is the case with BERT, they perform well on both tasks. We have also shown the utility of the newly-released BERT model. Our models can be deployed for real-world social media analysis at scale, since they can cover 17 Arabic countries. The models are also language-agnostic, and so can be applied to other languages. This is one of our future directions.

References

Muhammad Abdul-Mageed, Hassan Alhuzali, and Mohamed Elaraby. 2018. You tweet what you speak: A city-level dataset of arabic dialects. In *Proceedings*

- of the Eleventh International Conference on Language Resources and Evaluation (LREC-2018).
- Khaled Alrifai, Ghaida Rebdawi, and Nada Ghneim. 2017. Arabic tweeps gender and dialect prediction. In *CLEF (Working Notes)*.
- Shlomo Engelson Argamon. 2019. Register in computational language research. *Register Studies*, 1(1):100–135.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2014. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*.
- Michael Barlow. 2013. Individual differences and usage-based grammar. *International Journal of Corpus Linguistics*, 18(4):443–478.
- Michael Barlow. 2018. The individual and the group from a corpus perspective. *The Corpus Linguistics Discourse: In honour of Wolfgang Teubert*, 87:163.
- Reem Bassiouney. 2009. *Arabic sociolinguistics*. Edinburgh University Press.
- Wiebke Bleidorn and Christopher James Hopwood. 2018. Using machine learning to advance personality assessment and theory. *Personality and Social Psychology Review*, page 1088868318772990.
- John D Burger, John Henderson, George Kim, and Guido Zarrella. 2011. Discriminating gender on twitter. In *Proceedings of the conference on empirical methods in natural language processing*, pages 1301–1309. Association for Computational Linguistics.
- R. Caruana. 1993. Multitask learning: A knowledge-based source of inductive bias. In *Proceedings of the 10th International Conference on Machine Learning*.
- Rich Caruana. 1997. Multitask learning. *Machine learning*, 28(1):41–75.
- Jing Chen, Long Cheng, Xi Yang, Jun Liang, Bing Quan, and Shoushan Li. 2019. Joint learning with both classification and regression models for age prediction. In *Journal of Physics: Conference Series*, volume 1168, page 032016. IOP Publishing.
- Kyunghyun Cho, Bart Van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. 2014. Learning phrase representations using rnn encoder-decoder for statistical machine translation. *arXiv preprint arXiv:1406.1078*.
- Elanor Colleoni, Alessandro Rozza, and Adam Arvidsson. 2014. Echo chamber or public sphere? predicting political orientation and measuring political homophily in twitter using big data. *Journal of communication*, 64(2):317–332.
- Saman Daneshvar and Diana Inkpen. 2018. Gender identification in twitter using n-grams and lsa. In *Proceedings of the Ninth International Conference of the CLEF Association (CLEF 2018)*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Lucie Flekova, Daniel Preotiuc-Pietro, and Lyle Ungar. 2016. Exploring stylistic variation with age and income on twitter. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, volume 2, pages 313–319.
- Michael Gamon. 2004. Linguistic correlates of style: authorship classification with deep linguistic analysis features. In *Proceedings of the 20th international conference on Computational Linguistics*, page 611. Association for Computational Linguistics.
- Rob van der Goot, Nikola Ljubešić, Ian Matroos, Malvina Nissim, and Barbara Plank. 2018. Bleaching text: Abstract features for cross-lingual gender prediction. *arXiv preprint arXiv:1805.03122*.
- Sumit Goswami, Sudeshna Sarkar, and Mayur Rustagi. 2009. Stylometric analysis of bloggers age and gender. In *Third international AAAI conference on weblogs and social media*.
- Nizar Y Habash. 2010. Introduction to arabic natural language processing. *Synthesis Lectures on Human Language Technologies*, 3(1):1–187.
- Joanne Hinds and Adam Joinson. 2019. Human and computer personality prediction from digital footprints. *Current Directions in Psychological Science*, page 0963721419827849.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation*, 9(8):1735–1780.
- Clive Holes. 2004. *Modern Arabic: Structures, functions, and varieties*. Georgetown University Press.
- David I Holmes. 1998. The evolution of stylometry in humanities scholarship. *Literary and linguistic computing*, 13(3):111–117.
- Richard Anthony Hudson. 1996. *Sociolinguistics*. Cambridge university press.
- Kokil Jaidka, Niyati Chhaya, and Lyle Ungar. 2018. Diachronic degradation of language models: Insights from social media. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 195–200.
- Kristen Johnson and Dan Goldwasser. 2018. Classification of moral foundations in microblog political discourse. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 720–730.
- Diederik Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- William Labov. 1989. Exact description of the speech community: Short a in philadelphia. *Language change and variation*, pages 1–57.
- Gil Levi and Tal Hassner. 2015. Age and gender classification using convolutional neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 34–42.

- Chenxi Liu, Junhua Mao, Fei Sha, and Alan Yuille. 2017. Attention correctness in neural image captioning. In *Thirty-First AAAI Conference on Artificial Intelligence*.
- Minh-Thang Luong, Quoc V Le, Ilya Sutskever, Oriol Vinyals, and Lukasz Kaiser. 2015. Multi-task sequence to sequence learning. *arXiv preprint arXiv:1511.06114*.
- Sandra C Matz, Michal Kosinski, Gideon Nave, and David J Stillwell. 2017. Psychological targeting as an effective approach to digital mass persuasion. *Proceedings of the national academy of sciences*, 114(48):12714–12719.
- Bryan McCann, James Bradbury, Caiming Xiong, and Richard Socher. 2017. Learned in translation: Contextualized word vectors. In *Advances in Neural Information Processing Systems*, pages 6294–6305.
- Lilian Mitrou, Miltiadis Kandias, Vasilis Stavrou, and Dimitris Gritzalis. 2014. Social media profiling: A panopticon or omnipticon tool? In *Proc. of the 6th Conference of the Surveillance Studies Network*. Barcelona, Spain.
- Hamdy Mubarak and Kareem Darwish. 2014. Using twitter to collect a multi-dialectal corpus of arabic. In *Proceedings of the EMNLP 2014 Workshop on Arabic Natural Language Processing (ANLP)*, pages 1–7.
- Dong Nguyen, Noah A Smith, and Carolyn P Rosé. 2011. Author age prediction from text using linear regression. In *Proceedings of the 5th ACL-HLT Workshop on Language Technology for Cultural Heritage, Social Sciences, and Humanities*, pages 115–123. Association for Computational Linguistics.
- Heikki Palva. 2006. Dialects: classification. *Encyclopedia of Arabic Language and Linguistics*, 1:604–613.
- Dandan Pang, Johannes C Eichstaedt, Anneke Buffone, Barry Slaff, Willibald Ruch, and Lyle H Ungar. 2019. The language of character strengths: Predicting morally valued traits on social media. *Journal of personality*.
- Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. Deep contextualized word representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, volume 1, pages 2227–2237.
- Martin Potthast, Paolo Rosso, Efstathios Stamatatos, and Benno Stein. 2019. A decade of shared tasks in digital text forensics at pan. In *European Conference on Information Retrieval*, pages 291–300. Springer.
- Daniel Preoțiuc-Pietro, Ye Liu, Daniel Hopkins, and Lyle Ungar. 2017. Beyond binary labels: political ideology prediction of twitter users. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 729–740.
- Chatrine Qwaider, Motaz Saad, Stergios Chatzikyriakidis, and Simon Dobnik. 2018. Shami: A corpus of levantine arabic dialects. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC-2018)*.
- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. 2018. Improving language understanding by generative pre-training. URL https://s3-us-west-2.amazonaws.com/openai-assets/research-covers/languageunsupervised/language_understanding_paper.pdf.
- Francisco Rangel, Paolo Rosso, Irina Chugur, Martin Potthast, Martin Trenkmann, Benno Stein, Ben Verhoeven, and Walter Daelemans. 2014. Overview of the 2nd author profiling task at pan 2014. In *CLEF 2014 Evaluation Labs and Workshop Working Notes Papers, Sheffield, UK, 2014*, pages 1–30.
- Francisco Rangel, Paolo Rosso, Moshe Koppel, Efstathios Stamatatos, and Giacomo Inches. 2013. Overview of the author profiling task at pan 2013. In *CLEF Conference on Multilingual and Multimodal Information Access Evaluation*, pages 352–365. CELCT.
- Francisco Rangel, Paolo Rosso, Martin Potthast, and Benno Stein. 2017. Overview of the 5th author profiling task at pan 2017: Gender and language variety identification in twitter. *Working Notes Papers of the CLEF*.
- Francisco Rangel, Paolo Rosso, Ben Verhoeven, Walter Daelemans, Martin Potthast, and Benno Stein. 2016. Overview of the 4th author profiling task at pan 2016: cross-genre evaluations. In *Working Notes Papers of the CLEF 2016 Evaluation Labs. CEUR Workshop Proceedings/Balog, Krisztian [edit.]; et al.*, pages 750–784.
- Francisco Manuel Rangel Pardo, Fabio Celli, Paolo Rosso, Martin Potthast, Benno Stein, and Walter Daelemans. 2015. Overview of the 3rd author profiling task at pan 2015. In *CLEF 2015 Evaluation Labs and Workshop Working Notes Papers*, pages 1–8.
- Delip Rao, David Yarowsky, Abhishek Shreevats, and Manaswi Gupta. 2010. Classifying latent user attributes in twitter. In *Proceedings of the 2nd international workshop on Search and mining user-generated contents*, pages 37–44. ACM.
- Fatiha Sadat, Farnazeh Kazemi, and Atefeh Farzindar. 2014. Automatic identification of arabic language varieties and dialects in social media. *Proceedings of SocialNLP*, page 22.
- Mohammad Salameh and Houda Bouamor. 2018. Fine-grained arabic dialect identification. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 1332–1344.
- Maarten Sap, Gregory Park, Johannes Eichstaedt, Margaret Kern, David Stillwell, Michal Kosinski, Lyle Ungar, and Hansen Andrew Schwartz. 2014. Developing age and gender predictive lexica over social media. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1146–1151.

- H Andrew Schwartz, Johannes C Eichstaedt, Margaret L Kern, Lukasz Dziurzynski, Stephanie M Ramones, Megha Agrawal, Achal Shah, Michal Kosinski, David Stillwell, Martin EP Seligman, et al. 2013. Personality, gender, and age in the language of social media: The open-vocabulary approach. *PLoS one*, 8(9):e73791.
- Anders Søgaard and Yoav Goldberg. 2016. Deep multi-task learning with low level tasks supervised at lower layers. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, volume 2, pages 231–235.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. Dropout: a simple way to prevent neural networks from overfitting. *The Journal of Machine Learning Research*, 15(1):1929–1958.
- Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to sequence learning with neural networks. In *NIPS*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, ukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in Neural Information Processing Systems*, pages 6000–6010.
- Ben Verhoeven. 2018. *Two authors walk into a bar: studies in author profiling*. Ph.D. thesis, University of Antwerp.
- Ben Verhoeven, Walter Daelemans, and Barbara Plank. 2016. Twisty: a multilingual twitter stylometry corpus for gender and personality profiling. In *Proceedings of the 10th Annual Conference on Language Resources and Evaluation (LREC 2016)/Calzolari, Nicoletta [edit.]; et al.*, pages 1–6.
- Kees Versteegh. 2014. *The arabic language*. Edinburgh University Press.
- Prashanth Vijayaraghavan, Soroush Vosoughi, and Deb Roy. 2017. Twitter demographic classification using deep multi-modal multi-task learning. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 478–483.
- David Wright. 2013. Using corpora in forensic authorship analysis: Investigating idiolect in enron emails. *Corpus Linguistics 2013*, page 296.
- Wajdi Zaghrouani and Anis Charfi. 2018. Arap-tweet: A large multi-dialect twitter corpus for gender, age and language variety identification. *arXiv preprint arXiv:1808.07674*.

A Summary of Supplementary Material

We provide the following supplementary items:

1. Table 5 shows top 20 words attended to by our MTL-spec-attn model, along with attention weights by other (MTL) models and MI.
2. Table 6 shows top 20 words based on MI scores, along with attention weights by other models.
3. Figures 5 and 6 provides examples of attention-based visualization of our MTL-spec-attn model on the gender task.
4. Table 7 provides information about the epoch acquiring best performance across all our models on DEV.

Word	Eng	MI	Attn-BiGRU	MTL-C	MTL-S
يسالونني	they ask me	1.00E-06	0.038055	0.119423	0.169779
ياغالين	you dear (+plural)	9.40E-05	0.052512	0.078695	0.164816
منيحاً	beautiful (+fem)	5.00E-06	0.031567	0.117903	0.164619
مساء	evening	4.00E-06	0.027612	0.142467	0.161141
سيصادفك	you'll meet by chance	0.00E+00	0.040002	0.103273	0.153956
بونسوار	good evening (French)	3.00E-05	0.044578	0.10257	0.1479
سيصيبك	it'll befall you	2.00E-06	0.031588	0.097372	0.147765
شلوونكم	how are you (+plural)	5.00E-06	0.0352	0.125699	0.146776
اميه	I want it	1.50E-05	0.041253	0.095131	0.14668
ياعيون	you, darling	0.00E+00	0.032135	0.123004	0.142256
ياصدفه	what a surprise	1.00E-06	0.025398	0.124698	0.142011
انزين	we beautify	1.00E-06	0.025684	0.096841	0.141639
صبحهم	good morning	0.00E+00	0.03443	0.118689	0.139647
ياساااااا	God protect	0.00E+00	0.036266	0.104663	0.138652
سابتسم	I'll smile	1.00E-06	0.029951	0.097428	0.138609
تقييكم	what's your evaluation	2.00E-06	0.034339	0.091574	0.137949
مسلخير	good evening	7.00E-06	0.036409	0.114726	0.137911
الخير	good (morning/evening)	0.000141	0.058663	0.094799	0.137106
ليله	night	9.00E-06	0.026944	0.104899	0.136817
نبي	we want	0.00E+00	0.036886	0.098703	0.136785

Table 5: Top 20 most highly weighted words based on average attention weights from our MTL-spec-attn (MTL-S) network for *gender*. We also add corresponding average attention weights allocated to the words by our single-task attention BiGRU model (Attn-BiGRU) and MTL-common-attn (MTL-C) model. In addition, we add the mutual information (MI) weights for these words. Note the MI values are very small.

Word	Eng	MI	Attn-BiGRU	MTL-C	MTL-S
حبيبي	my darling (+fem.)	0.002155	0.050888	0.077016	0.094471
في	in	0.001078	0.033693	0.047777	0.047659
يارب	Oh, Lord	0.001053	0.035691	0.069558	0.0758
عارفه	I know (+fem.)	0.000664	0.043761	0.06062	0.068043
انا	I	0.000559	0.034185	0.066936	0.072569
قلبي	my heart	0.00047	0.03583	0.058327	0.060456
الدوري	soccer season	0.000457	0.039459	0.049224	0.051559
القصاص	retributive justice	0.000444	0.052651	0.046728	0.068582
مباراه	game	0.000434	0.037312	0.057625	0.060602
بن	son of	0.000431	0.034937	0.04922	0.048669
لاعب	player	0.000407	0.038375	0.055207	0.055142
انتي	you (+fem.)	0.000399	0.034844	0.065708	0.068472
رئيس	president	0.00039	0.034811	0.057263	0.059484
علي	Ali/on	0.000382	0.033676	0.049267	0.04817
يالغالي	dear (+you)	0.000358	0.043446	0.069519	0.072201
ميسي	Messi	0.000325	0.038833	0.061201	0.067188
الهلال	Hilal (soccer team)	0.000319	0.037964	0.053231	0.057722
يابو	father of (+you)	0.000302	0.040432	0.064222	0.070818
برشلونة	Barcelona	0.000299	0.03753	0.055462	0.060405
كاس	cup (soccer)	0.000279	0.036868	0.04998	0.048994

Table 6: Top 20 highest weighted words based on mutual information (MI) for *gender*. We also add corresponding average attention weights allocated to the words by our single-task attention BiGRU model (Attn-BiGRU), MTL-common-attn (MTL-C), and MTL-spec-attn (MTL-S) networks.

Gold: <male>; Predicted: <male>

القلب واحد والمحبه ل واحد م ارضي شريك لي ولو فيك قلبين لله للود والمعروف مانيب جاحد بس الخفوق اضمن ما يعشق اثنين

It is one heart, and love goes only to one person. I won't take another partner other than you, even if I had two hearts... I'm all-grateful for all the love and kindness, and the heart only beats not for two (but for one)

اخر منجهه NUM اصطباجه بسندوتشين طعميه مع كويابه شاي وسيجاره في البلكونه مع صوت سيد درويش

Very cool! A morning with two falafel sandwiches, a cup of tea, and a cigarette in the balcony... with Said Darwish song. Best thing ever!

Gold: <female>; Predicted: <female>

USER امين يا غسل الله لا يحرمني دعواتك ويحفظك يا ذوق

Amen, sweetie, May God protect you; you're so considerate.

نحبك و نبيغك و علاجك نموت و نفديك راک شهله العين نبيغك بابا هذوم الكلمات قليله عليه علي قد ما دارلي و حماني علي قد ما وجهني و نصحني URL

We love you, and long for you, and would die to save you; you're the best my eyes have seen... These words are not even enough appreciation of you. You've given, protected, guided, and advised me.

Figure 5: Attention-based visualization based on our MTL-spec-attn of hand-picked, correctly predicted samples from our TRAIN data.

Gold: <male>; Predicted: <female>

USER مبروك يا قلبي NUM URL

Congratulations, dear!

USER ماتقاش تهضر معايا

Don't mess with me in the future.

Gold: <female>; Predicted: <male>

NUM الواحد فعلا قاعد مبيعلمش حاجه غير انه بيتحرق دمه ويباخذ مواعيد دروس

I'm just sitting here doing nothing but getting repeatedly upset and receiving tutoring session schedules.

USER المشكله انو هالمؤمرات انتهت وهم لسا يدرسوها للتوم

The problem is that all these conspiracies are over, and they are still studying them.

Figure 6: Attention-based visualization based on our MTL-spec-attn of hand-picked, incorrectly predicted samples from our TRAIN data.

Setting	Age	Epoch	Gender	Epoch
small-GRU	36.13	1	53.39	1
Attn-BiGRU	47.03	3	61.64	2
MTL-common-attn	47.85	6	62.50	4
MTL-spec-attn	47.92	4	63.09	4
MTL-sprvsd-spec-attn	48.23	5	62.99	3
MTL-MI-spec-attn	47.90	3	63.15	5
BERT	50.95	4	64.96	6

Table 7: Epoch information for best model performance on our DEV.