

Seq2Emo for Multi-label Emotion Classification Based on Latent Variable Chains Transformation

Chenyang Huang, Amine Trabelsi, Xuebin Qin, Nawshad Farruque, Osmar R. Zaiane

Department of Computing Science, University of Alberta
 {chuang8, atrabels, xuebin, nawshad, zaiane}@ualberta.ca

Abstract

Emotion detection in text is an important task in NLP and is essential in many applications. Most of the existing methods treat this task as a problem of single-label multi-class text classification. To predict multiple emotions for one instance, most of the existing works regard it as a general Multi-label Classification (MLC) problem, where they usually either apply a manually determined threshold on the last output layer of their neural network models or train multiple binary classifiers and make predictions in the fashion of one-vs-all. However, compared to labels in the general MLC datasets, the number of emotion categories are much fewer (less than 10). Additionally, emotions tend to have more correlations with each other. For example, the human usually does not express “joy” and “anger” at the same time, but it is very likely to have “joy” and “love” expressed together. Given this intuition, in this paper, we propose a Latent Variable Chain (LVC) transformation and a tailored model – Seq2Emo model that not only naturally predicts multiple emotion labels but also takes into consideration their correlations. We perform the experiments on the existing multi-label emotion datasets as well as on our newly collected datasets. The results show that our model compares favorably with existing state-of-the-art methods.

1 Introduction

Emotion mining from text (Sailunaz et al. 2018; Yadollahi, Shahraki, and Zaiane 2017) has attracted increasing attention in the recent research on Natural Language Processing (NLP). However, most of the existing works regard this task as a problem of general *multi-class* text classification. Multi-class text classification problem associate a single label l from a set of single labels to any instance X . However, there are many other scenarios where an instance X may have multiple labels. The detection of human emotions, for example, is one such scenario. Due to the complexity of human emotions, it is very likely that multiple emotions are expressed by a single text instance. These emotions may also be correlated. For example, emotions such as ‘hate’ and ‘disgust’ may occur more often together than in isolation. Typically, the number of possible expressed emotions is not

large. Therefore, in this work, we regard emotion mining from the text as a special case of a Multi-label classification (MLC) problem where the number of labels (emotions) is small, and where correlations may subsist between them.

Common approaches to MLC problems usually involve various ways of *problem transformation*, where an MLC problem could be transformed into multiple single-label text classification problems. Consequently, general single-label classifiers may be adopted directly or with modifications. Well known transformation techniques include Binary Relevance (BR) (Godbole and Sarawagi 2004), Classifier Chains (CC) (Read et al. 2011), and Label Power-set (LP) (Tsoumakas, Katakis, and Vlahavas 2010). Given, $\mathcal{L} = \{l_1, l_2, \dots, l_k\}$ a set of labels, both transformations of BR and CC need to train k binary classifiers where each of the classifiers is responsible for discriminating a single label l_i . Compared to BR, CC takes into account the correlations among the labels, whereas BR predicts each label independently. LP treats each possible combination of the labels as a separate label, therefore it may expand the number of labels to 2^k so that it is usually not feasible when k is large.

In light of recent advances in Neural Network (NN) research which have shown great success in many NLP tasks (Peters et al. 2018; Devlin et al. 2019), we propose a new problem transformation which only uses the latent variables of a NN model as the “chains” to perform the task of MLC. As an analogy to CC, we refer to this transformation as Latent Variable Chains (LVC). Based on the proposed LVC method, we also tailor a deep Neural model – *Seq2Emo* which first captures both the semantic and the emotional features of an instance X , and then uses a bi-directional LVC to generate labels. The model performs a sequence of predictions based on the chain of latent features which leads to a multi-label emotion classification. In addition, we collect a dataset that contains Balanced Multi-label Emotional Tweets (BMET), from scratch, to test both the baseline models and our proposed approach.

The main contributions of this research are: (1) We propose an MLC problem transformation named **LVC** designed for NN models and more importantly, takes into account the correlations among target labels, which can be relevant for tasks like multi-label emotion classification. (2) More-

over, we propose **Seq2Emo**, a novel NN model based on LVC, that utilizes many recent research developments in deep learning and achieves encouraging results for classifying emotions in text. (3) Furthermore, to validate the proposed methods, we assemble a new dataset, **BMET**, a large and balanced multi-label emotion dataset. We make both the new dataset and the source code available to the public ¹.

In the remainder of the paper, we first present a brief synopsis of current multi-label classification approaches in Section 2. Then, in Section 3, we provide some preliminaries to better understand our model which is presented in Section 4. The existing emotion text data benchmarks and how we gathered our own emotion text collection, are exhibited in Section 5. We then present our experiments in Section 6 and analyze the results in Section 7. Perspectives and conclusions are highlighted in Section 8.

2 Related Work

Multi-label classification (MLC) assigns one or more labels to each sample in the dataset, as opposed to single-label classification which assigns a unique label to each sample. In this section we present an overview of MLC methods in general. The MLC for emotion detection are mainly adaptations of the more general MLC approaches.

One of the main approaches to MLC is the transformation based approach. It transforms an MLC task into some one-vs-all single labeling problems (Boutell et al. 2004; Read et al. 2011). Correlations or co-occurrences between labels is simply ignored in this case, as the problem is converted into isolated classification problems. Several MLC models for emotion follow this approach, transforming the problem into a binary classification problem (Baziotis et al. 2018). However, these models can be computationally expensive when using large amount of labels or datasets.

Another set of methods applies the threshold dependent approach. The methods usually set a threshold on the output probabilities in order to determine the predicted classes (Chen et al. 2017; Kurata, Xiang, and Zhou 2016). In our work, we consider multi-label emotion classification as a fixed length label-sequence generation problem. Instead of a threshold dependent model, the labels of emotion are generated sequentially, and are dependent of each other.

Recently deep learning methods for emotion classification have exhibited success. Using deep learning methods allows to avoid the labor-intensive task of feature engineering that is usually necessary with other classification paradigms (Yan and Turtle 2016). Deep learning methods also propose an end-to-end framework for classification, but remain dependent on a threshold function that needs to be learned or implemented (Yu et al. 2018). Finding a good threshold function is a challenging problem in itself (Fan and Lin 2007). Other methods like He and Xia (2018)’s work, although not using any threshold transformation based approach, they incorporate some prior knowledge on the different emotion relations for a better classification. In this work, we do not use any external or prior knowledge, or a threshold mechanism.

¹The dataset and related code will be made publicly available after publication

3 Overview

In order to compare our proposed LVC transformation with both BR and CC methods, in this section, we systematically introduce both BR and CC transformation methods. We also explain how NN models can be transformed using the two methods.

3.1 The MLC Task

In text classification tasks, an instance X is usually in the form of $X = [x_1, x_2, x_3, \dots, x_n]$ where x_i is a word or token and n is the length of the sequence. In addition, each X is assigned with a target Y , where $Y \subseteq \mathcal{L}$ represents the corresponding labels of X . The set relation “ $\subseteq$ ” indicates that each Y may contain multiple elements in $\mathcal{L}$ or none of them (i.e. $Y = \emptyset$).

Hence, an MLC model is supposed to learn the conditional distribution of $\mathcal{P}(Y|X)$, where Y is a set and the number of elements $|Y|$ is not always equal to one.

3.2 BR Transformation

Binary relevance transformation is a simple but very adaptive method which allows the incorporation of any single-label classifier to the task of MLC.

To begin with, the target Y is represented as a binary vector $Y^b = (y_1, y_2, \dots, y_k)$, where $y_i \triangleq \mathbb{1}(l_i \in Y)$ ². In general, when the size of the label set $\mathcal{L}$ is k , k individual models will be required for this type of transformation. Denote the classifiers for BR transformation are C_j^B ($j \in [1 \dots k]$). The classifier C_j^B is only responsible for the generation of y_i . In other words, C_j^B is learning the probability distribution of $\mathcal{P}(y_i|X)$, and Y^b is generated by the predictions of all k classifiers.

Traditional classifiers, such as SVM, Naïve Bayes, etc. can be used for MLC tasks by BR transformations. The deep learning models, although can still be adopted directly, do not necessarily need k totally individual models. When applying NN models for single-label text classification, instance X is firstly represented by some types of NN encoders, such as CNN (Kim 2014), RNN (Hochreiter and Schmidhuber 1997), Transformer (Vaswani et al. 2017), etc., and then apply a Fully Connect (FC) layer to project the representation to the space of labels using *SoftMax* normalizer. The FC layer itself can be regarded as a classifier which takes as input the vector representation of X which is generated by any encoders. Therefore, it is more efficient for the k classifiers to share a same encoder and only have different FC layers.

Given, FC layers denoted as FC_j ($j \in [1, \dots, k]$), in the case of BR transformation, each FC_j is responsible for a binary classification. As shown in Figure 1, there are two major variants of binary FC classifiers that can be used. The first type of the classifier has two cells as the other

²The symbol “ $\triangleq$ ” reads as “is defined as”, and it is not the same as “=” which indicates “equal to”. $\mathbb{1}$ is the indicator function, its value will be equal to 1 if the inner condition is satisfied, otherwise the value will be 0.

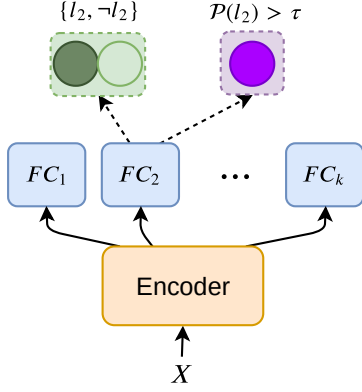


Figure 1: Two variants of Binary Relevance (BR) transformed NN models. The top left (green) block indicates the binary classifier using two cells, and the top right (purple) block indicating a classifier using one cell and threshold τ

end of the FC layer. The outputs of the two cells are regularized by *SoftMax*. Denote the two cells b_j^0 and b_j^1 , then $y_i \triangleq \mathbb{1}(b_j^0 < b_j^1)$. Another method involves an additional hyper-parameter τ and there is only one cell on the other end of the FC_j layer. The output is usually regularized by *Sigmoid* activation function so that the output will be in the range of $(0, 1)$. Correspondingly, denote the output as b_j^r and the binary classification is achieved through $y_i \triangleq \mathbb{1}(b_j^r > \tau)$.

In this models, it is assumed that the labels are independent. However, this assumption usually does not hold, especially when the labels correspond to emotions (Shahraki and Zaiane 2017).

3.3 CC Transformation

In order to take into consideration the correlations of the labels in $\mathcal{L}$, Read et al. (2011) proposed another transformation method called *classifier chains*.

Similar to BR, CC transformation also requires k individual classifiers. Given, the classifiers, C_j^C , where $j \in [1 \cdots k]$. The original CC transformation conducts k continuous binary classifications where each classification is based on the output of the previous one.

Using the binary representation Y^b , the transformation can be represented as the following recursive procedure:

$$y_j = C_j^C(X, y_{j-1}), \quad (1)$$

Where $y_0 = \emptyset$ (i.e. C_1^C only take as input X).

When CC is firstly proposed, DL methods was not as popular as the time of conducting this research. The use of CC transformation was restricted by the traditional models which are not as flexible on inputs and output as that on NN models in general. In the following paragraphs, we explain how NN models can use CC transformation methods.

In fact, Seq2Seq model (Sutskever, Vinyals, and Le 2014) which is widely used for neural machine translation, document summarization and end-to-end dialogue generation, is adopting the very similar idea of CC transformation. It usually contains two major components: *encoder* and *decoder*.

The encoder compresses the information of the sequence X into dense vector/vectors representations:

$$v = \text{Encoder}(X) \quad (2)$$

Given v , the decoder normally predicts the target Y^b sequentially using the following formula:

$$y_j = \text{Decoder}(v, y_{j-1}). \quad (3)$$

where y_0 is usually a special token $\langle s \rangle$ to indicate the start of the decoding. By comparing Eq. 1 and 3, one may find they are very similar to each other. The only major difference is that the decoder in Seq2Seq is a single model whereas the original CC method requires k individual models.

To the best of our knowledge, there has not been any existing research that directly uses Seq2Seq model upon the binary representation Y^b . Yang et al. (2018), however, applied Seq2Seq model on a different representation of the target label set Y . Their system is named *SGM* (Sequence Generation Model for Multi-label Classification). In their approach, Y is transformed into an ordered sequence Y^o . Once an arbitrary order of the full label set $\mathcal{L}$ is determined (denoted as $\mathcal{L}^o$). All the elements in Y^o will occur from left to right using the same order as that in $\mathcal{L}^o$.

The CC transformation has a critical problem. In the inference phase, the target sequence Y is unknown. Thus, applying Eq. 1 or 3 is not possible as the *true* y_{j-1} is unknown which prevents the generation of the next label. However, it is possible to use the estimated y_{j-1} instead, in order to continue the iteration. Therefore, if the model use the true y_{j-1} rather than estimated label in the training phase (which is also known as *teach forcing*), there will be an inconsistency between the training and the inference phases. Bengio et al. (2015) refer to this issue as *exposure bias*. We propose a new transformation method that circumvents this problem.

4 Proposed System

In the proposed model, we also have an encoder and a decoder. However compared to SGM, we propose a different problem transformation of MLC tasks. For SGM, the length of the target sequence Y is dependent on the number of elements in the set of positive emotions y and, therefore, it is directly dependent on the previous predicted label. Hence, the issue of exposure bias is inevitable by SGM's problem setup. In this section, we first propose a different transformation scheme which does not explicitly use y_{j-1} to connect the "chain", and thus avoids the problem of exposure bias.

4.1 LVC Transformation

We propose a transformation method called Latent Variable Chains (LVC). LVC make use of the special property of Recurrent Neural Network (RNN) models which have intermediate hidden states at each step of decoding.

LVC uses the same label representation Y^b as that in BR transformation, in addition, it requires a sequence of signals $S = (s_1, \dots, s_k)$. The signal has the same length as the size of total label set $\mathcal{L}$ and each signal is an auxiliary input for generating a binary label in Y^b .

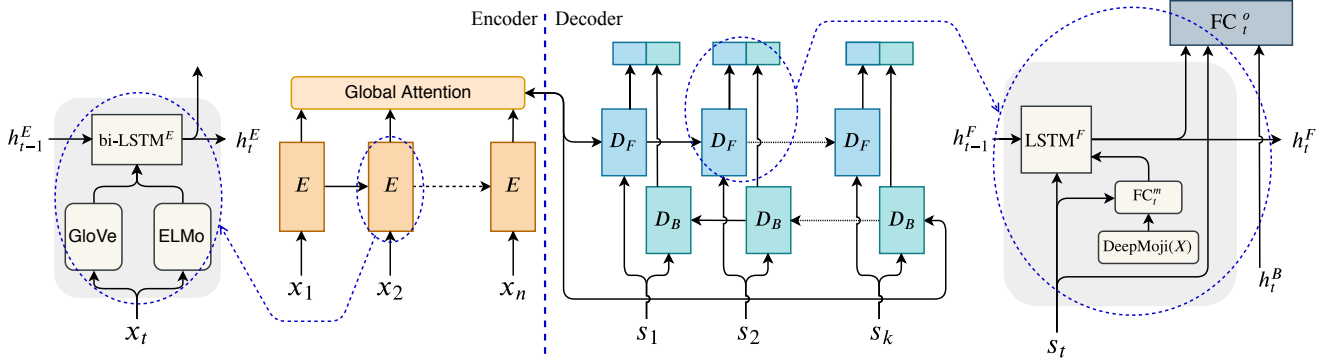


Figure 2: Overview of the Seq2Emo model

Formally, LVC first use the same encoder as that in Eq. 2, and its decoder is modified as the following:

$$h_j = \text{Decoder}(\mathbf{v}, h_{j-1}, s_j) \quad (4)$$

$$y_j = \text{Proj}(h_j) \quad (5)$$

In Eq. 4, h_j is the hidden state from an RNN decoder, which is further used to generate y_j . Compared to Eq. 3, y_{j-1} is not required to generate y_j . Instead, we use the signal s_j as the auxiliary input to assist the decoding of y_j . Thus, there will be no exposure bias problem during training and inference phases. Additionally, the hidden state h_j still retain the information of the previous decoding step (via input h_{j-1}), so that the correlations among the labels can be calculated in the process of generating the binary label Y^b . Proj is a model that project the hidden states into a binary space (two cells) in order to be able to estimate the likelihood of label y_j using *SoftMax*. The common choice of a *Proj* layer can be one or multiple *dense or fully connected* layers.

However, one limit of this setting is that the correlations of labels are considered in only one direction, which might be sub-optimal. For example, say y_3 stands for emotion “angry” and y_4 is corresponding to “sadness”. Eq. 4 suggests that while recognizing the emotion “sadness”, the latent variable which is used to detect “angry” is considered, but this information flow does not exist the other way around. In this regard, in order to fully consider the relations among the emotions, a model of chained classifiers needs to diversify the order of emotion labels. Read et al. (2011) have used ensembles of different CC classifiers with different orders to tackle this issue. However, they were limited by the lack of the ability of traditional classifiers to learn complex relations, as well as their lack of flexibility. RNN models such LSTM (Schuster and Paliwal 1997) and GRU (Chung et al. 2014) are able to effectively capture the relatively long distance relations of a sequence in one direction. Stacking only two RNN models of two reversed orders is intuitively a good solution. This idea is also known as bidirectional RNNs (Schuster and Paliwal 1997) which has already been widely used in many applications (Huang, Xu, and Yu 2015). Following the same idea, we further extend LVC transformation

into a bidirectional fashion as follows:

$$\vec{h}_j = \text{Decoder}^F(\mathbf{v}, \vec{h}_{j-1}, s_j) \quad (6)$$

$$\overleftarrow{h}_j = \text{Decoder}^B(\mathbf{v}, \overleftarrow{h}_{j-1}, s_{k-j+1}) \quad (7)$$

$$y_j = \text{Proj}(\vec{h}_j, \overleftarrow{h}_{k-j+1}) \quad (8)$$

where Decoder^F and Decoder^B stands for forward decoder and backward decoder respectively.

4.2 Seq2Emo Model

In Section 4.1, we have presented the *Latent Variable Chain* transformation for MLC task. In this section, we introduce the Seq2Emo model which is not only tailored to adapt the proposed transformation, but also dedicated for the task of emotion classification.

Figure 2 shows the high level overview of Seq2Emo, where E stands for encoder, D_F and D_B stand for a forward decoder and a backward decoder respectively. Seq2Emo also contain many other modules: “GloVe”, “ELMo”, “Global attention”, and “DeepMoji”, which we will explain their use in the later part of this section. The design of Seq2Emo is based on the existing Sequence-to-Sequence (Seq2Seq) model (Sutskever, Vinyals, and Le 2014) and its *encoder-decoder* structure. However, the two models are different as they are adapting two different transformations: Seq2Emo is adapting LVC while Seq2Seq is adapting CC.

Encoder We show the structure of the encoder in the left side of Figure 2, where we use a multi-layer bi-LSTM to encode the input sequence $X = [x_1, x_2, x_3, \dots, x_n]$. Inspired by the work of (Sanh, Wolf, and Ruder 2018), we use the combination of GloVe (Pennington, Socher, and Manning 2014) and ELMo (Peters et al. 2018) to best capture the local semantic meaning and the contextual representation of each word x_t .

GloVe and ELMo GloVe and ELMo are both pre-trained models which have been trained on large text corpora using unsupervised learning algorithms. GloVe does not differentiate the meaning of a word given its context, instead, it uses the probability distribution of a word’s context to represent its semantic meaning. Similar approaches exist

in the literature (Mikolov et al. 2013; Bengio et al. 2003; Joulin et al. 2016). However, in our proposed framework, we found GloVe to work slightly better than the others. ELMo is a recent RNN based contextual word vector model. Unlike GloVe, it assigns a dense vector representation to each word dynamically based on its context. Besides, ELMo is trained at the character level which can be used to capture the semantic meaning of out-of-vocabulary words. Therefore, we combine the GloVe and ELMo as the feature representation of the words.

Given, GlV as a pre-trained GloVe model, the word vector for x_t generated by GloVe can be thus represented as $GlV(x_t)$. GlV is a matrix of dimension $\mathbb{R}^{|V| \times D_G}$, where D_G is a hyper-parameter of a GloVe model and each word in GloVe will be represented in a vector space of $\mathbb{R}^{D_G}$. V is the set of words that Seq2Eemo is able to recognize, $|V|$ is the number of words.

To generate the vector representation of each word x_t , a pre-trained Elmo model, Elm , first takes as input X , and generate a matrix of dimension $\mathbb{R}^{n \times D_E}$, where n is the length of the sequence X and D_E is a hyper-parameter of the pre-trained ELMo model. Given X , we denote the generated matrix by the ELMo model as Elm^X . Further more, we use a subscript t to the to denote the t^{th} row of Elm^X . Therefore, the word vector of x_t given by Elm can be written as Elm_t^X and each vector will be in the space of $\mathbb{R}^{D_E}$.

LSTM encoder After having both vector representations of a word x_t , denote $[GlV(X_t); Elm_t^X]$ as the concatenation of the two vectors. By using the concatenation we have two pre-trained word representation models combined, and each word x_t is represented in a vector space of $\mathbb{R}^{D_G + D_E}$. We then use a multi-layer bi-directional LSTM (Graves, Mohamed, and Hinton 2013) to encode the concatenated vectors. For simplicity, we only use bi-LSTM^E to denote the model, and its iterations can be shown as:

$$h_t^E, c_t^E = \text{bi-LSTM}^E([GlV(X_t); Elm_t^X], [h_{t-1}^E; c_{t-1}^E]), \quad (9)$$

where $h_0^E = c_0^E = \mathbf{0}$ and h_t^E and c_t^E represent the *hidden* state and *cell* state of the LSTM model at time step t . We further use $\bar{h}_t$ and $\bar{c}_t$ to denote the states of the top layer of the deep LSTM model.

Global attention In this research, we use the *global attention* (Luong, Pham, and Manning 2015) to better capture the long-distance dependency between the encoder and decoder in the Seq2Seq framework. More specifically, we use the *general* alignment score function and *input-feeding* update scheme. Given $\bar{h}^E = [\bar{h}_1^E, \bar{h}_2^E, \dots, \bar{h}_n^E]$ as all the hidden states of the top LSTM layer from the encoder. We choose a single-layer single-directional LSTM for each of the *forward* and *backward* decoding direction. Denote h_t^D as the hidden state of time step t of a decoder D . It will be updated by the attention mechanism through $h_t^D \rightarrow \alpha_t \rightarrow CTX_t \rightarrow \tilde{h}_t^D$. α_t is usually referred as the vector of *attention scores*. CTX_t is the *context vector* which is dynamically calculated at each decoding step t , it

corresponds to a vector which is the weighted sum of encoder output $\bar{h}^E$ and the attention scores α_t . The updating of decoder hidden state h_t^D using global attention is shown in the following iterations:

$$\tilde{h}_t^D = \tanh(W_c [CTX_t; h_t^D]) \quad (10)$$

$$CTX_t = \frac{\sum \alpha_t \bar{h}^E}{\sum \alpha_t} \quad (11)$$

$$\alpha_t(i) = \frac{\exp(\text{score}(h_t^D, \bar{h}_i^E))}{\sum_{j=1}^n \exp(\text{score}(h_t^D, \bar{h}_j^E))} \quad (12)$$

$$\text{score}(h_t^D, \bar{h}_i^E) = h_t^{D\top} W_a \bar{h}_i^E \quad (13)$$

where $\alpha_t = (\alpha_1, \alpha_2, \dots, \alpha_n)$ and $\alpha_t(i) \triangleq \alpha_i$.

Decoder The design of the *decoder* is the core of the proposed Seq2Eemo model. Its graphical representation is shown on the right side of the Figure 2. We can observe two different FC modules and a module named “DeepMoji” along side the decoder LSTM. We can also notice two decoders of reversed directions: D^F and D^B . We explain the forward decoding of Seq2Eemo in details in this section. It can be easily adopted to backward decoding by changing the subscript similarly to what has been done in Eq. 7 compared to Eq. 6.

DeepMoji (Felbo et al. 2017) is an LSTM based model which is pre-trained on over 1 billion tweets by the task of predicting contained emojis. Given a sequence X , DeepMoji can give the emotional representation by extracting the output from the last layer. Given that the target domain of our study is emotion classification, we plug DeepMoji encodings into the proposed Seq2Eemo as it brings an emotional semantic dimension to the model. We denote this process as $\text{Moji}_X = \text{DeepMoji}(X)$. Furthermore, we add a fully connected layer FC_t^m where t is depending on the signal s_t . This FC layer will project the static representation Moji_X to a smaller but learnable vector while conditioning on the emotion that is about to be predicted.

For a single direction of decoding, we use the following equations to update the hidden states:

$$h_t^D, c_t^D = \text{LSTM}^D([s_t, FC_t^m(\text{Moji}_X)], [\bar{h}_{t-1}^D; c_{t-1}^D]) \quad (14)$$

$$h_0^D = \bar{h}_n^{En}, c_0^D = \bar{c}_n^E. \quad (15)$$

Denote $\vec{h}_t^D$ and $\overleftarrow{h}_t^D$ as the hidden states of forward decoder and backward respectively. We further apply different FC layers for each of the binary label classification in Y^b similar to that in Section 3.2. This procedure can be represented as follows:

$$y_t = FC_t^o([\vec{h}_t^D; \overleftarrow{h}_t^D]) \quad (16)$$

In the process of decoding, we feed a sequence of signals $S = (s_1, \dots, s_k)$ to the decoder to force a generation of k labels. The sequence S is dependent on size of the label set $\mathcal{L}$ which is a constant value for a given MLC task. Feeding the signals also means that in the training, each signal is

telling the decoder to learn a specific label given the input sequence X . To feed a signal into LSTM directly, we modify the LSTM^D in a similar way to that of Li et al.’s (2016). Signal s_t are used in both FC_t^o and FC_t^m so that each FC layer is only responsible for one emotion. During the experiments, we found that disentangling FC layers based on different labels is able to achieve better results in Seq2Emo model comparing to sharing a single FC layer.

5 Data Collection and Pre-processing

Due to the lack of study in the area of multi-label emotion classification, the publicly accessible datasets for this specific task remain rare. We first introduce two existing datasets that contain multi-labeled emotions and then explain the procedure of collecting a new large and balanced dataset with respect to each emotion category.

Table 1: Number of the emotions, instances and the proportions of the multi-labeled instances of the three datasets

Dataset	# of emotions	# of instances	% multi-label
SemEval18	11	10690	86.1 %
CBET	9	81162	5.6 %
BMET	6	96323	24.2 %

5.1 SemEval18

In the shared *SemEval-2018 Task 1: Affect in Tweets* (Mohammad et al. 2018), the provided dataset is labeled by human annotators. It has been widely used. The task itself is composed of many sub-tasks, among which, *E-c* is a task of emotion classification. It contains 11 emotion categories: “anger”, “anticipation”, “disgust”, “fear”, “joy”, “love”, “optimism”, “pessimism”, “sadness”, “surprise”, and “trust”. This dataset consists 10,690 Tweets which are mostly multi-labeled (see Table 1). For simplicity, we refer to this dataset as *SemEval18* in the following context.

5.2 CBET

Using hashtags as self-annotated labels, (Shahraki and Zaiane 2017) created a tweet-based dataset and named it as Cleaned Balanced Emotional Tweets (CBET). It contains 9 emotions which are chosen from the union of four highly regarded psychological models of emotions. The CBET dataset is much larger than SemEval18, however, very few instances are multi-labelled, most of the instances (94.4%) are singly labelled.

5.3 Balanced Multi-label Tweets (BMET)

The SemEval18 dataset encompasses 11 emotions and has only a little more than ten thousand instances. On the other hand, CBET is much larger but it is mostly single labeled. We collect a new dataset and name it Balanced Multi-label Tweets (BMET). It is larger than CBET dataset and contains much more multi-labeled instances. In addition, BMET is balanced with respect to each emotion category. The statistics are shown in Table 1. BMET data is collected from

scratch mostly following the procedure described in (Abdul-Mageed and Ungar 2017). The details of the data collection, post-processing and samples can be found in the supplementary materials.

6 Experiments

6.1 Metrics

Following the work of Yang et al. (2018) and Mohammad et al. (2018), we choose *Jaccard Index* (Rogers and Tanimoto 1960), *Hamming Loss* (Schapire and Singer 1999), and *Micro-averaged F1 score* (Manning, Raghavan, and Schütze 2008) as the automatic metrics.

Jaccard index Jaccard index is also referred as multi-label accuracy (Mohammad et al. 2018). Denote the test set as $\{X_i^{te}, Y_i^{te}\}_N$, where each Y_i^{te} is a set of emotion labels and N is the size of the test set. Let $\hat{Y}_i^{te}$ be the estimated labels by a model. Jaccard index can be defined as follows:

$$J = \frac{1}{N} \sum_{i=1}^N \frac{|Y_i^{te} \cap \hat{Y}_i^{te}|}{|Y_i^{te} \cup \hat{Y}_i^{te}|} \quad (17)$$

It has to mention that in Semeval18 dataset, there are instances with $Y_i^{te} = \emptyset$, therefore it is possible that the value of $|Y_i^{te} \cup \hat{Y}_i^{te}| = 0$. In this situation, we regard the value of the corresponding term as 1, because the estimated set $\hat{Y}_i^{te}$ corresponds to the true set $\emptyset$ in this case.

Hamming loss Hamming Loss (HL), is used to find out the number of wrongly predicted labels out of all labels. Hence, the less the score, the better.

Micro F1 We refer Micro-averaged F1 score as *Micro F* for simplicity. It takes into consideration of true positives, false negatives, and false positives, which is a widely used metrics for multi-label classification problems.

6.2 Baseline models

In this research, we propose a new problem transformation approach, LVC, for multi-label emotion classification. We compare our proposed LVC-based model, Seq2Emo, against models that are based on the BR transformation and CC transformation (see Section 3). For BR transformation, we use the *SL* and *SLD* models from (Huang, Trabelsi, and Zaiane 2019) as encoders, and adapt the models to solve MLC problems by adding multiple binary FC classifiers to the end (as shown in Figure 1). We name the models as Binary-SL and Binary-SLD respectively. SL and SLD utilize many recent advances in text classification and emotion mining. However, in the research of (Huang, Trabelsi, and Zaiane 2019), SLD is part of the proposed hierarchical framework and its individual performance is not given. In this work, SL without self-attention is used as the encoder of the proposed Seq2Emo model, the DeepMoji Module is used by the decoder. In order to justify the the performance of SL and SLD models, we test them with three single label classification datasets, the results and analysis are shown

Table 2: Results

Models	Semeval18			CBET			BMET		
	Jaccard	HL	Micro F.	Jaccard	HL	Micro F.	Jaccard	HL	Micro F.
SGM	0.4514	0.1668	0.5511	0.5184	0.1090	0.5270	0.5689	0.1610	0.6052
Binary-SL	0.5737	0.1230	0.6914	0.5573	0.0750	0.6368	0.5776	0.1266	0.6661
Binary-SLD	0.5752	0.1231	0.6909	0.5823	0.0739	0.6508	0.5685	0.1258	0.6619
Seq2Emo-L	0.5884	0.1217	0.7063	0.5750	0.0771	0.6433	0.5715	0.1301	0.6607
Seq2Emo-LD	0.5919	0.1211	0.7089	0.5779	0.0766	0.6440	0.5856	0.1276	0.6719

in Supplementary Material. For CC transformation, we directly use the public implementation by the author of the SGM model (Yang et al. 2018)³. To show the impact of DeepMoji module, we make two variants of the Seq2Emo model: Seq2Emo-L and Seq2Emo-LD. Seq2Emo-LD is the full sized model as shown in the Figure 2 and Seq2Emo-L simply removes the DeepMoji module and its connection to the decoder LSTM.

6.3 Hyper-parameters

We use PyTorch 1.0 as the deep learning framework. For the DeepMoji model, we use the implementation offered by Hugging Face team⁴. For the dimensions of the Bi-LSTMs encoders in Binary-SL, Binary-SLD, Seq2Emo-L, and Seq2Emo-LD, we set the dimension in each LSTM direction as 1,200. The number of layers of Bi-LSTM modules are set to 2. We use Adam optimizer with 5e-4 as the learning rate for Binary-SL, Binary-SLD and the encoder part of the proposed Seq2Emo-L and Seq2Emo-LD model. As for the decoder of the Seq2Emo-L and Seq2Emo-LD, we decrease the learning rate to 1e-4. We apply a Dropout rate (Srivastava et al. 2014) of 0.2 to all the models.

7 Results and Analysis

Table 1 highlights the fact that SemEval18 has the highest multi-label percentage followed by BMET. CBET has the lowest percentage, meaning that BMET, the dataset we collected, has more tweet posts with multiple labels. Table 2 shows the results of our methods and the contenders. As we can see, our model Seq2Emo-LD achieves better performance than contenders on the datasets (Semeval18 and BMET), which have the highest percentages of multi-label samples. On CBET dataset, which is mostly single-labeled, Binary-SLD is able to achieve better performance. We show that Binary-SLD is a very strong baseline model on single-label emotion classification task in the supplementary materials. In addition, models with DeepMoji (Binary-SLD and Seq2Emo-LD) achieves obvious performance improvements on datasets Semeval18 and CBET against those models without using DeepMoji (Binary-SL and Seq2Emo-L).

The results generated by Seq2Emo-LD on Semeval18 dataset outperform the top solutions of the shared task (Park, Xu, and Fung 2018). To the best of our knowledge, Seq2Emo model achieves the best Jaccard score on the SemEval18 dataset (Mohammad et al. 2018).

³<https://github.com/lancopku/SGM>

⁴<https://github.com/huggingface/torchMoji>

8 Conclusion

In this research, we aim at tackling the task of multi-label emotion classification. We propose LVC transformation – a new approach to adapt recurrent neural models on the task of the multi-label classification while avoiding the problem of exposure bias. We argue that, in multi-label emotion classification, it is necessary to consider the correlations that exist between the labels, and applying LVC transformation is ideal in this scenario. Therefore, we propose a model named Seq2Emo, which not only makes use of many state-of-the-art pre-trained models but also is tailored to adapt to the LVC transformation. Seq2Emo uses a bi-directional decoding scheme to capture the relations of both directions. Our experiments reveal that the proposed Seq2Emo model performs better on the datasets containing higher percentages of multi-labeled examples. It also indicates that our proposed model scales better on the amount of correlations between the labels.

However, we also notice some limitations of the proposed system. The LVC transformation needs k decoding steps for the label set $\mathcal{L}$ of size k . If the label sets are very large, for example, RCV1-V2 (Lewis et al. 2004) which has 103 labels, the decoding length might be too long for an RNN based model to capture the long distance dependency. In addition, the time complexity of the model is also linearly related to k , which potentially makes LVC based models hard to be scaled on the MLC tasks with a large number of distinct labels. For emotion mining and other practical MLC problems, the number of distinct labels is typically reasonably small.

9 Supplementary Material

9.1 Collection of BMET

We collect data from scratch mostly following the procedure described in (Abdul-Mageed and Ungar 2017). The general idea is to find specific hashtags in tweets and assume they are self-annotated (Mintz et al. 2009). We collect more than 4 billion tweets dated from 2011 to 2018 from Archive.org⁵. From the tweets, we first filter out those that are not English. Then, we define an overall of 46 hashtags to extract 9 emotions (same emotion categories as CBET) to further filter the data keeping only those containing at least two emotions. Based on the emotion distribution, we removed the emotion *love* because it occurs in about 87% of the tweets.

⁵<https://archive.org/details/twitterstream>

We also removed the emotion *guilt* and *disgust* as they together appear in less than 1% of the tweets. Table S1 enumerates these hashtags. We then remove the hashtags that are used for crawling. To reduce the computational cost, we only use the tweets that have a length ranging between 3 and 50 words. For pre-processing, we used the tool provided by (Baziotis, Pelekis, and Doukeridis 2017). In order to retain the semantic meanings of the emojis, we first convert the emojis to their textual aliases and then replace the delimiter such as the “:” and “_” with spaces. In order to make the dataset balanced, we first divide the datasets into two portions: multi-labeled only and single-labeled only. We then calculate the label distribution of the multi-labeled part and fill it up by randomly sampling instances from the single-labeled part.

Table S1: Hashtags used to extract the BMET dataset

Emotion	List of Hashtags
anger	#anger, #angry, #rage, #pain
fear	#fear, #anxiety, #horror, #horrific
joy	#happy, #joy, #like, #happiness, #smile, #peace, #pleased, #satisfied, #satisfying
sadness	#sad, #sadness, #depression, #depressed, #alone
surprise	#surprise, #amazing, #awesome, #fascinate, #fascinating, #incredible, #marvelous, #prodigious, #shocking, #unbelievable, #stunning, #surprising
thankfulness	#thankfulness, #gratefulness, #gratitude, #kindness, #thankful, #thanks, #gratful

We show several examples with multiple labels from the BMET on Table S2. The hashtags for the six emotions which are used to collect BMET datasets are shown in Table S1.

9.2 SL, and SLD on single label emotion classification

In our experiments, Seq2Emo is outperformed by binary-SLD model on the CBET dataset. In this section, we show that SLD is a strong baseline that is able to achieve great performance on single label emotion classification task. Compared to binary-SL and binary-SLD, only one single FC layer with *Softmax* regularizer is used to map the output of the encoders to the space of labels. In the state-of-the-art emotion classification work by (Zhang et al. 2018), they use lexicons to estimate the emotion distribution and use multi-task learning to train a CNN text classifier (MTCNN). We run three single labeled emotional datasets against their work: ISEAR (Scherer and Wallbott 1994), TEC (Mohammad 2012) and only single labeled instances in CBET dataset. We compare MTCNN with SL, SLD models and three other non- deep learning models (Naïve Bayes, Random Forest, and SVM) which use bag-of-word features to represent words. It needs to be mentioned that in the work of (Zhang et al. 2018), the performance of MTCNN is measured using the averages scores of the evaluation set of the 10-fold cross validation, whereas we run the numbers on a

held-out test (10% of the original dataset). The results are shown in Figure S3, from which we notice that on both TEC and CBET datasets, SLD outperforms MTCNN by a large margin, but MTCNN outperforms SLD on ISEAR dataset. ISEAR has only 7,666 instances in total, whereas TEC has 21,051 instances and CBET-Single 76,860 instances. The fact that MTCNN has better scores on the ISEAR maybe because the dataset is too small to be generalized on the held-out test set.

References

- [Abdul-Mageed and Ungar 2017] Abdul-Mageed, M., and Ungar, L. 2017. Emonet: Fine-grained emotion detection with gated recurrent neural networks. In *ACL*, volume 1, 718–728.
- [Baziotis et al. 2018] Baziotis, C.; Nikolaos, A.; Chronopoulou, A.; Kolovou, A.; Paraskevopoulos, G.; Ellinas, N.; and et al. 2018. Ntua-slp at semeval-2018 task 1: Predicting affective content in tweets with deep attentive rnns and transfer learning. In *SemEval*.
- [Baziotis, Pelekis, and Doukeridis 2017] Baziotis, C.; Pelekis, N.; and Doukeridis, C. 2017. Dastories at semeval-2017 task 4: Deep lstm with attention for message-level and topic-based sentiment analysis. In *SemEval*, 747–754.
- [Bengio et al. 2003] Bengio, Y.; Ducharme, R.; Vincent, P.; and Janvin, C. 2003. A neural probabilistic language model. *JMLR* 3:1137–1155.
- [Bengio et al. 2015] Bengio, S.; Vinyals, O.; Jaitly, N.; and Shazeer, N. 2015. Scheduled sampling for sequence prediction with recurrent neural networks. In *NIPS*, 1171–1179.
- [Boutell et al. 2004] Boutell, M. R.; Luo, J.; Shen, X.; and Brown, C. M. 2004. Learning multi-label scene classification. *Pattern Recognition* 37(9):1757 – 1771.
- [Chen et al. 2017] Chen, G.; Ye, D.; Xing, Z.; Chen, J.; and Cambria, E. 2017. Ensemble application of convolutional and recurrent neural networks for multi-label text categorization. In *IJCNN*. IEEE.
- [Chung et al. 2014] Chung, J.; Gülçehre, Ç.; Cho, K.; and Bengio, Y. 2014. Empirical evaluation of gated recurrent neural networks on sequence modeling. *arXiv preprint*.
- [Devlin et al. 2019] Devlin, J.; Chang, M.; Lee, K.; and Toutanova, K. 2019. BERT: pre-training of deep bidirectional transformers for language understanding. 4171–4186.
- [Fan and Lin 2007] Fan, R.-E., and Lin, C.-J. 2007. A study on threshold selection for multi-label classification. *Cite-seer*.
- [Felbo et al. 2017] Felbo, B.; Mislove, A.; Søgaard, A.; Rahwan, I.; and Lehmann, S. 2017. Using millions of emoji occurrences to learn any-domain representations for detecting sentiment, emotion and sarcasm. In *EMNLP*.
- [Godbole and Sarawagi 2004] Godbole, S., and Sarawagi, S. 2004. Discriminative methods for multi-labeled classification. In *PAKDD*, 22–30.
- [Graves, Mohamed, and Hinton 2013] Graves, A.; Mohamed, A.; and Hinton, G. E. 2013. Speech recognition

Table S2: Some examples from BMET dataset. Note that the hashtags expressing emotion labels are removed from the text.

Emotions	Tweet
surprise, joy	The moon looks #amazing :) it's hiding behind a thin curtain of clouds :) #smile
anger, sadness	What am I doing wrong??? Just cant seem to make it happen... #confusion #anger #sadness
thankfulness, joy	Even though I tend to get stressed and overreact, I am actually pretty content at how my life is going #thankful #happy
thankfulness	Nicely done class of 2014! Thank you for helping make @FSU_HESA students' experiences better! #grateful #LifeNet <url>

Table S3: Results on single label emotion classification

Models	ISEAR			
	Macro P.	Macro R.	Macro F1	Micro F1
Naïve Bayes	0.5351	0.536	0.5338	0.5359
Random Forest	0.5460	0.5467	0.5363	0.5463
SVM	0.5010	0.5061	0.5004	0.5059
Bi-LSTM	0.6167	0.6132	0.6068	0.6128
MTCNN*	0.6711	0.6691	0.6680	–
SL	0.6420	0.6261	0.6296	0.6258
SLD	0.6514	0.6523	0.6451	0.6519
Models	TEC			
	Macro P.	Macro R.	Macro F1	Micro F1
Naïve Bayes	0.5477	0.4841	0.5008	0.6035
Random Forest	0.5831	0.4024	0.4333	0.5741
SVM	0.5369	0.4969	0.5079	0.5935
Bi-LSTM	0.5904	0.5345	0.5555	0.6505
MTCNN*	0.6210	0.5257	0.5694	–
SL	0.6207	0.5568	0.5759	0.6543
SLD	0.6522	0.5817	0.6034	0.6781
Models	CBET-Single			
	Macro P.	Macro R.	Macro F1	Micro F1
Naïve Bayes	0.5277	0.5245	0.5218	0.5218
Random Forest	0.5188	0.5128	0.5111	0.5218
SVM	0.5288	0.5258	0.5263	0.5258
Bi-LSTM	0.5985	0.5993	0.5977	0.5993
MTCNN*	0.6120	0.6158	0.6139	–
SL	0.6102	0.6107	0.6092	0.6107
SLD	0.6312	0.6324	0.6302	0.6324

with deep recurrent neural networks. In *ICASSP*, 6645–6649.

- [He and Xia 2018] He, H., and Xia, R. 2018. Joint binary neural network for multi-label learning with applications to emotion classification. In *International Conference on Natural Language Processing and Chinese Computing*, 250–259.
- [Hochreiter and Schmidhuber 1997] Hochreiter, S., and Schmidhuber, J. 1997. Long short-term memory. *Neural Computation* 9(8):1735–1780.
- [Huang, Trabelsi, and Zaïane 2019] Huang, C.; Trabelsi, A.; and Zaïane, O. R. 2019. Ana at semeval-2019 task 3: Contextual emotion detection in conversations through hierarchical lstms and bert. In *SemEval*.
- [Huang, Xu, and Yu 2015] Huang, Z.; Xu, W.; and Yu, K. 2015. Bidirectional lstm-crf models for sequence tagging. *arXiv preprint*.
- [Joulin et al. 2016] Joulin, A.; Grave, E.; Bojanowski, P.; Douze, M.; Jégou, H.; and Mikolov, T. 2016. Fasttext.zip: Compressing text classification models. *arXiv preprint*.
- [Kim 2014] Kim, Y. 2014. Convolutional neural networks for sentence classification. *arXiv preprint arXiv:1408.5882*.
- [Kurata, Xiang, and Zhou 2016] Kurata, G.; Xiang, B.; and Zhou, B. 2016. Improved neural network-based multi-label

classification with better initialization leveraging label co-occurrence. In *ACL*.

- [Lewis et al. 2004] Lewis, D. D.; Yang, Y.; Rose, T. G.; and Li, F. 2004. Rcv1: A new benchmark collection for text categorization research. *JMLR* 5(Apr):361–397.
- [Li et al. 2016] Li, J.; Galley, M.; Brockett, C.; Spithourakis, G. P.; Gao, J.; and Dolan, B. 2016. A persona-based neural conversation model. *arXiv preprint*.
- [Luong, Pham, and Manning 2015] Luong, T.; Pham, H.; and Manning, C. D. 2015. Effective approaches to attention-based neural machine translation. In *EMNLP*, 1412–1421.
- [Manning, Raghavan, and Schütze 2008] Manning, C. D.; Raghavan, P.; and Schütze, H. 2008. *Introduction to information retrieval*. Cambridge University Press.
- [Mikolov et al. 2013] Mikolov, T.; Chen, K.; Corrado, G.; and Dean, J. 2013. Efficient estimation of word representations in vector space. *arXiv preprint*.
- [Mintz et al. 2009] Mintz, M.; Bills, S.; Snow, R.; and Jurafsky, D. 2009. Distant supervision for relation extraction without labeled data. In *AFNLP*, 1003–1011.
- [Mohammad et al. 2018] Mohammad, S.; Bravo-Marquez, F.; Salameh, M.; and Kiritchenko, S. 2018. Semeval-2018 task 1: Affect in tweets. In *SemEval*, 1–17.
- [Mohammad 2012] Mohammad, S. M. 2012. # emotional tweets. In **SEM*, 246–255.
- [Park, Xu, and Fung 2018] Park, J. H.; Xu, P.; and Fung, P. 2018. Plusemo2vec at semeval-2018 task 1: Exploiting emotion knowledge from emoji and# hashtags. *arXiv preprint*.
- [Pennington, Socher, and Manning 2014] Pennington, J.; Socher, R.; and Manning, C. 2014. Glove: Global vectors for word representation. In *EMNLP*, 1532–1543.
- [Peters et al. 2018] Peters, M. E.; Neumann, M.; Iyyer, M.; Gardner, M.; Clark, C.; Lee, K.; and Zettlemoyer, L. 2018. Deep contextualized word representations. In *NAACL-HLT*, 2227–2237.
- [Read et al. 2011] Read, J.; Pfahringer, B.; Holmes, G.; and Frank, E. 2011. Classifier chains for multi-label classification. *Machine Learning* 85(3):333–359.
- [Rogers and Tanimoto 1960] Rogers, D. J., and Tanimoto, T. T. 1960. A computer program for classifying plants. *Science* 132(3434):1115–1118.
- [Sailunaz et al. 2018] Sailunaz, K.; Dhaliwal, M.; Rokne, J. G.; and Alhajj, R. 2018. Emotion detection from text and speech: a survey. *Social Netw. Analys. Mining* 8(1):28:1–28:26.
- [Sanh, Wolf, and Ruder 2018] Sanh, V.; Wolf, T.; and Ruder, S. 2018. A hierarchical multi-task approach for learning embeddings from semantic tasks. *arXiv preprint*.

- [Schapire and Singer 1999] Schapire, R. E., and Singer, Y. 1999. Improved boosting algorithms using confidence-rated predictions. *Machine Learning* 37(3):297–336.
- [Scherer and Wallbott 1994] Scherer, K. R., and Wallbott, H. G. 1994. Evidence for universality and cultural variation of differential emotion response patterning. *Journal of personality and social psychology* 66(2):310.
- [Schuster and Paliwal 1997] Schuster, M., and Paliwal, K. K. 1997. Bidirectional recurrent neural networks. *IEEE TSP* 45(11):2673–2681.
- [Shahraki and Zañane 2017] Shahraki, A. G., and Zañane, O. R. 2017. Lexical and learning-based emotion mining from text. In *CICLing*.
- [Srivastava et al. 2014] Srivastava, N.; Hinton, G.; Krizhevsky, A.; Sutskever, I.; and Salakhutdinov, R. 2014. Dropout: a simple way to prevent neural networks from overfitting. *JMLR* 15(1):1929–1958.
- [Sutskever, Vinyals, and Le 2014] Sutskever, I.; Vinyals, O.; and Le, Q. V. 2014. Sequence to sequence learning with neural networks. In *NIPS*, 3104–3112.
- [Tsoumakas, Katakis, and Vlahavas 2010] Tsoumakas, G.; Katakis, I.; and Vlahavas, I. 2010. Random k-labelsets for multilabel classification. *IEEE Trans. on Knowledge and Data Engineering* 23(7):1079–1089.
- [Vaswani et al. 2017] Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention is all you need. In *NIPS*, 5998–6008.
- [Yadollahi, Shahraki, and Zañane 2017] Yadollahi, A.; Shahraki, A. G.; and Zañane, O. R. 2017. Current state of text sentiment analysis from opinion to emotion mining. *ACM Comput. Surv.* 50(2):25:1–25:33.
- [Yan and Turtle 2016] Yan, J. L. S., and Turtle, H. R. 2016. Exposing a set of fine-grained emotion categories from tweets. In *IJCAI*, 8–14.
- [Yang et al. 2018] Yang, P.; Sun, X.; Li, W.; Ma, S.; Wu, W.; and Wang, H. 2018. Sgm: Sequence generation model for multi-label classification. In *COLING*, 3915–3926.
- [Yu et al. 2018] Yu, J.; Marujo, L.; Jiang, J.; Karuturi, P.; and Brendel, W. 2018. Improving multi-label emotion classification via sentiment classification with dual attention transfer network. In *EMNLP*, 1097–1102.
- [Zhang et al. 2018] Zhang, Y.; Fu, J.; She, D.; Zhang, Y.; Wang, S.; and Yang, J. 2018. Text emotion distribution learning via multi-task convolutional neural network. In *IJCAI*, 4595–4601.