R obustness of retrieval properties against im balance between long-term potentiation and depression of spike-tim ing-dependent plasticity

Narihisa Matsumoto<sup>1,2</sup>, and Masato Okada<sup>2,3,y</sup>

<sup>1</sup>G raduate School of Science and Engineering, Saitam a University, Saitam a 338-8570, Japan
<sup>2</sup>RIKEN Brain Science Institute, Saitam a 351-0198, Japan
<sup>3</sup>\Intelligent Cooperation and Control, PRESTO, JST, Saitam a 351-0198, Japan
(Dated: January 2, 2022)

Spike-tim ing-dependent plasticity (STDP) has recently been shown in some physiological studies. STDP depends on the precise temporal relationship of pre- and post-synaptic spikes. Many authors have indicated that a precise balance between long-term potentiation (LTP) and long-term depression (LTD) of STDP is signicant for a stable learning. However, a situation in which the balance is maintained precisely is inconceivable in the brain. Using a method of the statistical neurodynamics, we show robust retrieval properties of spatio-temporal patterns in an associative memory model against the imbalance between LTP and LTD. When the uctuation of LTD is assumed to obey a Gaussian distribution with mean 0 and variance 2, the storage capacity takes a nite value even at large. This means that the balance between LTP and LTD of STDP need not to be maintained precisely, but must be maintained on average. Furthermore, we found that a basin of attraction becomes smaller as increases while an initial critical overlap remains unchanged.

PACS num bers: 87.18.Sn, 89.70.+c, 05.90.+m

### I. IN TRODUCTION

Recent experimental nding indicates that synaptic modi cation in cortical neurons depends on the precise temporal relationship between pre- and post-synaptic spikes [1, 2, 3]. In particular, pre-synaptic spikes that precede post-synaptic ring induce long-term potentiation (LTP) by no more than 20 ms, while those that follow post-synaptic ring induce long-term depression (LTD), with a rapid transition (a few ms). The magnitude of synaptic modi cation decays exponentially with the time interval between pre- and post-synaptic spikes. This form of synaptic modi cation has been called spiketim ing-dependent plasticity (STDP) [4] or temporally asymmetric Hebbian learning (TAH) [5, 6].

The functional role of STDP has been investigated by m any authors. They showed that STDP is a mechanism for synaptic competition [4, 5, 6, 7, 8, 9] or a learning mechanism of sequential patterns [10, 11, 12, 13, 14, 15, 16]. A sym m etric learning window depending on spike tim ing like STDP has been studied and shown to be appropriate learning rule for sequential patterns [17, 18, 19]. However, this asymmetric learning rule does not involve LTD. Some authors showed that the balance between LTP and LTD of STDP is signi cant for a stable learning [4, 14, 15, 16]. In our previous work, we analytically showed that STDP has the same qualitative e ect as the covariance rule when the spatio-tem poral patterns are stored since the di erences between spike times that induce LTP or LTD are capable of canceling out the effect of the ring rate information [16]. In the brain, a

situation in which the balance is maintained precisely is inconceivable. The data points obtained by experiments are uctuated in the dierent trials [1, 3]. Therefore, it is meaningful to discuss more biological plausible situation to investigate the neuronal mechanism for sequential learning in the brain. Some authors numerically investigated the impact of the imbalance between LTP and LTD on the network properties [4, 14].

The aim of this paper is to analytically discuss the retrieval properties of spatio-tem poral patterns in an associative m em ory m odel that incorporates the im balance between LTP and LTD of STDP using a method of the statistical neurodynam ics [16, 20, 21]. According to our previous work, when the balance is not precisely maintained, it is impossible to cancel out the information of ring rate. Consequently, a cross-talk noise diverges. However, if the magnitudes of LTP and LTD are equivalent on average in a learning process, it may be possible to stably retrieve spatio-tem poral patterns. Since the ratio of LTP and LTD is crucial, the magnitude of LTD changes while that of LTP is xed. We found that the storage capacity takes a nite value even at large when the uctuation of LTD is assumed to obey a Gaussian distribution with mean 0 and variance 2. This implies that the balance between LTP and LTD of STDP need not to be maintained precisely, but must be maintained on average. This mechanism might work in the brain. Furtherm ore, we found that a basin of attraction becomes smaller as increases while an initial critical overlap remains unchanged.

# II. M ODEL

The model contains N binary neurons with reciprocal connections. Each neuron has a binary state f0;1g.

We de ne discrete time steps and the following rule for synchronous updating:

$$u_{i}(t) = X^{N}$$
  $J_{ij}x_{j}(t);$  (1)

$$x_i(t+1) = F(u_i(t));$$
 (2)

$$F(u) = \begin{cases} 1: u & 0 \\ 0: u < 0; \end{cases}$$
 (3)

where  $x_i$  (t) is the state of the i-th neuron at time t,  $u_i$  (t) is the internal potential of that neuron, and is a uniform threshold. If the i-th neuron res at t, its state is  $x_i(t) = 1$ ; otherw ise,  $x_i(t) = 0$ .  $J_{ij}$  is the synaptic weight from the j-th neuron to the i-th neuron. Each element  $_{i}$  of the -th m em ory pattern = ( $_{1}$ ;  $_{2}$ ; generated independently by

$$P \text{ rob}[_{i} = 1] = 1$$
  $P \text{ rob}[_{i} = 0] = f$ : (4)

The expectation of is  $E[_i] = f$ , and thus f is considered to be the mean ring rate of the memory pattern. The memory pattern is sparse when f! 0, and this coding scheme is called sparse coding.

The synaptic weight  $J_{ij}$  follows the form of synaptic plasticity, which depends on the di erence in spike times between the i-th (post-) and j-th (pre-) neurons. The time di erence determines whether LTP or LTD is induced. This type of learning rule is called spike-tim ingdependent plasticity (STDP). The biological experim ental ndings show that LTP or LTD is induced when the di erence in the pre-and post-synaptic spike tim es falls within about 20 ms [3]. We de ne a single time step in equations (1{3) as 20 m s, and durations within 20 m s are ignored. The learning rule based on STDP conforms to this equation:

$$J_{ij} = \frac{1}{N \; f \; (l \quad \; f)} \, {\overset{X^p \quad n}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}{\underset{= \; l}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}{\underset{= \; l}{\underset{= \; l}{\overset{+ \; l}{\underset{= \; l}$$

The number of memory patterns is p = N, where de ned as a loading rate. LTP is induced when the j-th neuron resone time step before the i-th neuron, i ; = 1, while LTD is induced when the j-th neuron res one time step after the i-th neuron,  $\frac{1}{i} = \frac{1}{i} = 1$ . Since the ratio of LTP and LTD is crucial, the magnitude of LTD changes while the m agnitude of LTP and the tim e duration are  $\mbox{ xed. }_{\mbox{ }ij}$  is generated independently and obeys a Gaussian distribution with mean and variance N (; 2). Fig.1 shows the time function of STDP in our model. When  $_{ij} = 0$ , the balance between LTP and LTD is precisely maintained and then them odel is equivalent to the previous model [16]. A sequence of p m em ory patterns is stored by STDP:  $^{1}$ !  $^{2}$ ! p! 1! . In other words, is retrieved at t = 1,  $^{2}$  is retrieved at t = 2, and  $^{1}$  is retrieved at t = p + 1. There is a critical value c of the loading rate, so that the loading rate larger than  $\ \ _{\mathbb{C}}\ \ \mathrm{m}$  akes retrieval of the pattern sequence unstable. c is called a storage capacity.




FIG. 1: The time function of STDP in our model. LTP is induced when the j-th neuron resone time step before the i-th one. LTD is induced when the j-th neuron resone time step after the i-th one.  $_{\rm ij}$  follows a Gaussian distribution with mean and variance

## III. THEORY

In this section, we derive dynam ical equations that describe the retrieval properties of the network. In this paper, we consider the therm odynam ic lim it: N ! 1. The i-th neuronal internal potential u; (t) at time t can be expressed as

$$u_{i}(t) = \int_{j=1}^{X^{N}} J_{ij}x_{j}(t) = \frac{1}{N f(1 - f)} \int_{j=1}^{X^{N}} X^{p} n_{i+1} (1 + ij) \int_{i}^{1} X_{j} x_{j}(t)$$
(6)

$$= \frac{1}{N f (1 f)} \sum_{j=1}^{X^{N}} (x_{j}^{p}) (x_{j}^{+1}) = x_{j}^{1} (x_{j}^{+1}) (x_{j}^{+1}) (x_{j}^{+1}) (x_{j}^{+1}) = x_{j}^{N} (x_{j}^{p}) (x_{j}^{+1}) (x_{j}^{+1})$$

Using the periodic boundary condition of 
$$p = p = 1$$
 and  $p = p = 1$  and  $p =$ 

is given by

$$u_{i}(t) = \frac{1}{N f (1 - f)} X^{N} X^{p} (_{i}^{+1} - _{i}^{-1})_{j} x_{j}(t)$$

$$= \frac{1}{N f (1 - f)} X^{N} X^{p} (_{i}^{+1} - _{i}^{-1})_{j} x_{j}(t) \qquad (8)$$

$$= X^{p} (_{i}^{+1} - _{i}^{-1})_{m} (t)$$

$$= 1$$

$$= \frac{1}{N f (1 - f)} X^{N} X^{p} (_{i}^{-1} - _{i}^{-1})_{j=1 - 1} x_{j}^{-1} (_{i}^{-1} - _{i}^{-1})_{m} (t)$$

$$= (_{i}^{t+1} - _{i}^{t-1})_{m} (t) + X^{p} (_{i}^{+1} - _{i}^{-1})_{m} (t)$$

$$= (_{i}^{t+1} - _{i}^{t-1})_{m} (t) + X^{p} (_{i}^{+1} - _{i}^{-1})_{m} (t)$$

$$= (_{i}^{t+1} - _{i}^{t-1})_{m} (t) + (_{i}^{t+1} - _{i}^{-1})_{m} (t)$$

where m (t) is an overlap between (t) and x (t) and is given by

m (t) = 
$$\frac{1}{N f (1 f)} x^{N}_{i-1} x_{i}(t)$$
: (11)

The rst term in equation (10) is a signal term for the retrieval of the target pattern  $^{t+1}$ . The second and third terms are a cross-talk noise term that represents contributions from non-target patterns other than  $^{t+1}$  and that prevents  $^{t+1}$  from being retrieved. The third term is also a compensation term originated by a deviation from the balance between LTP and LTD of STDP. Since this term is order of N with respect to N, O(N), when 60, it diverges in the therm odynamic N 1 in it: N! 1. This means that the stored 1 in it cycle using the present learning rule (equation (5)) is unstable in the 1 in it of N! 1 when 1 0. Therefore, we will discuss the 1 0 case: 1 1 (0; 1 2).

W e derive the dynam ical equations using the m ethod of the statistical neurodynam ics [16, 20, 21]. When it is possible to store a pattern sequence, a cross-talk noise term, that is, the second and third terms in equation (10) is assumed to obey a Gaussian distribution with the average 0 and time-dependent variance  $^2$  (t) [16, 20]. We derive the recursive equations for m  $^{\rm t}$  (t) and  $^2$  (t) to investigate whether the memory pattern  $^{\rm t}$  is retrieved or not. Since m  $^{\rm t}$  (t) depends on  $^2$  (t), we derive  $^2$  (t). The dynam ical equations are derived as

$$m^{t}(t) = \frac{1}{2} \operatorname{erf}(_{0}) \frac{1}{2} \operatorname{erf}(_{1}) + \frac{f}{2} \operatorname{erf}(_{2}); \quad (12)$$

$$^{2}(t) = X^{t} \qquad Y^{a}$$

$$^{2}(a+1)C_{(a+1)} q(t \quad a) \qquad U^{2}(t \quad b+1)$$

$$^{2}(1 \quad f)^{2}q(t); \qquad (13)$$

$$U(t) = \frac{1}{2} \frac{1}{(t-1)} (1 - 2f + 2f^{2})e^{-\frac{2}{0}} + f(1 - f)(e^{-\frac{2}{1}} + e^{-\frac{2}{2}});$$
(14)  

$$q(t) = \frac{1}{2} \frac{1}{2} (1 - 2f + 2f^{2})erf(_{0}) - f(1 - f)(erf(_{1}) + erf(_{2})) :$$
(15)

where  $\operatorname{erf}(y) = \frac{2}{p^2} = \frac{R_y}{0} \exp(u^2) du$ , and  $0 = \frac{1}{p} \frac{1}{2(t \ 1)}$ ,  $0 = \frac{m \ p^{t-1} \ (t \ 1) + p}{2(t \ 1)}$ ,  $0 = \frac{m \ p^{t-1} \ (t \ 1) + p}{2(t \ 1)}$ ,  $0 = \frac{b!}{a! (b \ a)!}$  and a! is the factorial with positive integer a. The detail derivation of the dynam ical equations is shown in Appendix A.

#### IV. RESULTS

Fig 2 shows the dependence of the overlap m t (t) on the loading rate when the mean ring rate of the mem ory pattern is f = 0.1, and the threshold is = 0.52, which is optimized to maximize the storage capacity. (a) is the case at = 0.0, (b) is at = 1.0, and (c) is at = 2:0. The lines show analytical results obtained by the dynam ical equations (12{15). The upper line denotes the steady-state values of the overlap m t (t) in retrieval of the pattern sequence. m t (t) is obtained by setting the initial state of the network at the rst memory pattem:  $x(1) = {1 \choose 1}$ . Setting the initial values at  $m^{1}(1) = 1$ ,  $^{2}(1) = 2 f + \frac{^{2}f}{(1 f)^{2}}, U(1) = 0 \text{ and } q(1) = f \text{ and us-}$ ing the dynamical equations (12(15), m t (t) is obtained. W hen the overlap at the steady state is smaller than 0:5, the critical loading rate is regarded as the storage capacity  $_{\rm C}$  . The storage capacity  $_{\rm C}$  is 0:27(a), 0:178(b), and 0:087 (c). The lower line indicates the dependence of an initial critical overlap m  $_{\text{\scriptsize C}}$  on  $\,$  . The stored pattern sequence is retrievable when the initial overlap m 1 (1) is greater than the critical value m  $_{\text{\scriptsize C}}$  . The region in which m $^{1}$ (1) is larger than m $_{\text{C}}$  represents the basin of attraction for the retrieval of the pattern sequence. m c is obtained by setting the initial state of the network at 1 with additional noise. We employ the following method to add noise. 100s% of the m inority components  $(x_i(1) = 1)$  are ipped, while the same number of majority components  $(x_i(1) = 0)$  are also ipped. The initial overlap m<sup>1</sup> (1) is given as  $1 = \frac{2s}{1-f}$ . Then the mean ring rate of the network is kept equal to that of the memory pattern, f. The other initial values are equivalent to the upper line case. W hen the overlap at the steady state is smaller than 0:5, the initial overlap m 1 (1) is regarded as the initial critical overlap m  $_{\rm C}$  . The data points and error bars indicate the results of computer simulations of 11 trials with 5000 neurons: N = 5000. The results are obtained from the equations (1{5). The data points indicate median values and both ends of the error bars does 1/4 and 3/4 deviations. A discrepancy between the values of m c obtained by the computer simulations and the analytical results

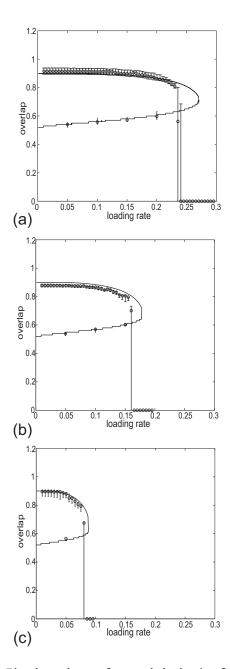


FIG. 2: The dependence of  $_{\text{C}}$  and the basin of attraction on the loading rate at f = 0.1 and = 0.52. The lower line represents the initial critical overlap and the upper line does the overlap at the steady state. The data points and the error bars show the results of computer simulation of 11 trials at N = 5000. (a): = 0.0, (b): = 1.0, (c): = 2.0.  $_{\text{C}}$  = 0.27(a), 0.178(b), 0.087(c). The basin of attraction decreases as increases.

is originated from the nite size e ect of the computer simulations [16].

Fig.3 shows the dependence of the storage capacity  $_{\rm C}$  on the standard derivation of the uctuation of LTD at f = 0:1 and = 0:52. The solid line shows the analytical results obtained by the same procedure to obtain  $_{\rm C}$  in




FIG. 3: The dependence of the storage capacity  $_{\rm C}$  on . The solid line shows the analytical results. The data points and error bars show the results of computer simulation of 10 trials at N = 5000. Both results are obtained at f = 0.1 and = 0.52. As the variance  $^2$  of the uctuation increases,  $_{\rm C}$  decreases.

Fig.2. The data points and error bars show the results of computer simulation of 10 trials at N = 5000. Them eans and standard deviations of  $_{\rm C}$  of 10 trials are plotted as the data points and the error bars, respectively. As the variance  $^2$  increases,  $_{\rm C}$  decreases. In other words, the model is robust against the inbalance between LTP and LTD of STDP. Thus, the balance does not need to be maintained precisely, but must simply be maintained on average.

Fig.4 shows an asymptotic property of  $_{\rm C}$  in a large lim it of  $^{\rm 2}$ . The solid line shows the analytical results




FIG. 4: An asymptotic property of  $_{\rm C}$  in a large lim it of  $^2$  at f = 0:1 and = 0:52. The solid line shows the analytical results while the dashed line shows  $\log_{10}$   $_{\rm C}$  =  $\log_{10}\frac{-2}{2}$  1:13.  $_{\rm C}$  converges to 0 as order of  $\frac{1}{2}$  with respect to , 0 ( $\frac{1}{2}$ ), in the large  $^2$  lim it.

obtained by the same procedure to obtain  $_{\rm C}$  in Fig.2 at f = 0:1 and  $_{\rm C}$  = 0:52 while the dashed line shows  $\log_{10}$   $_{\rm C}$  =  $\log_{10}\frac{2}{2}$  1:13. This gure indicates that  $_{\rm C}$ 

converges to 0 as order of  $\frac{1}{2}$  with respect to ,0  $(\frac{1}{2})$ , in the large  $^2$  lim it [22].

Next, we discuss the dependency of the basin of attraction on . Each region between the upper line and the lower line in Fig. 2(a),(b),(c) shows the basin of attraction at = 0.0;1.0;2.0, respectively. The basin becomes smaller as a value of increases. However, the initial critical overlap m  $_{\rm C}$  is unchanged. To introduce a threshold control scheme is known to enlarge the basin of attraction [16, 20, 23].

### V. DISCUSSION

In this paper, we investigated the impact of the imbalance between LTP and LTD of STDP on the retrieval properties of spatio-tem poral patterns, employing an associative mem ory network. We analytically investigated the retrieval properties using the statistical neurodynamics. When the uctuation of LTD is assumed to obey the Gaussian distribution with mean 0 and variance  $^2$ , the storage capacity takes a nite value even at large. This implies that the balance does not need to be maintained precisely, but must be maintained on average. This mechanism might work in the brain. Furtherm ore, the storage capacity converges to 0 as order 0  $(\frac{1}{2})$  in the large  $^2$  limit. Finally, we found that the basin of attraction becomes smaller as the uctuation of LTD increases while the initial critical overlap remains unchanged.

We found that the storage capacity takes a nite value even at large. When is larger than 1.0, LTD sometimes disappears in the learning process. The spatiotem poral patterns seem not to be retrievable. Surprisingly, even in this situation, the patterns are retrievable. This implies that the present model achieves strong robustness against the imbalance between LTP and LTD.

# APPENDIX A:DERIVATION OF DYNAM ICAL EQUATIONS BY THE STATISTICAL NEURODYNAM ICS

The detail derivation of the dynam ical equations (12 { 15) is given in this appendix. At rst, we give a sketch of the derivation. The main point in this derivation is to divide an internal potential  $\mathbf{u}_i$  (t) into two parts, a signal term for a retrieval of a target pattern and a cross-talk noise term that represents contributions from non-target patterns and prevents the target pattern from being retrieved. We evaluate the cross-talk noise term. Speci – cally, the internal potential  $\mathbf{u}_i$  (t) of i-th neuron at time t is expressed as (see equation (9))

$$= (_{i}^{t+1} \quad _{i}^{t})m^{t}(t) + X^{p} (_{i}^{t+1} \quad _{i}^{1})m (t)$$

$$\frac{1}{N f (1 f)} \sum_{j=1}^{X^{N}} x^{j} \sum_{j=1}^{1} \sum_{j=1}^{1} x_{j} (t)$$
 (A2)

= 
$$\binom{t+1}{i}$$
  $\binom{t}{i}$  )m  $t$  (t) +  $z_i$  (t); (A 3)

where  $_{i}$  =  $_{i}$  f, m (t) is the overlap between (t) and x (t) and is given by

m (t) = 
$$\frac{1}{N f(1 - f)} \sum_{i=1}^{X^{N}} x_{i}(t);$$
 (A 4)

and

$$z_{i}(t) = \frac{X^{p}}{6t} (x_{i}^{+1} x_{i}^{-1}) m (t)$$

$$\frac{1}{N f (1 f)} \frac{X^{N} X^{p}}{x_{j}^{+1} x_{j}^{-1}} (t) : (A 5)$$

The rst term in equation (A 3) is the signal term and the second term is the cross-talk noise term . Since  $\mathbf{x}_i$  (t) in equation (A 4) depends on  $_i$ , the distribution of the cross-talk noise term  $z_i$  (t) is unknown. The dependence on  $_i$  is extracted from  $\mathbf{x}_i$  (t) using the Taylor expansion (see equation (A 10)). In the therm odynam ic limit, N ! 1 ,m (t) tends to be determ inistic. Therefore,  $\mathbf{x}_i^f$  (t), which denotes that it does not include  $_i$ , is independent of  $_i$ . This enables us to assume that the cross-talk noise term  $z_i$  (t) obeys a G aussian distribution with mean 0 and variance  $^2$  [16, 20]. Since the distribution of the cross-talk noise term is known, the recursive equation of the overlap is obtained (see equation (A 35)).

To extract the dependence on  $_i$  from  $x_i$  (t), the state of the i-th neuron at time t + 1 is transform ed:

The rst term in the function F ( ) of equation A(6) is transformed using the periodic boundary condition of  $_{i}^{p+1} = _{i}^{1}$  and  $_{i}^{0} = _{i}^{p}$ :

The second term in the function F() of equation A(6) is transformed using the periodic boundary condition:

$$\frac{1}{N f (1 f)} \sum_{j=1}^{X^{N}} X^{p} \prod_{ij=1}^{1} \prod_{j=1}^{1} x_{j} (t)$$

$$= \frac{1}{N f (1 f)} \sum_{j=1}^{X^{N}} X^{p} \prod_{ij=1}^{0} \prod_{j=1}^{0} \sum_{j=1}^{0} (t) \prod_{j=1}^{1} x_{j} (t) : (A 8)$$

To extract the dependency on  $_{i}$  from  $x_{i}$  (t + 1), using the equation (A7) and (A8), x (t + 1) is divided into two parts, the terms which include  $_{i}$  and the terms which do not include  $_{i}$ :

At time t, the pattern  $^{\rm t}$  is designed to be retrieved. Therefore, we can assume that m  $^{\rm t}$  (t) is order of 1 w ith respect to N , m  $^{\rm t}$  (t) 0 (1), and m (t) (  $\frac{\rm t}{\rm p}$  t) is order of 1= N w ith respect to N , m (t) 0 (1= N). Since m p(t) 0 (1= N), m  $^{\rm t}$  (t) and m  $^{\rm t1}$  (t) are order of 1= N w ith respect to N . Since m  $^{\rm t1}$  (t) 0 (1= N) and  $_{\rm ij}$  0 (1), the second term in equation (A 9) can be considered to be order of 1= N w ith respect to N . In the therm odynam ic lim it, N ! 1 , the rst and the second term s in equation (A 9) are small. U sing the Taylor expansion up to the rst order of  $x_i$  (t + 1),  $x_i$  (t + 1) is transform ed:

$$x_{i}(t+1) = x_{i}^{()}(t+1) + u_{i}^{f}(t)x_{i}^{0()}(t+1);$$
 (A 10)

where  $x_i^{()}(t+1)$  is independent of  $x_i^{()}(t+1)$  is dierential of  $x_i^{()}(t+1)$ , and

We assume that the function F() is differentiable. This assumption is valid since the average of F() over a G aussian noise term will be taken in a later step (see equation (A 34)). For G t, the overlap G (t) is expressed as

$$m (t) = \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} (_{i} f) x_{i}(t) = \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{()}(t) + u_{i}^{f g}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{()}(t) + \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} (_{i})^{2} m^{-1}(t 1) m^{+1}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{2 N^{N}} x_{i}^{N} \sum_{i=1}^{N^{N}} (_{i})^{2} m^{-1}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{2 N^{N}} x_{i}^{N} \sum_{i=1}^{N^{N}} (_{i})^{2} m^{-1}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N} x_{i}^{N} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{0()}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{N^{N}} x_{i}^{N}(t 1) x_{i}^{N}(t 1) x_{i}^{N}(t 1)$$

If the averages over  $_{j}$  (  $\in$  t) and  $_{ji}$  (  $\in$  t) are taken in the right-hand side of equation (A 15), the third term vanishes since E [  $_{ji}$ ] = 0. Since the third term including  $x_{j}$  (t 1) depends on both  $_{j}$  and  $_{ji}$ ,  $_{j}$  and  $_{ji}$  are extracted from  $x_{j}$  (t) before the averages are taken:

$$x_{j}(t+1) = F \int_{j}^{m} m^{-1}(t) m^{+1}(t) \frac{1}{N f(1 f)} \frac{X^{N}}{N f(1 f)} \int_{k \in i}^{+1} x_{k}(t) \frac{1}{N f(1 f)} \frac{X^{P}}{N f(1 f)} \int_{i}^{+1} x_{i}(t) dt$$

$$\frac{1}{N f(1 f)} \int_{ji j i}^{+1} x_{i}(t) dt + \frac{X^{P}}{N f(1 f)} \int_{k \in i}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) dt + \frac{1}{N f(1 f)} \int_{k f(1 f)}^{+1} x_{i}(t) d$$

$$= x_{i}^{()(j_{i})}(t+1) + u_{i}^{f};_{j_{i}}^{j_{i}}(t)x_{i}^{0()(j_{i})}(t+1);$$
(A 17)

where  $x_{j}^{0()()_{ji}}$  (t), which is independent of both  $_{j}$  (t) and  $_{ji}$ , is the dierential of  $x_{j}^{()()_{ji}}$  (t) and

$$u_{j}^{f;j_{1}g}(t) = \int_{j}^{m} m^{-1}(t) m^{+1}(t) \frac{1}{N f(1 - f)} \sum_{k \in i}^{X^{N}} j_{k j k}^{+1} x_{k}(t) \frac{1}{N f(1 - f)} \sum_{i=j}^{X^{P}} j_{i j i}^{+1} x_{i}(t)$$

$$\frac{1}{N f(1 - f)} j_{i j i}^{+1} x_{i}(t); \tag{A18}$$

$$x_{j}^{(\ )(\ ji)}(t+1) = F(u_{j}(t) u_{j}^{f; jig}(t)); (A 19)$$
  
 $x_{j}^{((\ )(\ ji)}(t+1) = F^{(0)}(u_{j}(t) u_{j}^{f; jig}(t)); (A 20)$ 

The rst, second and third term p in the right-hand side of equation (A18) is order of 1=N with respect to N and the fourth term is order of 1=N with respect to N. In the therm odynam ic lim it, N! 1 ,  $u_j^{f}$ ;  $j^{ij}$  (t) is small and equation (A16) equals equation (A17). Substituting equation (A17) into the right-hand side of equation (A15) and averaging the resultant expressions over j and  $j^{ij}$  and using E [ $j^{ij}$ ] = 0 yield to the following equation for m (t) (f):

$$m (t) = \frac{1}{N f (1 f)} \sum_{i=1}^{X^{N}} x_{i}^{(i)}(t)$$

$$+ \frac{1}{N f (1 f)} \sum_{i=1}^{X^{N}} (x_{i})^{2} m^{-1} (t 1)$$

$$m^{+1} (t 1) x_{i}^{0(i)}(t)$$

$$= \frac{1}{N f (1 f)} \sum_{i=1}^{X^{N}} x_{i}^{(i)}(t)$$
(A 21)

+U (t) m 
$$^{1}$$
 (t  $^{1}$ ) m  $^{+1}$  (t  $^{1}$ ) ; (A 22)

where U (t) =  $\frac{1}{N}$   $\sum_{i=1}^{P} x_i^{0(\cdot)}$  (t). Substituting equation (A 22) into equation (A 2) yields

$$u_{i}(t) = \begin{pmatrix} t^{+1} & t^{-1} & 0 & t^{-1} \\ 1 & X^{N} & X^{P} & 1 \\ N & f & (1 - f) \end{pmatrix}_{j=1-6} X^{N} X^{P} \begin{pmatrix} t^{+1} & t^{-1} & t^{-1} \\ 1 & 1 & 1 \end{pmatrix}_{j} X^{(-)}_{j}(t)$$

$$+ \begin{pmatrix} X^{P} & n \\ U & (t) & t^{+1} & t^{-1} \\ 6t & 2 & t^{-1} & t^{-1} & (t-1) + t^{-1} & t^{-1} & (t-1) \end{pmatrix}_{6t}$$

$$- 2 & t^{-1} & t^{-1} & (t-1) + t^{-1} & t^{-1} & (t-1) \\ \hline - 1 & X^{N} & X^{P} & t^{-1} & t^{-1} & t^{-1} & (t-1) \end{pmatrix}_{j=1-8} X^{N} X^{P}$$

$$- 1 & t^{-1} & t^{-1}$$

Substituting equation (A17) into the last term of equation (A23) yields the following expression for  $u_i$  (t):

$$u_{i}(t) = \left( \begin{smallmatrix} t+1 & t & 1 \\ i & 1 \end{smallmatrix} \right) m^{t}(t) + \frac{1}{N f (1 - f)} \sum_{j=1 - 6 t}^{X^{N}} \left( \begin{smallmatrix} t+1 & i & 1 \\ i & 1 \end{smallmatrix} \right) {}_{j} x_{j}^{()}(t)$$

$$+ \frac{X^{p}}{U} (t)^{n} {}_{i}^{+1} m^{-1}(t - 1) + 2 {}_{i}^{-1} m^{-1}(t - 1) + i {}_{i}^{-1} m^{-1}(t - 1) + i {}_{i}^{-1} m^{-1}(t - 1)$$

$$- \frac{1}{N f (1 - f)} \sum_{j=1 - 1}^{X^{N}} X^{p} {}_{ij}^{-1} {}_{i}^{-1} {}_{j}^{-1} x_{j}^{()}(t) + u_{j}^{f} {}_{i}^{j} {}_{ij}^{g}(t - 1) x_{j}^{0()}(t) + 0$$

$$= \left( {}_{i}^{t+1} {}_{i}^{-1} \right) m^{t}(t) + \frac{1}{N f (1 - f)} \sum_{j=1 - 6 t}^{X^{N}} X^{p} {}_{j}^{e}(t - 1) + i {}_{i}^{-1} m^{-1}(t - 1) + i {}_{i}^{-1} m^{-1$$

$$\frac{1}{N f (1 f)} \frac{x^{N}}{j=1} \frac{x^{p}}{i} \frac{1}{i} \frac{1}{j j} m^{-1} (t 1) m^{+1} (t 1) x_{j}^{0(\cdot)(\cdot_{ji})} (t)$$

$$+ \frac{1}{N f (1 f)} \frac{2 x^{N}}{j=1} x_{j}^{p} \frac{1}{i} \frac{1}{j} \frac{x^{N}}{j k j} \frac{1}{k} x_{k} (t 1) x_{j}^{0(\cdot)(\cdot_{ji})} (t)$$

$$+ \frac{1}{N f (1 f)} \frac{2 x^{N}}{j=1} x_{j}^{p} \frac{1}{i} \frac{1}{j} \frac{x^{p}}{j i j} \frac{1}{i} x_{k} (t 1) x_{j}^{0(\cdot)(\cdot_{ji})} (t)$$

$$+ \frac{1}{N f (1 f)} \frac{2 x^{N}}{j=1} x_{j}^{p} \frac{1}{i} \frac{1}{j} \frac{x^{p}}{j i j} \frac{1}{i} x_{k} (t 1) x_{j}^{0(\cdot)(\cdot_{ji})} (t)$$

$$+ \frac{1}{N f (1 f)} \frac{2 x^{N}}{j=1} x_{j}^{p} \frac{1}{i} \frac{1}{j} \frac{1}{j j i j} \frac{1}{i} x_{k} (t 1) x_{j}^{0(\cdot)(\cdot_{ji})} (t) : \qquad (A 25)$$

The fth, sixth, seventh and eighth terms vanish since E [  $_{ij}$ ] = 0, and this yields

$$u_{i}(t) = \begin{pmatrix} t+1 & t^{1} \\ i & 1 \end{pmatrix} m^{t}(t) + \frac{1}{N f(1 - f)} X^{N} X^{p} \begin{pmatrix} t+1 & 1 \\ i & 1 \end{pmatrix} X^{(1)}_{j} X^{(1)}_{j}(t)$$

$$+ X^{p} & n \\ + U(t) & t^{1} m^{-1}(t - 1) & 2 & 1 m^{-1}(t - 1) + 1 & 1 m^{-1}(t - 1)$$

$$= \frac{1}{N f(1 - f)} X^{N} X^{p} & \frac{1}{j^{2} 1 - 1} X^{(1)}_{j}(t)$$

$$= \begin{pmatrix} t+1 & t^{1} \\ t & t^{1} \end{pmatrix} m^{t}(t) + z_{i}(t);$$
(A 26)

w here

$$z_{i}(t) = \frac{1}{N f (1 - f)} x_{j=1 - 6 t}^{N N X^{p}} (x_{i}^{+1} x_{j}^{-1}) x_{j}^{(n)}(t) + x_{j}^{p} x_{j}^{n}(t) + x_{j}^{p} x_{j}^{n}(t) + x_{j}^{p} x_{j}^{n}(t) + x_{j}^{p} x_{j}^{n}(t) + x_{j}^{n} x_{j}^{n}(t)$$

 $z_i$  (t) is the cross-talk noise term . We assume that the cross-talk noise obeys a Gaussian distribution with mean 0 and time-dependent variance  $z_i$  (t): E [ $z_i$  (t)] = 0; E [ $(z_i$  (t)) $z_i$ ] =  $z_i$  (t) [16, 20]. The rst and second term of  $z_i$  (t) are the same cross-talk noise term as that of our previous work [16]. The square of  $z_i$  (t) is given by

$$fz_{i}(t)g^{2} = \frac{1}{N f (1 - f)} \int_{j=1 - 6 t}^{2 N N} X^{p} \int_{j=1 - 6 t}^{i+1} \int_{i}^{1} \int_{j}^{2} \left( \int_{i}^{i+1} \int_{i}^{1} \int_{i}^{2} \left( \int_{i}^{i+1} \int_{i}^{1} \int_{i}^{2} \left( \int_{i}^{i+1} \int_{i}^{1} \int_{i}^{2} \int_{i}^{2} \left( \int_{i}^{2} \left( \int_{i}^{2} \int_{i}^{2} \left( \int_{i}^{2} \left( \int_{i}^{2} \int_{i}^{2} \left( \int_{i}^{2} \int_{i}^{2} \left( \int_{i}^{2} \left( \int_{i}^{2} \left( \int_{i}^{2} \int_{i}^{2} \left( \int_{i}^{2}$$

$$+2\frac{1}{N f (1 f)} \sum_{j=1}^{2} \sum_{i=1}^{N} \sum_{j=1}^{N} \sum_{i=1}^{N} \sum_{i=1}^{N} \sum_{i=1}^{N} \sum_{j=1}^{N} \sum_{i=1}^{N} \sum_{j=1}^{N$$

where p = N, q(t) =  $\frac{1}{N}$  $\frac{P}{i=1}$  $\frac{N}{x_i^{()}}$  $\frac{O_2}{x_i^{()}}$ ,  $_bC_a$  =  $\frac{b!}{a!(b|a)!}$ , a! is the factorial with positive integer a and E [ $(i_{jj})^2$ ] =  $(i_{jj})^2$  = 0, the fourth, fith and sixth term s in equation (A 29) vanish. We applied the relationship  $(i_{a=0})^2$  =  $(i_{b})^2$  =  $(i_{b})^2$  in this derivation. Since E [ $(i_{j})^2$ ] = 0, the variance  $(i_{b})^2$  (t) is equal to E [ $(i_{b})^2$ ]. We then get the recursive equation for  $(i_{b})^2$ 

$$\begin{array}{l} ^{2}\text{ (t) } = \begin{array}{l} X^{t} & Y^{a} \\ & _{2\,(a+\,1)}C_{\,(a+\,1)} & q\,(t-a) & Y^{a} \\ & _{a=\,0} & & _{b=\,1} \\ & + \frac{2}{\,(1-f\,)^{2}}q\,(t)\,; \end{array}$$

The overlap between the state x (t) and the retrieval pattern  $^{t}$  is given by

$$m^{t}(t) = \frac{1}{N f(1 - f)} \sum_{i=1}^{X^{N}} {t \choose i} f(x_{i}(t))$$

$$= \frac{1}{N f(1 - f)} \sum_{i=1}^{X^{N}} {t \choose i} f(x_{i}(t))$$

$$F (i^{t}_{i}) \sum_{i=1}^{t^{2}} m^{t}(t - 1) + z_{i}(t - 1) : (A 33)$$

Since  $u_i$  (t) is independent and identical distribution (i.i.d.), by the law of large numbers, the average over i can be replaced by an average over the m em ory patterns and the G aussian noise term  $z = N \ (0; ^2)$ . Then, the recursive equation for the overlap m  $^t$  (t) is transform ed:

$$m^{t}(t) = \frac{1}{f(1 + f)} \underbrace{\frac{1}{f(2 + f)}}_{p} \underbrace{\frac{Z}{2}}_{1} dz e^{\frac{z^{2}}{2}} \underbrace{\frac{DD}{2}}_{2} (^{t} + f)$$

$$EE$$

$$F (^{t} t^{2})m^{t}(t + 1) + z$$

$$= \frac{1}{f(1 + f)} \underbrace{\frac{Z}{2}}_{1} dz e^{\frac{z^{2}}{2}} \underbrace{\frac{DD}{2}}_{2} (^{t} + f)$$

$$^{\text{EE}}$$
 F (  $^{\text{t}}$   $^{\text{t}}$  )m  $^{\text{t}}$  (t 1) + (t 1)z (A 34)

= 
$$\frac{1 - 2f}{2}$$
erf(<sub>0</sub>)  $\frac{1 - f}{2}$ erf(<sub>1</sub>) +  $\frac{f}{2}$ erf(<sub>2</sub>); (A 35)

where z=z= ,  $erf(y)=\frac{P^2}{2}\frac{R_y}{0}\exp(u^2)du$ , and  $_0=\frac{P^2}{2(t-1)}$ ,  $_1=\frac{m_p^{t-1}(t-1)+}{2(t-1)}$ ,  $_2=\frac{m_p^{t-1}(t-1)+}{2(t-1)}$ , and the ii denotes an average over the memory patterm . Since  $x_i^0(t)=x_i^{0(-)}(t)=0$  ( $\frac{1}{N}$ ) and the them odynam ic limit, N ! 1 , is considered,  $x_i^{0(-)}(t)=x_i^0(t)$ . U sing this relationship, we derive U (t):

$$U(t) = \frac{1}{N} \sum_{i=1}^{N} x_{i}^{0(\cdot)}(t) = \frac{1}{N} \sum_{i=1}^{N} x_{i}^{0}(t) \qquad (A 36)$$

$$= \frac{1}{f(1 + f)} \frac{1}{2} \sum_{i=1}^{Z-1} dze^{\frac{z^{2}}{2}}$$

$$= \frac{1}{f(1 + f)} \frac{1}{2} \sum_{i=1}^{Z-1} dze^{\frac{z^{2}}{2}}$$

$$= \frac{1}{f(1 + f)} \frac{1}{2} \sum_{i=1}^{Z-1} dze^{\frac{z^{2}}{2}} z$$

$$= \frac{1}{f(1 + f)} \frac{1}{2} \sum_{i=1}^{Z-1} dze^{\frac{z^{2}}{2}} z$$

$$= \frac{1}{f(1 + f)} \sum_$$

Since  $x_i$  (t)  $x_i^{()}$  (t)  $x_i^{()}$  (t)  $x_i^{()}$  and  $x_i^{()}$  (t) =  $x_i$  (t). Using this relationship, we derive  $x_i^{()}$  (t):

$$q(t) = \frac{1}{N} \sum_{i=1}^{N} fx_i^{(i)}(t)g^2 = \frac{1}{N} \sum_{i=1}^{N} fx_i(t)g^2$$
 (A 40)

$$= \frac{1}{f(1 + f)} \frac{1}{p - 2} \int_{1}^{2} dz e^{-\frac{z^{2}}{2}} dz = \frac{1}{p - 2} \int_{1}^{2} dz e^{-\frac{z^{2}}{2}} dz = \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + 2f^{2}) erf(0) f(1 + f) (erf(1) + erf(2)) :$$

$$= \frac{1}{p - 2} \int_{0}^{2} (1 + f^{2}) erf(0) f(1 + f^{2}) (erf(0) + f^{2}) (erf(0$$

- G.Q.Bi and M.M.Poo, Journal of Neuroscience 18, 10464 (1998).
- [2] H.Markram, J.Lubke, M. Frotscher, and B. Sakmann, Science 275, 213 (1997).
- [3] L. I. Zhang, H. W. Tao, C. E. Holt, W. A. Harris, and M. M. Poo, Nature 395, 37 (1998).
- [4] S. Song, K.D. Miller, and L.F. Abbott, Nature Neuro-science 3, 919 (2000).
- [5] L. F. Abbott and S. Song, in Advances in Neural Information Processing Systems, edited by M. S. Keams, S. Solla, and D. Cohn (Cambridge, MAMIT Press, 1999), vol. 11, pp. 69{75.
- [6] J. Rubin, D. D. Lee, and H. Som polinsky, Physical Review Letters 86, 364 (2001).
- [7] N. Levy, D. Hom, I.M eilijon, and E. Ruppin, Nerural Networks 14, 815 (2001).
- [8] M.C.W. van Rossum, G.Q.Bi, and G.G. Turrigiano, Journal of Neuroscience 20, 8812 (2001).
- [9] S. Song and L.F. Abbott, Neuron 32, 339 (2001).
- [10] W. Gerstner, R. Kempter, J. L. van Hemmen, and H.Wagner, Nature 383, 76 (1996).
- [11] R.Kempter, W.Gerstner, and J.L.van Hemmen, Physical Review E 59, 4498 (1999).
- [12] W .M .K istler and J.L. van H em m en, N eural C om putation 12,385 (2000).
- [13] R.P.N.Rao and T.J.Sejnowski, in Advances in Neural

- Inform ation Processing Systems, edited by S.A. Solla, T.K. Leen, and K.R. Muller (Cambridge, MAM IT Press, 2000), vol. 12, pp. 164 (170.
- [14] P. Munro and G. Hernandez, in Advances in Neural Information Processing Systems, edited by S. A. Solla, T. K. Leen, and K. R. Muller (Cambridge, MA MIT Press, 2000), vol. 12, pp. 150{156.
- [15] M . Yoshioka, Physical Review E 65, 011903 (2002).
- [16] N. M atsum oto and M. O kada, Neural Computation 14, 2883 (2002), in Advances in Neural Information Processing Systems, edited by T.G. Dietterich, S. Becker and Z.G hahramani (Cambridge, MAMIT Press, 2002), vol. 14,245{252.
- [17] A. Herz, B. Sulzer, R. Kuhn, and J. L. van Hemmen, Biological Cybernetics 60, 457 (1989).
- [18] W .G erstner, R.R itz, and J.L. van Hemmen, Biological Cybernetic 69, 503 (1993).
- [19] L.F. Abbott and K. I. Blum, Cerebral Cortex 6, 406 (1996).
- [20] M . O kada, Neural Networks 9, 1429 (1996).
- [21] S.Am ari and K.M aginu, Neural Networks 1, 63 (1988).
- [22] K. Mimura, T. Kimoto, and M. Okada, condmat/0207545.
- [23] K. K itano and T. A oyagi, Journal of Physics A: M athematical and General 31, L613 (1998).