Interchain versus intrachain hole transm ission through desoxyribonucleic acid m olecular w ires

Eric R. Bittner

D epartm ent of C hem istry and C enter for M aterials C hem istry U niversity of H ouston H ouston, TX 77204 (D ated: A pril 14, 2024)

W e present a m ethodology for com puting the current-voltage response of a m olecular w ire w ithin the Landauer-Buttiker form alism based upon transforming the cummulative transm ission probability into an eigenvalue problem. The m ethod is extremely simple to apply since does not involve construction of the m olecular G reens function, and hence avoids the use of complex integration contours to avoid poles. W e use thism ethod to study the e ect of base-pair sequence on the conductivity of holes in DNA chains containing A -T bridges between guanine chains. Our results indicate that sequence plays a substantial role in ballistic transport via tunneling resonances tuned by sequence and interchain interactions. W e also nd that ballistic transport is dom inated by intrachain transport and that hole transm ission is insensitive to interchain uctuations.

I. IN TRODUCTION

A dvances in synthetic technique and nano-scale device fabrication have facilitated the creation of prototypical electronic logic components in which the length scale of the device is on the order of the de Broglie wavelength of an electron. The prospect of using such \m olecular electronic" components in technological applications is a strong driving force in the emerging science and engineering of nanotechnology. The real prom ise of nanotechnology relies upon on our ability to predictably m anipulate m atter on the m olecular length scale. In particular, for m olecular electronic m aterials, the goal is to be able to ne tune the quantum mechanical energy states so that the properties of the individual quantum states is expressed whatever macroscopic device we are trying to engineering. The challenge here is then to build the interconnects between the individual molecules and the \outside world" so that one can reliably address and access the molecular-scale components.

The sequence dependence of charge transport in DNA is a topic of considerable interest from both experimental and theoretical view points. From a design standpoint, DNA has a number of desirable properties. It possess a high degree of of site speci c binding between single strands of DNA and its related self-assem bly properties. Furtherm ore, one can synthesize essentially any sequence desired and hence potentially tune its properties in a controllable way. Such characteristics have m ade DNA an ideal candidate for incorporation into molecular scale electronic devices. W ith such motivation, a num ber of studies of the charge-transport properties of DNA have been performed [1, 2, 3, 4, 5, 6, 7, 8] and there is an emerging consensus regarding the mechanism for single-electron transport in DNA chains. [9] However, the DNA's intrinsic conductivity remains highly controversial. Depending upon the experiment, DNA is a.) an insulator at room tem perture [10, 11, 12, 13], b.) a wideband gap sem iconductor at all tem peratures [14, 15], c.) 0 hm ic at room tem perature and an insulator at low tem -

pertures [15, 16, 17, 18, 19, 20, 21], or d.) m etallic down to low tempertures [22] with induced superconductivity. A recent review by Endres, Cox, and Singh nicely sum – m arizes these varied experiments. [23]

A number of studies have been performed at various levels of theory with the aim of computing the currentvoltage (IV) response of a molecular wire. [24, 25, 26, 27, 28, 29, 31, 32, 33, 33, 34, 35, 36, 37, 38, 39] The studies di er widely in terms of the level of treatment of the electronic structure, the coupling between the molecule and the sem i-in nite leads, and the change of electrostatic potential due to bias across the system. B oth rst principles and sem i-em pirical treatments have been used, with the form er being restricted to smaller scale system s.

We consider the case where the term inal G's and G C pairs are anchored to opposing sem i-in nite continua corresponding to the m etal contacts. Sim ilar m odels have been considered by Jortner and Bixon [4, 8] considering the canonical transfer rate from G_i to G_f separated by (T A)_n bridges. Here, we consider the microcanonical transmission probability at a given scattering energy, T (E). From this we can compute the transmission current as a function of applied voltage bias via [34, 35, 36, 37, 38, 39, 40, 41]

$$I(V) = \frac{2e}{h}^{2}$$
 T(E;V)(f_L(E) V=2) + f_R(E + V=2))dE(1)

where $f_{L,R}$ are the Ferm i distribution functions for the left and right hand electrodes and T (E;V) is the transmission probability at a given energy E and applied voltage bias V. We exam ine how permuting base-pairs changes the transmission probabilities and hence the current-voltage response. A side from di erences in parameterization of the models, the results presented herein parallel those of Roche et al. who considered the the scaling behavior of the intrinsic conductivity of DNA due to length and sequence correlations. [42, 43] Here we com pare intra-vs. interchain hole transport whereas the work by Roche et al considered considered the DNA strand as a single quasi-one dimensional strand.




FIG.1: Intrachain and interchain coupling pathways for hole transport in DNA sequences considered. Solid connecting lines correspond to intrachain hopping matrix-elements and dashed lined correspond to non-zero interchain hopping matrix elements.

Here present a simple approach for embedding a generic quantum chem ical problem into a scattering calculation for the purposes of computing the currentvoltage response of molecular wire. Our approach uses a idea originally developed by M anthe and M iller for computing the canonical therm al rate constant for bimolecular reactions in reactive scattering.[44] The original idea was to apply absorbing boundary conditions about the transition state and use these to arti cially in pose the correct boundary conditions on the G reens functions used to construct the transm ission matrix directly, thus, avoiding the explicit construction of the scattering m atrix. In the case at hand, we impose absorbing boundary conditions through the use of a complex selfenergy term for atoms in our system in direct contact with sem i-in nite leads.

II. HOLE TRANSM ISSION THROUGH MODEL DNA SEQUENCES

A. Tight-binding model

In what follows, we consider the bridging m olecule to be a single DNA strand with m atched nucleotide pairs attached to the left and right m etal clusters at the term inal sites as shown schem atically in Fig.2. Guanine, G, has the lowest oxidation potential of the four nucleotides and we consider the case where an injected hole travels along the DNA chain hopping on the sites containing G.

As the hole propagates along the chain, sites containing A-T pairs act as potential barrier between guanine sites that must be overcom e by quantum mechanical tunneling. Between guanine sites, hole transfer is taken to be e ectively barrierless with no net change in free energy as the hole hops from G_n to G_{n-1} . Since scattering dynam ics is dom inated entirely by what happens when the particle encounters a potential change, the term inal G units can be considered to be e ective sites linking a short seqm ent containing (T A) bridges to the asymptotic region. W hen there is a single barrier in for the hole, the hole can tunnel through the barrier and be transmitted. If there are multiple barriers, there is the possibility of resonant tunneling through quasi-bound hole-states on the chain. These resonant states will appear as discrete peaks in the transm ission probability as a function of energy. Loosely speaking, each quasi-bound state corresponds to a particular single-particle eigenstate delocalized over the entire chain.

For this consider a simple Huckel chain connected to left and right electrodes at the left and right most sites:

$$H_{m} = \int_{j}^{X} c_{j}^{v} c_{j} + \int_{ij}^{x} t_{ij}^{(m)} (c_{i}^{v} c_{j} + c_{j}^{v} c_{i})$$
(2)

where $t_{ij}^{(m)}$ is the hopping integral, c_j^v and c_j are ferm ion operators which create or rem ove a hole from the jth site, and ${}_{j}^{(m)}$ the site energy. For m etal contacts, we constructed two 5 5 5 sim ple cubic lattices each located at the ends of the molecular chain. This we do to insure that the density of states of the contacts is properly accounted for. The DNA sequence itself was connect to the center of the opposing faces of the left and right clusters. The cluster H am iltonians were taken to be tight-binding with

$$H_{m} = \sum_{\substack{c;j \\ j \\ j}}^{X} \sum_{\substack{c;j \\ j \\ i \in j}}^{Y} \sum_{\substack{c \\ j \\ i \in j}}^{X} t_{jj}^{(c)} (b_{j}^{y} b_{j} + b_{j}^{y} b_{j})$$
(3)

where the hopping integral couples nearest neighbor sites. F inally, the clusters and DNA strands were connected via

$$V_{Lmc} = t^{mc} (b_1 c_j^{Y} + b_1^{Y} c_j)$$
 (4)

$$V_{Rmc} = t^{mc} (b_r c_k^{y} + b_r^{y} c_k)$$
 (5)

where the subscripts indicate the connected sites between the bridging DNA strand and the contact.

The various 4-base-pair chains considered here are depicted in Fig. 1. The dashed lines between chains the indicate non-zero o -diagonal transfer integrals between sites on opposing chains. Each nucleotide site has associated with it a hole-wavefunction jii, a site energy, "i and a transfer integral $t_{ij}^{(m)}$ to the other sites in the sequence. Since we are dealing with a tight-binding model, connectivity between sites plays a central role in determ ining the energetics of the system . We consider the following general scheme: For intrachain transport, hopping occurs between nearest neighboring pairs. For interchain hopping, we assume that the hole on the nth unit can hop




FIG. 2: Types of electrode-DNA -electrode contacts considered herein. In the last case, com plem entary strands are connected to the opposing electrodes.

to an unit on the other chain one site removed, n 1. Furthermore, we assume that interchain hops can occur between units of the same type,

orbetween G A⁰ and A

term
$$t_{j}^{(m)}$$

 $G_n \ A_{n-1}^{0}$ (0.021eV) (7)
 $A_n \ T_{n-1}^{0}$ (0.016eV)

(m)

T⁰ interchain neighbors

The logic behind this scheme is that there is better overlap between interchain neighbors displaced by one step than those directly adjacent. This allows relatively facile hopping to occur between neighboring interchain pairs. This scheme has been veri ed via quantum chemical calculations by Voityuk [5] and the param eters for our model we take from a recent study by Lakhno, Sultanov, and Pettitt[1] who considered a com bined hopping/super-exchange model for com puting hole-transfer rates through such model chains. The values of the interchain hopping terms and remaining param eters are available as supplem entary material. Since all of hopping terms are positive, these can be considered as barriers for the delocalization of the hole over connected units.

B. Embedding system in continuum

To connect the cluster-DNA-cluster system to a continuum, we consider the system as if it were embedded in between two sem i-in nite continua acting as reservoirs. Once we assume this, we can partition the state space of the total system into three domains, $Q_{\rm L}$ and $Q_{\rm R}$ which span the states of the left and right electrodes and P which spans the electronic states of the bridging DNA m olecule. Thus, the full H am iltonian has the structure

where the diagonal term s are the H am iltonians for the uncoupled subsystems and $V_{m \; L}$ and $V_{m \; R}$ are the couplings between the DNA and the left and right electrodes. There is considerable ambiguity in how this partitioning can be constructed since the m etal contacts and the DNA bridge are in intim ate contact. Here, we take a som ew hat middle ground and de ne our partition between system and reservoir by including the inner three layers of atom s in the contacts in the \m olecular" subspace in order to properly include the surface density of states and the electronic interaction between the DNA and surface in our calculations. Once we have made this partitioning, we can use the Schwinger-Keldysh form alism [45] to derive the self-energy operators, $_{\rm L}$ and $_{\rm R}$, which embed the molecular sub-space into the continuum. As a result, the Greens function for quantum particle moving through the molecular subspace is

$$G(E) = (E H + L + R)^{\perp}$$
: (9)

Note that in general $_{\rm L}$ and $_{\rm R}$ are complex non-local operators which depend upon the scattering energy, E ,

$$m_{m m \circ} = \frac{X}{k} \frac{V_{m k} V_{km \circ}}{E_{k} + i}$$
(10)

Here, $V_{m,k}$ is the coupling between the chain and the contact and the sum is over the energy eigenvalues $_k$ of the contacts.[45] The i in the denom inator insures that the proper retarded scattering boundary conditions are enforced.

W ritten in tight-binding site-representation, they can be written in a local form

$$L_{in} = i_{n}(E) + i_{n}(E)$$

where (E) shifts the site energy of the nth site. $_n$ (E) has the e ect of acting as an absorbing potential for the scattering wave function. This insures that the scattering wave function obeys the proper asym ptotic boundary conditions as we move away from the scattering region.

We assume that the absorbing boundary conditions can be constructed as local self-energy terms within the subspace of the clusters by setting the site energy of any atom located beyond a given cut-o radius from the point of contact between the bridge and the cluster to be com plex

with = 0.2eV. In the examples that follow, we set the cut-o radius such that at least two atom ic layers of the contact cluster were inside the cut-o radius and two layers were outside the cut-o. This provided a reasonable comprom ise between having enough atom s in the cluster to represent the density of states of a simple cubic continuum, and provide a reasonable absorbing boundary condition region for the scattering wave functions.

C. Computing Transm ission and Current

To com pute transm ission and current though the DNA strand, we use the Landauer-Buttiker form ula for relating the current, I(V) to the transm ission probability, T (E; V), which may depend upon the applied bias, V,

$$I(V) = \frac{2e}{h}^{L} T(E;V)(f_{L}(E = V=2) + f_{R}(E + V=2))dE(11)$$

where $f_{L,R}$ are the Ferm i distribution functions for the left and right hand electrodes. The transm ission probability is m icrocanonical rate for an electron injected on one end of the chain to leave on the other end as given by the Caroli equation, [44, 45, 46, 47]

$$T(E) = 4Tr _{L}G_{r}^{y}(E) _{R}G_{r}(E) ;$$
 (12)

where $_{L,R}$ are the imaginary parts of the left and right self-energies describing the coupling of the molecular wire to the left and right hand continua. Finally, G_r is the reduced G reens function describing hole propagation through the bridging region

$$G_{r}(E) = (E H +)^{-1};$$
 (13)

where H is the molecular H am iltonian with = L + R being the self-energy operator of the hole on in the bridge.

W e can also consider I (V) in terms of the number of modes contributing to the current $\left[38\right]$

$$I = \frac{2e}{h}M(F^{+} F)$$
(14)

where F are the potentials for the incoming and outgoing holes and M is the number of modes. We can generalize this by letting the trace in T (E) be the sum over the probability that a given mode will contribute to the current at a given energy,

$$T(E) = \sum_{n}^{X} p_n(E) = Tr(P):$$
 (15)

Since the trace of a matrix is invariant to representation, we can construct the probability matrix, [44]

$$P(E) = 4 {}_{L}^{1=2}G^{Y}(E) {}_{R}G(E) {}_{L}^{1=2}; \qquad (16)$$

and p_n (E) are then the eigenvalues of P (E) which are bound by p_n (E) 2 [0;1]. If we invert P, we have

$$P^{-1} = \frac{1}{4} L^{1=2} (E + H +) R^{-1} (E + H +) L^{1=2} (17)$$

and the eigenvalues of P $^{-1}$ are p_n^{-1} . Consequently, we can compute the transm ission and hence current by sum ming the eigenvalues of the P $\mbox{-m}$ atrix which we can construct directly from H . Any singularity which may be present in the G reens function no longer presents a problem when performing the energy integration in the Landauer-Buttiker equation.

In practice, there is usually only one low -lying eigenvalue of the P⁻¹ m atrix and this eigenvalue is typically on the order of unity. The remaining eigenvalues are typically on the order of 10^7 greater than the lowest eigenvalue. Consequently, we can use matrix diagonalization techniques optimized for nding isolated eigenvalues. Since only the lowest eigenvalue of P⁻¹ contributes to to TrP] to any signi cant extent, once this eigenvalue has been determined, we do not need to compute the remaining eigenvalues. Furthermore, for determining N (E), we do not need to compute the eigenvectors of P⁻¹. Since computing P⁻¹ and its lowest eigenvalue involves sim – ple matrix-vector manipulations, these tasks can be efciently performed on a parallel computer. A lso, the m ethod is universal and can be used to compute trans-

m ethod is universal and can be used to compute transm ission through any model system given model H am iltonian and a self-energy representing the coupling of the model system to a continuum.

One nal comment regarding implementation of the M anthe-M iller algorithm is that as expressed P is a singular matrix if $_{\rm L}$ and $_{\rm R}$ are localized to nite region and can not be formally inverted. To remedy this, we allow the absorbing potential to be very small in regions outside the absorbing region $_{\rm L\,;R}$ = . Typically, we set to be between 10 7 to 10 $^{10}{\rm eV}$.

D. Transm ission through peptide chains

We considered transmission through four model sequences as shown in Fig. 1. Furtherm ore, to explore the e ect of intra-vs. interchain transm ission we considered three possible contact scenarios between the chain and the electrode surfaces. In the rst case, the term inal sites on both chains are connected directly to the cluster surfaces. In this case, hole in jection and extraction occurs through both chains and can lead to destructive and constructive interferences as in a two-slit experim ent. Secondly, we considered the case where only one chain, the one with the term inalG sites, is directly connected to the clusters. Here, the second chain acts as a hole acceptor and one expects to see only resonances coming from the intra-chain scattering pathways. Lastly, we consider the case where one chain is connected to each cluster and the chains are connected by their com plem entary base pairs. This scenario has a potential technological ram i cation in designing current probes which bind only to speci c com plem entary sequences on the opposite cluster surface. In this case, current through the DNA must occur via interchain hops. This we expect to be quite weak, given that the interchain hopping matrix elements are roughly

an order of m agnitude less than the intrachain hopping matrix elements.

The corresponding transmissions through each sequence is shown in Fig. 3. In the black curves plotted in Fig. 3-A through D, both term inal G-C units are \connected" to the left and right m etal clusters through transfer integral term s. In this case, current can result via transfer through both opposing chains. The interchain hopping leads to constructive and destructive interferences between the two current pathways. In the red curves plotted in Fig. 3-A through D we consider the case in which only the term inal G sites are capable of transferring holes between the contacts and the chain. Here, loosely speaking, scattering interferences can occur when the hole hops from the initial chain to the second and back to the rst. Since this process is also present in the dual contact cases, we can distinguish purely intrachain processes from multi-chain scattering processes by identifying peaks present in both spectra.

In cases A and B we compare a A A bridge to a Т T bridge. In both cases, there is a weak broad resonance at E = 0. However, the primary e ect is to switch the order of the single resonance at E = 0.8 eVwith the cluster of three resonances at E = 0.5 eV. It is also interesting to note that the gap between the single resonance and the cluster is alm ost unchanged by the switch. C om paring the dual contact transmission to the single contact transm ission, we note that the single resonance peak is present in both in the single and duel contact cases and that two of the three resonances in the cluster about E = 0.5 eV are present in the single contact case. For B the resonance at E 0:4eV is present in both cases; however, in the single contact case, only one of the three corresponding resonances peaks from the duel contact case is present. In both A and B, the weak resonance at E = 0eV disappears when there is only a single contact.

In case C we have a T A linkage and we can see clearly three resonance peaks, a doublet centered at 0.4 eV and a single peak at 0.7 eV. In each of these cases, the corresponding eigenstate of the isolated molecular Ham iltonian is a delocalized interchain state. The other eigenstates are more or less localized to one chain or the other and do not extend fully across the bridge. Changing the DNA-metal contact so that only the term inal G's are connected profoundly dim in ishes the intensity of each transmission resonance. Consequently, for the case of T A linkages, interchain pathways appear to play an important role In case D, we transpose the linkage in case C to A T . Here, we observe the same resonance peaks as in case C , except with uniform ly greater intensity even when we change the nature of the DNA-m etal contact.

Next, we consider the sensitivity of the transmission to interchain uctuations. W ithin our model, the interchain hopping terms represent the tunneling splitting between two neighboring interchain sites. Since tunneling is highly sensitive to distance of separation, struc-

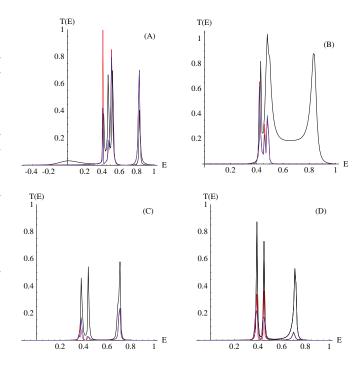


FIG.3: (COLOR) M icrocanonical transm ission probabilities for hole transm ission through various DNA sequences. Black curves correspond to transm ission with both term inalG and C groups connected to the surface of the electrodes, R ed and blue curves correspond to only having the term inalG group on one strand attached to both electrodes. For the blue curves, we random ly the interchain m atrix elem ents to determ ine sensitivity to interchain interactions. The units for the energy axis are eV.

tural uctuations should have a profound e ect on the the ability of a hole to tunnel between the chains. Such uctuations can be included in the present model by sam pling the interchain hopping matrix elements from a norm aldistribution centered about som e average value. For the blue curves, we allowed each o -diagonal interchain term to uctuate about its average value by i = 0.01 eVand then sampled over an ensemble of 100 con gurations. Comparing the blue and red curves in Fig.3A, the narrow resonance at 0.4eV is more or less washed out entirely by the interchain uctuations. On the other hand, the two other resonances are clearly present in both the static case and in the uctuating case indicating that at least some of the resonance features are insensitive to interchain uctuations. These surviving resonances are certainly due to intrachain transmission. For the other three cases, the main resonance features are more or less una ected by the interchain uctuations.

In the last case, we connect one strand to the left contact and the complimentary strand on the other such that current can only pass through the sequence through interchain hopping. Such a scenario could be useful in developing a sequence speci c probe since current can only ow if the complementary strands m atch. Unfortunately, how ever, our calculations indicate essentially zero transm ission through any of the strand com binations considered above. This is som ewhat surprising considering that in each case at least one eigenstate of the isolated chain H am iltonians are delocalized over the entire chain and have som e appreciable am plitude on both of the term inal contact sites.

III. D ISC U SSIO N

These results are both encouraging and discouraging for the potential utility of using current/voltage probes to assay sequence. They are encouraging since clearly sequence has a very profound in pact on the hole transm ission probability. If one assumes that a given chain can be decom posed into a series of A -T potential barriers separated by a series of G's and that net transm ission probability through the chain can computes as the product as a series of incoherent transition probabilities at a given energy, one could e ectively engineer a DNA wire with speci c voltage turn-on characteristics. For instance, having paired -A -A - or -T -T - sections as in

 5° G A A G G T T G $^{\circ}$ 3

would lead to a turn-on voltage of about 0.4 eV since both chain segments A and B have a series of resonances starting at this energy. P lacing a -G -T -A -G - segment on the chain as in

would lead to a slightly higher tum-on voltage since the transm ission probability for the -G -T -A -G - (sequence D) has a series of resonance peaks at 0.45 eV and this is in the m iddle of the cluster of resonances for sequences A and B.M oreover, transposing the A and T to -G -A -T -G - (sequence C) as in

5⁰ G A A G G A T G G T T G 3⁰

will result in a similar turn-on voltage for the current, however, the current will be roughly half that of when we have -G -T -A - G -.

W hat is also surprising is that the transm ission is dom inated by intrachain transport rather than a combination of intra- and interchain hopping. This is surprising given that the interchain hopping terms generally less positive then the intra-chain hopping matrix elements. A positive hopping term between sites in plies that the lower energy eigenstates will be the more localized than the higher energy states. The greater the hopping term, the m ore localized the lower energy states become. This is the opposite case from conjugated polyenes where the hopping term is negative leading delocalized low energy states and resonance stabilization. Consequently, the delocalized interchain states should be lower in energy than the delocalized intrachain states. The problem then is that they are insu ciently delocalized over the chain to provide a conduit from one end of the bridging molecule to the other.

Finally, we note that the transmission only occurs above a certain threshold energy determ ined by the scattering resonances of the bridging system . Equally im portant is density of available states in the regions on ether side of DNA bridge. Here, we took the contacts to be three-dimensional sim ple-cubic solids with a fairly high density of states in the energies considered. How ever, in a real DNA molecular wire, the bridging region is more like

 5^0 G G (bridge) G 0 G 3

and one should use a sequence of G's in building the density of states and the self-energies. If we consider a sequence of 5 G G to be a quasi-one dimensional chain with hopping integral between neighboring sites, then the dispersion relation for the chain is $\sin p \ln d$

$$''_{k} = 2 \cos(k)$$

with k in units of h=2a and a being the lattice spacing. Consequently, if the bandwidth 2 is less than the resonance energy of the bridge, the transmission through the bridge will not occur since the density of incoming states at that energy is zero. On the other hand, if is large, and one has a wide band for the holes in the guanine chains, then transmission through the bridge can occur. This suggests that the conductivity properties of a DNA chain are highly dependent upon both the basepair sequence of the DNA chain and the mobility of holes between neighboring G sites.

A cknow ledgm ents

This work was supported by the National Science Foundation and the Robert Welch Foundation. I also wish to acknow ledge conversations with Prof. B.M. Pettitt concerning electronic transport in DNA sequences.

- [1] V. D. Lakhno, V. B. Sultanov, and B. M. Pettitt, (preprint)
- [3] M. Bixon and J. Jortner, J. Phys. Chem. B 104, 3906 (2000).
- [2] V. D. Lakhno and N. S. Fialko, JETP Lett. 78 336 [4 (2003).
- [4] M. Bixon, B. Giese, S. Wessely, T. Langenbacher, M. E. Michel-Beyerle, and J. Jortner, Proc. Nat. A cad. Sci.

USA 96,61 (1999).

- [5] A.A.Voityuk, J. Jortner, M.Bixon, and N.Rosch.J. Chem. Phys. 114, 5614 (2001).
- [6] F.C.G rozem a, Y.A.Berin, and L.D.A.Siebbeles, Int. J.Quant.Chem. 75, 1009 (1999)
- [7] F.C.Grozem a, Y.A.Berin, and L.D.A.Siebbeles, J. Am.Chem.Soc.112, 10903 (2000).
- [8] J. Jortner, M. Bixon, A. A. Voityuk, and N. Rosch, J. Phys. Chem. B 106, 7599 (2002).
- [9] C.Dekker and M.A.Ratner, Phys.W orld, 14 29 (2001).
- [10] E.Braun, Y.Eichen, U.Sivan, and G.Ben-Yoseph, Nature (London) 391,775 (1998).
- [11] P.J.de Pablo, F.M oreno-Herrero, J.Colchero, J.G om ez Herrero, A.M. Bar, P.Prdjon, J.M. Soler, and E.Artacho, Phys. Rev. Lett. 85, 4992 (2000).
- [12] A.J. Storm, J. van Noort, S. de Vries, and C. Dekker, Appl.Phys.Lett. 79, 3881 (2001).
- [13] Y. Zhang, R. H. Austin, J. K raeff, E. C. Cox, and N. P. Ong, Phys. Rev. Lett. 89, 198102 (2002).
- [14] D. Porath, A. Bezryadin, S. De Vries, and C. Decker, Nature (London) 403,635 (2000).
- [15] A.Rakitin, P.Aich, C.Papadopoulos, Y.Kobzar, A.S. Vedeneev, J.S.Lee, and J.M.Xu, Phys. Rev. Lett. 86, 3670 (2001).
- [16] H.W. Fink and C. Schonenberger, Nature (London), 398,407 (1999)
- [17] L.Cai, H.Tabata, and T.Kawai, Appl. Phys. Lett. 77, 3105 (2000).
- [18] P. Tran, B. A lavi, and G. G runer, Phys. Rev. Lett. 85, 1564 (2000).
- [19] K.-H.Yoo, D.H.Ha, J.-O.Lee, J.W. Park, J.Kim, J.J. Kim, H.-Y.Lee, T.Kawai, and H.Y.Choi, Phys.Rev. Lett. 87,198102 (2001).
- [20] B. Hartzel, B. M cC ord, D. Asare, H. Chen, J. J. Heremans, and V. Sogomonian, Appl. Phys. Lett. 82, 4800 (2003).
- [21] B. Hartzel, B. M of ord, D. Asare, H. Chen, J. J. Heremans, and V. Sogomonian, J. Appl. Phys. 94 2764 (2003).
- [22] Y.A.Kasum ov, M.Kociak, S.Gueron, B.Ruelet, and V.T.Volkov, Science 291, 280 (2001).
- [23] R.G. Endres, D.L. Cox, and R.R.P.Singh, Rev. Mod. Phys. 76, 195 (2004).
- [24] M. Emzerhof and M. Zhuang, J. Chem. Phys. 119, 4134 (2003).

Electrical transport through individual DNA molecules.

- [25] X in-Q i Li and Y iJing Yan Appl. Phys. Lett. 79 2190 (2001).
- [26] P.A. Derosa and J.M. Sem inario, J.Phys.Chem. B 105, 471 (2001).
- [27] P.D am le, A.W. Ghosh, and S.D atta, Chem. Phys. 281, 471 (2002).
- [28] M. Brandbyge, J.L. Mozos, P. Prdejon, and K. Stockbro, Phys. Rev. B 65 165401, (2002)
- [29] P.S.Krstic, X.G.Zhang, and W.H.Butler, Phys. Rev. B 66, 205319 (2002).
- [30] S.Datta, W. Tian, S.Hong, R.Reifenberger, J.I. henderson, and C.P.Kubiak, Phys. Rev. Lett. 79, 2530 (1997).
- [31]
- [32] E. G. Emberly and G. Kirczenow, Phys. Rev B 64, 235412 (2001).
- [33] X. G. Zhang, P. S. K rstic, and W. H. Butler, Int. J. Quant. Chem. 95, 394 (2003).
- [34] A. Nitzan, Annual Reviews of Phys. Chem. 52, 681 (2001).
- [35] A.N itzan and M.A.Ratner, Science 300, 1384 (2003).
- [36] V. Mujica, M. Kemp, and M. Ratner, J. Chem. Phys. 101, 6849 (1994).
- [37] V. Mujica, M. Kemp, A. Roitberg and M. Ratner, J. Chem. Phys. 104, 7296 (1996).
- [38] E lectronic transport in mesoscopic systems, S. Datta (C am bridge U niv. P ress, New York, 1995).
- [39] Y. Xue, S. Datta and M. A. Ratner, Chem ical Physics 281, 151 (2002).
- [40] R.Landauer, IM B J.Res.Dev.1, 233 (1957); R.Philos. M ag. 21, 863 (1970).
- [41] M.Buttiker Phys. Rev. Lett. 57, 1761 (1986).
- [42] S.Roche, Phys. Rev. Lett. 91, 108101 (2003)
- [43] S. Roche, D. Bicout, E. Macia and E. Kats, Phys. Rev. Lett. 91, 228101 (2003).
- [44] U. M anthe and W . H. M iller, J. Chem. Phys. 99, 3411 (1993).
- [45] Quantum Collision Theory, C. J. Joachain (North-Holland, Am sterdam, 1975).
- [46] C.Caroli, R.Com bescot, P.Nozieres, D.Saint-James, J. Phys.C 4, 916 (1971).
- [47] T. Seidem an and W .H.M iller, J.Chem .Phys. 96, 4412 (1992).