

Multi-Perspective Inferrer: Reasoning Sentences Relationship from Holistic Perspective

Zhen Cheng, Zaixiang Zheng, Xin-Yu Dai, Shujian Huang, Jiajun Chen

National Key Laboratory for Novel Software Technology, Nanjing University, Nanjing, China
Collaborative Innovation Center of Novel Software Technology and Industrialization, Nanjing, China
{chengzhen, zhengzx}@smail.nju.edu.cn, {daixinyu, huangsj, chenjj}@nju.edu.cn

Abstract

Natural Language Inference (NLI) aims to determine the logic relationships (i.e., entailment, neutral and contradiction) between a pair of premise and hypothesis. Recently, the alignment mechanism effectively helps NLI by capturing the aligned parts (i.e., the similar segments) in the sentence pairs, which imply the perspective of entailment and contradiction. However, these aligned parts will sometimes mislead the judgment of neutral relations. Intuitively, NLI should rely more on multiple perspectives to form a holistic view to eliminate bias. In this paper, we propose the Multi-Perspective Inferrer (MPI), a novel NLI model that reasons relationships from multiple perspectives associated with the three relationships. The MPI determines the perspectives of different parts of the sentences via a routing-by-agreement policy and makes the final decision from a holistic view. Additionally, we introduce an auxiliary supervised signal to ensure the MPI to learn the expected perspectives. Experiments on SNLI and MultiNLI show that 1) the MPI achieves substantial improvements on the base model, which verifies the motivation of multi-perspective inference; 2) visualized evidence verifies that the MPI learns highly interpretable perspectives as expected; 3) more importantly, the MPI is architecture-free and compatible with the powerful BERT.

1 Introduction

Natural language inference (NLI) aims to determine whether a natural-language hypothesis can be inferred from a given premise reasonably (MacCartney and Manning, 2009), more concretely, the logic relationships including *entailment*, *neutral* and *contradiction*.

To determine the logic relationships effectively, various alignment mechanisms (MacCartney et al., 2008; Rocktäschel et al., 2015; Guo

Premise	Exhibitions are often held in the splendid entrance hall.
Hypothesis	The exhibitions in the entrance hall are usually the most exciting.
Relation	Neutral
Premise	You want to punch the button and go.
Hypothesis	You don't want to push the button lightly, but rather punch it hard.
Relation	Neutral

Figure 1: NLI instances from MultiNLI development sets. Text in blue/yellow/green are useful for the judgment of entailment/neutral/contradiction relations. For the first example, both the premise and hypothesis are about “the exhibition in the entrance hall”, but the hypothesis points the “the most exciting”, which has no reference in the premise and imply the neutral relation. The second example is about that “you (don’t) want to punch the button” which imply the contradiction relation. However, “punch it lightly or hard” in the hypothesis has no reference in the premise, so it is neutral.

et al., 2019) have been introduced into NLI models to model the interaction between the sentence pairs and achieve significant improvement in NLI. The achievement of the alignment mechanism is due to it being able to capture the aligned parts between the sentence pairs which are useful for the judgment of entailment and contradiction.

However, we find that the aligned parts cannot benefit or even mislead the judgment of neutral (see Figure 1). We argue that almost all the parts in the sentence pairs are useful not limit to aligned parts, and the key point is their unequal contributions for the judgment of different relations. In fact, humans perform reasoning from multiple *perspectives* associated with the three logic relationships, and focus on the different parts in each perspective to form a holistic perspective to eliminate bias for different relations.

Motivated by this, we propose the MPI, a novel NLI model that makes decision from the multiple perspectives associated with the three logic relationships. With MPI, all parts in the sentence pairs are captured unequally regarding different

perspectives. To be specific, we formulate this procedure as *parts-to-wholes* assignment (Sabour et al., 2017), in which the tokens in the sentence pairs (parts) are assigned into the corresponding perspectives (wholes) they stand for. During this procedure, the MPI digs out the perspectives of different parts via routing-by-agreement (Sabour et al., 2017) and takes all the perspectives into account to make the final decision.

Additionally, to ensure that the perspectives obtained by MPI are as expected, we introduce an explicit supervision on the representation of each perspective. Our explicit supervision does not only achieve better performance on the MPI, but also endows the obtained perspectives with high interpretability as well, which is absent in the previous routing-by-agreement-based studies of NLP.

Finally, experiments on SNLI and MultiNLI show that our MPI achieves significant improvement over the alignment based NLI models—cross alignment baseline and BERT, which also reveals the architecture-free capability of our MPI. Furthermore, we analyze the error rate by word overlap rate to demonstrate that our MPI relieves the misjudgment of entailment and neutral when the aligned parts are in a small amount, which is the error-prone area in NLI.

2 Background

In this section, we summarize the alignment-based NLI models in a highly abstract way¹. Based on this architecture, we introduce the proposed approach in Section 3.

Notation We denote premise as $\mathbf{x}^P = (\mathbf{x}_1^P, \mathbf{x}_2^P, \dots, \mathbf{x}_m^P)$ and hypothesis as $\mathbf{x}^H = (\mathbf{x}_1^H, \mathbf{x}_2^H, \dots, \mathbf{x}_n^H)$, where $\mathbf{x}_i^P$ or $\mathbf{x}_j^H \in \mathbb{R}^K$ is a K -dimensional one-hot vector of the token. We use $\bar{\mathbf{x}}^P$ and $\bar{\mathbf{x}}^H$ to denote the word embedding (distribution representations) of $\mathbf{x}^P$ and $\mathbf{x}^H$.

2.1 Alignment-based Encoder

The alignment-based encoder in NLI aims to encode the context and model the interaction between the sentence pairs. The encoded representation of each token in the sentence pairs can be abstractly formulated as:

$$(s^P, s^H) = \text{Encoder}(\bar{\mathbf{x}}^P, \bar{\mathbf{x}}^H) \quad (1)$$

We divide the dominative alignment-based methods into two groups—cross alignment and BERT

alignment.

Cross Alignment Encoder In cross alignment encoder, premise and hypothesis are fed into the encoder separately. This type of encoder usually consists of one or several RNN/CNN/Transformer layers to obtain the context-aware representation of each token in the sentence pairs (Chen et al., 2017a; Gong et al., 2018c; Guo et al., 2019). :

$$\bar{\mathbf{x}}^{P/H} = \text{RNN/CNN/Transformer}(\bar{\mathbf{x}}^{P/H}). \quad (2)$$

To model the interaction between sentence pairs, various alignment mechanisms have been introduced among the encoder layers:

$$(\tilde{\mathbf{x}}_i^P, \tilde{\mathbf{x}}_i^H) = \text{Cross-Alignment}(\bar{\mathbf{x}}_i^P, \bar{\mathbf{x}}_j^H), \quad (3)$$

where Cross-Alignment can be dot-product attention (Chen et al., 2017a), convolutional interaction network (Gong et al., 2018a), factorization machines (Tay et al., 2018) and etc. Finally, the representation of each token can be obtained as:

$$\mathbf{s}_i^{P/H} = f_1(\bar{\mathbf{x}}_i^{P/H}, \tilde{\mathbf{x}}_i^{P/H}), \quad (4)$$

where f_1 can be various transformation like difference and element-wise product (Mou et al., 2016).

BERT Encoder Recently, BERT (Devlin et al., 2018) pre-trained on the large corpus achieves state-of-the-art performance on lots of NLP tasks. Different from the cross alignment encoder in which the sentence pair are fed separately, premise and hypothesis are concatenated as one sequence in BERT encoder. Then BERT inherently models the alignment among the tokens by self-attention in Transformer (Vaswani et al., 2017):

$$[s^P; s^H] = \text{BERT-Encoder}([\bar{\mathbf{x}}^P; \bar{\mathbf{x}}^H]). \quad (5)$$

2.2 Prediction

Once we encode the sentence pairs, a prediction module is used to convert the obtained feature vectors s^P and s^H into a fixed length vector:

$$\mathbf{v} = f_2([s^P; s^H]), \quad (6)$$

where f_2 is a multi-layer perceptron (MLP) with pooling. Then we predict the logic relationships of $(\mathbf{x}^P, \mathbf{x}^H)$ based on this fixed length vector:

$$p(l|\mathbf{x}^P, \mathbf{x}^H) = \text{softmax}(E_l^\top \mathbf{v}), \quad (7)$$

where E_l is the label embedding for l relationship.

¹See the appendix for the detail implementation.

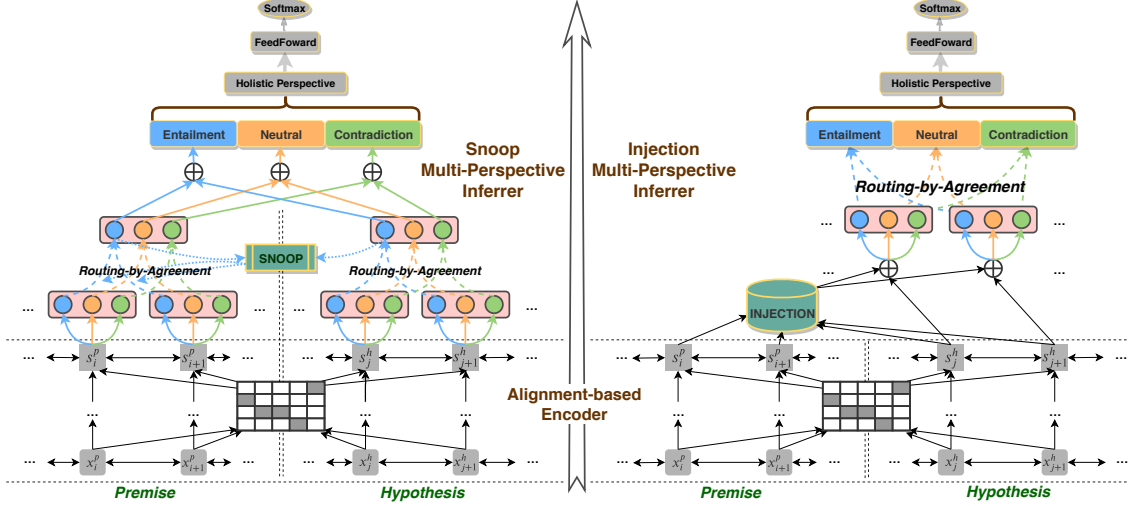


Figure 2: Multi-perspective inferer (MPI) in alignment-based NLI model. The left one is the Snoop MPI and the right one is the Injection MPI. $\oplus$ denotes the concatenation operation. The alignment-based encoder can be instantiated as cross alignment encoder or BERT encoder.

3 Multi-perspective Inferer

In this section, we propose a novel inference method called Multi-Perspective Inferer (MPI), which aims to pick out the perspectives of different parts in the sentence pairs and take all the perspectives into account to make the final decision.

Our inferer is motivated by the observation: different parts in the sentence pairs imply different relationships (see Figure 1), and their significance is not equal for the judgment of different relationships. NLI models should exploit the multiple perspectives associated with the three logic relationships—entailment, neutral and contradiction. This procedure can be seen as a *parts-to-wholes* assignment (Sabour et al., 2017), where *parts* are tokens in the sentence pairs and *wholes* are the perspectives associated with the relations.

Sabour et al. (2017) showed the capability of *Capsule Networks* (Hinton et al., 2011) to solve the problems of assigning parts to wholes. A *capsule* is a neuron representing one of the distinct properties (wholes) of the input features (parts) and can be determined by an iterative refinement procedure called *dynamic routing* (Sabour et al., 2017). In the iterative routing procedure, the proportion of parts are assigned to wholes by the agreement between them. Obviously, we can employ this procedure in our MPI.

Figure 2 depicts the overall architecture of the alignment-based model with MPI. Instead of pooling the extracted features to predict directly, first

MPI picks out the existing perspectives from the extracted features of the sentence pairs via *dynamic routing* and then takes all the perspectives into account to make the final prediction. The biggest challenge is how to employ the routing policy to solve the sentence-pair inputs rather than a single input. Therefore, we design two variants of MPI, the Snoop MPI and the Injection MPI, using different routing policies to pick out the perspectives in the sentence pairs.

3.1 Modeling Perspectives via Routing-by-Agreement Policy

First, we introduce the basic concept of the multi-perspective inferer (MPI) via the routing-by-agreement policy, which determines the perspectives from premise and hypothesis respectively. We route the sentences pairs *individually* using Algorithm 1 and then combine them by perspectives.

Take the hypothesis as an example. We define the extracted features s_i^H of token i as low-level capsules and its perspectives representations v_l^H as high-level capsules, where $l \in L = \{EN, NE, CON\}$ is the perspective they stand for². Before the routing process, each extracted features vector $s_i^H \in \mathbb{R}^{d_{low}}$ is transformed into the “vote vector” u_{il}^H :

$$u_{il}^H = W_l s_i^H \in \mathbb{R}^{d_{high}}, \quad \forall l \in L, \quad (8)$$

²Orphan capsule (Sabour et al., 2017) are introduced to attract irrelevant assignment of noisy contents. For simplicity and correspondence with the perspectives we omitted it there.

where $\mathbf{W}_l(\cdot) \in \mathbb{R}^{d_{\text{low}} \times d_{\text{high}}}$ is a trainable transformation matrix and shared among the tokens. Then MPI uses dynamic routing in Algorithm 1 to assign vote vectors $\mathbf{u}_i^H$ into the high-level capsules $\mathbf{v}_l^H$. The “squash” in Algorithm 1 is a non-linear activation function:

$$\text{squash}(\hat{\mathbf{v}}_l^H) = \frac{\|\hat{\mathbf{v}}_l^H\|^2}{1 + \|\hat{\mathbf{v}}_l^H\|^2} \frac{\hat{\mathbf{v}}_l^H}{\|\hat{\mathbf{v}}_l^H\|}, \quad (9)$$

where $\hat{\mathbf{v}}_l^H$ is the inactivated high-level capsule representations by the weighted sum of the corresponding low-level “vote vectors”:

$$\hat{\mathbf{v}}_l^H = \sum_i^n c_{il}^H \mathbf{u}_{il}^H, \quad (10)$$

where the assignment weight c_{il}^H is computed by

$$b_{il}^H \leftarrow b_{il}^H + \mathbf{u}_{il}^H \cdot \mathbf{v}_l^H, \quad (11)$$

$$c_{il}^H = \text{softmax}(b_{il}^H). \quad (12)$$

The high-level capsules of premise $\mathbf{v}_l^P$ can be obtained by the same procedure. Finally, the representation of each perspective is obtained by concatenating the high-level capsules of sentence pair:

$$\mathbf{v}_l = [\mathbf{v}_l^P; \mathbf{v}_l^H]. \quad (13)$$

Snoop Multi-perspective Inferrer

Although the final perspective representations obtained above are from the sentence pairs, it is supposed to generate the perspectives by the sentence pair mutually rather than individually. To remedy this, we introduce a variant of the routing policy called snoop routing (see the left of Figure 2).

Take the hypothesis as an example. The snoop routing policy models its interaction with premise: when the low-level capsules of hypothesis update their routing weights, they will not only consider the agreement with their own high-level capsules $\mathbf{v}_l^H$, also snoop at the high-level capsules of premise $\mathbf{v}_l^P$ ³. Formally, instead of updating routing weights b_{il}^H in Equation 11, we update b_{il}^H by:

$$b_{il}^H \leftarrow b_{il}^H + \mathbf{u}_{il}^H \cdot \mathbf{v}_l^H + \alpha \mathbf{u}_{il}^H \cdot \mathbf{v}_l^P, \quad (14)$$

where α is the snoop coefficient to model the sim-

³We also tried routing with the concatenated sentence pairs, but find that the sentence-level gap is much larger than the perspectives gap among the tokens. There are two main differences from snoop routing to concatenation routing: First, the high-level capsules are not fed with the low-level information from another sentence. Second, there is a trade-off between the own high-level capsules and the snooped high-level capsules during routing weights update.

Algorithm 1: Dynamic Routing

Input: vote vectors $\mathbf{u}_i$ in low-level, iterations

r

Output: high-level $\mathbf{v}_l$

procedure ROUTING($\mathbf{u}_i, r$):

$\forall i, l : b_{il} \leftarrow 0$

for r iterations **do**

for each i in low-level, l in high-level:

$c_{il} \leftarrow \text{softmax}(b_{il})$

for each l in high-level:

$\mathbf{v}_l \leftarrow \text{squash}(\sum_i c_{il} \mathbf{u}_{il})$

for each i in low-level, l in high-level:

$b_{il} \leftarrow b_{il} + \mathbf{u}_{il} \cdot \mathbf{v}_l$

end

return $\mathbf{v}_l$

ilarity of the individual perspectives between the sentence pairs. Specifically, the snoop coefficient is generated by the high-level capsules of the sentence pairs:

$$\alpha = \sigma(\text{Linear}([\mathbf{v}_l^H; \mathbf{v}_l^P])). \quad (15)$$

Injection Multi-perspective Inferrer

In contrast to the Snoop MPI, which uses a routing policy on both premise and hypothesis to obtain the final perspectives, another form of MPI called Injection Multi-perspective Inferrer (IMPI) determines the perspectives mainly focusing on hypothesis (see the right of Figure 2), which is inspired by the intrinsic asymmetry of NLI (MacCartney et al., 2008) and the fact of the perspectives mainly expressed by the hypothesis.

However, the information of the premise will leak while only routing the hypothesis to form the final perspectives. So the key issue of IMPI is to inject the information of premise into the hypothesis. To do so, we resort to bilinear attention as the injection method:

$$\alpha_{ij} = \mathbf{s}_i^P \mathbf{W} \mathbf{s}_j^H, \quad (16)$$

$$\tilde{\mathbf{s}}_j^H = \sum_{i=1}^m \text{softmax}_i(\alpha_{ij}) \bar{\mathbf{s}}_i^P, \forall j \in [1, \dots, n]. \quad (17)$$

Finally, we use $\hat{\mathbf{s}}_i^H = [\mathbf{s}_i^H; \tilde{\mathbf{s}}_i^H]$ instead of $\mathbf{s}_i^H$ in Equation 8 to get the vote vectors and use Algorithm 1 to get the final perspective $\mathbf{v}_l = \mathbf{v}_l^P$.

3.2 Prediction from Holistic Perspective

After computing the representations of each perspective, we can obtain a holistic perspective rep-

representation by:

$$\mathbf{v} = f_1([\mathbf{v}_{\text{EN}}, \mathbf{v}_{\text{NE}}, \mathbf{v}_{\text{CON}}]), \quad (18)$$

where f_1 is a two-layer feed-forward network. Then we predict the logic relationships of $(\mathbf{x}^P, \mathbf{x}^H)$ based on this holistic perspective.

Training We use multi-class cross-entropy loss to optimize our base model by minimizing the negative log-likelihood for each pair of $(\mathbf{x}^P, \mathbf{x}^H)$ in the dataset of i.i.d observations:

$$\ell = -\log p(l|\mathbf{x}^P, \mathbf{x}^H). \quad (19)$$

3.3 Learning Perspectives as Expected

To ensure that the obtained perspectives actually represent the associated relations, we design an auxiliary loss for the representations of perspectives. Formally, $\mathbf{v}_l$ is required to be predictive of l rather than the other relations, and the corresponding probability is computed by:

$$\tilde{\mathbf{v}}_l = f_2(\mathbf{v}_l), \quad (20)$$

$$p(l|\mathbf{v}_l) = \text{softmax}(E_l^\top \tilde{\mathbf{v}}_l), \quad (21)$$

where f_2 is a two-layer feed-forward network. Consider that one perspective, say l , does not exist in some cases, then the corresponding prediction $p(l|\mathbf{v}_l)$ will be non-informative. Thus, we resort to the *weighted cross-entropy* loss by taking the existence of each perspective into account, and maximize $p(l|\mathbf{v}_l)$ for each perspective representation:

$$\ell_{\text{ce}}(\mathbf{v}) = -\sum_{l \in L} \|\mathbf{v}_l\| \cdot \log p(l|\mathbf{v}_l), \quad (22)$$

where $\|\mathbf{v}_l\|$ is the norm length of $\mathbf{v}_l$, representing the existence of the perspective l due to the property of capsule network (Sabour et al., 2017). We further regularize the norm length of each capsule by *marginal loss* to ensure the least existence of each perspective:

$$\ell_{\text{aux}} = \ell_{\text{ce}}(\mathbf{v}) + \ell_{\text{margin}}(\|\mathbf{v}\|). \quad (23)$$

The final training objective is updated from Equation 19 to $\ell^* = \ell + \beta \cdot \ell_{\text{aux}}$, where β is a hyperparameter.

4 Experiments

4.1 Datasets

We use the Stanford Natural Language Inference (SNLI) dataset (Bowman et al., 2015)

and the Multi-Genre Natural Language Inference (MultiNLI) dataset (Williams et al., 2018) to make quantitative evaluation of our MPIs. These two datasets both focus on three concrete logic relations between the given premise and hypothesis: *entailment*, *neutral* and *contradiction*.

SNLI The SNLI corpus consists of 570k sentence pairs. The premise data is drawn from the captions of the Flickr30k corpus, and the hypothesis data is manually composed. We discard the “—” annotated relationship (lack of human annotation) as with previous work. The training/development/test datasets consist of 549,367/9,842/9,824 pairs of sentence.

MultiNLI The MultiNLI corpus consists of 433k sentence pairs. These sentence pairs contain nine genres, which compose the concept of multi-genres. In MultiNLI, only half of genres appear in the training set while the rest are not, creating matched (in-domain) and mismatched (cross-domain) development/test sets. We use the official training/development sets to select our best models and test on Kaggle.com⁴.

We use the accuracy to evaluate the performance of our multi-perspective inferers (MPIs) and other models on SNLI and MultiNLI.

4.2 Overall Results

Table 1 shows the performance of the state-of-the-art models and the proposed MPIs. Our approach achieves the best performance on both SNLI (BERT+IMPI) and MultiNLI (BERT+IMPI) test datasets compared to the previous studies. In detail, our MPIs achieve 1.2 percent improvement over cross alignment baseline, and 0.7 percent improvement over BERT baseline. The significant improvement on two NLI datasets demonstrates that our motivation of inferring relationships from multiple perspectives does make sense.

Architecture-free Capability of MPIs Theoretically, our MPIs could be architecture-free, since the MPIs’ inputs are the extracted features of each token in the premise and hypothesis (see Figure 2) no matter what kind of the encoder we use. As shown in Table 1, the significant improvement on both cross alignment baseline and

⁴<https://www.kaggle.com/c/multinli-matched-open-evaluation/leaderboard>, and <https://www.kaggle.com/c/multinli-mismatched-open-evaluation/leaderboard>

Models	SNLI MultiNLI	
DecompAtt+IntraAtt (Parikh et al., 2016)	86.8	-/-
BiMPM (Wang et al., 2017)	86.9	-/-
ESIM (Chen et al., 2017a)	88.0	76.8/75.8
CIN (Gong et al., 2018a)	88.0	77.0/77.6
DIIN (Gong et al., 2018c)	88.0	78.8/77.8
MwAN (Tan et al., 2018)	88.3	78.5/77.7
CAFE (Tay et al., 2018)	88.5	78.7/77.9
KIM (Chen et al., 2017b)	88.6	77.2/76.4
SAN (Liu et al., 2018)	88.7	79.3/78.7
DRCN (Kim et al., 2019)	88.9	79.1/78.4
Gaussian Transformer (Guo et al., 2019)	89.2	80.0/79.4
<i>BERT</i> _{base} (Devlin et al., 2018)	-	84.6/83.4
Cross Alignment baseline	87.9	77.7/76.8
+ Vanilla MPI	88.4	78.6/77.7
+ SMPI	88.6	78.7/77.9
+ IMPI	88.7	78.9/78.1
BERT baseline ($v_{\text{test}} = 1.0\times$)	90.2	84.5/83.3
+ Vanilla MPI ($v_{\text{test}} = 0.98\times$)	90.3	84.6/83.5
+ SMPI ($v_{\text{test}} = 0.98\times$)	90.7	85.0/83.8
+ IMPI ($v_{\text{test}} = 0.99\times$)	90.8	85.2/84.1

Table 1: Performance on SNLI and MultiNLI (matched/ mismatched) test datasets. Our MPIs models are implemented on both cross alignment baseline and BERT. v_{test} is the test speed compared to the baseline.

BERT demonstrates the architecture-free capability of our MPIs. We suggest that modeling multiple perspectives is important and useful for NLI, and the proposed solution could inspire future research in this filed.

SMPI v.s IMPI As shown in Table 1, both variants of the MPI get better performance than the vanilla MPI, which demonstrates that the perspectives should be generated by the sentence pairs together and the snoop and injection mechanisms are powerful. Additionally, we find that the IMPI always gets better performance than the SMPI on both SNLI and MultiNLI, which may relate to the intrinsic asymmetry in NLI (MacCartney et al., 2008) and the fact of the perspectives mainly expressed by the hypothesis. Poliak et al. (2018) pointed out that it is related to the irregularities of the datasets. However, we argue that the sentence pairs in NLI are actually intrinsically asymmetrical and we should deal with the premise and hypothesis differently.

Efficiency As shown in the last group of Table 1, we perform the efficiency test on BERT baseline and our MPIs. The test speed of Vanilla MPI and SMPI is 0.98 times compared to the BERT baseline while the test speed of IMPI is 0.99 times compared to the BERT baseline. Our MPIs improve the baseline system with very mild speed degradation, which demonstrates a good efficiency of MPIs that could be applied to arbitrary architecture with less hurt.

4.3 Analysis and Discussion

To verify our motivation and investigate if our MPIs did relieve the error phenomenon in our observation, we take the cross alignment baseline as an example to conduct in-depth analysis and discussion on word overlap rate and auxiliary loss.

Word Overlap Rate Word overlap between the sentence pairs is a special case of alignment. One of our observations in the base model is that: if the aligned parts between sentence pairs are in a small amount, the misjudgments of entailment and neutral will be serious. To investigate whether our MPIs relieve this phenomenon, we perform the analysis of the error rate by word overlap rate on MultiNLI development matched set.

Formally, given a sentence pair of premise $\mathbf{x}^P = \langle x_1^P, x_2^P, \dots, x_m^P \rangle$ and hypothesis $\mathbf{x}^H = \langle x_1^H, x_2^H, \dots, x_n^H \rangle$, the word overlap rate R_{wo} from hypothesis to premise can be defined as:

$$R_{\text{wo}} = \frac{\sum_{j=1}^n \mathbb{1}(x_j^P \in \mathbf{x}^H)}{m}. \quad (24)$$

To be specific, we divide MultiNLI development matched set into six groups by word overlap rates: [0,0.2), [0.2,0.4), [0.4,0.6), [0.6,0.8), [0.8,1.0) and 1.0, and Table 2 shows the statistics.

Then we compute the error rates of entailment and neutral individually⁵. Figure 3(a) shows the error rate of entailment class. Both two MPIs reduce the error rates of low word overlap rates, i.e., [0,0.2) and [0.2, 0.4), significantly. This is because the judgment of entailment is related to the alignment, and the base model cannot utilize adequate aligned parts to make the prediction of entailment. After applying MPI, the aligned parts can be captured by entailment perspective although it is in a small amount. Then the classifier can focus more on the entailment perspective so the error rate of

⁵See appendix for total and contradiction.

Relation	[0,0.2)	[0.2,0.4)	[0.4,0.6)
EN	458	1331	986
NE	982	1254	495
CON	845	1368	651
Total	2285	3953	2132
Relation	[0.6,0.8)	[0.8,1.0)	1.0
EN	513	147	44
NE	253	68	71
CON	284	54	11
Total	1050	269	126

Table 2: Statistics of MultiNLI development matched set divided by the word overlap rates into six groups: [0,0.2), [0.2,0.4), [0.4,0.6), [0.6,0.8), [0.8,1.0) and 1.0.

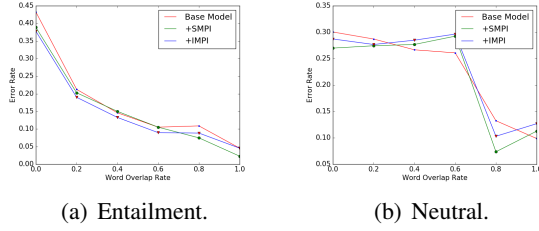


Figure 3: Error rate of entailment and neutral by word overlap rate. Base Model is the cross alignment baseline. Our MPIs relieve the error rate in the intervals with low word overlap rate [0, 0.4) of entailment and neutral significantly, which is the most error-prone area in NLI.

these interval decreases significantly. Figure 3(b) shows the error rate of the neutral class. Our MPIs reduce the error rates of the low word overlap rate intervals, i.e., [0,0.2) and [0.2, 0.4), the same as with the entailment class. Consider both entailment class and neutral class, our MPIs obviously relieve the phenomenon: the small amount aligned parts can cause the misjudgment between entailment relations and neutral relations.

Disaster Area in NLI: lower word overlap rates.

We find a similar phenomenon concerning the error rate and the amount of entailment and neutral: the error is much more severe in the lower word overlap rate intervals (e.g., [0,0.2) and [0.2, 0.4)) than the higher rate intervals. If the aligned parts are in a small amount, the strength of alignment-based models will be weakened. It is the most error-prone area in NLI. We believe that NLI models need not only focus on capturing the aligned parts, but also take advantage of the unaligned parts. To summarize, NLI models should take the problems into account in multiple perspectives and solve them from a holistic perspective.

Auxiliary Loss	SMPI	IMPI
w/o ℓ_{aux}	78.7/78.4	78.6/78.4
w/ ℓ_{aux} (i.e., $\ell_{ce} + \ell_{margin}$)	78.8/78.6	79.1/78.9
- $\ \mathbf{v}_l\ $	78.7/78.7	78.3/78.8
only w/ ℓ_{ce}	78.5/78.6	78.6/78.4
- $\ \mathbf{v}_l\ $	78.0/78.6	78.6/78.3
only w/ ℓ_{margin}	78.6/78.2	78.4/77.8

Table 3: Ablation studies of auxiliary loss on MultiNLI development sets.

Auxiliary Loss Our auxiliary loss is an explicit supervision on the representation of each perspective to ensure the perspectives obtained by our MPIs are expected. In this section, we demonstrate that our auxiliary loss improves both performance and an interpretability of predictions.

First, we compute the accuracy of predictions by perspective representations $\mathbf{v}_l^n$ according to Equation 25 and obtain 100% accuracy on MultiNLI development matched set. It reveals that our auxiliary loss ensures that the representation of each perspective is associated with the corresponding relationship.

$$acc = \frac{1}{|L| \cdot N} \sum_{n=1}^N \sum_{l \in L} \mathbf{1}(p(l|\mathbf{v}_l^n) == l). \quad (25)$$

The auxiliary loss improves the performance of the MPIs. Table 3 shows the ablation studies of auxiliary loss on MultiNLI development sets. Results in the second line are the performance of two MPIs with the introduced supervision loss, which achieve the best accuracy. After removing the auxiliary loss, we find the performance of both two MPIs degrade to 78.7/78.4 and 78.6/78.4, which means the guided loss ensures the representation of each perspective.

Visualization on Routing Assignment Weights.

Another contribution of our auxiliary loss on each perspective is that the predictions of MPIs are highly interpretable. Figure 4 contains two instances from MultiNLI development matched set. Since different parts of the sentences imply the different perspectives, our base model gets the incorrect predictions. However, capturing the different parts by multiple perspectives and making the decision from the holistic perspective accounts for our IMPI’s correct predictions.⁶

⁶See other MPIs’ routing visualization in the appendix.

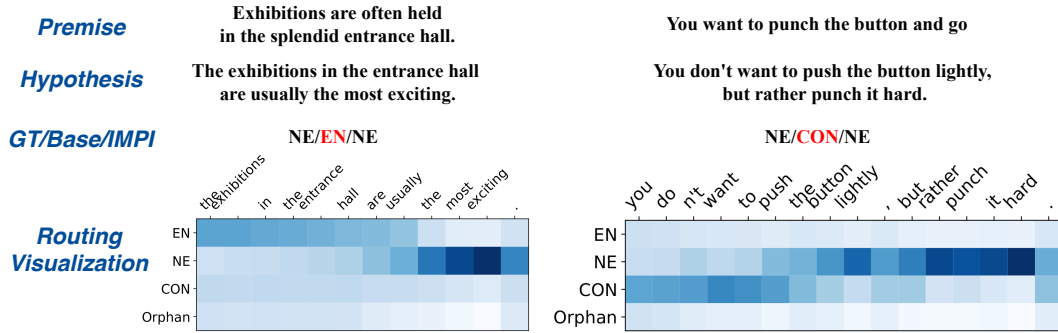


Figure 4: Visualization of routing weights c_{il} in IMPI. Darker color corresponds to higher routing weights. GT represents the ground truth. Our base model gives the wrong predictions of both two samples. IMPI corrects the wrongs by taking multiple perspectives into account. Also, the routing weights of IMPI are highly interpretable. For the left example, IMPI routes the “The exhibitions in the entrance hall” to entailment perspective, which can be entailed by the premise actually. Additionally, IMPI routes the “The the most exciting” to neutral perspective since there is no evidence in the premise. For the right example, IMPI routes the “you don’t want to push the button” to contradiction perspective, which conflicts with the premise actually. However, IMPI finds the more important parts “push the button lightly, but rather punch it hard.” in neutral perspective.

5 Related Work

Natural language inference is a long-standing problem in NLP research. Early studies use small datasets while leveraging lexical and syntactic features for NLI (MacCartney and Manning, 2009). With the development of deep learning and the releases of large-scale annotated datasets, e.g. the SNLI (Bowman et al., 2015) and the MultiNLI (Williams et al., 2018), researchers have made big progress on neural network based NLI models.

MacCartney et al. (2008) introduced the traditional alignment mechanism into NLI and Rocktäschel et al. (2015) first proposed an attention-based neural model for NLI. After that, neural alignment-based models have been developed rapidly in NLI (Wang and Jiang, 2016; Chen et al., 2017a; Ghaeini et al., 2018; Gong et al., 2018c; Tay et al., 2018; Gong et al., 2018a; Tan et al., 2018; Kim et al., 2019; Guo et al., 2019). Parikh et al. (2016) introduced to decompose the different parts of sentences by decomposable attention. Wang et al. (2017) proposed a multi-perspective matching model to capture the aligned parts by four matching operations. Both of them focus on capturing the aligned parts in multiple perspectives. However, our MPIs focus on how to utilize the obtained information (both aligned and unaligned parts) from multiple perspectives associated with the relationships. Motivated by this, we proposed a multi-perspective inferer for existing alignment-based model inspired by *parts-to-wholes* (Sabour et al., 2017).

Sabour et al. (2017) introduced the capsule networks to learn parts-to-wholes relations automatically by dynamic routing, which has been applied to many NLP tasks recently such as sentiment analysis (Wang et al., 2018, 2019), relation extraction (Zhang et al., 2018, 2019), text classification (Yang et al., 2018) and machine translation (Dou et al., 2019; Zheng et al., 2019). Gong et al. (2018b) regard dynamic routing as an information aggregation mechanism by concatenating all capsules representations and feeding them into a classifier without supervision. There are two main differences from our MPIs: First, we design the enhanced routing policies—snoop and injection, based on the understanding of the property of perspectives and the intrinsic asymmetry of NLI. Second, we introduce an auxiliary loss as supervision on each perspective, which guarantees that the meaning of perspectives and these predictions are highly interpretable.

6 Conclusion

In this paper, we proposed a new inference method called multi-perspective inferer (MPI) for NLI. The MPI extracts multiple perspectives associated with the relationships from the different parts of the sentence pairs and takes all the perspectives into account to make the final decision. Furthermore, we introduced an explicit supervision on each perspective which ensures the predictions are highly interpretable. Experiments on SNLI and MultiNLI demonstrate that our MPI achieves sub-

stantial improvement and especially relieves the misjudgment between entailment and neutral relations when there is a small amount of aligned parts, which is the most error-prone in NLI. In future work, we hope to make the routing-by-agreement more suitable for NLI and other sentence pair tasks such as semantic matching and machine comprehension.

References

- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. 2015. A large annotated corpus for learning natural language inference. In *EMNLP*.
- Qian Chen, Xiao-Dan Zhu, Zhen-Hua Ling, Si Wei, Hui Jiang, and Diana Inkpen. 2017a. Enhanced lstm for natural language inference. In *ACL*.
- Qian Chen, Xiaodan Zhu, Zhen-Hua Ling, Diana Inkpen, and Si Wei. 2017b. Neural natural language inference models enhanced with external knowledge. *arXiv preprint arXiv:1711.04289*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT*.
- Zi-Yi Dou, Zhaopeng Tu, Xing Wang, Longyue Wang, Shuming Shi, and Tong Zhang. 2019. Dynamic layer aggregation for neural machine translation with routing-by-agreement. *CoRR*, abs/1902.05770.
- Reza Ghaeini, Sadid A. Hasan, Vivek Datla, Joey Liu, Kathy Lee, Ashequl Qadir, Yuan Ling, Aaditya Prakash, Xiaoli Z. Fern, and Oladimeji Farri. 2018. Dr-bilstm: Dependent reading bidirectional lstm for natural language inference. In *NAACL-HLT*.
- Xavier Glorot and Yoshua Bengio. 2010. Understanding the difficulty of training deep feedforward neural networks. In *AISTATS*.
- Jingjing Gong, Xipeng Qiu, Xinchu Chen, Dong Liang, and Xuanjing Huang. 2018a. Convolutional interaction network for natural language inference. In *EMNLP*.
- Jingjing Gong, Xipeng Qiu, Shaojing Wang, and Xuanjing Huang. 2018b. Information aggregation via dynamic routing for sequence encoding. In *COLING*.
- Yichen Gong, Heng Luo, and Jian Zhang. 2018c. Natural language inference over interaction space. *CoRR*, abs/1709.04348.
- Maosheng Guo, Yu Zhang, and Ting Liu. 2019. Gaussian transformer: a lightweight approach for natural language inference.
- Geoffrey E. Hinton, Alex Krizhevsky, and Sida D. Wang. 2011. Transforming auto-encoders. In *ICANN*.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural Computation*, 9:1735–1780.
- Seonhoon Kim, Jin-Hyuk Hong, Inho Kang, and Nojun Kwak. 2019. Semantic sentence matching with densely-connected recurrent and co-attentive information. *CoRR*, abs/1805.11360.
- Diederik P. Kingma and Jimmy Ba. 2015. Adam: A method for stochastic optimization. *CoRR*, abs/1412.6980.
- Xiaodong Liu, Kevin Duh, and Jianfeng Gao. 2018. Stochastic answer networks for natural language inference. *CoRR*, abs/1804.07888.
- Bill MacCartney, Michel Galley, and Christopher D. Manning. 2008. A phrase-based alignment model for natural language inference. In *EMNLP*.
- Bill MacCartney and Christopher D Manning. 2009. *Natural language inference*. Citeseer.
- Lili Mou, Rui Men, Ge Li, Yan Xu, Lu Zhang, Rui Yan, and Zhi Jin. 2016. Natural language inference by tree-based convolution and heuristic matching. In *ACL*.
- Ankur P Parikh, Oscar Täckström, Dipanjan Das, and Jakob Uszkoreit. 2016. A decomposable attention model for natural language inference. *arXiv preprint arXiv:1606.01933*.
- Jeffrey Pennington, Richard Socher, and Christopher D. Manning. 2014. Glove: Global vectors for word representation. In *EMNLP*.
- Adam Poliak, Jason Naradowsky, Aparajita Haldar, Rachel Rudinger, and Benjamin Van Durme. 2018. Hypothesis only baselines in natural language inference. In **SEM@NAACL-HLT*.
- Tim Rocktäschel, Edward Grefenstette, Karl Moritz Hermann, Tomáš Kočiský, and Phil Blunsom. 2015. Reasoning about entailment with neural attention. *arXiv preprint arXiv:1509.06664*.
- Sara Sabour, Nicholas Frosst, and Geoffrey E. Hinton. 2017. Dynamic routing between capsules. In *NIPS*.
- Chuanqi Tan, Furu Wei, Wenhui Wang, Weifeng Lv, and Ming Zhou. 2018. Multiway attention networks for modeling sentence pairs. In *IJCAI*.
- Yi Tay, Anh Tuan Luu, and Siu Cheung Hui. 2018. Compare, compress and propagate: Enhancing neural architectures with alignment factorization for natural language inference. In *EMNLP*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *NIPS*.

- Shuohang Wang and Jing Jiang. 2016. Learning natural language inference with lstm. In *HLT-NAACL*.
- Yequan Wang, Aixin Sun, Jialong Han, Ying Liu, and Xiaoyan Zhu. 2018. Sentiment analysis by capsules. In *WWW*.
- Yequan Wang, Aixin Sun, Minlie Huang, and Xiaoyan Zhu. 2019. Aspect-level sentiment analysis using as-capsules. In *WWW 2019*.
- Zhiguo Wang, Wael Hamza, and Radu Florian. 2017. Bilateral multi-perspective matching for natural language sentences. In *IJCAI*.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2018. A broad-coverage challenge corpus for sentence understanding through inference. In *NAACL-HLT*.
- Min Yang, Wei Zhao, Jianbo Ye, Zeyang Lei, Zhou Zhao, and Soufei Zhang. 2018. Investigating capsule networks with dynamic routing for text classification. In *EMNLP*.
- Ningyu Zhang, Shumin Deng, Zhanlin Sun, Xi Chen, Wei Zhang, and Huajun Chen. 2018. Attention-based capsule networks with dynamic routing for relation extraction. In *EMNLP*.
- Xinsong Zhang, Pengshuai Li, Weimin Jia, and Hai Zhao. 2019. Multi-labeled relation extraction with attentive capsule network. *CoRR*, abs/1811.04354.
- Zaixiang Zheng, Shujian Huang, Zhaopeng Tu, Xinyu Dai, and Jiajun Chen. 2019. Dynamic past and future for neural machine translation. *ArXiv*, abs/1904.09646.

A Our Baselines for NLI

In this section, we introduce two baselines using different interactive encoders—cross alignment encoder and BERT encoder in detail, which are used as our baselines in the experiments.

Notation We denote premise as $\mathbf{x}^P = (\mathbf{x}_1^P, \mathbf{x}_2^P, \dots, \mathbf{x}_m^P)$ and hypothesis as $\mathbf{x}^H = (\mathbf{x}_1^H, \mathbf{x}_2^H, \dots, \mathbf{x}_n^H)$, where $\mathbf{x}_i^P$ or $\mathbf{x}_j^H \in \mathbb{R}^K$ is a K -dimensional vector of the token.

A.1 Cross Alignment Baseline

In cross alignment baseline, premise and hypothesis are fed into the model separately. We use RNNs to learn the context-aware representation of each token in the sentence pairs and dot-product attention to capture the alignments between the premise and hypothesis.

Embedding We use *GloVe* as the pretrained word embeddings for the ESIM, as well as widely-used one-hot external linguistic features such as lexical, syntactical and part-of-speech tagging to enrich the representation of the inputs as with [Gong et al. \(2018a,c\)](#). All of these embeddings are fixed during training. They are together fed into a one-layer feed-forward network to construct the final input representations:

$$\bar{\mathbf{x}} = g(\mathbf{x}) \cdot f(\mathbf{x}) + (1 - g(\mathbf{x})) \cdot \mathbf{x}, \quad (26)$$

where $g(\cdot)$ is a fusion gate parameterized by MLP with *sigmoid* and $f(\cdot)$ is another MLP with *ReLU*.

Cross Alignment Encoding First, we use an identical BiLSTM ([Hochreiter and Schmidhuber, 1997](#)) to encode premise and hypothesis to get the context-aware representation of each token:

$$\bar{\mathbf{x}}_i^P = \text{BiLSTM}_1(\mathbf{x}_i^P, i), \forall i \in [1, \dots, m], \quad (27)$$

$$\bar{\mathbf{x}}_j^H = \text{BiLSTM}_1(\mathbf{x}_j^H, j), \forall j \in [1, \dots, n]. \quad (28)$$

Then, to model the local inference between sentence pairs, we use the dot-product attention to obtain the interaction representations:

$$e_{ij} = \bar{\mathbf{x}}_i^{P\top} \bar{\mathbf{x}}_j^H, \quad (29)$$

$$\tilde{\mathbf{x}}_i^P = \sum_{j=1}^n \text{softmax}_j(e_{ij}) \bar{\mathbf{x}}_j^H, \forall i \in [1, \dots, m], \quad (30)$$

$$\tilde{\mathbf{x}}_j^H = \sum_{i=1}^m \text{softmax}_i(e_{ij}) \bar{\mathbf{x}}_i^P, \forall j \in [1, \dots, n]. \quad (31)$$

After obtaining the encoded representations and interaction representations, we use the following enhancement by difference and element-wise product to take advantage of them ([Mou et al., 2016](#)):

$$\mathbf{m}_i^P = [\bar{\mathbf{x}}_i^P; \tilde{\mathbf{x}}_i^P; \bar{\mathbf{x}}_i^P - \tilde{\mathbf{x}}_i^P; \bar{\mathbf{x}}_i^P \odot \tilde{\mathbf{x}}_i^P], \quad (32)$$

$$\mathbf{m}_j^H = [\bar{\mathbf{x}}_j^H; \tilde{\mathbf{x}}_j^H; \bar{\mathbf{x}}_j^H - \tilde{\mathbf{x}}_j^H; \bar{\mathbf{x}}_j^H \odot \tilde{\mathbf{x}}_j^H]. \quad (33)$$

A one-layer feed-forward network to decrease the dimension of enhancement representations:

$$\bar{\mathbf{m}}_i^P = f(\mathbf{m}_i^P), \quad \bar{\mathbf{m}}_j^H = f(\mathbf{m}_j^H). \quad (34)$$

Finally, another BiLSTM is used to compose the enhancement representations with their context:

$$\mathbf{s}_i^P = \text{BiLSTM}_2(\bar{\mathbf{m}}^P, i), \forall i \in [1, \dots, m], \quad (35)$$

$$\mathbf{s}_j^H = \text{BiLSTM}_2(\bar{\mathbf{m}}^H, j), \forall j \in [1, \dots, n]. \quad (36)$$

Prediction First, we use max pooling and average pooling to convert the obtained feature vectors into a fixed length vector:

$$\mathbf{v} = f([\mathbf{s}_{\max}^P; \mathbf{s}_{\text{avg}}^P; \mathbf{s}_{\max}^H; \mathbf{s}_{\text{avg}}^H]), \quad (37)$$

where f is a multi-layer perceptron (MLP). Then we predict the logic relationships of $(\mathbf{x}^P, \mathbf{x}^H)$ based on this fixed length vector:

$$p(l|\mathbf{x}^P, \mathbf{x}^H) = \text{softmax}(E_l^\top \mathbf{v}), \quad (38)$$

where E_l is the label embedding for l relationship.

A.2 BERT Baseline

In BERT ([Devlin et al., 2018](#)) baseline, premise and hypothesis are concatenated as one sequence to feed into the model instead of feeding separately. We use the Google BERT pretrained on the large corpus and fine-tunes it on the NLI datasets.

Embedding Since the premise and hypothesis are concatenated as one sequence to feed into the model, a special token [SEP] is inserted between them to differentiate the two sentences. Additionally, another special token [CLS] is inserted as the first token, which will be used to make the final prediction in the original BERT implementation:

$$\bar{\mathbf{x}} = [[\text{CLS}]; \bar{\mathbf{x}}^P; [\text{SEP}]; \bar{\mathbf{x}}^H; [\text{SEP}]]. \quad (39)$$

BERT Encoding The self-attention mechanism in Transformer ([Vaswani et al., 2017](#)) performs the alignment role among the tokens in the concatenated premise and hypothesis. Finally, we obtain the extracted features of each token:

$$\mathbf{s} = \text{BERT-Encoder}(\bar{\mathbf{x}}). \quad (40)$$

Prediction In the original BERT, the extracted features of special token [CLS] are used to make the final prediction directly. In our BERT-based model, we use the extracted features of each token to conduct average pooling instead⁷:

$$p(l|\mathbf{x}^P, \mathbf{x}^H) = \text{softmax}(E_l^\top \cdot f(\mathbf{s}_{\text{avg}})). \quad (41)$$

B Implementation Details

We implement our models using PyTorch and train them on Nvidia 1080Ti. We use the Adam optimizer (Kingma and Ba, 2015) with an initial learning rate of 0.0002. If the loss on development sets doesn’t decrease in three epochs, the learning rate will be decayed to half. The minimum learning rate is 10^{-5} . The dropout rate of 0.4 is applied before each feed-forward layer and recurrent layer. L2 regularization is set to 10^{-5} . The batch size is set to 32. The hidden size is set to 300. All parameters are initialized with xavier initialization (Glorot and Bengio, 2010). Word embeddings are preloaded with 300d GloVe embeddings (Pennington et al., 2014) and fixed during training. The iteration of routing is tuned amongst $\{1, 2, 3, 4, 5\}$. The m^+ and m^- of marginal loss is tuned amongst $\{0.8, 0.9\}$ and $\{0.4, 0.5\}$.

For the BERT baseline, we use the official uncased BERT-Base (12-layer, 768-hidden, 12-heads, 110M parameters) and fine-tune it with our MPIs according to the preliminary experiments on the cross alignment baseline.

C Linguistic Error Analysis

We perform the linguistic error analysis using the supplementary annotations provided by the MultiNLI dataset. We compare the MPIs against the outputs of the our base model across 13 categories of linguistic phenomena. Table 4 and Table 5 show the results. Both two MPIs outperform our base model on overall accuracy on the matched and mismatched sets. The word overlap category in the supplementary annotations is whether both sentences share more than 70% of their tokens, containing 37 instances. Their statistical method of word overlap is much different from ours: the word overlap rate R_{wo} is calculated by the amount of shared tokens and the amount of hypothesis, which is related to the intrinsically asymmetric in NLI (MacCartney et al., 2008) and

⁷We found the performance of these two methods is close in the preliminary experiments.

Category	Baseline	SMPI	IMPI
Conditional	69.6	73.9	56.5
Word overlap	92.9	89.3	89.3
Negation	82.2	77.5	79.8
Antonym	76.5	64.7	76.5
Long Sentence	78.8	75.8	78.8
Tense Difference	82.4	84.3	84.3
Active/Passive	100.0	93.3	100.0
Paraphrase	96.0	92.0	92.0
Quantity/Time	66.7	66.7	60.0
Coreference	73.3	73.3	73.3
Quantifier	80.8	76.8	80.0
Modal	80.6	79.2	80.6
Belief	77.3	72.7	78.8
Overall	77.8	78.7	79.1

Table 4: Linguistic Error Analysis on MultiNLI development matched sets. Baseline is the cross alignment baseline

Category	Baseline	SMPI	IMPI
Conditional	76.9	69.2	76.9
Word overlap	81.1	89.2	86.5
Negation	76.0	73.1	75.0
Antonym	80.0	80.0	85.0
Long Sentence	73.4	69.7	78.0
Tense Difference	77.8	77.8	72.2
Active/Passive	90.0	90.0	90.0
Paraphrase	86.5	89.2	89.2
Quantity/Time	64.1	66.7	64.1
Coreference	89.7	82.8	82.8
Quantifier	77.9	72.1	76.4
Modal	81.7	75.4	77.0
Belief	87.9	84.5	86.5
Overall	77.8	78.6	78.9

Table 5: Linguistic Error Analysis on MultiNLI development mismatched sets. Baseline is the cross alignment baseline

the fact that the perspectives mainly is expressed by the hypothesis.

D Visualization on Routing Assignment Weights

Here we will show more visualization on routing assignment weights c_{il} in Figure 5.

E Overall Analysis on Word Overlap Rate

Table 6 shows the statistic about the MultiNLI development matched/mismatched sets divided

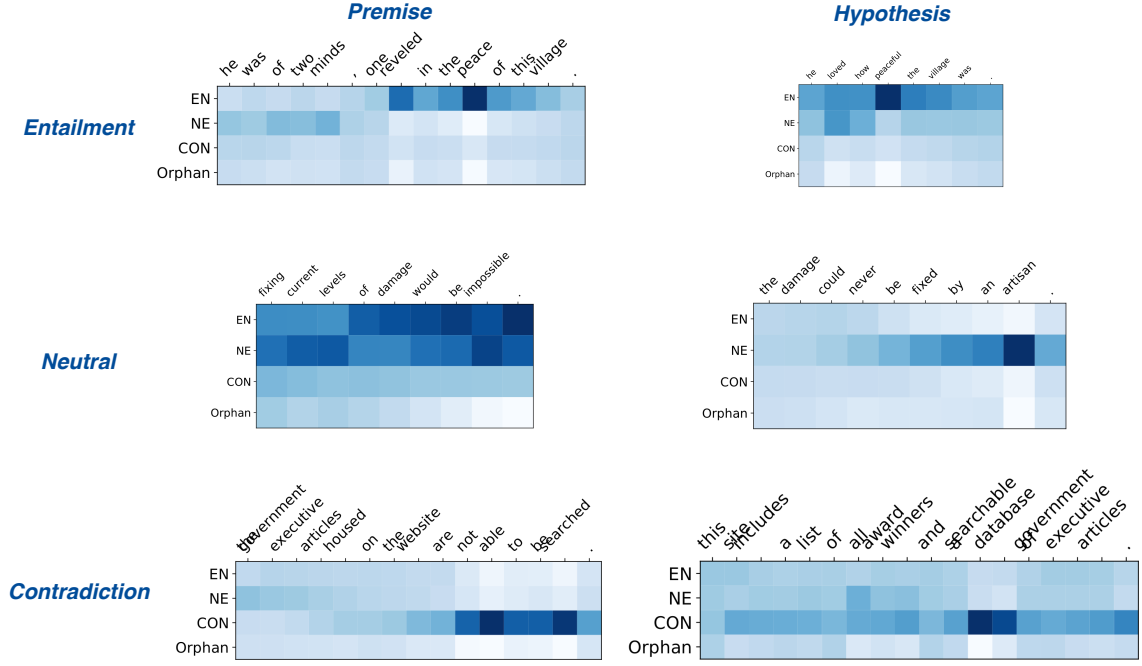


Figure 5: Routing weights c_{il} visualization of SMPI with three samples in MultiNLI development dataset. Darker color correspond to a higher routing weights.

Relation	[0,0.2)	[0.2,0.4)	[0.4,0.6)	[0.6,0.8)	[0.8,1.0)	1.0
EN	458/317	1331/1221	986/1123	513/599	147/161	44/42
NE	982/849	1254/1264	495/578	253/290	68/101	71/47
CON	845/684	1368/1459	651/725	284/289	54/75	11/8
Total	2285/1850	3953/3944	2132/2426	1050/1178	269/337	126/97

Table 6: Statistics of MultiNLI development matched/mismatched sets divided by the word overlap rates into six groups: [0,0.2), [0.2,0.4), [0.4,0.6), [0.6,0.8), [0.8,1.0) and 1.0.

into six groups by word overlap rates: [0,0.2), [0.2,0.4), [0.4,0.6), [0.6,0.8), [0.8,1.0) and 1.0. Figure 6 and 7 show the corresponding error rates of our base model and two MPIs. Obviously, our MPIs relieve the phenomenon: the small amount aligned parts can cause the misjudgment between entailment relations and neutral relations. As the Figure 6(a) and Figure 7(a) show, the total error rate is much higher when the aligned parts in the small amount. This phenomenon is more serious in entailment class and neutral class—40% and 30%.⁸ We hope that NLI models should not only focus on capturing the aligned parts, also take advantage of the unaligned parts. The described phenomenon in NLI will be relieve in this way and NLI models can achieve better performance.

⁸the error rate of low word overlap rate on contradiction is about 20% which is close to the overall performance. The judgment of contradiction does not only need aligned parts (to find the same object like entailment) also need unaligned parts to find the conflict (somewhat like neutral), word overlap rate is hard to quantify it.

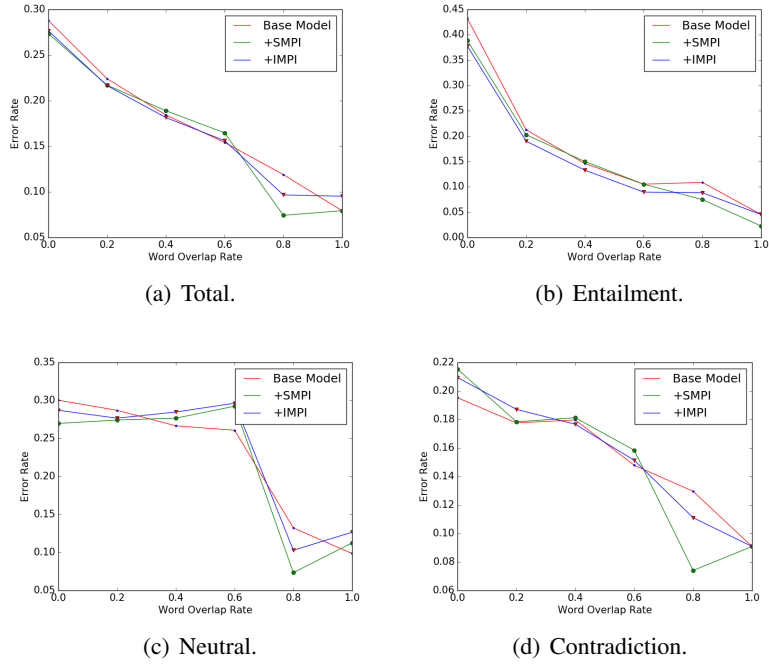


Figure 6: Error rate of total and three inference classes (entailment, neutral and contradiction) by word overlap rate in MultiNLI development matched set. Base Model is the cross alignment baseline. Our MPIs relieve the error rate in the intervals with low word overlap rate of entailment and neutral significantly.

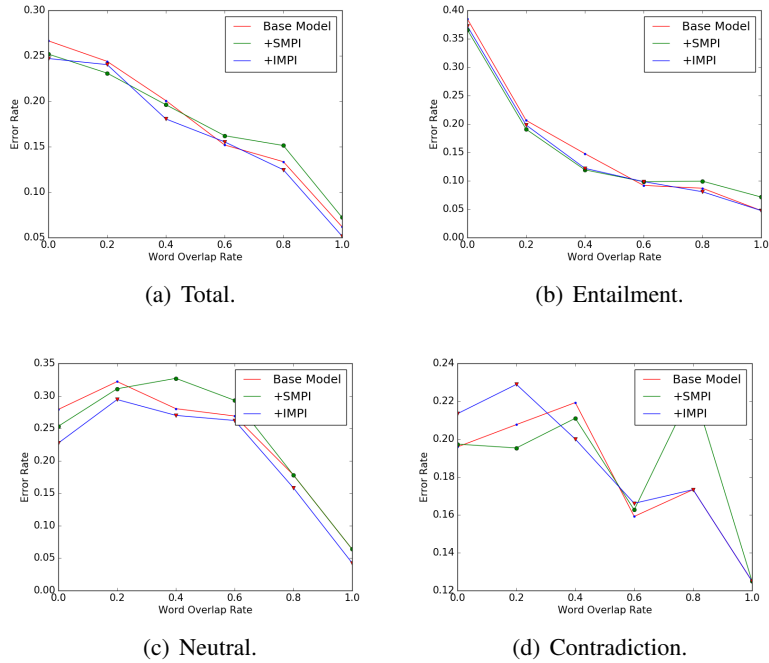


Figure 7: Error rate of total and three inference classes (entailment, neutral and contradiction) by word overlap rate in MultiNLI development mismatched set. Base Model is the cross alignment baseline. Our MPIs relieve the error rate in the intervals with low word overlap rate of entailment and neutral significantly.