

# A Direct Construction of GCP and Binary CCC of Length Non Power of Two

Praveen Kumar, Sudhan Majhi, Subhabrata Paul

**Abstract**—This paper presents a direct construction of Golay complementary pairs (GCPs) and binary complete complementary codes (CCCs) of non power of two lengths. CCCs have found wide range of practical applications including coding, signal processing and wireless communication due to their zero auto and cross-correlation sum properties. It is the first time GCPs of non power of two lengths are constructed using generalised Boolean functions (GBFs). We have truncated the tail of the sequence in generating non power of two length sequences. The idea is further extended to generate complementary sets (CSs). Finally, binary CCCs are constructed using CSs and its mate. To the best of authors' knowledge the direct construction of GCPs and binary CCCs of non power of two length doesn't exist in literature. We have also investigated the row and column sequence peak to mean envelope power ratio (PMEPR) of the generated sequences.

**Index Terms**—Complementary set (CS), Complete complementary set (CCC), generalised Boolean function (GBF), Golay complementary pair (GCP)

## I. INTRODUCTION

THE Golay complementary pairs (GCPs) were first introduced by Golay [1]. The aperiodic auto-correlation sum (AACS) of a GCP diminishes to zero for all time shifts not equal to zero. The sequences in a GCP are known as Golay sequences. Tseng and Liu extended the concept of GCP to complementary set (CS), which is a set of  $M(\geq 2)$  sequences of equal length  $N$  such that their AACS sum is zero for all non zero time shift [2]. They also proposed the idea of mutually orthogonal complementary set (MOCS), which can be viewed as collection of  $K$  CSs of size  $M$  and sequence length  $N$  such that any two distinct CSs are orthogonal to each other i.e., their aperiodic cross-correlation sum (ACCS) is zero for all shifts. A MOCS consisting of  $K$  CSs, each containing  $M$  sequences of length  $N$  is denoted by  $(K, M, N)$ -MOCS. For a MOCS the set size  $K$  is bounded above by number of constituent sequences  $M$ , i.e.,  $K \leq M$  [3]. For the special case, when the set size of MOCS achieves its upper bound, i.e, MOCS with  $K = M$  are known as a set of complete complementary codes (CCCs) and is denoted by  $(K, K, N)$ -CCC [4]. Due to the ideal correlation properties and optimal set size CCCs have found its application in next generation multi carrier code division multiple access (MC-CDMA) [5]–[9]. Apart from this CCCs are used in optimal channel estimation in multiple-input and multiple-output (MIMO) frequency-selective channels [10], MIMO radar [11], [12], cell search in orthogonal frequency division multiplexing (OFDM) systems [13], and data hiding [14], et al.

A primary approach to construct CCCs based on generalised Boolean functions (GBFs). This was started by Davis and

Jedwab in year 1999, who have proposed a GBFs based construction of  $2^h$  ( $h \in \mathbb{N}$ ) GCPs of length  $2^m$  ( $m \in \mathbb{N}$ ) [15]. Paterson extended the idea of  $2^h$ -ary GCPs to  $q$ -ary (for even  $q$ ) CSs with constituent sequences having power of two lengths [16]. Paterson's idea was further extended by Rathinakumar and Chaturvedi [17] to construct  $(K, K, 2^m)$ -CCC. All these construction based on GBFs generates sequence of length  $2^m$  only. In the recent development GBFs based construction of CSs with more flexible lengths have been proposed [18]–[22]. CSs with flexible lengths are of interest to practical orthogonal frequency division multiplexing (OFDM) systems with varying numbers of subcarriers. Several GBFs based construction of Z-complementary code set (ZCCS) of non power of two length are proposed in literature [23], [24]. MOCS constructions based on a series of sequence operations (e.g., reversals, negations, interleaving, and concatenations) have been proposed in [2]. Das *et al.* presented methods by using paraunitary (PU) matrices to construct MOCSs and CCCs with various lengths [25]–[27]. However, the sequence generated through these indirect methods may not be friendly for hardware generation due to their large space and time requirements. In [28], [29] construction of MOCSs with non power of two lengths based on GBFs have been proposed, where the set size is upper bounded by half of the number of constituent sequences in a CS, i.e.,  $K \leq M/2$ . Recently, Palash *et al.* has proposed the construction of CCCs using multivariable functions [30]. This direct construction can generates  $q$ -ary CCCs of all possible length. However, in case of  $q = 2$ , only binary CCC of length in the form  $2^m$  ( $m \in \mathbb{Z}$ ) can be constructed [30]. So, direct construction of binary CCCs of non power of two length is still an open problem.

In this paper a GBFs based construction of binary CCCs of length  $2^{m-1} + 2^{m-3}$  ( $m \geq 5$ ) is proposed. Using GBFs and truncating the tail of the sequence,  $2^{m-1} + 2^{m-3}$  ( $m \geq 5$ ) length GCPs are constructed in *Theorem 1*. We have used the idea of graphs corresponding to the quadratic part of the GBFs, with the property that deleting some vertices of the graph results in a path. In *Theorem 2* the idea has been further extended to generate CSs. Finally in *Theorem 3* binary CCC of non power of two length has been constructed using CSs of *Theorem 2* and its mate.

The remaining letter is organized as follows. Basic notations and definitions are provided in Section II. In Section III, the proposed construction of  $q$ -ary even length ZCPs is discussed. Finally, concluding remarks are provided in Section IV.

## II. NOTATIONS AND DEFINITIONS

In this section we will discuss the preliminaries, notations and basic results that will be required in our proposed construction.

*Definition 1:* Let  $\mathbf{d} = [d_0, d_1, \dots, d_{N-1}]$  and  $\mathbf{e} = [e_0, e_1, \dots, e_{N-1}]$  be two  $N$  length complex valued sequence. The ACCF at a shift  $\tau$  ( $\tau \in \mathbb{Z}$ ) is defined by

$$C(\mathbf{d}, \mathbf{e})(\tau) = \begin{cases} \sum_{k=0}^{N-1-\tau} d_k \cdot e_{k+\tau}^*, & 0 \leq \tau \leq N-1, \\ \sum_{k=0}^{N-1-\tau} d_{k+\tau} \cdot e_k^*, & -N+1 \leq \tau \leq -1, \\ 0, & |\tau| \geq N. \end{cases}$$

Where  $e^*$  is the complex conjugate of  $e$ . When  $\mathbf{d}$  and  $\mathbf{e}$  are equal, it is known as AACCS of  $e$  and is denoted by  $A(\mathbf{e})(\tau)$ . We can also define the ACCF and AACF of  $\mathbb{Z}_q$  valued sequences by defining a one-one correspondence between  $\mathbb{Z}_q$  valued sequence  $\mathbf{e} = [e_0, e_1, \dots, e_{N-1}]$  and the complex valued sequence  $\mathbf{e}' = [e'_0, e'_1, \dots, e'_{N-1}]$ , where  $e'_i = \omega^{e_i}$  and  $\omega = \exp(2\pi\sqrt{-1}/q)$ . So if  $\mathbf{d}$  and  $\mathbf{e}$  are  $\mathbb{Z}_q$  valued sequence then we define their ACCF  $C(\mathbf{d}, \mathbf{e})(\tau)$  and AACF  $A(\mathbf{e})(\tau)$  respectively as ACCF and AACF of the corresponding complex value sequence  $\mathbf{d}'$  and  $\mathbf{e}'$ .

*Definition 2:* A set of  $n$  sequences  $\mathbf{e}^0, \mathbf{e}^1, \dots, \mathbf{e}^{n-1}$ , each of equal length  $N$ , is said to be a complementary set (CS) if

$$A(\mathbf{e}^0)(\tau) + A(\mathbf{e}^1)(\tau) + \dots + A(\mathbf{e}^{n-1})(\tau) = \begin{cases} nN, & \tau = 0, \\ 0, & \text{otherwise.} \end{cases}$$

A size two CS is called a GCP.

*Definition 3:* Consider a set containing  $K$  sequences sets  $\mathcal{E} = \{E^0, E^1, \dots, E^{K-1}\}$ , where each set  $E^p$  consists of  $M$  sequences  $E^p = \{\mathbf{e}_0^p, \mathbf{e}_1^p, \dots, \mathbf{e}_{M-1}^p\}$  and each sequence has length  $N$ ,  $0 \leq p \leq K-1$ . The set  $\mathcal{E}$  is called a MOCS, denoted by  $(K, M, N)$ -MOCS, if the aperiodic correlation function of  $E^p$  and  $E^{p'}$  satisfies

$$C(E^p, E^{p'}) (\tau) = \sum_{n=0}^{M-1} C(\mathbf{e}_n^p, \mathbf{e}_n^{p'}) (\tau) = \begin{cases} MN, & \tau = 0, p = p' \\ 0, & \text{otherwise} \end{cases} \quad (1)$$

where  $0 \leq p, p' \leq K-1$ ,  $K$  is the set size,  $M$  is the flock size, and  $N$  is the sequence length. For an  $(K, M, N)$ -MOCS, the upper bound on the set size is given by  $K \leq M$ . If  $K = M$ , the MOCS is called a CCC of order  $K$  and length  $N$ , and denoted by  $(K, K, N)$ -CCC.

### A. Generalised Boolean Function

A GBF  $f$  in  $m$  binary variables  $x_0, x_1, \dots, x_{m-1}$  is a function from  $\{0, 1\}^m$  to  $\mathbb{Z}_q$  (where throughout the paper  $q \geq 2$  is an even integer). A monomial of degree  $r$  is defined as the product of any  $r$  variables among  $x_0, x_1, \dots, x_{m-1}$ . So there are  $\sum_{r=0}^m \binom{m}{r} = 2^m$  monomials, namely  $1, x_0, x_1, \dots, x_{m-1}, x_0x_1, x_0x_2, \dots, x_{m-2}x_{m-1}, \dots, x_0x_1 \dots x_{m-1}$ . With the linear combination of these  $2^m$  monomials by taking coefficient from  $\mathbb{Z}_q$ , a GBF can be expressed uniquely. In

the expression of a GBF of order  $r$ , there exist at least one highest-degree monomial of order  $r$  with non-zero coefficient. Corresponding to a GBF  $f$  of  $m$  variables  $x_0, x_1, \dots, x_{m-1}$ , length- $2^m$   $\mathbb{Z}_q$ -valued vector is expressed as

$$\mathbf{f} = [\omega^{f_0}, \omega^{f_1}, \dots, \omega^{f_{2^m-1}}], \quad (2)$$

where  $f_i = f(i_0, i_1, \dots, i_{m-1})$  and  $[i_0, i_1, \dots, i_{m-1}]$  is the binary vector representation of  $i$ . A complex-valued vector  $\mathbf{f}'$  is associated with every  $\mathbf{f}$ , where  $f'_i = \omega^{f_i}$  and  $\omega = \exp(2\pi\sqrt{-1}/q)$ . When it is clear from the context, we will just use  $f$  to refer to all three. Corresponding to a GBF  $f$  with  $m$  variables the sequence  $\mathbf{f}$  is of length  $2^m$ . In this paper, we focus on sequences of length  $\neq 2^m$ . Hence, we define the truncated sequence  $\mathbf{f}^{(L)}$  and  $\mathbf{f}_{(L)}$  corresponding to the GBF  $f$  by respectively deleting the first  $L$  and last  $L$  elements of the sequence  $\mathbf{f}$ . For the sake of simplicity, we ignore the superscript of  $\mathbf{f}^{(L)}$  and subscript of  $\mathbf{f}_{(L)}$  when the sequence length is known from the context. Also for a set  $A$  containing sequences of equal length,  $\Psi^L(A)$  and  $\Psi_L(A)$  represents a set by respectively deleting first  $L$  and last  $L$  elements of each sequence of the set  $A$ .

### B. Graph of a Generalised Boolean Function

Let  $Q: \{0, 1\}^m \rightarrow \mathbb{Z}_q$  be the generalized Boolean function defined by

$$Q(x_0, \dots, x_{m-1}) = \sum_{0 \leq i < j < m} q_{ij} x_i x_j$$

where  $q_{ij} \in \mathbb{Z}_q$ , so that  $Q$  is a quadratic form in  $m$  variables over  $\mathbb{Z}_q$ . We associate a labeled graph  $G(Q)$  on  $m$  vertices with  $Q$  as follows. We label the vertices of  $G(Q)$  by  $0, 1, \dots, m-1$  and join vertices  $i$  and  $j$  by an edge labeled  $q_{ij}$  if  $q_{ij} \neq 0$ . In the case  $q = 2$ , every edge is labeled 1 and by convention we will omit edge labels in this case. Of course, from any graph  $G$  of this type we can recover a quadratic form  $Q$ . If  $f: \{0, 1\}^m \rightarrow \mathbb{Z}_q$  is a GBF of order  $r$ , then we define  $G(f)$  to be the graph  $G(Q)$  where  $Q$  is the quadratic part of  $f$ . We say that a graph  $G$  of the type defined above is a path if either

- $m = 1$  (in which case the graph contains a single vertex and no edges), or
- $m \geq 2$  and  $G$  has exactly  $m-1$  edges, all labeled  $q/2$  which form a Hamiltonian path in  $G$ .

For  $m \geq 2$ , a path on  $m$  vertices corresponds to a quadratic form of the type

$$\frac{q}{2} \cdot \sum_{\alpha=0}^{m-1} x_{\pi(\alpha)} x_{\pi(\alpha+1)},$$

where  $\pi$  is a permutation of  $\{0, 1, \dots, m-1\}$ .

### C. Restricted Boolean Function

Let  $f: \{0, 1\}^m \rightarrow \mathbb{Z}_q$  be a generalized Boolean function in variables  $x_0, x_1, \dots, x_{m-1}$ . Let  $0 \leq j_0 < j_1 < \dots < j_{k-1} < m$  be a list of  $k$  indices and write  $\mathbf{x} = [x_{j_0} x_{j_1} \dots x_{j_{k-1}}]$ . Let  $\mathbf{c} = [c_0 c_1 \dots c_{k-1}]$  be a binary word of length  $k$ . Then we define the vector  $f|_{\mathbf{x}=\mathbf{c}}$  to be the complex-valued vector

with component  $i = \sum_{j=0}^{m-1} i_j 2^j$  equal to  $\omega^{f(i_0, i_1, \dots, i_{m-1})}$  if  $i_{j_\alpha} = c_\alpha$  for each  $0 \leq \alpha < k$ , and equal to 0 otherwise. Here  $\omega$  is a complex  $q$ th root of unity. By convention, in the special case where  $\mathbf{x}$  and  $\mathbf{c}$  are null (i.e., of length zero), we define  $f|_{\mathbf{x}=\mathbf{c}}$  to be the complex-valued vector associated with  $f$ . A simple consequence of the definition is the following vector identity: for any  $\mathbf{x}$  defined as above

$$f = \sum_{\mathbf{c}} f|_{\mathbf{x}=\mathbf{c}}.$$

The vector  $f|_{\mathbf{x}=\mathbf{c}}$  can also be thought of as being constructed from the GBF  $f$  by substituting  $x_{i_\alpha} = c_\alpha$  in the algebraic normal form for  $f$  for each  $0 \leq \alpha < k$ , simplifying to obtain a GBF in  $m-k$  variables (which we also denote by  $f|_{\mathbf{x}=\mathbf{c}}$ ), then calculating  $\omega^{f|_{\mathbf{x}=\mathbf{c}}}$  over the domain of this new function and finally inserting zeros at appropriate locations in the resulting vector.

*Lemma 1 ([17]):* Let  $f, g : \{0, 1\}^m \rightarrow \mathbb{Z}_q$  be GBFs in variables  $x_0, x_1, \dots, x_{m-1}$ . Let  $0 \leq j_0 < j_1 < \dots < j_{k-1} < m$  be a list of  $k$  indices and let  $\mathbf{c} = [c_0 c_1 \dots c_{k-1}]$  and  $\mathbf{d} = [d_0 d_1 \dots d_{k-1}]$  be binary-valued vectors. Write  $\mathbf{x} = [x_{j_0} x_{j_1} \dots x_{j_{k-1}}]$  and suppose  $0 \leq i_1 < i_2 < \dots < i_{l-1} < m$  is a set of indices not in  $\{j_0, j_1, \dots, j_{k-1}\}$ . Denote  $\mathbf{y} = [x_{i_0} x_{i_1} \dots x_{i_{l-1}}]$ , then

$$\mathbf{C}(f|_{\mathbf{x}=\mathbf{c}}, g|_{\mathbf{x}=\mathbf{d}})(\tau) = \sum_{\mathbf{c}_1, \mathbf{c}_2} \mathbf{C}(f|_{\mathbf{xy}=\mathbf{cc}_1}, g|_{\mathbf{xy}=\mathbf{dc}_2})(\tau) \quad (3)$$

*Lemma 2 ([16]):* Let  $f : \{0, 1\}^m \rightarrow \mathbb{Z}_q$  be a generalized Boolean function in variables  $x_0, x_1, \dots, x_{m-1}$ . Let

$$0 \leq j_0 < j_1 < \dots < j_{k-1} < m$$

be a list of  $k$  indices. Write  $\mathbf{x} = [x_{j_0} x_{j_1} \dots x_{j_{k-1}}]$ . Then

$$A(f)(\ell) = \sum_{\mathbf{c}} A(f|_{\mathbf{x}=\mathbf{c}})(\ell) + \sum_{\mathbf{c}_1 \neq \mathbf{c}_2} C(f|_{\mathbf{x}=\mathbf{c}_1}, f|_{\mathbf{x}=\mathbf{c}_2})(\ell) \quad (4)$$

### III. PROPOSED CONSTRUCTION

In this section, we first provide a direct GBFs based construction of GCPs of non power of two length. The result is further extended to generate CSs and its mate. Finally with union of two MOCSS non power of two length binary CCC is constructed using GBFs. In this section always  $m \geq 5$ . Suppose  $Q : \mathbb{Z}_2^{m-4} \rightarrow \mathbb{Z}_q$  is the quadratic form in variables  $x_0, x_1, \dots, x_{m-5}$ , i.e.,

$$Q(x_0, x_1, \dots, x_{m-5}) = \frac{q}{2} \sum_{0 \leq i < j < m-4} q_{ij} x_i x_j. \quad (5)$$

For any  $c, c_i \in \mathbb{Z}_q$ , define

$$f1 = Q + \sum_{i=0}^{m-5} c_i x_i + c, \text{ where } Q \text{ is defined in (5)}. \quad (6)$$

Using  $f1$  of (6), define the GBF  $f : \mathbb{Z}_2^m \rightarrow \mathbb{Z}_2$  as

$$\begin{aligned} f = & f1 + \frac{q}{2} \bar{x}_{m-1} (\bar{x}_{m-4} (x_{m-3} + x_{m-2}) + x_{m-2} x_{m-3}) \\ & + \frac{q}{2} x_{\beta_1} (\bar{x}_{m-1} (x_{m-2} \bar{x}_{m-3} \bar{x}_{m-4} + x_{m-2} x_{m-3}) \\ & + x_{m-1} \bar{x}_{m-2} \bar{x}_{m-3}). \end{aligned} \quad (7)$$

Let  $0 \leq j_0 < j_1 < \dots < j_{k-1} < m-4$ , be a list of  $k$  indices, where  $0 \leq k \leq m-5$  and write  $\mathbf{x} = [x_{j_0}, x_{j_1}, \dots, x_{j_{k-1}}]$ . Let the remaining  $m-4-k$  indices between 0 to  $m-5$  are  $0 \leq i_0 < i_1 < \dots < i_{m-k-5} < m-4$ . Let  $\mathbf{c} = [c_0 c_1 \dots c_{k-1}]$  is a  $k$  length binary vector.

#### A. Construction of GCPs of Non Power of Two length

*Theorem 1:* Suppose that the function  $f|_{\mathbf{x}=\mathbf{c}}$  (obtained by substituting  $x_{j_\alpha} = c_\alpha, 0 \leq \alpha \leq k \leq m-5$ , in (7)) is such that the  $G(f|_{\mathbf{x}=\mathbf{c}})$  is a path. Then the complex-valued vector  $f|_{\mathbf{x}=\mathbf{c}}$  is Golay sequence of length  $2^{m-1} + 2^{m-3}$  and forms a GCP with each vector of the form

$$\left( f + \frac{q}{2} x_{\beta_2} + c' \right) |_{\mathbf{x}=\mathbf{c}},$$

where  $c \in \mathbb{Z}_q$  and  $\beta_1$  and  $\beta_2$  be the label of end vertices of the path  $G(f|_{\mathbf{x}=\mathbf{c}})$  when  $0 \leq k < m-5$ . In case of  $k = m-5$ ,  $G(f|_{\mathbf{x}=\mathbf{c}})$  has only a single vertex labeled  $\beta = \beta_1 = \beta_2$ .

*Proof:* We will prove the theorem by induction on  $k$ , where the statement of the theorem is taken as an inductive hypothesis.

*Base Case:* For  $k = m-5$ , in this case  $Q$  the quadratic part of  $f|_{\mathbf{x}=\mathbf{c}}$  is identically zero and  $G(f|_{\mathbf{x}=\mathbf{c}})$  has a single vertex labeled  $\beta$ , and  $\mathbf{x}$  omits exactly the variable  $x_\beta$  among  $\{x_0, x_1, \dots, x_{m-5}\}$ . Since the higher order terms of the function remains unaffected by  $\mathbf{x} = \mathbf{c}$ , so the function  $f|_{\mathbf{x}=\mathbf{c}}$  takes non-zero values in exactly 20 components numbered

$$k2^{m-4} + \sum_{j \neq \beta} c_j 2^j \text{ and } 2^\beta + k2^{m-4} + \sum_{j \neq \beta} c_j 2^j \text{ for } 0 \leq k \leq 9. \quad (8)$$

and these non zero terms in increasing order of their positions are

$$\{ \omega^{f_0}, \omega^{f_1}, \omega^{f_0}, \omega^{f_1}, -\omega^{f_0}, -\omega^{f_1}, \omega^{f_0}, \omega^{f_1}, -\omega^{f_0}, \omega^{f_1}, \omega^{f_0}, \omega^{f_1}, -\omega^{f_0}, \omega^{f_1}, \omega^{f_0}, \omega^{f_1}, -\omega^{f_0}, \omega^{f_1}, -\omega^{f_0}, \omega^{f_1} \},$$

where  $f_0, f_1$  are the values taken by the function  $f1|_{\mathbf{x}=\mathbf{c}}$  at  $\sum_{j \neq \beta} c_j 2^j$  and  $2^\beta + \sum_{j \neq \beta} c_j 2^j$  respectively.

The function  $(f1 + \frac{q}{2} x_\beta + c')|_{\mathbf{x}=\mathbf{c}}$  will takes values  $f_0 + c'$  and  $f_1 + \frac{q}{2} + c'$  at positions  $\sum_{j \neq \beta} c_j 2^j$  and  $2^\beta + \sum_{j \neq \beta} c_j 2^j$  respectively. So the 20 non-zero components of the function  $(f + \frac{q}{2} x_\beta + c')|_{\mathbf{x}=\mathbf{c}}$  at positions mentioned in (8) are

$$\begin{aligned} & \{ \omega^{f_0+c'}, -\omega^{f_1+c'}, \omega^{f_0+c'}, -\omega^{f_1+c'}, -\omega^{f_0+c'}, \omega^{f_1+c'}, \omega^{f_0+c'}, \\ & -\omega^{f_1+c'}, -\omega^{f_0+c'}, -\omega^{f_1+c'}, \omega^{f_0+c'}, -\omega^{f_1+c'}, -\omega^{f_0+c'}, \\ & -\omega^{f_1+c'}, -\omega^{f_0+c'}, -\omega^{f_1+c'}, \omega^{f_0+c'}, \omega^{f_1+c'}, \omega^{f_0+c'}, \omega^{f_1+c'} \}, \end{aligned}$$

The non zero value of the AACF of the vectors corresponding to  $f|_{\mathbf{x}=\mathbf{c}}$  and  $(f + \frac{q}{2} x_\beta + c')|_{\mathbf{x}=\mathbf{c}}$  occurs only at shifts  $\tau = k2^{m-4} + 2^\beta, 0 \leq k \leq 9$  and  $\tau = k2^{m-4} - 2^\beta, 1 \leq k \leq 9$ .

For  $\tau = k2^{m-4} + 2^\beta, 0 \leq k \leq 9$ .

$$A(f|_{\mathbf{x}=\mathbf{c}})(\tau) = s_k \omega^{f_0} (\omega^{f_1})^* = s_k \omega^{f_0-f_1}$$

and

$$A\left(\left(f + \frac{q}{2} x_\beta + c'\right)|_{\mathbf{x}=\mathbf{c}}\right)(\tau) = s_k \omega^{f_0+c'} (-\omega^{f_1+c'})^* = -s_k \omega^{f_0-f_1}$$

where  $s_k$  is some constant.

Similarly for  $\tau = k2^{m-4} - 2^\beta$ ,  $1 \leq k \leq 9$ .

$$A(f|_{\mathbf{x}=\mathbf{c}})(\tau) = t_k \omega^{f_1} (\omega^{f_0})^* = t_k \omega^{f_1 - f_0}$$

and

$$\begin{aligned} A\left(\left(f + \frac{q}{2}x_\beta + c'\right)|_{\mathbf{x}=\mathbf{c}}\right)(\tau) &= t_k(-\omega^{f_1+c'})(-\omega^{f_0+c'})^* \\ &= -t_k \omega^{f_1 - f_0}, \text{ where } t_k \text{ is some constant.} \end{aligned}$$

So the AACS is zero for all  $\tau \neq 0$ , and hence the statement is true for  $k = m - 5$ .

Now, suppose that the theorem is true in the case where  $\mathbf{x}$  contains  $k + 1$  variables, where  $0 \leq k < m - 5$ . The non-zero components of the function  $f|_{\mathbf{x}=\mathbf{c}}$  are determined by the values of the function  $f|_{\mathbf{x}=\mathbf{c}}$  in variables  $(x_{i_0}, x_{i_1}, \dots, x_{i_{m-k-5}}, x_{m-4}, x_{m-3}, x_{m-2}, x_{m-1})$ , where  $G(Q|_{\mathbf{x}=\mathbf{c}})$  is a path. So for some permutation  $\pi$  of  $\{0, 1, \dots, m - k - 5\}$  and  $c_0, c_1, \dots, c_{m-k-5}, c \in \mathbb{Z}_2$

$$\begin{aligned} f|_{\mathbf{x}=\mathbf{c}}(x_{i_0}, x_{i_1}, \dots, x_{i_{m-k-5}}, x_{m-4}, x_{m-3}, x_{m-2}, x_{m-1}) \\ &= \frac{q}{2} \sum_{\alpha=0}^{m-k-6} x_{i_{\pi(\alpha)}} x_{i_{\pi(\alpha+1)}} + \sum_{\alpha=0}^{m-k-5} c_\alpha x_{i_{\pi(\alpha)}} + c \\ &+ \frac{q}{2} x_{i_{\pi(m-k-5)}} (\bar{x}_{m-1} (x_{m-2} \bar{x}_{m-3} \bar{x}_{m-4} + x_{m-2} x_{m-3}) + x_{m-1} \\ &\bar{x}_{m-2} \bar{x}_{m-3}) + \frac{q}{2} \bar{x}_{m-1} (\bar{x}_{m-4} (x_{m-3} + x_{m-2}) + x_{m-2} x_{m-3}) \end{aligned} \quad (9)$$

The higher order terms in (9) will be used frequently, so for the sake of simplicity let

$$\begin{aligned} R &= \frac{q}{2} x_{i_{\pi(m-k-5)}} (\bar{x}_{m-1} (x_{m-2} \bar{x}_{m-3} \bar{x}_{m-4} + x_{m-2} x_{m-3}) + x_{m-1} \\ &\bar{x}_{m-2} \bar{x}_{m-3}) + \frac{q}{2} \bar{x}_{m-1} (\bar{x}_{m-4} (x_{m-3} + x_{m-2}) + x_{m-2} x_{m-3}) \end{aligned} \quad (10)$$

Now, we will show that  $f|_{\mathbf{x}=\mathbf{c}}$  and  $(f + \frac{q}{2}x_{i_{\pi(0)}} + c')|_{\mathbf{x}=\mathbf{c}}$ , where  $c' \in \mathbb{Z}_q$  is arbitrary, forms a  $2^{m-1} + 2^{m-3}$  length GCP. Let  $\tau \neq 0$  is chosen arbitrarily and consider

$$\begin{aligned} A(f|_{\mathbf{x}=\mathbf{c}})(\tau) + A\left(\left(f + \frac{q}{2}x_{i_{\pi(0)}} + c'\right)|_{\mathbf{x}=\mathbf{c}}\right)(\tau) \\ &= A(g1)(\tau) + A(g2)(\tau) + C(g1, g2)(\tau) + C(g2, g1)(\tau) \\ &+ A(g3)(\tau) + A(g4)(\tau) + C(g3, g4)(\tau) + C(g4, g3)(\tau), \end{aligned} \quad (11)$$

where,  $g1 = f|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}0}$ ,  $g3 = (f + \frac{q}{2}x_{i_{\pi(0)}} + c')|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}0}$ ,

$$g2 = f|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}1} \quad g4 = (f + \frac{q}{2}x_{i_{\pi(0)}} + c')|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}1}$$

The non-zero components of the vector  $g1$  come from a function  $h1$  obtained by substituting  $x_{i_{\pi(0)}} = 0$  in the function  $f|_{\mathbf{x}=\mathbf{c}}$  in (9). For  $0 \leq k \leq m - 7$

$$\begin{aligned} h1|_{\mathbf{x}=\mathbf{c}}(x_{i_{\pi(0)}}, x_{i_{\pi(1)}}, \dots, x_{i_{\pi(m-k-5)}}, x_{m-4}, x_{m-3}, x_{m-2}, x_{m-1}) \\ &= \frac{q}{2} \sum_{\alpha=1}^{m-k-6} x_{i_{\pi(\alpha)}} x_{i_{\pi(\alpha+1)}} + \sum_{\alpha=1}^{m-k-5} c_\alpha x_{i_{\pi(\alpha)}} + c + R. \end{aligned}$$

While for  $k = m - 6$

$$\begin{aligned} h1(x_{i_{\pi(0)}}, x_{i_{\pi(1)}}, \dots, x_{i_{\pi(m-k-5)}}, x_{m-4}, x_{m-3}, x_{m-2}, x_{m-1}) \\ &= c_1 x_{i_{\pi(1)}} + c + R, \end{aligned}$$

where  $R$  is defined in (10).

Similarly, the non zero components of the vector  $g2$  come

from a function  $h2$  obtained by substituting  $x_{i_{\pi(0)}} = 1$  in the function  $f|_{\mathbf{x}=\mathbf{c}}$ . We have

$$\begin{aligned} h2(x_{i_{\pi(0)}}, x_{i_{\pi(1)}}, \dots, x_{i_{\pi(m-k-5)}}, x_{m-4}, x_{m-3}, x_{m-2}, x_{m-1}) \\ &= h1 + x_{i_{\pi(1)}} + c_0. \end{aligned}$$

Next consider the vector

$$g2' = \left(f + \frac{q}{2}x_{i_{\pi(1)}} + c_0\right)|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}0}.$$

Substituting  $\mathbf{x} = \mathbf{c}$  and then  $x_{i_{\pi(0)}} = 0$  in the expression for  $f + \frac{q}{2}x_{i_{\pi(1)}} + c_0$ , we obtain the function  $h1 + \frac{q}{2}x_{i_{\pi(1)}} + c_0$  identical to  $h2$ . It follows that the value of vector  $g2$  in component  $i$  is equal to that of the vector  $g2'$  in position  $i - 2^{x_{i_{\pi(0)}}$  (i.e. in the non-zero positions,  $g2$  is just a shift of  $g2'$ ). So, the vectors  $g2$  and  $g2'$  have identical AACF. Now consider the pair

$$g1 = f|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}0}.$$

and

$$g2' = \left(f + \frac{q}{2}x_{i_{\pi(1)}} + c_0\right)|_{\mathbf{x}x_{i_{\pi(0)}}=\mathbf{c}0}.$$

We have seen above that  $h1$ , the generalized Boolean function to which  $g1$  corresponds, is quadratic and has a graph that is a path on  $m - k - 5$  vertices. Moreover, either  $i_{\pi(1)}$  is an end vertex of this path, or  $k = m - 6$  and it is the only vertex in the graph. By the inductive hypothesis,  $g1$  and  $g2'$  is a Golay complementary pair, hence for  $\tau \neq 0$

$$A(g1)(\tau) + A(g2')(\tau) = 0$$

Since  $A(g2)(\tau) = A(g2')(\tau)$  for every  $\tau$ , we also have

$$A(g1)(\tau) + A(g2)(\tau) = 0. \quad (12)$$

From the definitions, we have  $g3 = \omega^{c'} g1$  and  $g4 = -\omega^{c'} g2$ . It follows that  $A(g3)(\tau) = A(g1)(\tau)$  and  $A(g4)(\tau) = A(g2)(\tau)$ , so from (11)

$$A(g3)(\tau) + A(g4)(\tau) = 0. \quad (13)$$

Also,

$$\begin{aligned} C(g3, g4)(\tau) &= C(\omega^{c'} g1, -\omega^{c'} g2)(\tau) \\ &= -C(g1, g2)(\tau), \end{aligned}$$

and so

$$\begin{aligned} C(g1, g2)(\tau) + C(g3, g4)(\tau) \\ &= C(g2, g1)(\tau) + C(g4, g3)(\tau) = 0. \end{aligned} \quad (14)$$

So, from (12)-(14), the sum in (10) is zero. Since  $\tau \neq 0$  was chosen arbitrary, it follows that  $f|_{\mathbf{x}=\mathbf{c}}$  and  $(f + \frac{q}{2}x_{i_{\pi(0)}} + c')|_{\mathbf{x}=\mathbf{c}}$  forms a GCP of length  $2^{m-1} + 2^{m-3}$ .  $\blacksquare$

*Example 1:* For  $m = 8$  and  $q = 2$ , consider the  $5^{th}$  order GBF  $f$  defined as,

$$\begin{aligned} f &= x_0 x_1 + x_1 x_2 + x_2 x_3 + x_3 x_0 + x_0 x_2 + x_1 x_3 + x_0 + x_1 \\ &+ x_2 + x_3 + \bar{x}_7 (\bar{x}_4 (x_5 + x_6) + x_6 x_5) + x_2 (\bar{x}_7 (x_6 \bar{x}_5 \bar{x}_4 \\ &+ x_6 x_5) + x_7 \bar{x}_6 \bar{x}_5) \end{aligned}$$

The graph  $G(f)$  of  $f$  (quadratic part of  $f$ ) is given in Fig.1. By substituting  $x_0 x_3 = 00$  ( deleting vertices  $x_0, x_3$ ) we get  $G(f|_{x_0 x_3=00})$  is a path. So by *Theorem 1*,  $f|_{x_0 x_3=00}$  and  $(f + x_1 + 1)|_{x_0 x_3=00}$  forms a GCP of length 160.

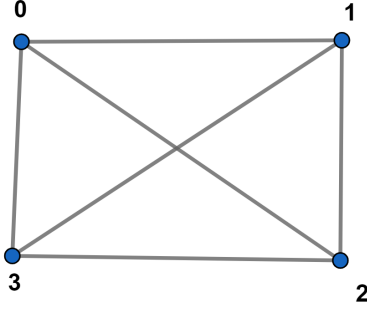


Fig. 1: The graph of quadratic form of  $f$

### B. Construction of Mutually Orthogonal Complementary Sets

Suppose  $Q$  and  $f$  are defined in (5) and (7) respectively ( $q = 2$ ), with the notation that  $G(f)$  is  $G(Q)$ . For  $0 \leq t < 2^k$ , ( $0 \leq k \leq m - 5$ ) define the ordered set  $S_t$  (with the natural order induced by the binary vector  $[d_0 d_1 \dots d_{k-1}]$ ) as

$$\left\{ f + \sum_{\alpha=0}^{k-1} d_{\alpha} x_{j_{\alpha}} + \sum_{\alpha=0}^{k-1} b_{\alpha} x_{j_{\alpha}} + dx_{\beta_2} : d, d_{\alpha} \in \{0, 1\} \right\}, \quad (15)$$

where  $t = \sum_{\alpha=0}^{k-1} b_{\alpha} 2^{\alpha}$ .

**Theorem 2:** Suppose that  $G(Q)$  contains a set of  $k \leq m - 5$  distinct vertices labeled  $j_0, j_1, \dots, j_{k-1}$  with the property that deleting those  $k$  vertices and all their edges results in a path. Let  $\beta_1$  and  $\beta_2$  be the label of end vertices of the path. In case of single vertex let  $\beta_1 = \beta_2 = \beta$ . Then for any choice of  $c, c_i \in \mathbb{Z}_q$ , the set  $\Psi_L(S_t)$  (for  $L = 2^{m-2} + 2^{m-3}$ ) is a CS for each  $0 \leq t < 2^k$ . Further, for  $t' \neq t$ ,  $S_{t'}$  and  $S_t$  are MOCSS.

*Proof:* Since each  $S_t$  for  $1 \leq t < 2^k$  is a permutation of  $S_0$ , so proving  $S_0$  is a complementary set is sufficient to show that for any  $0 \leq t < 2^k$ , the set  $S_t$  is a complementary set.

Let  $\mathbf{x} = x_{j_0} x_{j_1} \dots x_{j_{k-1}}$  and  $\mathbf{d} = d_0 d_1 \dots d_{k-1}$ . So  $\mathbf{d} \cdot \mathbf{x} = \sum_{\alpha=0}^{k-1} d_{\alpha} x_{j_{\alpha}}$ . Now from Lemma 2 we have for  $\tau \neq 0$

$$\sum_{\mathbf{d}, d} A(f + \mathbf{d} \cdot \mathbf{x} + dx_{\alpha}) (\tau) = L_1 + L_2,$$

where

$$L_1 = \sum_{\mathbf{d}, d} \sum_c A((f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}) (\tau), \quad (16)$$

and

$$L_2 = \sum_{\mathbf{c}_1 \neq \mathbf{c}_2} \sum_{\mathbf{d}} \sum_{\mathbf{d}} C((f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau). \quad (17)$$

For every choice of  $\mathbf{c}$  and  $\mathbf{d}$  the graph of the function  $(f + \mathbf{d} \cdot \mathbf{x})|_{\mathbf{x}=\mathbf{c}}$  is a path. So from Theorem 1 for every  $\mathbf{c}$  and  $\mathbf{d}$  the vectors  $(f + \mathbf{d} \cdot \mathbf{x})|_{\mathbf{x}=\mathbf{c}}$  and  $(f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}$  forms a GCP. Hence the sum  $L_1$  in (15) is zero. For fixed values of  $\mathbf{c}_1, \mathbf{c}_2$  and  $d$ , consider the inner sum of  $L_2$  of (16) i.e.,

$$\sum_{\mathbf{d}} C((f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau). \quad (18)$$

Now, the vector  $\mathbf{x}$  contains all the terms of  $\mathbf{d} \cdot \mathbf{x}$ . So for fixed  $\mathbf{c}_1, \mathbf{c}_2$  and  $d$  we have,

$$(f + \mathbf{d} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_j} = \begin{cases} \mathbf{a}_j = (f + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_j}, & \text{when } \mathbf{d} \cdot \mathbf{c}_j = 0 \pmod{2}, \\ -\mathbf{a}_j, & \text{when } \mathbf{d} \cdot \mathbf{c}_j = 1 \pmod{2}. \end{cases}$$

So, there are two types of correlations in the inner sum of  $L_2$  (18) type-I and type-II, where type-I contains  $C(\mathbf{a}_1, \mathbf{a}_2)$  or  $C(-\mathbf{a}_1, -\mathbf{a}_2)$  and type-II contains  $C(-\mathbf{a}_1, \mathbf{a}_2)$  or  $C(\mathbf{a}_1, -\mathbf{a}_2)$ . Notice that type-I correlation arises either when  $\mathbf{d} \cdot \mathbf{c}_1 = \mathbf{d} \cdot \mathbf{c}_2 = 0 \pmod{2}$  or  $\mathbf{d} \cdot \mathbf{c}_1 = \mathbf{d} \cdot \mathbf{c}_2 = 1 \pmod{2}$  i.e., when  $\mathbf{d} \cdot \mathbf{c}_1 = \mathbf{d} \cdot \mathbf{c}_2 \pmod{2}$ . Similarly type-II correlation arises when  $\mathbf{d} \cdot \mathbf{c}_1 \neq \mathbf{d} \cdot \mathbf{c}_2 \pmod{2}$ . Since  $\mathbf{c}_1 \neq \mathbf{c}_2$  implies that  $\mathbf{c}_1 + \mathbf{c}_2 \neq 0 \pmod{2}$  and so the linear functional  $\mathbf{d} \cdot (\mathbf{c}_1 + \mathbf{c}_2) \pmod{2}$  (regarded as a function of  $\mathbf{d}$ ) is not equal to the zero functional. Hence it is balanced, i.e., takes on the values 0 and 1 equally often as  $\mathbf{d}$  varies. Thus  $\mathbf{d} \cdot \mathbf{c}_1$  and  $\mathbf{d} \cdot \mathbf{c}_2$  agree modulo 2 for half the values of  $\mathbf{d}$  and disagree modulo 2 for the other half. Hence there are equal numbers of type-I and type-II correlations.

Now since there are equal numbers of type-I and type-II correlations and they are equal in magnitude but have opposite signs. So, the inner sum of  $L_2$  is zero and so is  $L_2$ . Hence it is proved that  $S_t$  is a complementary set of size  $2^k$ .

Let  $\mathbf{b} = [b_0 b_1 \dots b_{k-1}]$  and  $t = \sum_{\alpha=0}^{k-1} b_{\alpha} 2^{\alpha}$ ,  $t' = \sum_{\alpha=0}^{k-1} b'_{\alpha} 2^{\alpha}$  and  $t \neq t'$ . To prove that  $S_t$  and  $S_{t'}$  are mutually orthogonal, by Lemma 1 we have,

$$\sum_{\mathbf{d}, d} C(f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + dx_{\beta_2}, f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{x} + dx_{\beta_2}) (\tau) = M_1 + M_2,$$

where

$$M_1 = \sum_{\mathbf{d}, d} \sum_{\mathbf{c}_1 \neq \mathbf{c}_2} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau), \quad (19)$$

and

$$M_2 = \sum_{\mathbf{d}, d} \sum_{\mathbf{c}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}) (\tau). \quad (20)$$

For the fixed  $\mathbf{c}_1, \mathbf{c}_2$  and  $d$ , consider the sum  $M_1$

$$\begin{aligned} & \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau) \\ &= \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{c}_1 + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{c}_2 + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau) \\ &= \sum_{\mathbf{d}} (-1)^{\mathbf{d} \cdot (\mathbf{c}_1 \oplus \mathbf{c}_2)} C((f + \mathbf{b} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + \mathbf{b}' \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau) \\ &= C((f + \mathbf{b} \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (f + \mathbf{b}' \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2}) (\tau) \sum_{\mathbf{d}} (-1)^{\mathbf{d} \cdot (\mathbf{c}_1 \oplus \mathbf{c}_2)}. \end{aligned} \quad (21)$$

Since in the terms of  $M_1$ ,  $\mathbf{c}_1 \neq \mathbf{c}_2$ , so the function  $\mathbf{d} \cdot (\mathbf{c}_1 \oplus \mathbf{c}_2)$  take values 0 and 1 equal number of times and hence (21) vanishes for all  $\tau$ .

Now for the fixed  $\mathbf{c}_1, \mathbf{d}$  consider the following sum in  $M_2$ .

$$\begin{aligned}
& \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}} \\
& \quad (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{x} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau). \\
& = \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{c} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, \\
& \quad (f + (\mathbf{d} + \mathbf{b}') \cdot \mathbf{c} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau) \\
& = \sum_{\mathbf{d}} C((f + (\mathbf{b} + \mathbf{b}') \cdot \mathbf{c} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, \\
& \quad (f + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau) \\
& = (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} \sum_{\mathbf{d}} C((f + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, (f + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau) \\
& = (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} A(f|_{\mathbf{x}=\mathbf{c}})(\tau) + A((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau). \quad (22)
\end{aligned}$$

From *Theorem 1* the above sum in (22) is zero for all  $\tau \neq 0$ . For  $\tau = 0$ , we get

$$A(f|_{\mathbf{x}=\mathbf{c}})(\tau) = A((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(\tau) = 2^{m-k-4} \quad (23)$$

for  $\mathbf{c} \in \mathbb{Z}_2^k$ , substituting this back in (22), we get

$$\begin{aligned}
& \sum_{\mathbf{d}} C((f + (\mathbf{b} + \mathbf{b}') \cdot \mathbf{c} + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, \\
& \quad (f + dx_{\beta_2})|_{\mathbf{x}=\mathbf{c}})(0) = (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} \cdot 2^{m-k-3}. \quad (24)
\end{aligned}$$

Since we are considering the case  $t \neq t'$ , so  $\mathbf{b} \neq \mathbf{b}'$ , and hence  $\mathbf{b} \oplus \mathbf{b}' \neq (0)$ , and so the linear functional  $(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}$  (regarded as a function of  $\mathbf{c}$ ) is not equal to the zero functional. Hence it is balanced, i.e., takes on the values 0 and 1 equally often as  $\mathbf{c}$  varies. Hence the sum

$$\sum_{\mathbf{c}} (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} \cdot 2^{m-k+1} = 0.$$

For a given GBF in  $m$  variables  $\bar{f}(x_0, x_1, \dots, x_{m-1}) = f(\bar{x}_0, \bar{x}_1, \dots, \bar{x}_{m-1})$ , where  $\bar{x}_i = 1 - x_i$ .

*Lemma 3:* Suppose that  $G(Q)$  contains a set of  $k \leq m - 5$  distinct vertices labeled with the property that deleting those  $k$  vertices and all their edges results in a path. Let  $\beta_1$  and  $\beta_2$  be the label of end vertices of the path. In case of  $k = m - 5$  let the single vertex of the graph is  $\beta_1 = \beta_2 = \beta$ . Then for each  $0 \leq t < 2^k$ , the ordered set  $\Psi^L(\bar{S}_t)$  (for  $L = 2^{m-2} + 2^{m-3}$ ) given by

$$\left\{ \bar{f} + \sum_{\alpha=0}^{k-1} d_{\alpha} \bar{x}_{j_{\alpha}} + \sum_{\alpha=0}^{k-1} b_{\alpha} \bar{x}_{j_{\alpha}} + \bar{d} x_{\beta_2} : d, d_{\alpha} \in \{0, 1\} \right\}, \quad (25)$$

is a complementary set of size  $2^{k+1}$ , where  $f$  (using  $q = 2$ ) is defined in (7) and  $t = \sum_{\alpha=0}^{k-1} b_{\alpha} 2^{\alpha}$ . Further, for  $t' \neq t$ ,  $\bar{S}_{t'}$  and  $\bar{S}_t$  are mutually orthogonal complementary sets.

The next theorem gives  $2^{k+1}$  mutually orthogonal binary complementary set of size  $2^{k+1}$

*Theorem 3:* Let the sets  $S_t$  and  $\bar{S}_t$  are defined in *Theorem 2* and *Lemma 3* respectively, then for  $L = 2^{m-2} + 2^{m-3}$

$$\{\Psi^L(S_t) : 0 \leq t < 2^k\} \cup \{\Psi^L(\bar{S}_t) : 0 \leq t < 2^k\} \quad (26)$$

forms a  $(2^{k+1}, 2^{k+1}, 2^{m-1} + 2^{m-3})$ -CCC.

*Proof:* We will show that any complementary set  $S_{t_1}$  is mutually orthogonal to any other complementary set  $\bar{S}_{t_2}$ . Let

$$\begin{aligned}
& \sum_{\mathbf{d}} C(f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + x_{\beta_2}, \bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}})(\tau) \\
& + C(f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x}, (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}} + x_{\beta_2}))(\tau) \\
& = \sum_{\mathbf{d}} \sum_{\mathbf{c}_1, \mathbf{c}_2} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, \\
& \quad (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}})|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& + C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x})|_{\mathbf{x}=\mathbf{c}_1}, \\
& \quad (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}} + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2})(\tau) = M(\text{say}) \quad (27)
\end{aligned}$$

For a given  $\mathbf{c}_1$  and  $\mathbf{c}_2$ , consider the following sum of the first correlation term in (27)

$$\begin{aligned}
& \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, \\
& \quad (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}})|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& = \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x} + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, \\
& \quad (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot (\mathbf{1} - \mathbf{x})|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& = C((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (\bar{f}|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& \cdot \sum_{\mathbf{d}} \left( (-1)^{\mathbf{b} \cdot \mathbf{c}_1 \oplus \mathbf{b}' \cdot \mathbf{c}_2} \cdot (-1)^{(\mathbf{d} \oplus \mathbf{b}') \cdot \mathbf{1}} \cdot (-1)^{\mathbf{d} \cdot (\mathbf{c}_1 \oplus \mathbf{c}_2)} \right) \\
& = C((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (\bar{f}|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& \cdot (-1)^{\mathbf{b} \cdot \mathbf{c}_1 \oplus \mathbf{b}' \cdot \mathbf{c}_2 \oplus \mathbf{b}' \cdot \mathbf{1}} \sum_{\mathbf{d}} (-1)^{\mathbf{d} \cdot (\mathbf{c}_1 \oplus \mathbf{c}_2 \oplus \mathbf{1})} \quad (28)
\end{aligned}$$

The above sum in (28) vanishes whenever  $(\mathbf{c}_1 \oplus \mathbf{c}_2) \neq \mathbf{1}$ . So when  $(\mathbf{c}_1 = \mathbf{c}_2)$ , the first correlation term in (27) is zero. Thus, summing (28) over all  $\mathbf{c}_1 \neq \mathbf{c}_2$ , we get

$$\begin{aligned}
& \sum_{\substack{\mathbf{c}_1 \neq \mathbf{c}_2 \\ \mathbf{c}_1 + \mathbf{c}_2 = \mathbf{1}}} C((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_1}, (\bar{f}|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& \quad \cdot (-1)^{\mathbf{b} \cdot \mathbf{c}_1 \oplus \mathbf{b}' \cdot \mathbf{c}_2 \oplus \mathbf{b}' \cdot \mathbf{1}} 2^k \\
& = \sum_{\mathbf{c}} C((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, (\bar{f}|_{\mathbf{x}=(\mathbf{c} \oplus \mathbf{1})})(\tau) \\
& \quad \cdot (-1)^{\mathbf{b}' \cdot \mathbf{1}} 2^k \cdot (-1)^{\mathbf{b} \cdot \mathbf{c} \oplus \mathbf{b}' \cdot (\mathbf{1} \oplus \mathbf{c})} \\
& = \sum_{\mathbf{c}} C((f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, (\bar{f}|_{\mathbf{x}=(\mathbf{c} \oplus \mathbf{1})})(\tau) 2^k \cdot (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} \quad (29)
\end{aligned}$$

Similarly, the second term of the correlation in (27) becomes

$$\begin{aligned}
& \sum_{\mathbf{d}} C((f + (\mathbf{d} + \mathbf{b}) \cdot \mathbf{x})|_{\mathbf{x}=\mathbf{c}_1}, \\
& \quad (\bar{f} + (\mathbf{d} + \mathbf{b}') \cdot \bar{\mathbf{x}} + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}_2})(\tau) \\
& = \sum_{\mathbf{c}} C(f|_{\mathbf{x}=\mathbf{c}}, (\bar{f} + x_{\beta_2})|_{\mathbf{x}=(\mathbf{c} \oplus \mathbf{1})})(\tau) \cdot 2^k \cdot (-1)^{(\mathbf{b} \oplus \mathbf{b}') \cdot \mathbf{c}} \quad (30)
\end{aligned}$$

Substituting back (29) and (30) in (27) we get,

$$M = \sum_c \left( C \left( (f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, (\bar{f})|_{\mathbf{x}=(\mathbf{c}\oplus\mathbf{1})} \right) (\tau) \right. \\ \left. + C \left( f|_{\mathbf{x}=\mathbf{c}}, (\bar{f} + x_{\beta_2})|_{\mathbf{x}=(\mathbf{c}\oplus\mathbf{1})} \right) (\tau) \right) \cdot 2^k \cdot (-1)^{(\mathbf{b}\oplus\mathbf{b}')\cdot\mathbf{c}} \quad (31)$$

From Lemma 1

$$C \left( (f + x_{\beta_2})|_{\mathbf{x}=\mathbf{c}}, \bar{f}|_{\mathbf{x}=(\mathbf{c}\oplus\mathbf{1})} \right) (\tau) \\ = C \left( (f + x_{\beta_2})|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ + C \left( (f + x_{\beta_2})|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \\ + C \left( (f + x_{\beta_2})|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ + C \left( (f + x_{\beta_2})|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \quad (32) \\ = C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ + C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \\ - C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ - C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau)$$

Similarly,

$$C \left( f|_{\mathbf{x}=\mathbf{c}}, (\bar{f} + x_{\beta_2})|_{\mathbf{x}=(\mathbf{c}\oplus\mathbf{1})} \right) (\tau) \\ = C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ - C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \quad (33) \\ + C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ - C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau)$$

Substituting (32) and (33) in (31), we get

$$M = 2 \sum_c \left( C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \right. \\ \left. - C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \right) \cdot 2^k \cdot (-1)^{(\mathbf{b}\oplus\mathbf{b}')\cdot\mathbf{c}} \quad (34)$$

Since  $G(Q|_{\mathbf{x}=\mathbf{c}})$  is a path, so for some permutation  $\pi$  of  $\{0, 1, \dots, m-k-5\}$  and  $g_i, g' \in \mathbb{Z}_q$  the function obtained by substituting  $\mathbf{x} = \mathbf{c}$  in  $f$  should be of the form

$$f|_{\mathbf{x}=\mathbf{c}} = \sum_{\alpha=0}^{m-k-6} x_{\pi(\alpha)} x_{\pi(\alpha+1)} + \sum_{\alpha=0}^{m-k-5} c_{\alpha} x_{\pi(\alpha)} + c \\ + x_{\pi(m-k-5)} (\bar{x}_{m-1} (x_{m-2} \bar{x}_{m-3} \bar{x}_{m-4} + x_{m-2} x_{m-3}) + x_{m-1} \\ \bar{x}_{m-2} \bar{x}_{m-3}) + \bar{x}_{m-1} (\bar{x}_{m-4} (x_{m-3} + x_{m-2}) + x_{m-2} x_{m-3}) \quad (35)$$

Let  $h1$  denote the function obtained from  $f$  by substituting  $\mathbf{x} = \mathbf{c}$  and  $x_{\beta_2} = 0$  for some binary vector  $\mathbf{c}$  and let  $h2$  be the corresponding function when  $\mathbf{x} = \mathbf{c}$  and  $x_{\beta_2} = 1$ . Further without loss of generality let  $\beta_2 = \pi(0)$ . Then

$$h1 = \sum_{\alpha=1}^{m-k-6} x_{\pi(\alpha)} x_{\pi(\alpha+1)} + \sum_{\substack{\alpha=0 \\ \pi(\alpha) \neq 0}}^{m-k-5} c_{\alpha} x_{\pi(\alpha)} + c + R \quad (36)$$

$$h2 = h1 + x_{\pi(1)} + c_0 \quad (37)$$

The nonzero components of the complex vectors  $\mathbf{a} = f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}$  and  $\mathbf{b} = f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}$  are given by the functions  $h1$  and  $h2$  respectively. Similarly, the nonzero components of the vector  $\bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0}$  and  $\bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1}$  are given by the function  $h2$  and  $h1$  respectively. Using the identity

$$C(a, \bar{b}) (\tau) = C(b, \bar{a}) (\tau)$$

We get,

$$C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}0}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})0} \right) (\tau) \\ = C \left( f|_{\mathbf{x}x_{\beta_2}=\mathbf{c}1}, \bar{f}|_{\mathbf{x}x_{\beta_2}=(\mathbf{c}\oplus\mathbf{1})1} \right) (\tau) \quad (38)$$

which shows that  $M$  in (34) is zero, and hence the result follows from (27). ■

#### IV. CONCLUSION

In this paper, we proposed a direct and generalized construction of binary CCC of non-power of two length by using higher order GBFs. The resultant CCCs can be obtained directly from GBFs without using other tedious sequence operations. The non power of two length binary CCCs directly constructed using GBFs find many applications in wireless communication due to its good correlation properties. The construction of GCPs and Complementary sets of non power of two lengths are also provided in this paper.

#### REFERENCES

- [1] M. Golay, "Complementary series," *IRE Transactions on Information Theory*, vol. 7, no. 2, pp. 82–87, Apr. 1961.
- [2] C.-C. Tseng and C. Liu, "Complementary sets of sequences," *IEEE Transactions on Information Theory*, vol. 18, no. 5, pp. 644–652, 1972.
- [3] H.-H. Chen, S.-W. Chu, and M. Guizani, "On next generation CDMA technologies: The real approach for perfect orthogonal code generation," *IEEE Transactions on Vehicular Technology*, vol. 57, no. 5, pp. 2822–2833, 2008.
- [4] N. Suehiro and M. Hatori, "N-shift cross-orthogonal sequences," *IEEE Transactions on Information Theory*, vol. 34, no. 1, pp. 143–146, 1988.
- [5] S.-M. Tseng and M. Bell, "Asynchronous multicarrier DS-SS using mutually orthogonal complementary sets of sequences," *IEEE Transactions on Communications*, vol. 48, no. 1, pp. 53–59, 2000.
- [6] H.-H. Chen, J.-F. Yeh, and N. Suehiro, "A multicarrier CDMA architecture based on orthogonal complementary codes for new generations of wideband wireless communications," *IEEE Communications Magazine*, vol. 39, no. 10, pp. 126–135, 2001.
- [7] H. Chen, *The Next Generation CDMA Technologies*. Wiley, Jul. 2007, publisher Copyright: © 2007 John Wiley & Sons Ltd. All Rights Reserved.
- [8] Z. Liu, Y. L. Guan, and U. Parampalli, "New complete complementary codes for peak-to-mean power control in multi-carrier CDMA," *IEEE Transactions on Communications*, vol. 62, no. 3, pp. 1105–1113, 2014.
- [9] Z. Liu, Y. L. Guan, and H.-H. Chen, "Fractional-delay-resilient receiver design for interference-free MC-SS communications based on complete complementary codes," *IEEE Transactions on Wireless Communications*, vol. 14, no. 3, pp. 1226–1236, 2015.
- [10] S. Wang and A. Abdi, "MIMO ISI channel estimation using uncorrelated Golay complementary sets of polyphase sequences," *IEEE Transactions on Vehicular Technology*, vol. 56, no. 5, pp. 3024–3039, 2007.
- [11] S. Li, J. Chen, and L. Zhang, "Optimisation of complete complementary codes in MIMO radar system," *Electronics Letters*, vol. 46, pp. 1157–1159, 2010.
- [12] J. Tang, N. Zhang, Z. Ma, and B. Tang, "Construction of doppler resilient complete complementary code in MIMO radar," *IEEE Transactions on Signal Processing*, vol. 62, no. 18, pp. 4704–4712, 2014.
- [13] C.-Y. Chen, Y.-J. Min, K.-Y. Lu, and C.-C. Chao, "Cell search for cell-based OFDM systems using quasi complete complementary codes," in *IEEE International Conference on Communications*, 2008, pp. 4840–4844.

- [14] T. Kojima, T. Tachikawa, A. Oizumi, Y. Yamaguchi, and U. Parampalli, "A disaster prevention broadcasting based on data hiding scheme using complete complementary codes," in *International Symposium on Information Theory and its Applications*, 2014, pp. 45–49.
- [15] J. A. Davis and J. Jedwab, "Peak-to-mean power control in OFDM, Golay complementary sequences, and Reed-Muller codes," *IEEE Transactions on Information Theory*, vol. 45, no. 7, pp. 2397–2417, Nov. 1999.
- [16] K. G. Paterson, "Generalized Reed-Muller codes and power control in OFDM modulation," *IEEE Transactions on Information Theory*, vol. 46, no. 1, pp. 104–120, Jan. 2000.
- [17] A. Rathinakumar and A. K. Chaturvedi, "Complete mutually orthogonal Golay complementary sets from Reed-Muller codes," *IEEE Transactions on Information Theory*, vol. 54, no. 3, pp. 1339–1346, Mar. 2008.
- [18] C.-Y. Chen, "Complementary sets of non-power-of-two length for peak-to-average power ratio reduction in OFDM," *IEEE Transactions on Information Theory*, vol. 62, no. 12, pp. 7538–7545, 2016.
- [19] —, "A new construction of golay complementary sets of non-power-of-two length based on Boolean functions," in *IEEE Wireless Communications and Networking Conference (WCNC)*, 2017, pp. 1–6.
- [20] —, "A novel construction of complementary sets with flexible lengths based on Boolean functions," *IEEE Communications Letters*, vol. 22, no. 2, pp. 260–263, 2018.
- [21] A. R. Adhikary and S. Majhi, "New constructions of complementary sets of sequences of lengths non-power-of-two," *IEEE Communications Letters*, vol. 23, no. 7, pp. 1119–1122, 2019.
- [22] Y.-J. Lin, Z.-M. Huang, and C.-Y. Chen, "Golay complementary sets and multiple-shift complementary sets with non-power-of-two length and bounded paprs," *IEEE Communications Letters*, pp. 1–1, 2021.
- [23] P. Sarkar, A. Roy, and S. Majhi, "Construction of Z-complementary code sets with non-power-of-two lengths based on generalised Boolean functions," *IEEE Communications Letters*, vol. 24, no. 8, pp. 1607–1611, 2020.
- [24] S.-W. Wu, A. Şahin, Z.-M. Huang, and C.-Y. Chen, "Z-complementary code sets with flexible lengths from generalised Boolean functions," *IEEE Access*, vol. 9, pp. 4642–4652, 2021.
- [25] S. Das, S. Budišin, S. Majhi, Z. Liu, and Y. L. Guan, "A multiplier-free generator for polyphase complete complementary codes," *IEEE Transactions on Signal Processing*, vol. 66, no. 5, pp. 1184–1196, 2018.
- [26] S. Das, S. Majhi, and Z. Liu, "A novel class of complete complementary codes and their applications for APU matrices," *IEEE Signal Processing Letters*, vol. 25, no. 9, pp. 1300–1304, 2018.
- [27] S. Das, S. Majhi, S. Budišin, and Z. Liu, "A new construction framework for polyphase complete complementary codes with various lengths," *IEEE Transactions on Signal Processing*, vol. 67, no. 10, pp. 2639–2648, 2019.
- [28] S.-W. Wu, C.-Y. Chen, and Z. Liu, "How to construct mutually orthogonal complementary sets with non-power-of-two lengths?" *IEEE Transactions on Information Theory*, vol. 67, no. 6, pp. 3464–3472, 2021.
- [29] L. Tian, X. Lu, C. Xu, and Y. Li, "New mutually orthogonal complementary sets with non-power-of-two lengths," *IEEE Signal Processing Letters*, vol. 28, pp. 359–363, 2021.
- [30] P. Sarkar, Z. Liu, and S. Majhi, "Multivariable function for new complete complementary codes with arbitrary lengths," 2021.