

Structured Output Feedback Control for Linear Quadratic Regulator Using Policy Gradient Method

Shokichi Takakura and Kazuhiro Sato

Abstract—We consider the static output feedback control for Linear Quadratic Regulator problems with structured constraints under the assumption that system parameters are unknown. To solve the problem in the model free setting, we propose the policy gradient algorithm based on the gradient projection method and show its global convergence to ε -stationary points. In addition, we introduce a variance reduction technique and show both theoretically and numerically that it significantly reduces the variance in the gradient estimation. We also show in the numerical experiments that the model free approach efficiently solves the problem.

Index Terms—Reinforcement learning, data-driven control, model free control, linear quadratic regulator, gradient descent, non-convex optimization

I. INTRODUCTION

Linear Quadratic Regulator (LQR), which is a well-studied framework in the optimal control theory, has been revisited from the Reinforcement Learning (RL) perspective. For policy gradient methods, the global linear convergence to the global optima was obtained in [1], [2]. To obtain structured policy, Structured Policy Iteration of state feedback gains for LQR problems with a regularization term was proposed in [3] and the local linear convergence to a stationary point was provided. In addition, the projected gradient method for model-free state feedback LQR problems with convex constraints were studied in [4]. For the model based setting, the projected gradient method was studied in [5] and [6] considered linearly constrained problem for state feedback LQR problems.

However, it is difficult to observe the entire state. That is, only some outputs are available in practice. The static output feedback control is a practical approach to deal with such situations. For model based control design, some iterative methods are found in [7] and recently, the global convergence of the gradient descent for output feedback LQR problems was shown in [8] using smoothness and Lipschitz continuity on the sublevel sets of the LQR objective function. A model free algorithm was also proposed in [9] based on integral RL. However, to the best of our knowledge, there has been no previous researches on policy gradient methods with various theoretical guarantees for static output feedback LQR problems in the model free setting.

In this study, we consider a policy gradient method for the LQR problem with structured constraints for the static output feedback control under the assumption that system parameters

are unknown, in contrast to many existing works [1], [2], [4], which studied the policy gradient method for state feedback LQR problems and [8], which studied gradient methods in the model based setting. The structured constraints are naturally introduced due to the system structure such as linear port-Hamiltonian systems [10].

Our contribution: The main contributions of this paper are summarized as follows:

- To solve the LQR problem with structured constraints in the model free setting, we propose a policy gradient projection algorithm with a gradient estimation procedure.
- We show the global convergence to ε -stationary points of our proposed algorithm using the LQR objective function properties such as bounded sublevel sets, L -smoothness on sublevel sets, and dependency on horizon time. In addition, we show that the feedback gain obtained by the proposed method asymptotically stabilizes the closed-loop system. We also provide the sample complexity of the gradient estimation procedure.
- We propose a variance reduction method using the baseline technique and show its suboptimality.

Paper organization: In Section II, we introduce the LQR problem for output feedback control with structured constraints. In Section III, we show some properties of the objective function on sublevel sets. In Section IV, we propose the gradient estimation method and the policy gradient projection algorithm in the model free setting. We then show that the algorithm outputs an ε -stationary point with high probability. In addition, we provide a variance reduction method and show its asymptotic optimality. In Section V, we conduct some numerical experiments and show properties of our proposed method. Section VI is devoted to conclusion.

Notation: For a vector $v \in \mathbb{C}^n$, v^\top and v^* denote the transpose and conjugate transpose of v , respectively. The symbol I and O denote the identity matrix and the zero matrix, respectively. The symbol \mathbb{S}^n denotes the set of $n \times n$ symmetric matrices. For a matrix $A \in \mathbb{R}^{n \times m}$, $\|A\|_F$ and $\|A\|_2$ represent Frobenius and spectral norm of A , respectively, $\lambda_i(A)$ denotes the i -th eigenvalue of A indexed as $\text{Re}(\lambda_1(A)) \leq \dots \leq \text{Re}(\lambda_n(A))$, and $\text{vec}(A) \in \mathbb{R}^{nm}$ denotes the vectorized form of A . For matrices $A, B \in \mathbb{R}^{n \times m}$, the inner product $\langle A, B \rangle$ is defined as $\langle A, B \rangle = \text{tr}(AB^\top)$ and $A \circ B$ denotes the Hadamard product of A and B . Given a symmetric matrix $S \in \mathbb{S}^n$, $\lambda_{\min}(S)$ ($\lambda_{\max}(S)$) denotes the minimum (maximum) eigenvalue of S . Given a random variable X which follows the distribution \mathcal{D} , $E_{X \sim \mathcal{D}}[X]$ or just $E[X]$ denotes the expectation over $X \sim \mathcal{D}$ and $V[X]$ denotes the variance of X . For $z \in \mathbb{C}$, $\text{Re}(z)$ ($\text{Im}(z)$) denotes the real (imaginary) part of z .

S. Takakura is with the Department of Mathematical Informatics, Graduate School of Information Science and Technology, The University of Tokyo, Tokyo 113-8656, Japan, email: masayoshi361@g.ecc.u-tokyo.ac.jp

K. Sato is with the Department of Mathematical Informatics, Graduate School of Information Science and Technology, The University of Tokyo, Tokyo 113-8656, Japan, email: kazuhiro@mist.i.u-tokyo.ac.jp

II. PROBLEM FORMULATION

A. Linear system

We consider the linear time-invariant (LTI) system

$$\begin{aligned} \dot{x}(t) &= Ax(t) + Bu(t), \\ y(t) &= Cx(t), \\ x(0) &\sim \mathcal{D}, \end{aligned} \quad (1)$$

where $x(t) \in \mathbb{R}^n$ is state, $u(t) \in \mathbb{R}^m$ is input, $y(t) \in \mathbb{R}^p$ is output, $A \in \mathbb{R}^{n \times n}$, $B \in \mathbb{R}^{n \times m}$, and $C \in \mathbb{R}^{p \times n}$ are constant matrices, and \mathcal{D} is a probability distribution over \mathbb{R}^n . In this paper, we assume that B and C are not zero matrices.

The closed-loop system with the input $u(t) = -Ky(t)$ is given by

$$\dot{x}(t) = A_K x(t), \quad y(t) = Cx(t), \quad (2)$$

where $K \in \mathbb{R}^{m \times p}$ is a static output feedback gain, and

$$A_K := A - BKC. \quad (3)$$

B. LQR problem with structured constraints

We consider the infinite-horizon continuous-time LQR problem

$$\begin{aligned} &\text{minimize } E_{x(0) \sim \mathcal{D}} \left[\int_0^\infty (y^\top(t)Qy(t) + u^\top(t)Ru(t)) dt \right] \\ &\text{subject to (1)} \end{aligned} \quad (4)$$

with constant positive definite matrices $Q \in \mathbb{R}^{p \times p}$ and $R \in \mathbb{R}^{m \times m}$. The expectation is taken with respect to the initial state $x(0) \sim \mathcal{D}$.

For the static output feedback $u(t) = -Ky(t)$ to system (1), the objective function (4) becomes $f(K) := E_{x(0) \sim \mathcal{D}} [\tilde{f}(K; x(0))]$, where

$$\tilde{f}(K; v) := \int_0^\infty \left[v^* e^{A_K^\top t} C^\top (Q + K^\top RK) C e^{A_K t} v \right] dt \quad (5)$$

for $v \in \mathbb{C}^n$. It is difficult to obtain the optimal static output feedback gain, since the objective function $f(K)$ is non-convex and it may have saddle points in general [8]. Another reason for difficulty is that the feasible set may have exponentially many disconnected components [11]. Although an iterative method was proposed in [9] to obtain a suboptimal static output feedback gain in the model free setting, it cannot be applied directly to problems with feedback gain constraints.

In this paper, we consider the constraints $K \in \Omega$, where $\Omega \subset \mathbb{R}^{m \times p}$ is a closed convex set that specifies the structural information of feedback gains. This is because a structured policy is often used in practical situations. See Section II-C.

By using Bellman lemma [12], the problem (4) with structured constraints can be formulated as

$$\begin{aligned} &\text{minimize } f(K) = \text{tr}(X\Sigma) \\ &\text{subject to } K \in \Omega, A_K \text{ is Hurwitz,} \end{aligned} \quad (6)$$

where $\Sigma := E[x(0)x^\top(0)]$ and X is the solution to

$$A_K^\top X + XA_K + C^\top (K^\top RK + Q)C = 0.$$

In this paper, we suppose that (A, B, C, \mathcal{D}) in (1) is unknown unlike the situation in [8]. Thus, we develop a model free algorithm in Section IV for solving the problem (6).

To develop a model free algorithm with theoretical guarantees for solving the problem (6), we impose the following throughout this paper:

Assumption 1:

- 1) $\Sigma \succ 0$.
- 2) The pair (A, C) is observable.
- 3) There exists $K_0 \in \Omega$ such that A_{K_0} is Hurwitz and K_0 is known.

Since A_{K_0} is Hurwitz, there exist positive definite matrices G, H and a skew-adjoint matrix J such that $A_{K_0} = (J - G)H$. The proof is found in [13]. Let $H = L^\top L$ be the Cholesky decomposition. Using the coordinate transformation $x'(t) = Lx(t)$, the closed-loop system (2) becomes

$$\begin{aligned} \dot{x}'(t) &= A'_{K_0} x'(t), \\ y(t) &= C' x'(t), \end{aligned}$$

where $A'_{K_0} = L J L^\top - L G L^\top$, $C' = C L^{-1}$. Since $L G L^\top \succ 0$ and $L J L^\top = -(L J L^\top)^\top$, we have $A'_{K_0} + A'_{K_0}{}^\top = -2L G L^\top \prec 0$. In the following, we assume system (2) after the above coordinate transformation, because we consider a static output feedback that is invariant by the coordinate transformation. That is, without loss of generality, we can assume $A_{K_0} + A_{K_0}{}^\top \prec 0$.

Under Assumption 1, the objective function $f(K)$ is defined only on the set S of stabilizing controllers, which is defined as

$$S = \{K \in \mathbb{R}^{m \times p} \mid A_K \text{ is Hurwitz}\}. \quad (7)$$

If $K \notin S$, there exists an eigenvalue μ of A such that $\text{Re}(\mu) \geq 0$ and $f(K)$ goes to infinity.

Remark 1: The standard LQR cost is given by

$$\int_0^\infty (x^\top(t)Qx(t) + u^\top(t)Ru(t)) dt,$$

where $Q \in \mathbb{R}^{n \times n}$ and $R \in \mathbb{R}^{m \times m}$ are positive definite matrices. However, in the model free and output feedback setting, this cost cannot be calculated in practice, because the information of the state $x(t)$ is not available. Therefore, we consider the problem (4) following some previous researches [14], [15]. While similar convergence properties to the standard LQR cost can be obtained for our formulation in the model based setting if (A, C) is observable [8], more detailed studies of the objective function properties are necessary for model-free version of the convergence analysis.

C. Examples

1) *Decentralized control:* In the network decentralized control, some components of K need to be 0 [16]. This implies that Ω should be a certain linear subspace of $\mathbb{R}^{m \times p}$.

2) *Linear port-Hamiltonian system:* For a linear port-Hamiltonian system [10], if the feedback gain is positive semi-definite, the closed loop system is also a port-Hamiltonian system and passive. To ensure passivity, Ω should be defined as the set of positive semi-definite matrices, which is closed and convex.

III. PROPERTIES OF THE OBJECTIVE FUNCTION

In this section, we prove some properties of the objective function $f(K)$ in (6) for the convergence analysis of the gradient method presented in Section IV.

A. Norm bounds

For preparation, we show some matrix norm inequalities in this section.

We define the sublevel set by $S(a) = \{K \in S \mid f(K) \leq a\}$, where S is defined as (7). Thus, all elements in $S(a)$ are stabilizing feedback gains.

Using the same argument as Lemma C.2 in [8], we have $\|K\| \leq \kappa(a)$ for $K \in S(a)$, where

$$\kappa(a) := \frac{2\|B\|_2\|C\|_2a}{\lambda_{\min}(\Sigma)\lambda_{\min}(R)\lambda_{\min}(CC^\top)} + \frac{\|A\|_2}{\|B\|_2\|C\|_2}.$$

Next, for $K \in S(a)$, we provide an upper bound on the solutions to the following Lyapunov equations:

$$A_K^\top X + X A_K + C^\top(Q + K^\top R K)C = 0, \quad (8)$$

$$A_K Y + Y A_K^\top + \Sigma = 0, \quad (9)$$

$$A_K Y' + Y' A_K^\top - (BECY + (BECY)^\top) = 0, \quad (10)$$

where A_K is defined in (3) and $E \in \mathbb{R}^{m \times p}$ is a given matrix. Note that X , Y , and Y' uniquely exist, because $K \in S(a)$ implies that A_K is Hurwitz [12]. To simplify the notation, we define

$$\xi := \frac{1}{4\|B\|_2\kappa(a)}, \quad \mathfrak{X}(a) := \frac{a}{\lambda_{\min}(\Sigma)},$$

$$\mathfrak{Y}(a) := \max\left(\frac{a}{\xi^2\lambda_{\min}(Q)}, \frac{\|\Sigma\|}{\sigma}\right), \quad (11)$$

$$\mathfrak{Y}'(a) := 2\frac{\|B\|_2\|C\|_2\mathfrak{Y}(a)^2}{\lambda_{\min}(\Sigma)} \quad (12)$$

with $\sigma := -\frac{1}{2}\lambda_{\max}(A_{K_0} + A_{K_0}^\top) > 0$, where K_0 satisfies 3 in Assumption 1.

Lemma 1: Let X, Y, Y' be the solution to (8), (9), and (10), respectively. Assume that $\|E\|_F = 1$. Then, for any $K \in S(a)$, we have

$$\|X\|_2 \leq \mathfrak{X}(a), \quad \|Y\|_2 \leq \mathfrak{Y}(a), \quad \|Y'\|_2 \leq \mathfrak{Y}'(a).$$

Proof: See Appendix A. \square

B. L -smoothness of $f(K)$

A differentiable function is called L -smooth if its gradient is L -Lipschitz continuous. For our objective function, we have the following result.

Theorem 1: For any $a \in \mathbb{R}$, $f(K)$ in (6) is L -smooth on $S(a)$ with the constant

$$L := 2\lambda_{\max}(R)\|C\|_F^2\mathfrak{Y}(a) + 4(\sqrt{n}\|R\|_F\kappa(a)\|C\|_F + n\|B\|_F\mathfrak{X}(a))\mathfrak{Y}'(a)\|C\|_F, \quad (13)$$

where $\mathfrak{Y}(a)$ and $\mathfrak{Y}'(a)$ are defined in (11) and (12), respectively.

Proof: Theorem 3.15 in [8] cannot be applied to our setting directly, because $\lambda_1(C^\top QC)$ may be 0. However, by replacing the norm bounds in the proof of Theorem 3.15 with those in Lemma 1, we obtain the result. \square

IV. MODEL FREE ALGORITHM

In this section, we consider problem (6) in the model free setting. That is, we assume that (A, B, C, D) in system (1) is unknown. First, we introduce a gradient estimation algorithm based on the derivative-free optimization and show that the estimated gradient is close to the exact gradient with high probability. Then, we provide Policy Gradient Projection Algorithm in Algorithm 2. Despite the error in the estimated gradient, we can prove the global convergence to ε -stationary points. Finally, we propose a variance reduction method using the baseline technique and prove its optimality.

A. Gradient estimation

In the model free setting, the exact gradient of the objective function $f(K)$ in (4) cannot be accessed directly. Then, based on the zeroth-order or derivative-free optimization approach [1], we propose Algorithm 1 to calculate the stochastic estimate $\hat{\nabla}f(K)$ of the gradient $\nabla f(K)$.

Algorithm 1 Gradient Estimation

Require: $K \in \Omega, N > 0, r > 0, \tau > 0$

- 1: **for** $i = 1$ to N **do**
- 2: Sample U_i from the uniform distribution \mathcal{S} over matrices with $\|U_i\|_F = \sqrt{mp}$.
- 3: Simulate the system

$$\dot{x}_i(t) = Ax_i(t) + Bu_i(t),$$

$$y_i(t) = Cx_i(t),$$

where $u_i(t) = -(K + rU_i)y_i(t)$, $x_i(0) \sim \mathcal{D}$ until time τ and calculate the empirical cost c_i by

$$c_i = \int_0^\tau [y_i^\top(t)Qy_i(t) + u_i(t)^\top Ru_i(t)] dt.$$

- 4: **end for**
- 5: Define the estimated gradient by

$$\hat{\nabla}f(K) = \frac{1}{rN} \sum_{i=1}^N c_i U_i. \quad (14)$$

- 6: **return** $\hat{\nabla}f(K)$.
-

In this section, we assume the following in addition to Assumption 1.

Assumption 2:

- U_i and $x_i(0)$ are independent.
- $K \in S(a)$ with a given constant a .
- The distribution \mathcal{D} of initial state $x(0) \sim \mathcal{D}$ satisfies $\|x(0)\| \leq P$ a.s. for a constant $P > 0$.

The second assumption is justified in Section IV-B.

The following lemma ensures $K + rU \in S(2a)$ for sufficiently small r .

Lemma 2: There exists $r_0 > 0$ such that for any $r \leq r_0$, $K \in S(a)$ and U such that $\|U\| = \sqrt{mp}$, we have $K + rU \in S(2a)$.

Proof: Using the same argument as Lemma 4 in [2], we obtain the result. \square

The following theorem is an extension of Lemma 27 in Supplementary material of [1] to output feedback control. To prove this, we derive some inequalities in Appendix B.

Theorem 2: Let $\hat{\nabla}f(K)$ be defined as (14). For any $\varepsilon' > 0$ and $\delta > 0$, set $r = O(\varepsilon')$, $\tau = O(\log 1/\varepsilon')$, $N = O((\log 1/\delta)/\varepsilon'^4)$. Then, we have

$$\left\| \hat{\nabla}f(K) - \nabla f(K) \right\|_{\mathbb{F}} \leq \varepsilon', \quad (15)$$

for any $K \in S(a)$, with probability greater than $1 - \delta$.

Proof : See Appendix B. \square

B. Convergence properties

In this section, we prove the global convergence of the policy gradient method in the model free setting. We show a model free control algorithm, Policy Gradient Projection, in Algorithm 2. The positive integer T is the iteration number, α is the step size, K_0 is the initial point of the feedback gain K , and proj is the projection onto Ω with respect to the Frobenius norm. The termination condition $\|K_{i+1} - K_i\|_{\mathbb{F}} \leq \varepsilon\alpha$ is added for technical reasons.

Algorithm 2 Policy Gradient Projection

Require: $T > 0, \alpha > 0, \varepsilon > 0, K_0 \in \Omega, N > 0, r > 0, \tau > 0$

- 1: **for** $i = 0$ to $T - 1$ **do**
 - 2: Calculate $\hat{\nabla}f(K_i)$ using Algorithm 1.
 - 3: $K_{i+1} := \text{proj} \left(K_i - \alpha \hat{\nabla}f(K_i) \right)$.
 - 4: **if** $\|K_{i+1} - K_i\|_{\mathbb{F}} \leq \varepsilon\alpha$ **then**
 - 5: **return** K_i
 - 6: **end if**
 - 7: **end for**
 - 8: **return** K_T
-

Lemma 3 describes the property of orthogonal projections, which is essential to our convergence analysis.

Lemma 3: Let $\text{proj} : \mathbb{R}^{m \times p} \rightarrow \Omega$ be an orthogonal projection onto Ω . For any $x \in \Omega$ and $y \in \mathbb{R}^{m \times p}$, we have

$$\langle x - \text{proj}(y), y - \text{proj}(y) \rangle \leq 0.$$

Proof : See Theorem 6.41 of [17]. \square

The following definition is required to show our main result.

Definition 1: For positive constants α and ε , K is called an ε -stationary point if $\|G_\alpha(K)\|_{\mathbb{F}} \leq \varepsilon$, where $K^+ := \text{proj}(K - \alpha \nabla f(K))$ and $G_\alpha(K) := \frac{1}{\alpha}(K^+ - K)$.

The following theorem is a main result, which is an extension of Theorem 4.2 in [8] to the model-free and constrained problems. The proof is based on the proof for projected gradient method without gradient error for L -smooth functions [17]. However, in the presence of gradient errors, the termination condition and some extra arguments to bound the effect of the difference between the true and estimated gradients are required.

Theorem 3: Assume that the constants N, r, τ satisfies the condition in Theorem 2 with $\varepsilon' = \lambda\varepsilon$ for the given constants $0 < \lambda < 1, \varepsilon > 0, \delta > 0$. Let $\{K_i\}_{i=0}^{T'}$ be the sequence generated by the Algorithm 2, where T' is the total number of

iterations, which can be different from T due to the terminate condition. For a step size $\alpha \in \left(0, \frac{2(1-\lambda)}{L}\right)$, where L is the Lipschitz constant of ∇f , we have the following result with probability greater than $1 - T\delta$.

- The sequence $\{K_i\}_{i=0}^{T'}$ remains in S and $\{f(K_i)\}_{i=0}^{T'}$ is strictly decreasing. That is, for any $0 \leq i \leq T' - 1$,

$$f(K_{i+1}) < f(K_i). \quad (16)$$

- If $T > \frac{f(K_0)}{\varepsilon^2 \alpha^2 \left(\frac{1-\lambda}{\alpha} - \frac{L}{2}\right)}$, $K_{T'}$ is a $(1 + \lambda)\varepsilon$ -stationary point.

Proof : We define $G'_\alpha(K) = \frac{1}{\alpha}v$, where $v := \hat{K}^+ - K$ and $\hat{K}^+ := \text{proj}(K - \alpha \hat{\nabla}f(K))$. First, we show that if $\|G'_\alpha(K)\|_{\mathbb{F}} \leq \varepsilon$ and (15) holds, $K \in S_0$ is a $(1 + \lambda)\varepsilon$ -stationary point.

$$\begin{aligned} \|G_\alpha(K)\|_{\mathbb{F}} &\leq \|G'_\alpha(K)\|_{\mathbb{F}} + \frac{1}{\alpha} \left\| K^+ - \hat{K}^+ \right\|_{\mathbb{F}} \\ &\leq \varepsilon + \left\| \nabla f(K) - \hat{\nabla}f(K) \right\|_{\mathbb{F}} \leq (1 + \lambda)\varepsilon. \end{aligned}$$

The second inequality holds, because projections onto convex sets are contractive, and the last inequality follows from (15).

Next, we show $\|G'_\alpha(K_{T'})\|_{\mathbb{F}} \leq \varepsilon$ with high probability. The termination condition ensures $\|G'_\alpha(K_i)\|_{\mathbb{F}} > \varepsilon$ for $i = 0, \dots, T' - 1$. Assume that $\|G'_\alpha(K)\|_{\mathbb{F}} > \varepsilon$ and Eq. (15) with $\varepsilon' = \lambda\varepsilon$ holds for $K \in S_0$. We define $K_t := K + tv$ and $t^* := \max\{t \geq 0 \mid f(K_t) \leq f(K)\}$. Then, Lemma 3 yields

$$\langle \hat{\nabla}f(K), v \rangle \leq -\frac{1}{\alpha} \|v\|_{\mathbb{F}}^2. \quad (17)$$

and L -smoothness of $f(K)$ on S_0 implies

$$\begin{aligned} f(K_t) - f(K) &\leq \langle \nabla f(K), K_t - K \rangle + \frac{L}{2} \|K_t - K\|_{\mathbb{F}}^2 \\ &= t \langle \nabla f(K), v \rangle + \frac{Lt^2}{2} \|v\|_{\mathbb{F}}^2. \end{aligned} \quad (18)$$

By adding both sides of the equations (17) multiplied by t and (18), we obtain

$$\begin{aligned} f(K_t) - f(K) &\leq \left(\frac{Lt^2}{2} - \frac{t}{\alpha} + t \frac{\left\| \nabla f(K) - \hat{\nabla}f(K) \right\|_{\mathbb{F}}}{\|v\|_{\mathbb{F}}} \right) \|v\|_{\mathbb{F}}^2 \\ &< \left(\frac{Lt^2}{2} - t \frac{1-\lambda}{\alpha} \right) \|v\|_{\mathbb{F}}^2. \end{aligned} \quad (19)$$

The last inequality follows from (15) and $G'_\alpha(K) = \|v\|_{\mathbb{F}}/\alpha > \varepsilon$. For $t = t^*$, we have

$$0 = f(K_{t^*}) - f(K) \leq \left(\frac{Lt^{*2}}{2} - t^* \frac{1-\lambda}{\alpha} \right) \|v\|_{\mathbb{F}}^2$$

Since $\|v\| > 0$, we have $t^* \geq \frac{2(1-\lambda)}{L\alpha} \geq 0$. Therefore, (19) holds for $t = 1$. Eq. (19) with $K = K_i$ and $t = 1$ leads us to

$$f(K_{i+1}) - f(K_i) < \left(\frac{L}{2} - \frac{1-\lambda}{\alpha} \right) \|K_{i+1} - K_i\|_{\mathbb{F}}^2 < 0,$$

because $\alpha \in (0, \frac{2(1-\lambda)}{L})$. Thus, (16) holds for any $0 \leq i \leq T' - 1$.

If $T' < T$, the termination condition ensures $\|G'_\alpha(K_{T'})\|_{\mathbb{F}} \leq \varepsilon$. Therefore, it suffices to show $T' < T$.

Since $T' \leq T$ by definition, suppose that $T' = T$. Then, we obtain

$$\begin{aligned} f(K_0) &\geq f(K_0) - f(K_T) = \sum_{i=0}^{T-1} f(K_i) - f(K_{i+1}) \\ &\geq \left(\frac{1-\lambda}{\alpha} - \frac{L}{2}\right) \sum_{i=0}^{T-1} \|K_{i+1} - K_i\|_F^2 \\ &\geq \left(\frac{1-\lambda}{\alpha} - \frac{L}{2}\right) T \varepsilon^2 \alpha^2. \end{aligned}$$

The assumption $T > \frac{f(K_0)}{\varepsilon^2 \alpha^2 (\frac{1-\lambda}{\alpha} - \frac{L}{2})}$ yields $f(K_0) > f(K_0)$, which is a contradiction. Thus, $T' < T$, that is, $\|G'_\alpha(K_{T'})\|_F \leq \varepsilon$. From Theorem 2, the probability that Eq. (15) holds for $K = K_i (i = 0, \dots, T')$ is greater than $(1-\delta)^{T'+1} \geq 1 - T\delta$. This completes the proof. \square

The convergence rate $T = O(1/\varepsilon^2)$ is essentially the same as the rate of projected gradient method without gradient error for L -smooth functions [17]. The same rate was obtained for discrete-time state feedback LQR problems in the model free setting [4] but not known for the model free and output feedback setting.

C. Variance reduction

Policy gradient methods tend to suffer from a large variance, which leads to slow learning [18]. The use of baseline is one of the variance reduction techniques for policy gradient methods [18]. State-depending functions are often used as a baseline, because it does not add any bias to the estimated gradient [19], [20]. In this section, we propose to use the cost function \tilde{f} defined in (5) as a baseline and show its optimality.

For a baseline function $b(x)$, the estimated gradient $\bar{\nabla}f$ is defined as

$$\bar{\nabla}f(K) := \frac{1}{rN} \sum_{i=1}^N (\tilde{f}_\tau(K + rU_i; x_i(0)) - b(x_i(0)))U_i, \quad (20)$$

where

$$\tilde{f}_\tau(K; x(0)) := \int_0^\tau y^\top(t)(Q + K^\top RK)y(t)dt. \quad (21)$$

Note that \tilde{f}_τ satisfies $\lim_{\tau \rightarrow \infty} \tilde{f}_\tau(K; x(0)) = \tilde{f}(K; x(0))$. Because

$$\hat{\nabla}f(K) = \frac{1}{rN} \sum_{i=1}^N \tilde{f}_\tau(K + rU_i; x_i(0))U_i,$$

the estimated gradient $\bar{\nabla}f(K)$ satisfies

$$\begin{aligned} E[\bar{\nabla}f(K)] &= E[\hat{\nabla}f(K)] - \frac{1}{rN} \sum_{i=1}^N E[b(x_i(0))U_i] \\ &= E[\hat{\nabla}f(K)] - \frac{1}{rN} \sum_{i=1}^N E[b(x_i(0))]E[U_i] \\ &= E[\hat{\nabla}f(K)]. \end{aligned}$$

The second equality holds from the assumption that U_i and $x_i(0)$ are independent, and the last equality follows from

$E[U_i] = 0$. Thus, the bias in $\bar{\nabla}f$ is the same as the one in $\hat{\nabla}f$.

In terms of the variance, the baseline $b(x(0)) = \tilde{f}(K; x(0))$ is almost optimal for small r and large τ .

Theorem 4: For $a > 0$, $r \leq r_0$, $\tau > 0$, and $K \in S(a)$, the optimal baseline $b^*(x(0))$ which minimizes the variance of the estimated gradient (20) is given by

$$b^*(x(0)) = E_{U \sim \mathcal{S}}[\tilde{f}_\tau(K + rU; x(0))], \quad (22)$$

where \mathcal{S} is defined in Algorithm 1 and it satisfies

$$\lim_{r \rightarrow 0, \tau \rightarrow \infty} b^*(x(0)) = \tilde{f}(K; x(0)). \quad (23)$$

Proof : Since $\{x_i(0)\}_{i=1}^N, \{U_i\}_{i=1}^N$ are assumed to be independent, $\{\tilde{f}_\tau(K; x_i(0)) - b(x_i(0))\}_{i=1}^N U_i$ are independent and we have

$$\begin{aligned} V[\bar{\nabla}f(K)] &= \frac{1}{r^2 N} \left[E \left[\left\| (\tilde{f}_\tau(K + rU; x(0)) - b(x(0)))U \right\|_F^2 \right] \right. \\ &\quad \left. - \left\| E[(\tilde{f}_\tau(K + rU; x(0)) - b(x(0)))U] \right\|_F^2 \right]. \end{aligned} \quad (24)$$

for any baseline $b(x)$. Because we have assumed that $x(0)$ and U are independent and $E[U] = 0$,

$$E[b(x(0))U] = E[b(x(0))]E[U] = 0.$$

Thus, the expectation $E[(\tilde{f}_\tau(K + rU; x(0)) - b(x(0)))U]$ is independent of the choice of a baseline $b(x)$, that is,

$$\begin{aligned} &E[(\tilde{f}_\tau(K + rU; x(0)) - b(x(0)))U] \\ &= E[\tilde{f}_\tau(K + rU; x(0))U]. \end{aligned}$$

Then, the second term in (24) is independent of the choice of $b(x)$ and we just need to minimize the first term in (24),

$$\begin{aligned} &E \left[\left\| (\tilde{f}_\tau(K + rU; x(0)) - b(x(0)))U \right\|_F^2 \right] \\ &= mp E_{x(0) \sim \mathcal{D}} \left[E_{U \sim \mathcal{S}} \left[\left(\tilde{f}_\tau(K + rU; x(0)) - b(x(0)) \right)^2 \right] \right]. \end{aligned}$$

Since the expectation $E_{U \sim \mathcal{S}}[\tilde{f}_\tau(K + rU; x(0))]$ minimizes the mean squared error $E_{U \sim \mathcal{S}} \left[\left(\tilde{f}_\tau(K + rU; x(0)) - b(x(0)) \right)^2 \right]$ for any $x(0)$, the optimal baseline is given by (22). Eq. (23) follows from the continuity of $\tilde{f}_\tau(K + rU; x(0))$. \square

Based on Theorem 4, we propose to use $\tilde{f}(K; x(0))$ as a baseline. Since $\tilde{f}(K; x(0))$ cannot be computed directly for a given $x(0)$ in the model free setting, we provide the estimation procedure for $\tilde{f}(K; x(0))$ in Algorithm 3. In the following, we define $\bar{y}(t; x(0)) = [y(t)^\top, y(t+h_1)^\top, \dots, y(t+h_{D-1})^\top]^\top \in \mathbb{R}^{pD} (0 \leq h_1 < h_2 < \dots < h_{D-1} = T)$. The following theorem ensures that the estimated cost $\hat{f}(K; x(0))$ is equal to $\tilde{f}(K; x(0))$.

Theorem 5: For any $T > 0$, $D > 2(n-1) + \frac{T}{2\tau}\beta$, where $\beta = 2(\|A\|_2 + \|B\|_2\|C\|_2\kappa(a))$, if $x_j(0)x_j(0)^\top - x_j(s)x_j(s)^\top (j = 1, \dots, \frac{n(n+1)}{2})$ are linearly independent on

Algorithm 3 Estimate $\tilde{f}(K; x(0))$

Require: $K \in S, x(0) \in \mathbb{R}^n, s > 0$.

- 1: **for** $i = 1$ to $n(n+1)/2$ **do**
- 2: Simulate system (1) for $x(0) = x_i(0) \sim \mathcal{D}$ until time s .
- 3: **end for**
- 4: Find a solution to the following equations.

$$\begin{aligned} & \bar{y}(0; x_i(0))^\top \hat{P}(K) \bar{y}(0; x_i(0)) \\ & = \tilde{f}_s(K; x_i(0)) + \bar{y}(s; x_i(0))^\top \hat{P}(K) \bar{y}(s; x_i(0)), \end{aligned} \quad (25)$$

where \tilde{f}_s is defined as (21).

- 5: Define $\hat{f}(K; x(0)) = \bar{y}(0; x(0))^\top \hat{P}(K) \bar{y}(0; x(0))$.
 - 6: **return** $\hat{f}(K; x(0))$.
-

\mathbb{S}^n for s in Algorithm 3, then $\hat{f}(K; x(0)) = \tilde{f}(K; x(0))$ for any K and $x(0)$.

Proof: See appendix C.

V. NUMERICAL EXPERIMENTS

In this section, we numerically demonstrate that the policy gradient projection algorithm can solve the LQR problem efficiently in the model free setting. Based on [8], we consider the problem (6) with $A = (J - G)H$, $B = \text{ones}(10, 4) + \frac{1}{2} \text{rand}(10, 4)$, $C = \text{ones}(2, 10) + \frac{1}{2} \text{rand}(2, 10)$, $Q = I$, $R = I$, where $J = \tilde{J} - \tilde{J}^\top$, $\tilde{J} = \text{randn}(10, 10)$, $G = \tilde{G} \tilde{G}^\top$, $\tilde{G} = \text{randn}(10, 10)$, $H = \tilde{H} \tilde{H}^\top$, $\tilde{H} = \text{randn}(10, 10)$, $\text{ones}(a, b)$ is $a \times b$ matrix of ones, $\text{rand}(a, b)$ is $a \times b$ matrix with all entries distributed as the uniform distribution on $[0, 1]$, and $\text{randn}(a, b)$ is $a \times b$ matrix with all entries distributed as the standard normal distribution. We assume the distribution \mathcal{D} is the uniform distribution on $[-1, 1]^n$. Since J is skew-adjoint and G, H are positive definite, A is Hurwitz, as mentioned in Section II-B. Therefore, A_{K_0} is Hurwitz for $K_0 = O$. We set the parameters $\alpha = 10^{-4}, r = 0.001, \tau = 100, N = 2$ and define Ω by

$$\Omega = \{K \in \mathbb{R}^{4 \times 2} \mid K \circ S = O\}, \quad S = \begin{pmatrix} 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 1 \end{pmatrix}^\top.$$

As shown in Fig. 1, the relative error $\frac{\|\nabla f(K) - \nabla f(K)\|_{\mathbb{F}}}{\|\nabla f(K)\|_{\mathbb{F}}}$ in the estimated gradient with variance reduction was much smaller than $\frac{\|\nabla f(K) - \nabla f(K)\|_{\mathbb{F}}}{\|\nabla f(K)\|_{\mathbb{F}}}$ of Algorithm 1. Thus, using ∇f is likely to lead to faster learning even if we take into account additional $n(n+1)/2 = 55$ samples required to estimate the baseline. In fact, Algorithm 2 without the baseline technique did not converge in our setting. In contrast, Fig. 2 shows the convergence curve, which is decreasing with some fluctuations, of Algorithm 2 with the baseline technique.

VI. CONCLUSION

In this paper, we considered the non-convex optimization problem with convex constraints based on the output feedback version of LQR problems under the assumption that system parameters are unknown. To solve the problem, we proposed the policy gradient algorithm based on the gradient projection

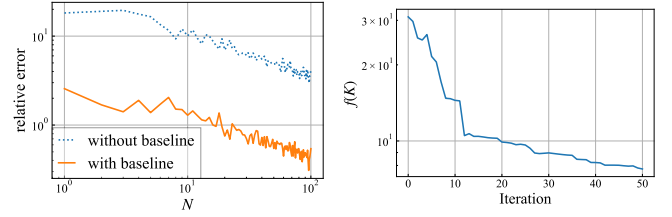


Fig. 1. Relative error in gradient estimation.




Fig. 2. Convergence curve of Algorithm 2.

method and the zeroth order optimization. We proved its global convergence to ε -stationary points with high probability. We also proposed the variance reduction method using the baseline technique and proved that it is almost optimal. In the numerical experiments, we showed that the baseline technique significantly reduces the variance in the gradient estimation and the model free method can achieve low LQR cost.

Policy Gradient Projection can be extended to the objective function with regularization terms using the proximal gradient method. In this setting, we are able to consider trade-offs between cost function and structure such as sparsity [3]. However, the convergence analysis would be more difficult, and it is left for a future work. In addition, the convergence of the gradient method with fixed step size could be slow since the smooth constant L can be large depending on the initial feedback gain K_0 . To overcome this issue, the gradient method with adaptive step size in the model based setting was considered in [5] and optimization methods on Riemannian manifolds were studied in [6]. Therefore, applying the adaptive step size to the model free algorithm is one of the important directions of future works. Other interesting directions of future works would be analysis for the natural policy gradient method [21] or other variants of the policy gradient method.

ACKNOWLEDGMENT

This work was supported by Japan Society for the Promotion of Science KAKENHI under Grant 20K14760.

APPENDIX

A. Proof of Lemma 1

Proof: For X , see Lemma 16 in [2].

Let μ be the largest eigenvalue of Y and v be a normalized eigenvector corresponding to μ . Note that $\|Y\|_2 = \mu$ since $Y \succeq 0$. In the following, we consider the case $\|Cy\| \geq \xi$ and the case $\|Cy\| \leq \xi$ separately. First, we consider the case $\|Cy\| \geq \xi$. Using $f(K) = \text{tr}(YC^\top(Q + K^\top RK)C)$, we have

$$a \geq \text{tr}(YC^\top(Q + K^\top RK)C) \geq \text{tr}(YC^\top QC).$$

Since $\mu vv^\top \preceq Y$,

$$\text{tr}(YC^\top QC) \geq \text{tr}(\mu vv^\top C^\top QC) = \mu(Cv)^\top Q Cv.$$

Therefore, $a \geq \mu(Cv)^\top Q Cv \geq \mu \|Cv\|^2 \lambda_{\min}(Q) \geq \mu \xi^2 \lambda_{\min}(Q)$ and $\mu \leq \frac{a}{\xi^2 \lambda_{\min}(Q)}$. Next, we consider the case $\|Cy\| \leq \xi$. From (9), we have

$$v^\top (A_K Y + Y A_K^\top + \Sigma) v = \mu v^\top (A_K + A_K^\top) v + v^\top \Sigma v = 0.$$

Since $A_{K_0} + A_{K_0}^\top \leq -2\sigma I$ and $\|Cv\| \leq \xi$, we obtain $v^\top(A_K + A_K^\top)v = v^\top(A_{K_0} + A_{K_0}^\top)v - v^\top(B(K - K_0)C + (B(K - K_0)C)^\top)v \leq -\sigma$. Therefore, $-\mu\sigma + v^\top\Sigma v \geq 0$, and thus, $\|Y\|_2 = \mu \leq \frac{\|\Sigma\|_2}{\sigma}$. Combining both cases, we have $\|Y\|_2 \leq \mathfrak{Y}(a)$.

For Y' , we have

$$\begin{aligned} -\frac{\|BECY + (BECY)^\top\|_{2\Sigma}}{\lambda_{\min}(\Sigma)} &\preceq -BECY - (BECY)^\top \\ &\preceq \frac{\|BECY + (BECY)^\top\|_{2\Sigma}}{\lambda_{\min}(\Sigma)}, \end{aligned}$$

and Lemma A.2 in [8] yields $Y^- \preceq Y' \preceq Y^+$, where

$$Y^+ = \frac{\|BECY + (BECY)^\top\|_{2\Sigma}}{\lambda_{\min}(\Sigma)} Y, \quad Y^- = -Y^+.$$

Therefore,

$$\|Y'\|_2 \leq \|Y^+\|_2 \leq \frac{2\|B\|_2\|C\|_2\|Y\|_2^2}{\lambda_{\min}(\Sigma)}. \quad (26)$$

Applying the bound on $\|Y\|_2$ to (26), we have the result.

B. Proof of Theorem 2

The total error $\left\| \hat{\nabla} f(K) - \nabla f(K) \right\|_{\mathbb{F}}$ can be divided into the bias term $\left\| E\left[\hat{\nabla} f(K) \right] - \nabla f(K) \right\|_{\mathbb{F}}$ and the variance term $\left\| \hat{\nabla} f(K) - E\left[\hat{\nabla} f(K) \right] \right\|_{\mathbb{F}}$.

First, we bound the bias term. The estimated gradient $\hat{\nabla} f(K)$ in (14) can be expressed in the form

$$\hat{\nabla} f(K) = \frac{1}{Nr} \sum_{i=1}^N \tilde{f}_\tau(K + rU_i; x_i(0)) U_i. \quad (27)$$

For any initial state $x(0)$ and $r > 0$, we define the smooth function $g_r(K)$ by $g_r(K) := E_{U \sim \mathcal{B}}[f(K + rU)]$, where \mathcal{B} is the uniform distribution over the set $\{U \in \mathbb{R}^{m \times p} \mid \|U\| \leq \sqrt{mp}\}$. Then, the bias in $\hat{\nabla} f(K)$ can be divided into two parts as follows.

$$\begin{aligned} \left\| \nabla f(K) - E\left[\hat{\nabla} f(K) \right] \right\|_{\mathbb{F}} &\leq \left\| \nabla f(K) - \nabla g_r(K) \right\|_{\mathbb{F}} \\ &+ \left\| \nabla g_r(K) - E\left[\hat{\nabla} f(K) \right] \right\|_{\mathbb{F}}, \end{aligned} \quad (28)$$

where the expectation is taken over $x_i(0) \sim \mathcal{D}$ and $U_i \sim \mathcal{S}$.

For the first term in (28), we have the following bound.

Lemma 4: For any $K \in S(a)$ and $r \leq r_0$, $\|\nabla f(K) - \nabla g_r(K)\|_{\mathbb{F}} \leq Lr\sqrt{mp}$, where L is the Lipschitz constant defined as (13) of ∇f on $S(2a)$.

Proof : From L -smoothness of f , we have $\|f(K) - f(K + rU)\|_{\mathbb{F}} \leq Lr\sqrt{mp}$. Therefore, $\|\nabla f(K) - \nabla g_r(K)\|_{\mathbb{F}} = E[\|\nabla f(K) - \nabla f(K + rU)\|_{\mathbb{F}}] \leq Lr\sqrt{mp}$. \square

Lemma 26 in Supplementary material of [1] implies $\nabla g_r(K) = E\left[\frac{1}{r}\tilde{f}(K + rU; x_0)U\right]$, and (27) yields

$E\left[\hat{\nabla} f(K)\right] = E\left[\frac{1}{r}\tilde{f}_\tau(K + rU; x_0)U\right]$, where the expectation is taken over $x_0 \sim \mathcal{D}$ and $U \sim \mathcal{S}$. By using these relations, we have the following upper bound of the second term in (28).

$$\begin{aligned} &\left\| \nabla g_r(K) - E\left[\hat{\nabla} f(K)\right] \right\|_{\mathbb{F}} \\ &\leq \frac{1}{rN} \sum_{i=1}^N E\left[\left|\tilde{f}(K + rU_i; x_i) - \tilde{f}_\tau(K + rU_i; x_i)\right| \|U_i\|_{\mathbb{F}}\right]. \end{aligned} \quad (29)$$

To bound the right-hand side, we introduce the following lemma.

Lemma 5: For $K \in S(a)$ with $a \in \mathbb{R}$ and $x(t)$, which follows (2), we have

$$\|x(t)\| \leq \frac{2\mathfrak{Y}(a)\mathfrak{Q}(a)}{\lambda_{\min}(\Sigma)} e^{-(\lambda_{\min}(\Sigma)/\mathfrak{Y}(a))t} \|x(0)\|^2, \quad (30)$$

where $\mathfrak{Q}(a) = \|A\|_2 + \|B\|_2\|C\|_2\kappa(a)$.

Proof : From Lemma 12 in [2], we have $\|e^{At}\|_2^2 \leq (\|Y\|_2/\lambda_{\min}(Y))e^{-(\lambda_{\min}(\Sigma)/\|Y\|_2)t}$. Therefore,

$$\|x(t)\|^2 \leq (\|Y\|_2/\lambda_{\min}(Y))e^{-(\lambda_{\min}(\Sigma)/\|Y\|_2)t} \|x(0)\|^2. \quad (31)$$

Lemma 1 yields $\|Y\|_2 \leq \mathfrak{Y}(a)$. This and Lemma A.5 in [8] imply

$$\lambda_{\min}(Y) \geq \frac{\lambda_{\min}(\Sigma)}{2\|A_K\|_2} \geq \frac{\lambda_{\min}(\Sigma)}{2(\|A\|_2 + \|B\|_2\|C\|_2\kappa(a))}.$$

Substituting these inequalities into (31), we obtain (30). \square

We are in a position to obtain an upper bound on the left side of (29).

Lemma 6: For any $\tau \geq 0$, $r \leq r_0$ and $K \in S(a)$,

$$\left\| \nabla g_r(K) - E\left[\hat{\nabla} f(K)\right] \right\|_{\mathbb{F}} = O(e^{-\eta\tau}/r), \quad (32)$$

where $\eta = \lambda_{\min}(\Sigma)/\mathfrak{Y}(2a)$.

Proof : Lemma 2 implies that $K + rU_i \in S(2a)$, and we have

$$\begin{aligned} \left\| \nabla g_r(K) - E\left[\hat{\nabla} f(K)\right] \right\|_{\mathbb{F}} &\leq \frac{1}{r} E[x(\tau)^\top Xx(\tau)\|U\|_{\mathbb{F}}] \\ &\leq \frac{\sqrt{mp}}{r} \|X\|_2 E[\|x(\tau)\|^2], \end{aligned}$$

where $x(t)$ follows $\dot{x}(t) = A_{K+rU}x(t)$, and we used the fact

$$\tilde{f}(K + rU; x(0)) - \tilde{f}_\tau(K + rU; x(0)) = x(\tau)^\top Xx(\tau),$$

where X is the solution to (8). From Lemma 5, we have

$$\|x(\tau)\|^2 \leq \frac{2\mathfrak{Y}(2a)\mathfrak{Q}(2a)}{\lambda_{\min}(\Sigma)} e^{-(\lambda_{\min}(\Sigma)/\mathfrak{Y}(2a))\tau} \|x(0)\|^2.$$

Thus, (32) holds, because $E[\|x(0)\|^2] = \text{tr}(\Sigma)$. \square

Next, we obtain an upper bound of the variance term.

Lemma 7: For any $\varepsilon > 0, \delta > 0$ and $K \in S(a)$, if $N = O((\log 1/\delta)/\varepsilon^4)$, we have

$$\Pr\left(\left\| \hat{\nabla} f(K) - E\left[\hat{\nabla} f(K)\right] \right\|_{\mathbb{F}} \geq \varepsilon\right) \leq \delta$$

Proof : Using matrix Bernstein inequality [22], we obtain the result in the same way with Lemma 27 in Supplementary material of [1]. \square

Combining Lemma 4, 6, and 7 completes the proof of Theorem 2.

C. Proof of Theorem 5

The observation $\bar{y}(0; x(0))$ is determined by

$$\bar{y}(0; x(0)) = Fx(0)$$

with $F := [C \ Ce^{(A-BKC)h_1} \dots Ce^{(A-BKC)h_{D-1}}]^\top$. Conversely, $x(0)$ is determined by $\bar{y}(0; x(0))$ if D is large enough.

Lemma 8: Let $\beta = 2(\|A\|_2 + \|B\|_2\|C\|_2\kappa(a))$. For any $T > 0$, F is column full rank if $D > 2(n-1) + \frac{T}{2\pi}\beta$, and it holds that

$$x(0) = F^+ \bar{y}(0; x(0)),$$

where $F^+ = (F^\top F)^{-1} F^\top$.

Proof: Let $\beta' = \max_{i,j} (\text{Im}(\lambda_i(A_K) - \lambda_j(A_K)))$. By Theorem 2 in [14], F is column full rank if $D > 2(n-1) + \frac{T}{2\pi}\beta'$ since (A, C) is assumed to be observable. Therefore, F^+ is well-defined and

$$(F^\top F)^{-1} F^\top \bar{y}(0; x(0)) = (F^\top F)^{-1} F^\top Fx(0) = x(0).$$

Thus, it is sufficient to show $\beta \geq \beta'$. We have

$$\beta' \leq 2 \max_i (|\lambda_i(A_K)|) \leq 2\|A_K\|_2 \leq \beta,$$

which completes the proof. \square

As a corollary, we can show $\tilde{f}(K; x(0))$ can be expressed as a quadratic form in terms of $\bar{y}(0; x(0))$.

Corollary 1: For any $x(0)$,

$$\tilde{f}(K; x(0)) = \bar{y}(0; x(0))^\top P(K) \bar{y}(0; x(0)), \quad (33)$$

where $P(K) = (F^+)^{\top} X F^+$.

According to [14], the matrix $P(K)$ satisfies the Bellman equations (25) for any $s \geq 0$ and $\{x_j(t)\}_{j=1, \dots, \frac{n(n+1)}{2}}$, which follow system (1).

Lemma 9: Assume that $x_j(0)x_j(0)^\top - x_j(s)x_j(s)^\top$ ($j = 1, \dots, \frac{n(n+1)}{2}$) are linearly independent on \mathbb{S}^n . For any solution $\hat{P}(K)$ of (25) and initial condition $x(0)$, we have

$$\tilde{f}(K; x(0)) = \bar{y}(0; x(0))^\top \hat{P}(K) \bar{y}(0; x(0)).$$

Proof: Let $v_j = x_j(0)x_j(0)^\top - x_j(s)x_j(s)^\top$ and $w_j = \bar{y}(0; x_j(0))\bar{y}(0; x_j(0))^\top - \bar{y}(s; x_j(0))\bar{y}(s; x_j(0))^\top$. We define V by the linear space generated by $\{v_j\}_j$ and W by the linear space generated by $\{w_j\}_j$. Since $V \subset \mathbb{S}^n$ and $\dim V = \dim \mathbb{S}^n = \frac{n(n+1)}{2}$, we have $V = \mathbb{S}^n$. Thus, the set $\{v_i\}_i$ is a basis of \mathbb{S}^n . Let $v = x(0)x(0)^\top \in \mathbb{S}^n$ for $x(0) \in \mathbb{R}^n$. Then, there exists the sequence $\{\alpha_i\}_i$ such that $v = \sum_{i=1}^{\frac{n(n+1)}{2}} \alpha_i v_i$. Define the linear map $\mathcal{F} : V \rightarrow W$ by $\mathcal{F}(v') = Fv'F^\top$, where $v' \in V$. Note that $\mathcal{F}(v_j) = w_j$. From (25), we have $\langle \hat{P}(K), \mathcal{F}(v_j) \rangle = \langle P(K), \mathcal{F}(v_j) \rangle$, and thus

$$\langle \hat{P}(K), \mathcal{F}(v) \rangle = \langle P(K), \mathcal{F}(v) \rangle.$$

Then, Eq. (33) yields

$$\langle P(K), \mathcal{F}(v) \rangle = \bar{y}(0; x(0))^\top P(K) \bar{y}(0; x(0)) = \tilde{f}(K; x(0)).$$

Therefore,

$$\begin{aligned} \bar{y}(0; x_0)^\top \hat{P}(K) \bar{y}(0; x_0) &= \langle \hat{P}(K), \mathcal{F}(v) \rangle = \langle P(K), \mathcal{F}(v) \rangle \\ &= \tilde{f}(K; x(0)), \end{aligned}$$

which completes the proof. \square

Corollary 1 and Lemma 9 ensure that Theorem 5 holds.

REFERENCES

- [1] M. Fazel, R. Ge, S. Kakade, and M. Mesbahi, "Global convergence of policy gradient methods for the linear quadratic regulator," in *International Conference on Machine Learning*. PMLR, 2018, pp. 1467–1476.
- [2] H. Mohammadi, A. Zare, M. Soltanolkotabi, and M. R. Jovanovic, "Convergence and sample complexity of gradient methods for the model-free linear quadratic regulator problem," *IEEE Transactions on Automatic Control*, 2021.
- [3] Y. Park, R. Rossi, Z. Wen, G. Wu, and H. Zhao, "Structured policy iteration for linear quadratic regulator," in *International Conference on Machine Learning*. PMLR, 2020, pp. 7521–7531.
- [4] B. Hambly, R. Xu, and H. Yang, "Policy gradient methods for the noisy linear quadratic regulator over a finite horizon," *SIAM Journal on Control and Optimization*, vol. 59, no. 5, pp. 3359–3391, 2021.
- [5] J. Bu, A. Mesbahi, M. Fazel, and M. Mesbahi, "LQR through the Lens of First Order Methods: Discrete-time Case," *arXiv preprint arXiv:1907.08921*, 2019.
- [6] S. Talebi and M. Mesbahi, "Policy Optimization over Submanifolds for Constrained Feedback Synthesis," *arXiv preprint arXiv:2201.11157*, 2022.
- [7] P. Makila and H. Toivonen, "Computational methods for parametric LQ problems—A survey," *IEEE transactions on automatic control*, vol. 32, no. 8, pp. 658–671, Aug 1987. [Online]. Available: <https://ieeexplore.ieee.org/document/1104686>
- [8] I. Fatkhullin and B. Polyak, "Optimizing Static Linear Feedback: Gradient Method," *SIAM journal on control and optimization*, vol. 59, no. 5, pp. 3887–3911, 2021.
- [9] L. M. Zhu, H. Modares, G. O. Peen, F. L. Lewis, and B. Yue, "Adaptive Suboptimal Output-Feedback Control for Linear Systems Using Integral Reinforcement Learning," *IEEE transactions on control systems technology*, vol. 23, no. 1, pp. 264–273, Jan 2015. [Online]. Available: <https://ieeexplore.ieee.org/document/6824757>
- [10] B. Jacob and H. Zwart, *Linear Port-Hamiltonian Systems on Infinite-dimensional Spaces*, 01 2012.
- [11] H. Feng and J. Lavaei, "On the Exponential Number of Connected Components for the Feasible Set of Optimal Decentralized Control Problems," in *2019 American Control Conference (ACC)*, 2019, pp. 1430–1437.
- [12] R. Bellman, "NOTES ON MATRIX THEORY—X A PROBLEM IN CONTROL," *Quarterly of applied mathematics*, vol. 14, no. 4, pp. 417–419, Jan 01, 1957. [Online]. Available: <https://www.jstor.org/stable/43636021>
- [13] S. Prajna, A. V. D. Schaft, and G. Meinsma, "An LMI approach to stabilization of linear port-controlled Hamiltonian systems," p. 371, 2002.
- [14] H. Modares, F. L. Lewis, and Z.-P. Jiang, "Optimal output-feedback control of unknown continuous-time linear systems using off-policy reinforcement learning," *IEEE Transactions on Cybernetics*, vol. 46, no. 11, pp. 2401–2410, 2016.
- [15] S. A. A. Rizvi and Z. Lin, "Output Feedback Reinforcement Learning Control for the Continuous-Time Linear Quadratic Regulator Problem," in *2018 Annual American Control Conference (ACC)*. AACC, Jun 2018, pp. 3417–3422. [Online]. Available: <https://ieeexplore.ieee.org/document/8431290>
- [16] M. R. Jovanović and N. K. Dhingra, "Controller architectures: Tradeoffs between performance and structure," *European Journal of Control*, vol. 30, pp. 76–91, 2016.
- [17] A. Beck, *First-order methods in optimization*. SIAM, 2017.
- [18] I. Grondman, L. Busoniu, G. A. D. Lopes, and R. Babuska, "A Survey of Actor-Critic Reinforcement Learning: Standard and Natural Policy Gradients," *IEEE transactions on systems, man and cybernetics. Part C, Applications and reviews*, vol. 42, no. 6, pp. 1291–1307, Nov 2012. [Online]. Available: <https://ieeexplore.ieee.org/document/6392457>
- [19] T. Degris, P. M. Pilarski, and R. S. Sutton, "Model-Free reinforcement learning with continuous action in practice," in *2012 American Control Conference (ACC)*. IEEE, Jun 2012, pp. 2177–2182. [Online]. Available: <https://ieeexplore.ieee.org/document/6315022>
- [20] V. Mnih, A. P. Badia, M. Mirza, A. Graves, T. Lillicrap, T. Harley, D. Silver, and K. Kavukcuoglu, "Asynchronous methods for deep reinforcement learning," in *International conference on machine learning*. PMLR, 2016, pp. 1928–1937.
- [21] S. M. Kakade, "A natural policy gradient," *Advances in neural information processing systems*, vol. 14, 2001.
- [22] J. A. Tropp, "User-friendly tail bounds for sums of random matrices," *Foundations of computational mathematics*, vol. 12, no. 4, pp. 389–434, 2012.