

GRASS: GRAph Spectral Sparsification Leveraging Scalable Spectral Perturbation Analysis

Zhuo Feng, *Senior Member, IEEE*

Abstract—Spectral graph sparsification aims to find ultra-sparse subgraphs whose Laplacian matrix can well approximate the original Laplacian eigenvalues and eigenvectors. In recent years, spectral sparsification techniques have been extensively studied for accelerating various numerical and graph-related applications. Prior nearly-linear-time spectral sparsification methods first extract low-stretch spanning tree from the original graph to form the backbone of the sparsifier, and then recover small portions of spectrally-critical off-tree edges to the spanning tree to significantly improve the approximation quality. However, it is not clear how many off-tree edges should be recovered for achieving a desired spectral similarity level within the sparsifier. Motivated by recent graph signal processing techniques, this paper proposes a similarity-aware spectral graph sparsification framework that leverages efficient spectral off-tree edge embedding and filtering schemes to construct spectral sparsifiers with guaranteed spectral similarity (relative condition number) level. An iterative graph densification scheme is also introduced to facilitate efficient and effective filtering of off-tree edges for highly ill-conditioned problems. The proposed method has been validated using various kinds of graphs obtained from public domain sparse matrix collections relevant to VLSI CAD, finite element analysis, as well as social and data networks frequently studied in many machine learning and data mining applications. For instance, a sparse SDD matrix with 40 million unknowns and 180 million nonzeros can be solved (1E-3 accuracy level) within two minutes using a single CPU core and about 6GB memory.

Index Terms—Spectral graph theory, iterative matrix solver, graph partitioning, circuit analysis, perturbation analysis

I. INTRODUCTION

Spectral methods are playing increasingly important roles in many graph and numerical applications [30], such as scientific computing [28], numerical optimization [5], data mining [22], graph analytics [16], machine learning [9], graph signal processing [24], and VLSI computer-aided design [11], [35]. For example, classical spectral graph partitioning (data clustering) algorithms embed original graphs into low-dimensional space using the first few nontrivial eigenvectors of graph Laplacians and subsequently perform graph partitioning (data clustering) on the low-dimensional graphs to obtain high-quality solution [22]. To further push the limit of spectral methods for large graphs, mathematics and theoretical computer science researchers have extensively studied many theoretically-sound research problems related to spectral graph theory. Recent *spectral graph sparsification* research [2], [6], [18], [22], [25], [27] allows computing nearly-linear-sized subgraphs (sparsifiers) that can robustly preserve the spectrum (i.e., eigenvalues and eigenvectors) of the original graph's Laplacian, which

immediately leads to a series of theoretically nearly-linear-time numerical and graph algorithms for solving sparse matrices, graph-based semi-supervised learning (SSL), spectral graph partitioning (data clustering), and max-flow problems [5], [17], [27], [28]. For example, sparsified circuit networks allow for developing more scalable computer-aided (CAD) design algorithms for designing large VLSI systems [11], [35]; sparsified social (data) networks enable to more efficiently understand and analyze large social (data) networks [30]; sparsified matrices can be immediately leveraged to accelerate the solution computation of large linear system of equations [37]. To this end, a spectral sparsification algorithm leveraging an edge sampling scheme that sets sampling probabilities proportional to edge effective resistances (of the original graph) has been proposed in [25]. However, it becomes a chicken-and-egg problem since calculating effective resistances (leverage scores for edge sampling) requires solving the original graph Laplacian matrix multiple times (even when using Johnson-Lindenstrauss lemma [25]) and thus can be extremely expensive for very large graphs.

This paper aims to address the standing question whether there exists a practically-efficient, nearly-linear time spectral graph sparsification algorithm that can immediately enable the development of nearly-linear time sparse SDD matrix solvers and other graph-based algorithms for large-scale, real-world problems. Our work is built upon the recent spectral perturbation analysis framework that allows for highly-scalable spectral sparsification of large (weighted) undirected graphs [11], [12].

Our method starts by extracting a spectrally-critical spanning tree subgraph as a backbone of the sparsifier, and subsequently recovers a small portion spectrally-critical off-tree edges to the spanning tree. In many scientific computing and graph-related applications, it can be quite desired to construct spectral graph sparsifiers according to a given spectral similarity level: introducing too few edges may lead to poor approximation of the original graph, whereas too many edges can result in high computational complexity. For example, when using a preconditioned conjugate gradient (PCG) solver to solve a symmetric diagonally dominant (SDD) matrix for multiple right-hand-side (RHS) vectors, it is hoped the PCG solver would converge to a good solution as quickly as possible, which usually requires the sparsifier (preconditioner) to be highly spectrally-similar to the original problem; on the other hand, in many graph partitioning tasks, only the Fiedler vector (the first nontrivial eigenvector) of graph Laplacian is needed [26], so even a sparsifier with much lower spectral

The author is with the Department of ECE, Stevens Institute of Technology, Hoboken, NJ, 07030. Email: zfeng12@stevens.edu.

similarity will suffice. To this end, this work introduces a similarity-aware spectral graph sparsification framework that leverages efficient spectral off-tree edge embedding and filtering schemes to construct spectral sparsifiers with guaranteed spectral similarity.

The contribution of this work has been summarized as follows:

- 1) We present a nearly-linear time and practically-efficient framework for constructing ultra-sparsifier subgraph from a spanning tree subgraph via efficient spectral perturbation analysis of generalized eigenvalue problem. The proposed algorithm allows effectively fixing the largest generalized eigenvalues, by recovering the most spectrally-critical off-tree edges to the original spanning-tree subgraph.
- 2) We present a similarity-aware spectral graph sparsification framework by leveraging spectral off-tree edge embedding and filtering schemes that have been motivated by recent graph signal processing techniques [24].
- 3) For highly ill-conditioned problems, we introduce an iterative-and-incremental spectral graph sparsification scheme that allows to more effectively fix the most problematic eigenvalues by progressively improving the ultra-sparsifier subgraphs. Such a scheme enables to flexibly trade off the complexity and spectral similarity of the sparsified graph. Compared to the single-pass sparsification scheme, the iterative scheme can always achieve greater reduction of the relative condition number and thus more effective spectral approximation of the original graph Laplacian matrices.
- 4) Extensive experiments have been conducted to validate the proposed method in various numerical and graph-related applications, such as solving sparse SDD matrices, and spectral graph partitioning, as well as simplification of large social and data networks. Very promising preliminary results for even extremely ill-conditioned VLSI, thermal and finite element analysis problems have been obtained.

The rest of this paper is organized as follows. Section II provides a brief introduction to graph Laplacians and the state of the art in spectral sparsification of graphs. In Sections III and IV, a scalable similarity-aware spectral sparsification method based on spectral perturbation analysis is described in detail. Section V demonstrates extensive experimental results for a variety of real-world, large-scale sparse Laplacian matrix and graph problems, which is followed by the conclusion of this work in Section VI.

II. BACKGROUND

A. Graph Laplacian Matrices and Quadratic Forms

Consider a weighted, undirected graph $G = (V, E, \omega)$, where V denotes a set of vertices, E denotes a set of edges, and ω denotes a weight function that assigns a positive weight

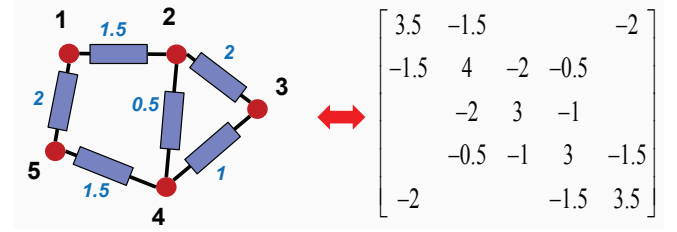


Fig. 1. A resistor network (conductance value of each element is shown) and its graph Laplacian matrix.

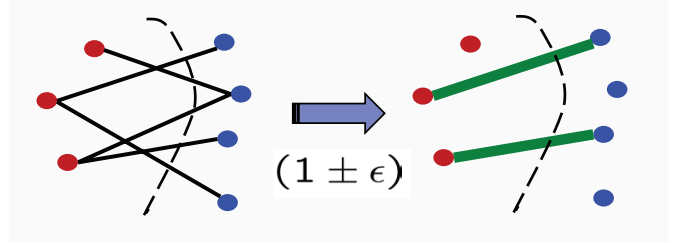


Fig. 2. Cut sparsifier preserves cuts of a graph.

to each edge. As shown in Fig. 1, the Laplacian matrix of graph G can be defined as follows:

$$\mathbf{L}_G(p, q) = \begin{cases} -\omega(p, q) & \text{if } (p, q) \in E \\ \sum_{(p, t) \in E} \omega(p, t) & \text{if } (p = q) \\ 0 & \text{if otherwise.} \end{cases} \quad (1)$$

It can be shown that every graph Laplacian matrix is an SDD matrix, which also can be considered as an admittance matrix of a resistor circuit network. For any real vector $x \in \mathbb{R}^V$, the Laplacian quadratic form of graph G is defined as:

$$\mathbf{x}^\top \mathbf{L}_G \mathbf{x} = \sum_{(p, q) \in E} \omega_{p, q} (x(p) - x(q))^2. \quad (2)$$

B. Graph Sparsification and Its Applications

Classic graph sparsification problem can be described as follows: given a graph $G = (V, E, \omega)$ and its graph Laplacian matrix $\mathbf{L}_G$, graph sparsification aims to find a subgraph (a.k.a graph sparsifier) $P = (V, E_s, \omega_s)$ and its graph Laplacian matrix $\mathbf{L}_P$ so that this sparse subgraph can preserve all vertices but significantly less number of edges than the original graph.

Graph sparsifiers typically fall into the following two categories: the cut sparsifier [4] and spectral sparsifier [27]. The cut sparsifier preserves the values of cuts in a graph as shown in Fig. 2, whereas spectral sparsifier preserves eigenvalues and eigenvectors of the original graph. It has been shown that a good cut sparsifier may not always be a good spectral sparsifier, while the spectral sparsifier is always a stronger notion than the cut sparsifier [27].

To illustrate the importance of graph sparsification techniques in numerical computation applications, consider the following example of the standard preconditioned conjugate gradient (PCG) algorithm for solving SDD matrices. The

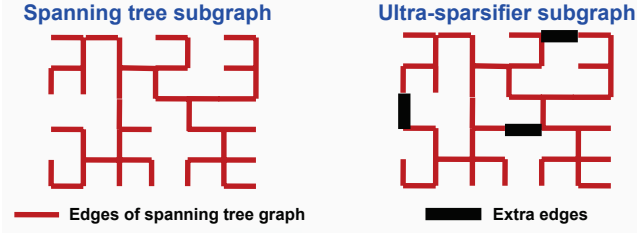


Fig. 3. A spanning tree and its ultra-sparsifier subgraph.

PCG algorithm can find an ϵ -accurate solution in at most $O(\kappa(\mathbf{L}_G, \mathbf{L}_P)^{1/2} \log \epsilon^{-1})$ iterations, where the relative condition number $\kappa(\mathbf{L}_G, \mathbf{L}_P)$ is defined as follows:

$$\kappa(\mathbf{L}_G, \mathbf{L}_P) = \frac{\lambda_{max}}{\lambda_{min}}, \quad (3)$$

where λ_{min} and λ_{max} denote the smallest and largest nonzero generalized eigenvalues¹ that satisfy:

$$\mathbf{L}_G \mathbf{u} = \lambda \mathbf{L}_P \mathbf{u}, \quad (4)$$

with $\mathbf{u}$ denoting the eigenvector corresponding to the generalized eigenvalue λ . It is desired that the preconditioner $\mathbf{L}_P$ matrix should lead to a much smaller relative condition number while maintaining a much sparser structure than the original $\mathbf{L}_G$ matrix so that the cost of the preconditioned iterations can be much lower than directly solving the original $\mathbf{L}_G$ matrix. It can be shown that a graph sparsifier with good spectral approximation of the original matrix can be immediately leveraged as a preconditioner for solving SDD or SDD-like matrix problems [13], [14], [17], [28], [32]–[34].

C. Spectral Graph Sparsification

Graphs G and P are said to be σ -spectrally similar if for all real vectors $\mathbf{x} \in \mathbb{R}^V$ the following holds [3]:

$$\frac{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}}{\sigma} \leq \mathbf{x}^\top \mathbf{L}_G \mathbf{x} \leq \sigma \mathbf{x}^\top \mathbf{L}_P \mathbf{x}. \quad (5)$$

It can be shown that the relative condition number $\kappa(\mathbf{L}_G, \mathbf{L}_P) \leq \sigma^2$. It is obvious that a graph sparsifier that can result in a smaller relative condition number indicates it is more spectrally similar to the original graph and can lead to faster convergence of iterative methods, such as Krylov-subspace iterative methods. For complete graphs, it has been shown that Ramanujan graphs are the best spectral graph sparsifiers [2]. For arbitrary graphs on the other hand, the linear-sized Twice-Ramanujan graphs can achieve the same spectral similarity with subgraphs that have twice as many as the edges in Ramanujan graphs [2], [18]. However, it still remains unclear if there is a practically-efficient algorithm for constructing linear-sized spectral sparsifiers.

Define *spectrally-critical* edges to be the ones that can mostly perturb the spectral graph properties, such as the

¹The smallest eigenvalue of a Laplacian matrix is always 0 with the corresponding all-1s eigenvector. For a disconnected graph, the number of zero eigenvalues equal to the number of disconnected components, which is equal to the algebraic multiplicity of 0 in the Laplacian.

first few Laplacian eigenvalues and eigenvectors. Recent approaches for constructing nearly-linear-sized spectral sparsifiers aim to reduce relative condition number and typically include the following two key steps (as shown in Fig. 3) [15], [17], [25], [28]:

- 1) Extract an initial spanning tree from the original graph as a backbone of the sparsifier;
- 2) Recover a small number of spectrally-critical off-tree edges to the spanning tree to form an ultra-sparsifier subgraph.

It can be shown that, the smallest non-zero generalized eigenvalue λ_{min} of a spanning tree subgraph (without scaling) is always greater than 1, so the relative condition number $\kappa(\mathbf{L}_G, \mathbf{L}_P) = \frac{\lambda_{max}}{\lambda_{min}}$ is always bounded by λ_{max} .

For step 1), recent theoretical computer science research results suggest that low-stretch spanning trees should be constructed since they will result in an upper bound of $\lambda_{max} < O(m \log n (\log \log n)^2)$ that can immediately lead to the development of nearly-linear time algorithms for solving SDD matrices [17], where m denotes the number of nonzeros and n the number of equations in the matrix. Towards this goal, nearly-linear time low-stretch spanning tree algorithms based on star- and petal-decomposition methods have been proposed [1], [10].

For step 2), it requires to recover the most spectrally-critical off-tree edges to the spanning tree for constructing the ultra-sparsifier, so that it can drastically improve the spectral approximation of the previous spanning tree subgraph. To this end, effective-resistance based edge sampling scheme has been proposed for recovering these off-tree edges [25]. However, calculating effective resistances (leverage scores for edge sampling) requires solving the original graph Laplacian matrix multiple times (even when using the Johnson-Lindenstrauss lemma [25]) and thus can be extremely expensive for very large graphs. It is also suggested to use stretch to replace effective resistance for edge sampling, which is more computationally efficient but will increase the number of edges sampled [15].

D. Overview of Our Approach

The overview of the proposed method for similarity-aware spectral sparsification of undirected graphs has been summarized as follows. For a given input graph, the following key procedures are involved in the proposed algorithm flow: (a) low-stretch spanning tree [1], [10] extraction based on its original graph Laplacian; (b) spectral (generalized eigenvalue) embedding and filtering of off-tree edges by leveraging the recent spectral perturbation analysis framework [11]; (c) incremental sparsifier improvement (graph densification) by gradually adding small portions of dissimilar off-tree edges to the spanning tree.

Fig. 4 shows the spectral drawings [16] of an airfoil graph [8] as well as its spectrally-similar subgraph computed by the proposed similarity-aware spectral sparsification algorithm. Since recovering too many off-tree edges will result in high computational costs, whereas recovering insufficient amount of

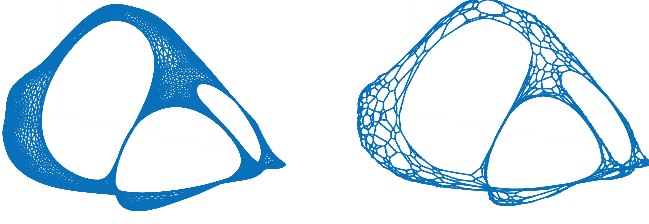


Fig. 4. Two spectrally-similar airfoil graphs.

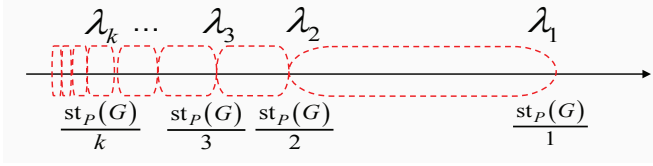


Fig. 5. A nearly worst-case distribution of generalized eigenvalues for a spanning-tree preconditioned system.

edges can lead to poor or misleading approximation results, in this work we propose an incremental graph densification procedure leveraging an efficient off-edge filtering scheme.

In the rest of this paper, we assume that $G = (V, E, w)$ is a weighted, undirected and connected graph, whereas $P = (V, E_s, w_s)$ is its sparsifier. To simplify our analysis, we assume the edge weights in the sparsifier remain the same as the original ones, though the latest iterative edge re-scaling schemes [36] can be applied to further improve the approximation. The descending eigenvalues of $\mathbf{L}_P^+ \mathbf{L}_G$ are denoted by $\lambda_{max} = \lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_n \geq 1$, where $\mathbf{L}_P^+$ denotes the Moore-Penrose pseudoinverse of $\mathbf{L}_P$.

III. SPECTRAL GRAPH SPARSIFICATION VIA EFFICIENT SPECTRAL PERTURBATION ANALYSIS

In this paper, we introduce a practically-efficient, nearly-linear time spectral graph sparsification algorithm that can be efficiently applied to sparsify large-scale real-world graphs (Laplacian matrices). We show that for an initial spectrally-critical spanning-tree subgraph, such as a low-stretch spanning tree, the proposed algorithm can always efficiently identify the most spectrally-critical off-tree edges to be added to the spanning tree, thereby drastically reducing the relative condition number of the preconditioned system. As a result, an ultra-sparse and spectrally-similar subgraph can be constructed and leveraged for solving sparse SDD matrices as well as other graph related problems in nearly-linear time.

A. Spanning Tree as A Spectral Sparsifier

Recent research work proves that when using a spanning tree subgraph as a spectral graph sparsifier or preconditioner, $\mathbf{L}_P^+ \mathbf{L}_G$ will not have many large eigenvalues [29]: it has at most k eigenvalues greater than $\frac{st_P(G)}{k}$, where $st_P(G)$ denotes the stretch of the original graph G with respect to the spanning tree subgraph P defined as [29]:

$$st_P(G) = \sum_{(p,q) \in E} st_P(p, q), \quad (6)$$

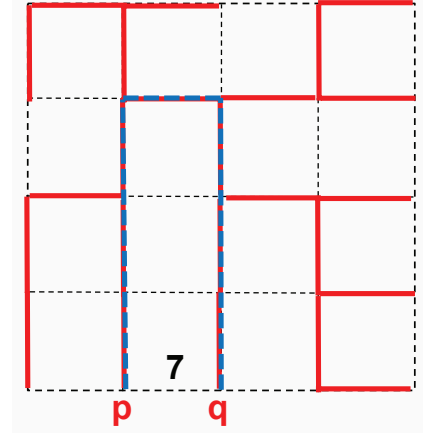


Fig. 6. The stretch of an off-tree edge (p, q) is computed by $st_P(p, q) = 7$ for a weighted graph with equal edge weight.

where $st_P(p, q)$ is the stretch of an edge $(p, q) \in E$ that belongs to the original graph, which is further defined as:

$$st_P(p, q) = \omega_{p,q} \left(\sum_{f \in S} \frac{1}{\omega_f} \right), \quad (7)$$

where S denotes the set of edges in the path in the spanning tree P from p to q . A nearly-worst case distribution of eigenvalues with $\lambda_i \leq st_P(G)/i$ has been illustrated in Fig. 5.

Define $\mathbf{e}_p \in \mathbb{R}^V$ to be a vector with only the p -th element being 1 and others being 0. Also define $\mathbf{e}_{p,q} = \mathbf{e}_p - \mathbf{e}_q$. Then the trace of $\mathbf{L}_P^+ \mathbf{L}_G$ becomes [29]:

$$\begin{aligned} \text{Tr}(\mathbf{L}_P^+ \mathbf{L}_G) &= \sum_{i=1}^n \lambda_i = \sum_{(p,q) \in E} \omega_{p,q} \text{Tr}(\mathbf{L}_P^+ \mathbf{e}_{p,q} \mathbf{e}_{p,q}^\top) \\ &= \sum_{(p,q) \in E} \omega_{p,q} \text{Tr}(\mathbf{e}_{p,q}^\top \mathbf{L}_P^+ \mathbf{e}_{p,q}) \\ &= \sum_{(p,q) \in E} \omega_{p,q} \mathbf{e}_{p,q}^\top \mathbf{L}_P^+ \mathbf{e}_{p,q} \\ &= st_P(G) \geq \lambda_1. \end{aligned} \quad (8)$$

As a result, it is suggested that a spanning tree with low stretch should be constructed so that the preconditioned system will have a small relative condition number. It has been shown that if each of the largest eigenvalues can be fixed by adding a small number of extra off-tree edges to the spanning tree, an ultra-sparsifier with totally $n + o(n)$ edges can be created to provide a good spectral approximation of G [15], [17], [28]. For instance, it has been shown that an ultra-sparsifier with a relative condition number αk^2 can be built by adding at most n/k extra off-tree edges to the spanning tree subgraph [28].

B. Perturbation Analysis of Generalized Eigenvalue Problems

Consider the following first-order eigenvalue perturbation problem:

$$\mathbf{L}_G(\mathbf{u}_i + \delta \mathbf{u}_i) = (\lambda_i + \delta \lambda_i)(\mathbf{L}_P + \delta \mathbf{L}_P)(\mathbf{u}_i + \delta \mathbf{u}_i), \quad (9)$$

where perturbation $\delta \mathbf{L}_P$ is applied to $\mathbf{L}_P$, leading to perturbations in generalized eigenvalues and eigenvectors $\lambda_i + \delta \lambda_i$ and $\mathbf{u}_i + \delta \mathbf{u}_i$ for $i = 1, \dots, n$, respectively. After keeping only the first-order terms, (9) becomes:

$$\mathbf{L}_G \delta \mathbf{u}_i = \lambda_i \mathbf{L}_P \delta \mathbf{u}_i + \delta \lambda_i \mathbf{L}_P \mathbf{u}_i + \lambda_i \delta \mathbf{L}_P \mathbf{u}_i. \quad (10)$$

Write $\delta \mathbf{u}_i$ in terms of the original eigenvectors $\mathbf{u}_j$ for $j = 1, \dots, n$:

$$\delta \mathbf{u}_i = \sum_{j=1}^n \zeta_{ij} \mathbf{u}_j, \quad (11)$$

where $\mathbf{u}_j$ can always be constructed to satisfy:

$$\mathbf{u}_i^\top \mathbf{L}_P \mathbf{u}_j = \begin{cases} 1, & i = j \\ 0, & i \neq j. \end{cases} \quad (12)$$

Substituting (11) into (10) leads to:

$$\begin{aligned} & \sum_{j=1}^n \zeta_{ij} \lambda_j \mathbf{L}_P \mathbf{u}_j \\ &= \lambda_i \mathbf{L}_P \left(\sum_{j=1}^n \zeta_{ij} \mathbf{u}_j \right) + \delta \lambda_i \mathbf{L}_P \mathbf{u}_i + \lambda_i \delta \mathbf{L}_P \mathbf{u}_i. \end{aligned} \quad (13)$$

Multiplying $\mathbf{u}_i^\top$ to both sides of (13) results in:

$$\begin{aligned} & \mathbf{u}_i^\top \left(\sum_{j=1}^n \zeta_{ij} \lambda_j \mathbf{L}_P \mathbf{u}_j \right) = \\ & \lambda_i \mathbf{u}_i^\top \mathbf{L}_P \left(\sum_{j=1}^n \zeta_{ij} \mathbf{u}_j \right) + \delta \lambda_i \mathbf{u}_i^\top \mathbf{L}_P \mathbf{u}_i + \lambda_i \mathbf{u}_i^\top \delta \mathbf{L}_P \mathbf{u}_i, \end{aligned} \quad (14)$$

which immediately leads to:

$$\delta \lambda_i = -\lambda_i \frac{\mathbf{u}_i^\top \delta \mathbf{L}_P \mathbf{u}_i}{\mathbf{u}_i^\top \mathbf{L}_P \mathbf{u}_i} = -\lambda_i \mathbf{u}_i^\top \delta \mathbf{L}_P \mathbf{u}_i. \quad (15)$$

Expanding $\delta \mathbf{L}_P$ that includes multiple extra off-tree edges (p, q) leads to:

$$\delta \mathbf{L}_P = \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \mathbf{e}_{p,q} \mathbf{e}_{p,q}^\top. \quad (16)$$

The above leads to the following based on (15):

$$\delta \lambda_i = -\lambda_i \sum_{(p,q) \in E \setminus E_s} \mathbf{w}_{p,q} \mathbf{u}_i^\top \mathbf{e}_{p,q} \mathbf{e}_{p,q}^\top \mathbf{u}_i. \quad (17)$$

It is obvious from (17) that the reduction of λ_i is proportional to the Joule heat produced by the extra off-tree edges when its unperturbed eigenvector $\mathbf{u}_i$ is applied as a node-voltage vector. For instance, the voltage difference between nodes p and q is computed by

$$v_{p,q} = \mathbf{u}_i^\top \mathbf{e}_{p,q}, \quad (18)$$

which results in the following Joule heat for the off-tree edge (p, q) :

$$h_{p,q} = \omega_{p,q} v_{p,q}^2. \quad (19)$$

Therefore, the perturbation of eigenvalue λ_i becomes:

$$\delta \lambda_i = -\lambda_i \sum_{(p,q) \in E \setminus E_s} h_{p,q}. \quad (20)$$

Consequently, it becomes clear that adding the off-tree edges with the largest Joule heat values computed using the dominant generalized eigenvector ($\mathbf{u}_1$) that corresponds to the largest eigenvalue (λ_1) will dramatically reduce the relative condition number and thus improve the spectral approximation of the subgraph. By repeating the above procedures for all large eigenvalues, very good spectral graph sparsifiers can be obtained.

C. Why Dominant Generalized Eigenvectors?

As shown in the previous perturbation analysis, dominant generalized eigenvectors can help identify the most spectrally-critical off-tree edges. Alternatively, we can consider the following **Courant-Fischer theorem** for understanding why using generalized eigenvectors would work so well for spectral sparsification purpose. By assigning each node in the graph with an integer value either 0 or 1, the corresponding Laplacian quadratic form measures the boundary size (cut) of a node set. For example, if a node set Q is defined as

$$Q \stackrel{\text{def}}{=} \{q \in V : x(q) = 1\}, \quad (21)$$

then the number of edges going out of Q equals to:

$$\mathbf{x}^\top \mathbf{L}_G \mathbf{x} = \text{cut}(Q, \bar{Q}) = |\partial_G(Q)|, \quad (22)$$

where the boundary of Q in G is defined as

$$\partial_G(Q) \stackrel{\text{def}}{=} \{(p, q) \in E : p \notin Q, q \in Q\}. \quad (23)$$

The Courant-Fischer theorem for generalized eigenvalue problems allows finding dominant eigenvalues and eigenvectors by solving the following optimization task:

$$\lambda_{\max} = \max_{\substack{\|\mathbf{x}\| \neq 0 \\ \mathbf{x}^\top \mathbf{1} = 0}} \frac{\mathbf{x}^\top \mathbf{L}_G \mathbf{x}}{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}} \geq \max_{\substack{\|\mathbf{x}\| \neq 0 \\ x(p) \in \{0,1\}}} \frac{\mathbf{x}^\top \mathbf{L}_G \mathbf{x}}{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}} = \max \frac{|\partial_G(Q)|}{|\partial_P(Q)|}, \quad (24)$$

where $\mathbf{1} \in \mathbb{R}^V$ is the all-one vector, and

$$\mathbf{x}^\top \mathbf{L}_G \mathbf{x} = |\partial_G(Q)|, \mathbf{x}^\top \mathbf{L}_P \mathbf{x} = |\partial_P(Q)|. \quad (25)$$

Then (24) indicates that finding the dominant generalized eigenvector would be quite similar to finding Q such that $\frac{|\partial_G(Q)|}{|\partial_P(Q)|}$ or the ratio of the boundary sizes in the original graph G and subgraph P is maximized. As a result, $\lambda_{\max} = \lambda_1$ becomes the upper bound of the largest mismatch in boundary (cut) size between G and P . Fig. 7 shows the connection between the dominant generalized eigenvalue/eigenvector and the largest subgraph mismatch.

D. Problem Formulation

Consequently, once Q or $\partial_G(Q)$ is found using dominant generalized eigenvectors, we can recover a small number of edges from $\partial_G(Q)$ to P in order to dramatically reduce the maximum mismatch (λ_1), and thus improve the spectral approximation of P . To this end, we propose the following problem formulation for spectral graph sparsification:

$$\min_{\mathbf{L}_P} \left\{ \max_{\mathbf{x}} \left(\frac{\mathbf{x}^\top \mathbf{L}_G \mathbf{x}}{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}} \right) + \beta \|\mathbf{L}_P\|_0 \right\}, \quad (26)$$

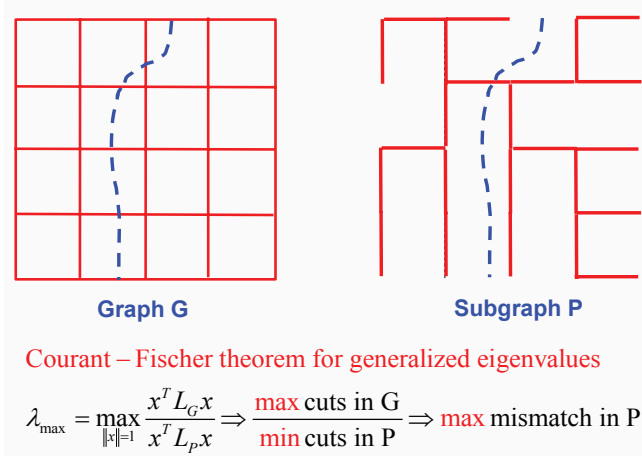


Fig. 7. An alternative view based on Courant-Fischer theorem.

where L_P denotes the Laplacian matrix of the subgraph P , $\mathbf{x}^\top \mathbf{1} = 0$ and $|\mathbf{x}| \neq 0$. The above formulation aims to minimize the largest generalized eigenvalue by adding the minimum amount of edges into the subgraph P , which can be solved iteratively by repeating the following two steps: 1) compute the generalized eigenvector corresponding to the largest (dominant) eigenvalue, and 2) identify the most spectrally-critical off-tree edges that can mostly decrease the dominant eigenvalue(s) and add them into the subgraph P . Once the dominant eigenvalue is small enough (e.g., $\lambda = 10$), P will be very spectrally similar to the original graph G .

However, computing the largest eigenvalue and its eigenvector can sometimes be too costly for large-scale graph Laplacian matrices, even when state-of-the-art eigenvalue decomposition methods are adopted [23]. Additionally, there can still be too many eigenvalues to be fixed in order to achieve a desired spectral similarity level (relative condition number).

E. Edge Embedding with Approximate Dominant Eigenvector

To more efficiently identify critical off-tree edges, approximate dominant generalized eigenvectors and eigenvalues of (4) can be exploited. To this end, a generalized power iteration procedure that can be computed in nearly-linear time has been proposed in [11]. In the rest of this paper, we assume that a very small positive diagonal element is added to a randomly selected row of the graph Laplacian matrix to convert the Laplacian matrix into a full-rank matrix. We express an initial random vector $\mathbf{h}_0$ that is orthogonal to the all-one vector using generalized eigenvectors $\mathbf{u}_i$ as follows:

$$\mathbf{h}_0 = \sum_{i=1}^n \alpha_i \mathbf{u}_i, \quad (27)$$

where $\mathbf{1}^\top \mathbf{h}_0 = 0$. Applying t -step power iterations to the generalized eigenvalue problem, we have

$$\mathbf{h}_t = (L_P^{-1} L_G)^t \mathbf{h}_0 = \sum_{i=1}^n \alpha_i \lambda_i^t \mathbf{u}_i. \quad (28)$$

Given the vector $\mathbf{h}_t$ computed by (28), the Laplacian quadratic form function $Q_{\delta L_P}(\mathbf{h}_t) = \mathbf{h}_t^\top \delta L_P \mathbf{h}_t$ can be expanded as:

$$\begin{aligned} Q_{\delta L_P}(\mathbf{h}_t) &= \mathbf{h}_t^\top \delta L_P \mathbf{h}_t = \left(\sum_{i=1}^n \alpha_i \lambda_i^t \mathbf{u}_i \right)^\top \delta L_P \left(\sum_{j=1}^n \alpha_j \lambda_j^t \mathbf{u}_j \right) \\ &= \sum_{i=1}^n (\alpha_i \lambda_i^t)^2 \mathbf{u}_i^\top \delta L_P \mathbf{u}_i + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \alpha_i \alpha_j \lambda_i^t \lambda_j^t \mathbf{u}_j^\top \delta L_P \mathbf{u}_i. \end{aligned} \quad (29)$$

Substituting (16) into (29), $Q_{\delta L_P}(\mathbf{h}_t)$ becomes:

$$\begin{aligned} Q_{\delta L_P}(\mathbf{h}_t) &= \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \left(\sum_{i=1}^n \alpha_i \lambda_i^t \mathbf{u}_i^\top \mathbf{e}_{p,q} \right)^2 \\ &= \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \bar{v}_{p,q}^2, \end{aligned} \quad (30)$$

which indicates that an off-tree edge with greater $|\bar{v}_{p,q}|$ or Joule heat for $t > 0$ will be a more spectrally-critical off-tree edge that is more likely to significantly influence large generalized eigenvalues. Expanding (30) leads to:

$$\begin{aligned} Q_{\delta L_P}(\mathbf{h}_t) &= \sum_{i=1}^n \alpha_i^2 \lambda_i^{2t} \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} (\mathbf{u}_i^\top \mathbf{e}_{p,q})^2 + \\ &\sum_{i=1}^n \sum_{j=1, j \neq i}^n \alpha_i \alpha_j \lambda_i^t \lambda_j^t \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \mathbf{u}_i^\top \mathbf{e}_{p,q} \mathbf{u}_j^\top \mathbf{e}_{p,q}. \end{aligned} \quad (31)$$

If we further define:

$$\delta L_{P,\max} = L_G - L_P, \quad (32)$$

which can be considered as an extreme-case Laplacian matrix that includes all off-tree edges that belong to the original graph G but not the subgraph P , then the following equation holds:

$$\begin{aligned} \sum_{i=1}^n \sum_{j=1, j \neq i}^n \alpha_i \alpha_j \lambda_i^t \lambda_j^t \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \mathbf{u}_i^\top \mathbf{e}_{p,q} \mathbf{u}_j^\top \mathbf{e}_{p,q} &= \\ \sum_{i=1}^n \sum_{j=1, j \neq i}^n \alpha_i \alpha_j \lambda_i^t \lambda_j^t \mathbf{u}_i^\top (L_G - L_P) \mathbf{u}_j &= 0, \end{aligned} \quad (33)$$

which leads to the edge-based expansion of the quadratic form for $\delta L_{P,\max}$ as follows:

$$\begin{aligned} Q_{\delta L_{P,\max}}(\mathbf{x}_t) &= \mathbf{x}_t^\top \delta L_{P,\max} \mathbf{x}_t = \sum_{i=1}^n (\alpha_i \lambda_i^t)^2 (\lambda_i - 1) \\ &= \sum_{(p,q) \in E \setminus E_s} \omega_{p,q} \sum_{i=1}^n \alpha_i^2 \lambda_i^{2t} (\mathbf{u}_i^\top \mathbf{e}_{p,q})^2. \end{aligned} \quad (34)$$

It is obvious that (30), or (34) will allow ranking each off-tree edge according to its “spectral-criticality” level. (34) also indicates that adding all off-tree edges with nonzero Joule heat values back to P will immediately bring all generalized eigenvalues to 1. It should be noted that the required number of generalized power iterations can be rather small (e.g. $t = 2$) in practice to observe good result.

F. Spectrally-unique Off-tree Edges

Define a spectrally-unique off-tree edge (p_i, q_i) to be the off-tree edge that can completely and only impact one large (dominant) generalized eigenvalue λ_i , though each edge will usually influence more than one eigenvalues and eigenvectors

according to (34). Then the following truncated expansion of the Laplacian quadratic form can be obtained when considering the top k most dominant and spectrally-unique off-tree edges for fixing the top k largest eigenvalues:

$$\begin{aligned} Q_{\delta L_{P, \max}}(\mathbf{x}_t) &\approx \sum_{i=1}^k w_{p_i, q_i} \alpha_i^2 \lambda_i^{2t} (u_i^\top \mathbf{e}_{p_i, q_i})^2 \\ &= \sum_{i=1}^k \alpha_i^2 \lambda_i^{2t} (\lambda_i - 1), \end{aligned} \quad (35)$$

where we should be able to find $\gamma_i \neq 0$ such that:

$$\mathbf{e}_{p_i, q_i} = \gamma_i \mathbf{L}_P \mathbf{u}_i, \quad (36)$$

while the following will also be satisfied:

$$\mathbf{u}_j^\top \mathbf{e}_{p_i, q_i} = \begin{cases} \gamma_i, i = j, \\ 0, i \neq j. \end{cases} \quad (37)$$

Since each of the top k off-tree edges can only fix one large eigenvalue, the following can be obtained based on (35):

$$Q_{\delta L_{P, \max}}(\mathbf{x}_t) \approx \sum_{i=1}^k w_{p_i, q_i} \alpha_i^2 \lambda_i^{2t} \gamma_i^2 = \sum_{i=1}^k \alpha_i^2 \lambda_i^{2t} (\lambda_i - 1). \quad (38)$$

Obviously, for random coefficients α_i , the following must be satisfied for a spectrally-unique off-tree edge:

$$w_{p_i, q_i} \gamma_i^2 = \lambda_i - 1. \quad (39)$$

Consequently, if there is an off-tree edge (p_i, q_i) with weight w_{p_i, q_i} that satisfies:

$$\mathbf{e}_{p_i} - \mathbf{e}_{q_i} = \pm \sqrt{\frac{\lambda_i - 1}{w_{p_i, q_i}}} \mathbf{L}_P \mathbf{u}_i, \quad (40)$$

adding this off-tree edge back to the spanning tree will completely fix the corresponding eigenvalue λ_i . Then the effective resistance of edge (p_i, q_i) in P becomes:

$$R_{e_i}^{\text{eff}} = \mathbf{e}_{p_i, q_i}^\top \mathbf{L}_P^\dagger \mathbf{e}_{p_i, q_i} = \gamma_i^2 \mathbf{u}_i^\top \mathbf{L}_P \mathbf{u}_i = \gamma_i^2, \quad (41)$$

which immediately leads to:

$$Q_{\delta L_P, \max}(\mathbf{h}_t) \approx \sum_{i=1}^k \alpha_i^2 \lambda_i^{2t} w_{p_i, q_i} R_{e_i}^{\text{eff}} \approx \sum_{i=1}^k \alpha_i^2 \lambda_i^{2t+1}. \quad (42)$$

Since the stretch of off-tree edge (p_i, q_i) is computed by $\text{st}_P(p_i, q_i) = w_{p_i, q_i} R_{e_i}^{\text{eff}}$, (42) also indicates that $\text{st}_P(e_i) \approx \lambda_i$ holds for spectrally-unique off-tree edges. Consequently, the key off-tree edges identified by (34) or (42) will have the largest stretch values and therefore most significantly impact the largest eigenvalues of $\mathbf{L}_P^\dagger \mathbf{L}_G$. (42) also can be considered as a randomized version of $\text{Trace}(\mathbf{L}_P^\dagger \mathbf{L}_G)$ that is further scaled up by a factor of λ_i^{2t} .

G. Rank-One Update with A Spectrally-Unique Edge

The updated generalized eigenvalue λ'_i after adding one spectrally-unique off-tree edge (p_i, q_i) with weight w_{p_i, q_i} back to the spanning tree for fixing eigenvalue λ_i can be derived based on the Sherman-Morrison Formula and Matrix Determinant Lemma. Define matrix $\mathbf{A}_P$ to be:

$$\mathbf{A}_P = \mathbf{L}_G^\dagger \mathbf{L}_P^{-1} \mathbf{L}_G^\dagger, \quad (43)$$

which has the same set of eigenvalues of matrix $\mathbf{L}_P^{-1} \mathbf{L}_G$. After adding the off-tree edge (p_i, q_i) , the updated $\mathbf{A}_P$ is denoted by $\mathbf{A}'_P$ that is expressed as:

$$\begin{aligned} \mathbf{A}'_P &= \mathbf{L}_G^\dagger (\mathbf{L}_P + w_{p_i, q_i} \mathbf{e}_{p_i, q_i} \mathbf{e}_{p_i, q_i}^\top)^{-1} \mathbf{L}_G^\dagger \\ &= \mathbf{A}_P - \frac{w_{p_i, q_i} \mathbf{L}_G^\dagger \mathbf{L}_P^{-1} \mathbf{e}_{p_i, q_i} \mathbf{e}_{p_i, q_i}^\top \mathbf{L}_P^{-1} \mathbf{L}_G^\dagger}{1 + w_{p_i, q_i} \mathbf{e}_{p_i, q_i}^\top \mathbf{L}_P^{-1} \mathbf{e}_{p_i, q_i}} = \mathbf{A}_P - \mathbf{v}_P \mathbf{v}_P^\top, \end{aligned} \quad (44)$$

where vector $\mathbf{v}_P$ is defined as:

$$\mathbf{v}_P = \frac{\sqrt{w_{p_i, q_i}} \mathbf{L}_G^\dagger \mathbf{L}_P^{-1} \mathbf{e}_{p_i, q_i}}{\sqrt{1 + w_{p_i, q_i} \mathbf{e}_{p_i, q_i}^\top \mathbf{L}_P^{-1} \mathbf{e}_{p_i, q_i}}} = \frac{\gamma_i \sqrt{w_{p_i, q_i}} \mathbf{L}_G^\dagger \mathbf{u}_i}{\sqrt{1 + w_{p_i, q_i} \gamma_i^2}}. \quad (45)$$

The characteristic polynomial of $\mathbf{A}'_P = \mathbf{A}_P - \mathbf{v}_P \mathbf{v}_P^\top$ can be computed as follows:

$$\begin{aligned} p_{\mathbf{A}'_P}(x) &= p_{\mathbf{A}_P - \mathbf{v}_P \mathbf{v}_P^\top}(x) = \det(\mathbf{xI} - \mathbf{A}_P + \mathbf{v}_P \mathbf{v}_P^\top) \\ &= \det(\mathbf{xI} - \mathbf{A}_P) \det(\mathbf{I} + (\mathbf{xI} - \mathbf{A}_P)^{-1} \mathbf{v}_P \mathbf{v}_P^\top). \end{aligned} \quad (46)$$

According to Matrix Determinant Lemma, we have:

$$p_{\mathbf{A}'_P}(x) = p_{\mathbf{A}_P}(x) (1 + \mathbf{v}_P^\top (\mathbf{xI} - \mathbf{A}_P)^{-1} \mathbf{v}_P). \quad (47)$$

Denoting $\mathbf{z}_i$ for $i = 1, \dots, n$ the unit-length orthonormalized eigenvectors of matrix $\mathbf{A}_P$ that correspond to eigenvalues λ_i respectively, we have:

$$(\mathbf{xI} - \mathbf{A}_P)^{-1} = \left(\sum_{i=1}^n (x - \lambda_i) \mathbf{z}_i \mathbf{z}_i^\top \right)^{-1} = \sum_{i=1}^n \frac{\mathbf{z}_i \mathbf{z}_i^\top}{x - \lambda_i}, \quad (48)$$

which leads to:

$$p_{\mathbf{A}'_P}(x) = p_{\mathbf{A}_P}(x) \left(1 + \sum_{i=1}^n \frac{(\mathbf{v}_P^\top \mathbf{z}_i)^2}{x - \lambda_i} \right). \quad (49)$$

It has been shown in [2] that (49) indicates: 1) the latest eigenvalues after rank-one update will always be reduced if $(\mathbf{v}_P^\top \mathbf{z}_i)^2 > 0$; 2) the greater value of $(\mathbf{v}_P^\top \mathbf{z}_i)^2$ will result in greater reduction in λ_i . Therefore, if an off-tree edge satisfies $(\mathbf{v}_P^\top \mathbf{z}_i)^2 \gg 0$ for multiple eigenvectors $\mathbf{z}_i$, adding this edge back to the spanning tree subgraph will substantially reduce multiple eigenvalues at the same time; on the other hand, a spectrally-unique off-tree edge will substantially reduce only one eigenvalue. It can be shown that:

$$\mathbf{L}_G^\dagger \mathbf{L}_P^{-1} \mathbf{L}_G^\dagger \left(\frac{\mathbf{L}_G^\dagger \mathbf{u}_i}{\|\mathbf{L}_G^\dagger \mathbf{u}_i\|} \right) = \lambda_i \left(\frac{\mathbf{L}_G^\dagger \mathbf{u}_i}{\|\mathbf{L}_G^\dagger \mathbf{u}_i\|} \right) = \lambda_i \mathbf{z}_i, \quad (50)$$

which indicates that $\mathbf{v}_P$ is an eigenvector of matrix $\mathbf{A}_P$ corresponding to the eigenvalue λ_i . Consequently, the characteristic polynomial of $\mathbf{A}'_P = \mathbf{A}_P - \mathbf{v}_P \mathbf{v}_P^\top$ can be further simplified into the following form:

$$p_{\mathbf{A}'_P}(x) = p_{\mathbf{A}_P}(x) \left(1 + \frac{(\mathbf{v}_P^\top \mathbf{z}_i)^2}{x - \lambda_i} \right) = p_{\mathbf{A}_P}(x) \left(1 + \frac{\mathbf{v}_P^\top \mathbf{v}_P}{x - \lambda_i} \right). \quad (51)$$

Therefore, the updated eigenvalue λ'_i after adding the off-tree edge can be computed by solving $p_{\mathbf{A}'_P}(x) = 0$, which leads to:

$$\lambda'_i = \lambda_i - \mathbf{v}_P^\top \mathbf{v}_P = \frac{\lambda_i}{1 + w_{p_i, q_i} \gamma_i^2}. \quad (52)$$

For achieving the desired λ'_i after adding the off-tree edge, the edge weight should be set as:

$$w_{p_i, q_i} = \frac{\lambda_i - \lambda'_i}{\lambda'_i \gamma_i^2}. \quad (53)$$

It can be shown that when the desired $\lambda'_i = 1$, we have $w_{p_i, q_i} = \frac{\lambda_i - 1}{\gamma_i^2}$, which is equivalent to (39). As a result, considering the nearly-worst case eigenvalue distribution $\lambda_i \leq \text{st}_P(G)/i$ shown in Fig. 5, a σ -similar spectral sparsifier with $n - 1 + O(\frac{m \log n \log \log n}{\sigma^2})$ edges can be obtained in $O(m)$ time using the proposed method when an initial low-stretch spanning tree is given.

H. Algorithm Flow and Complexity

The detailed algorithm flow of the proposed spectral graph sparsification approach has been summarized as follows:

- 1) Extract a spanning tree subgraph (e.g. a scaled low-stretch spanning tree [1], [10]) from the original graph;
- 2) Perform t -step generalized power iterations to compute x_t with an initial random vector;
- 3) Compute the spectral criticality of each edge based on the Laplacian quadratic form of $\delta L_{P, \max}$ using (34);
- 4) Rank each edge using its spectral criticality levels;
- 5) Add a small portion of dissimilar off-tree edges back to the spanning tree to form the ultra-sparse spectral graph sparsifier.

It should be noted that the proposed spectral graph sparsification approach allows to rank all off-tree edges according to their “spectral criticality” levels in a very efficient and effective way. Compared to the state-of-the-art sampling-based approaches that rely on effective resistance calculations, the proposed method can achieve the very similar goal of ranking “spectrally critical” off-tree edges while the overall computational complexity has been dramatically reduced.

The complexity of the proposed spectral perturbation based approach can be analyzed by considering two key steps: (a) spanning tree construction based on the original graph, and (b) ultra-sparsifier construction based on the spanning tree. Recent research has shown that low-stretch spanning trees in (a) can be constructed in nearly-linear time [1], [10]. For instance, the petal-decomposition algorithm requires $O(m \log n \log \log n)$ time to generate a low-stretch spanning tree with a total stretch of $O(m \log n \log \log n)$ [1]; the t -step generalized power iterations in (b) can be achieved in linear time for a fixed t since factorization of a tree-graph Laplacian matrix can be accomplished within linear $O(m)$ time. Consequently, the overall complexity of the proposed spectral perturbation based sparsification algorithm is almost linear.

IV. SIMILARITY-AWARE SPECTRAL SPARSIFICATION BY EDGE FILTERING

Although (34) and (42) provide a spectral ranking for each off-tree edge, it is not clear how many off-tree edges should be recovered to the spanning tree for achieving a desired spectral similarity level. To this end, we introduce a simple yet effective spectral off-tree edge filtering scheme motivated by recent graph signal processing techniques [24].

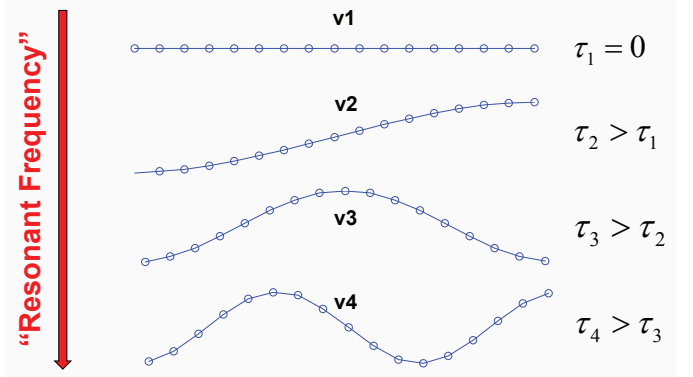


Fig. 8. The eigenvectors (v_i) of increasing eigenvalues (τ_i) for a path graph.

A. Spectral Sparsification: A Low-Pass Filter on Graphs

To more efficiently analyze signals on general undirected graphs, graph signal processing techniques have been extensively studied recently [24]. There is a clear analogy between traditional signal processing based on classical Fourier analysis and graph signal processing: 1) the signals at different time points in classical Fourier analysis correspond to the signals at different nodes in an undirected graph; 2) the more slowly oscillating functions in time domain correspond to the graph Laplacian eigenvectors associated with lower eigenvalues and more slowly varying (smoother) components across the graph. For example, the first few nontrivial eigenvectors associated with the smallest non-zero eigenvalues of a path graph Laplacian have been illustrated in Fig. 8, where the increasing eigenvalues correspond to increasing oscillation frequencies in the line graph. A comprehensive review of fundamental signal processing operations, such as filtering, translation, modulation, dilation, and down-sampling to the graph setting has been provided in [24].

Spectral sparsification aims to maintain a simplest sub-graph sufficient for preserving the slowly-varying or “low-frequency” signals on graphs, which therefore can be regarded as a “low-pass” graph filter. In other words, such spectrally sparsified graphs will be able to preserve the eigenvectors associated with low eigenvalues more accurately than high eigenvalues, and thus will retain “low-frequency” graph signals sufficiently well, but not so well for highly-oscillating (signal) components due to the missing edges.

In practice, preserving the spectral (structural) properties of the original graph within the spectral sparsifier is key to design of many fast numerical and graph-related algorithms [5], [17], [25], [28]. For example, when using spectral sparsifier as a preconditioner in preconditioned conjugate gradient (PCG) iterations, the convergence rate only depends on the spectral similarity (or relative condition number) for achieving a desired accuracy level, while in spectral graph partitioning and data clustering tasks only the first few eigenvectors associated with the smallest nontrivial eigenvalues of graph Laplacian are needed [22], [26].

B. Off-Tree Edge Filtering with Joule Heat

To only recover the off-tree edges that are most critical for achieving the desired spectral similarity level, we propose the following scheme for truncating spectrally-unique off-tree edges based on each edge's Joule heat. For a spanning-tree preconditioner, since there will be at most k generalized eigenvalues that are greater than $\text{st}_P(G)/k$, the following simple yet nearly worst-case generalized eigenvalue distribution can be assumed:

$$\lambda_i = \frac{2\lambda_{\max}}{i+1} = \frac{\text{st}_P(G)}{i+1}, i \geq 1. \quad (54)$$

To most economically select the top- k spectrally-unique off-tree edges that will dominantly impact the top- k largest generalized eigenvalues, the following sum of quadratic forms (Joule heat levels) can be computed based on (42) by performing t -step generalized power iterations with r multiple random vectors $\mathbf{h}_{t,1}, \dots, \mathbf{h}_{t,r}$:

$$Q_{\delta \mathbf{L}_P, \max}(\mathbf{h}_{t,1}, \dots, \mathbf{h}_{t,r}) \approx \sum_{j=1}^r \sum_{i=1}^k (\alpha_{i,j})^2 \left(\frac{2\lambda_{\max}}{i+1} \right)^{2t+1}. \quad (55)$$

The goal is to select top k spectrally-unique off-tree edges for fixing the top k largest generalized eigenvalues such that the resulting upper bound of the relative condition number will become $\sigma^2 = \frac{\tilde{\lambda}_{\max}}{\tilde{\lambda}_{\min}}$, where $\tilde{\lambda}_{\max}$ and $\tilde{\lambda}_{\min}$ denote the largest and smallest eigenvalues of $\mathbf{L}_P^+ \mathbf{L}_G$ after adding top- k spectrally-unique off-tree edges. Then we have:

$$k = 2\lambda_{\max}/\tilde{\lambda}_{\max} - 1. \quad (56)$$

When using multiple random vectors for computing (55), it is expected that $\sum_{j=1}^r \alpha_{k,j}^2 \approx \sum_{j=1}^r \alpha_{1,j}^2$, which allows us to define the normalized edge Joule heat θ_k for the k -th spectrally-unique off-tree edge through the following simplifications:

$$\theta_k = \frac{\text{heat}_{\lambda_k}}{\text{heat}_{\lambda_1}} = \left(\frac{\sum_{j=1}^r \alpha_{k,j}^2}{\sum_{j=1}^r \alpha_{1,j}^2} \right) \left(\frac{\tilde{\lambda}_{\max}}{\lambda_{\max}} \right)^{2t+1} \approx \left(\frac{\sigma^2 \tilde{\lambda}_{\min}}{\lambda_{\max}} \right)^{2t+1} \quad (57)$$

The key idea of the proposed similarity-aware spectral sparsification is to leverage the normalized Joule heat (57) as a threshold for filtering off-tree edges: only the off-tree edges with normalized Joule heat values greater than θ_k will be selected for inclusion into the spanning tree for achieving the desired spectral similarity (σ) level. Although the above scheme is derived for filtering spectrally-unique off-tree edges, general off-tree edges also can be filtered using similar strategies. Since adding the off-tree edges with largest Joule heat to the subgraph will mainly impact the largest generalized eigenvalues but not the smallest ones, we will assume $\tilde{\lambda}_{\min} \approx \lambda_{\min}$, and use the following edge truncation scheme for filtering general off-tree edges: the off-tree edge (p, q) will be included

into the sparsifier if its normalized Joule heat value is greater than the threshold determined by:

$$\theta_{(p,q)} = \frac{\text{heat}_{(p,q)}}{\text{heat}_{\max}} \geq \theta_\sigma \approx \left(\frac{\sigma^2 \lambda_{\min}}{\lambda_{\max}} \right)^{2t+1}, \quad (58)$$

where θ_σ denotes the threshold for achieving the σ -spectral similarity in the sparsifier, and $\text{heat}_{\max}$ denotes the maximum Joule heat of all off-tree edges computed by (34) with multiple initial random vectors.

C. Estimation of Extreme Eigenvalues

To achieve the above spectral off-tree edge filtering scheme, we need to compute θ_σ in (58) that further requires to estimate the extreme eigenvalues $\lambda_{\max}$ and $\lambda_{\min}$ of $\mathbf{L}_P^+ \mathbf{L}_G$. In this work, we propose the following efficient methods for computing these extreme generalized eigenvalues.

1) *Estimating $\lambda_{\max}$ via Power Iterations*: Since generalized power iterations converge at a geometric rate determined by the separation of the two largest generalized eigenvalues $\lambda_{\max} = \lambda_1 > \lambda_2$, the error of the estimated eigenvalue will decrease quickly when $|\lambda_2/\lambda_1|$ is small. It has been shown that the largest eigenvalues of $\mathbf{L}_P^+ \mathbf{L}_G$ are well separated from each other [29], which thus leads to very fast convergence of generalized power iterations for estimating λ_1 . To achieve scalable performance of power iterations, we can adopt recent graph-theoretic algebraic multigrid (AMG) methods for solving the sparsified Laplacian matrix $\mathbf{L}_P$ [19], [37].

2) *Estimating $\lambda_{\min}$ via Node Coloring*: Since the smallest eigenvalues of $\mathbf{L}_P^+ \mathbf{L}_G$ are crowded together [29], using (shifted) inverse power iterations may not be efficient due to the extremely slow convergence rate. To the extent of our knowledge, none of existing eigenvalue decomposition methods can efficiently compute $\lambda_{\min}$.

This work exploits the following Courant-Fischer theorem for generalized eigenvalue problems:

$$\lambda_{\min} = \min_{|\mathbf{x}| \neq 0} \frac{\mathbf{x}^\top \mathbf{L}_G \mathbf{x}}{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}}, \quad (59)$$

where $\mathbf{x}$ is also required to be orthogonal to the all-one vector. (59) indicates that if we can find a vector $\mathbf{x}$ that minimizes the ratio between the quadratic forms of the original and sparsified Laplacians, $\lambda_{\min}$ can be subsequently computed. By restricting the values in $\mathbf{x}$ to be only 1 or 0, which can be considered as assigning one of the two colors to each node in graphs G and P , the following simplifications can be made:

$$\lambda_{\min} \leq \min_{\substack{|\mathbf{x}| \neq 0 \\ x(i) \in \{0,1\}}} \frac{\mathbf{x}^\top \mathbf{L}_G \mathbf{x}}{\mathbf{x}^\top \mathbf{L}_P \mathbf{x}} = \min_{\substack{|\mathbf{x}| \neq 0 \\ x(i) \in \{0,1\}}} \frac{\sum_{x(p) \neq x(q), (p,q) \in E} w_{pq}}{\sum_{x(p) \neq x(q), (p,q) \in E_s} w_{pq}}, \quad (60)$$

which will always allow estimating an upper bound for $\lambda_{\min}$. To this end, we first initialize all nodes with 0 value and subsequently try to find a node p such that the ratio between quadratic forms can be minimized:

$$\lambda_{\min} \leq \min_{p \in V} \frac{L_G(p, p)}{L_P(p, p)}. \quad (61)$$

The above procedure for estimating λ_{min} only requires finding the node with the smallest node degree ratio and thus can be easily implemented and efficiently performed for even very large graph problems. Our results for real-world graphs show that the proposed method is highly efficient and can very well estimate the smallest generalized eigenvalues when compared with existing generalized eigenvalue methods [23].

D. Iterative Sparsification for Ill-Conditioned Problems

To achieve more effective edge filtering for similarity-aware spectral graph sparsification, we propose to iteratively recover off-tree edges to the sparsifier through an incremental graph densification procedure. Each densification iteration adds a small portion of “filtered” off-tree edges to the latest spectral sparsifier, while the spectral similarity is estimated to determine if more off-tree edges are needed. The i -th graph densification iteration includes the following steps:

- 1) Update the subgraph Laplacian matrix $\mathbf{L}_P$ as well as its solver by leveraging recent graph-theoretic algebraic multigrid methods [19], [37];
- 2) Estimate the spectral similarity by computing λ_{max} and λ_{min} using the methods described in Section IV-C;
- 3) If the spectral similarity is not satisfactory, continue with the following steps; otherwise, terminate the subgraph densification procedure.
- 4) Perform t -step generalized power iterations with $O(\log|V|)$ random vectors to compute the sum of Laplacian quadratic forms (55);
- 5) Rank and filter each off-tree edge according to its normalized Joule heat value using the threshold θ_σ in (58);
- 6) Check the similarity of each selected off-tree edge and only add dissimilar edges to the latest sparsifier.

V. EXPERIMENTAL RESULTS

The proposed spectral perturbation based spectral graph sparsification method (GRASS) has been implemented in C++ and available for download ². The proposed spectral graph sparsification algorithm allows developing nearly-linear time algorithms for tackling SDD or SDD-like sparse matrix problems, spectral graph partitioning problems, as well as graph-based regression problems [13], [17], [28], [33], [38]. In this paper, a sparse SDD matrix algorithm has been implemented and compared to the state-of-the-art sparse matrix solver, Cholmod [7]. Test cases demonstrated in this paper cover a great variety of sparse SDD matrix problems obtained from realistic VLSI power grid problems [20], [31], and the sparse matrix collection from the University of Florida that includes integrated circuit simulation problems, three-dimensional thermal analysis problems, finite-element analysis, etc [8]. Additionally, a spectral graph partitioning engine is also implemented, which has been dramatically accelerated by taking advantage of the proposed spectral sparsification approach. All experiments are performed using a single CPU

TABLE I
RESULTS OF SPARSE SDD MATRIX SOLVER (SPECTRAL SPARSIFICATION WITH 5% TO 10% $|V|$ EXTRA OFF-TREE EDGES) FOR TEST CASES IN [20].

CKTs	$ V $	NNZ	T_D (M_D)	T_I (M_I)	N_I	$\frac{\lambda_1}{\lambda_{1,fin}}$	$\frac{N_I^{ST}}{N_I}$
ibmpg3	0.9E6	3.7E6	15.0s (0.8G)	1.2s (0.2G)	13	37X	6X
ibmpg4	1.0E6	4.1E6	18.3s (1.0G)	1.3s (0.2G)	12	18X	4X
ibmpg5	1.1E6	4.3E6	12.7s (0.6G)	1.3s (0.2G)	12	2,826X	50X
ibmpg6	1.7E6	6.6E6	18.3s (0.9G)	2.5s (0.3G)	13	173X	13X
ibmpg7	1.5E6	6.2E6	27.2s (1.3G)	2.3s (0.3G)	13	177X	13X
ibmpg8	1.5E6	6.2E6	18.7s (1.3G)	2.3s (0.3G)	13	120X	11X

TABLE II
RESULTS OF SPARSE SDD MATRIX SOLVER (SPECTRAL SPARSIFICATION WITH 1% TO 2% $|V|$ EXTRA OFF-TREE EDGES) FOR TEST CASES IN [31].

CKTs	$ V $	NNZ	T_D (M_D)	T_I (M_I)	N_I	$\frac{\lambda_1}{\lambda_{1,fin}}$	$\frac{N_I^{ST}}{N_I}$
thupg1	5.0E6	2.1E7	75s (4.0G)	10s (0.8G)	27	34,047X	185X
thupg2	8.9E6	3.9E7	158s (7.6G)	21s (1.5G)	32	39,426X	199X
thupg3	1.2E7	5.1E7	250s (10.0G)	25s (1.9G)	32	101,052X	318X
thupg4	1.5E7	6.6E7	N/A	36s (2.5G)	32	97,550X	312X
thupg5	1.9E7	8.5E7	N/A	47s (3.1G)	33	136,678X	370X
thupg6	2.4E7	1.1E8	N/A	62s (3.8G)	34	108,898X	330X
thupg7	2.8E7	1.2E8	N/A	70s (4.6G)	34	87,463X	296X
thupg8	4.0E7	1.8E8	N/A	110s (6.5G)	34	368,898X	607X

core of a computing platform running 64-bit RHEW 6.0 with a 2.67GHz 12-core CPU.

A. A Scalable Iterative Solver For Power Grid Analysis

The spectral sparsifier obtained by the proposed algorithm (without weight re-scaling for the spanning tree and off-tree edges) is leveraged as a preconditioner in a PCG solver. The preconditioner is factorized by the same Cholmod solver [7]. The right-hand-side (RHS) input vector b is generated randomly and the solver is set to converge to an accuracy level $\|Ax - b\| < 10^{-3}\|b\|$ for all test cases. “ $|V|$ ” denotes the number of nodes, “NNZ” denotes the number of nonzero elements in the original matrix, “ T_D ” (“ T_I ”) denotes the total solution time including both the matrix factorization and resolving steps of the direct (iterative) solver, “ M_D ” (“ M_I ”) denotes the memory cost for sparse matrix factorizations, “ N_I ” denotes the number of iterations for the PCG solver to converge to the required accuracy level, $\frac{\lambda_1}{\lambda_{1,fin}}$ calculates the reduction rate of the largest eigenvalue using the proposed spectral sparsification approach when compared to the initial spanning tree preconditioner, and $\frac{N_I^{ST}}{N_I}$ is the ratio of required iteration numbers using the initial spanning-tree preconditioners and the new subgraph preconditioners.

Accurate analysis of on-chip power grids is indispensable for designing modern VLSI chips since it can help reveal critical design issues related to power supply noise, electromigration, etc. However, modern power grid designs can integrate billions of components, which results in super-linear runtime/memory cost when using direct solution methods. The proposed spectral sparsification technique allows to develop nearly-linear time iterative solvers for power grid analysis problems. Additionally, even more general transistor-level SPICE-accurate circuit simulations can potentially benefit from the proposed spectral graph sparsification algorithm

²<https://sites.google.com/mtu.edu/zhufeng-graphspar>

TABLE III
RESULTS OF SPARSE SDD MATRIX SOLVER (SPECTRAL SPARSIFICATION WITH 5% TO 10% $|V|$ EXTRA OFF-TREE EDGES) FOR TEST CASES IN [8].

Test Cases	$ V $	NNZ	T_D (M_D)	T_I (M_I)	N_I	$\frac{\lambda_1}{\lambda_{1,fin}}$	$\frac{N^{ST}}{N_I}$
G3_circuit	1.6E6	7.7E6	45.1s (2.2G)	5.2s (0.3G)	37	45,897X	214X
thermal2	1.2E6	8.6E6	16.0s (0.9G)	4.4s (0.2G)	34	1,582X	40X
ecology2	1.0E6	5.0E6	12.5s (0.7G)	3.6s (0.2G)	47	1,728X	42X
tmt_sym	0.7E6	5.1E6	11.8s (0.6G)	2.2s (0.1G)	30	796X	28X
paraboli_fem	0.5E6	3.7E6	6.3s (0.5G)	1.2s (0.1G)	25	120X	11X

TABLE IV
RESULTS OF EXTREME EIGENVALUE ESTIMATIONS.

Test Cases	λ_{min}	$\tilde{\lambda}_{min}$	$\epsilon_{\lambda_{min}}$	λ_{max}	$\tilde{\lambda}_{max}$	$\epsilon_{\lambda_{max}}$
fe_rotor	1.34	1.40	4.4%	120.9	116.7	3.5%
pdb1HYS	1.71	1.89	10.5%	120.6	113.2	6.1%
bcsstk36	1.18	1.27	7.6%	96.0	92.4	3.8%
brack2	1.15	1.20	4.3%	92.6	90.3	2.5%
raefsky3	1.13	1.25	10.5%	84.4	82.7	2.0%

[13], [32], [33]. Table I and Table II demonstrate the DC analysis results of IBM and THU power grid design benchmarks [20], [31], showing nearly-linear runtime/memory cost. Similar runtime scalability is observed from Table III for solving sparse matrices from [8]. In all test cases, the proposed spectral graph sparsification algorithm can find tree-like ultra-sparsifiers with high spectral similarity. For example, we achieve $\kappa(L_G, L_P) \approx 16$ ($\sigma \approx 4$), for all IBM power grid test cases, which allows to solve the sparse matrices within just a small number of PCG iterations (e.g. $N_I < 14$).

Our results show that the proposed method can extract the whole spectral sparsifier (spanning tree and ultra-sparsifier) in nearly-linear time, as shown in Fig. 13. It should be noted that each spectral sparsifier needs to be extracted once and can be reused or incrementally updated many times [14], [34].

B. Estimation of Extreme Eigenvalues

In Table IV, the extreme generalized eigenvalues ($\tilde{\lambda}_{min}$ and $\tilde{\lambda}_{max}$) estimated by the proposed methods (Section IV-C) are compared with the ones (λ_{min} and λ_{max}) computed by the “eigs” function in Matlab for sparse matrices in [8], while the relative errors ($\epsilon_{\lambda_{min}}$ and $\epsilon_{\lambda_{max}}$) are also shown. $\tilde{\lambda}_{max}$ is estimated using less than ten generalized power iterations.

C. Spectral Ranking of Off-tree Edges

We illustrate the results of spectral edge ranking and filtering according to Joule heat levels computed by one-step generalized power iteration using (34) in Fig. 9 for two sparse matrices in [8]. The thresholds of normalized edge Joule heat values required for spectral edge filtering are labeled using red dash lines. It is observed in Fig. 9 there is a sharp change of the top normalized edge Joule heat values, which indicates that there are not many large eigenvalues of $\mathbf{L}_P^+ \mathbf{L}_G$ in both cases and agrees well with the prior theoretical analysis [29].

We also demonstrate the results of Joule heat levels (spectral criticality) of off-tree edges computed by (34) for a random

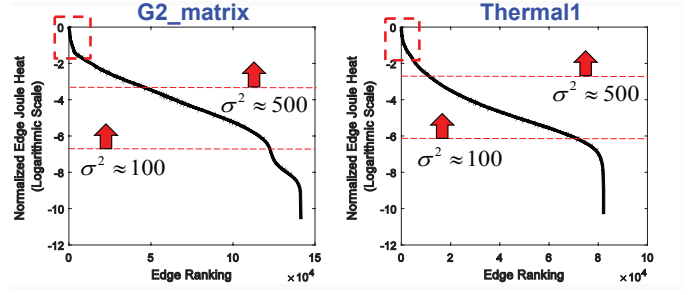


Fig. 9. Spectral edge ranking and filtering by normalized Joule heat of off-tree edges for $G2_circuit$ (left) and $Thermal1$ (right) test cases [8] with top off-tree edges highlighted in red rectangles.

vector using one-step generalized power iteration ($t = 1$) for a “hair-comb” spanning tree shown in Fig. 10. It is not difficult to show that such a spanning tree can not well match the top part of the original 2D grid, so the Joule heat levels of off-tree edges at the top should be much greater than the ones at the bottom part. In fact, it has been shown that the “hair-comb” spanning tree for a $\sqrt{n} \times \sqrt{n}$ 2D mesh will have a total stretch of $\Theta(n\sqrt{n})$ that is mainly contributed by the off-tree edges with largest stretch values near the top part of the mesh grid [21]. Using the proposed similarity-aware spectral graph sparsification framework, we are able to efficiently identify and recover the most spectrally-critical off-tree edges, thereby dramatically reducing the largest generalized eigenvalues. For example, the “hair-comb” spanning tree of a 200×200 mesh grid can be dramatically improved in terms of spectral similarity by recovering top 400 spectrally-critical off-tree edges: σ^2 is reduced from about 64,000 to about 100 ($640\times$ reduction), which can also be indicated by the Joule heat distributions before and after adding these off-tree edges as illustrated in Fig. 10.

D. Preservation of Long-Range Effects in the Sparsifier

The similarity-aware spectral sparsifier extracted using the proposed framework will effectively preserve low-frequency graph signals or long-range effects due to the good preservation of graph spectral (structural or global) properties. As an example shown in Fig. 11, the responses of the original on-chip power grid and its spectrally sparsified grid ($\sigma^2 = 50$) are obtained by solving $\mathbf{Ax} = \mathbf{b}$ and $\tilde{\mathbf{A}}\tilde{\mathbf{x}} = \mathbf{b}$ respectively, where $\mathbf{A}$ ($\tilde{\mathbf{A}}$) denotes the original (sparsified) conductance matrix and $\mathbf{b}$ denotes a unit excitation right-hand-side (RHS) vector with only a single element being 1 and others being 0. Note that we applied a global edge scaling procedure [36] to the sparsified power grid network in order to match the original node-wise effective resistances in $\tilde{\mathbf{A}}$. If we consider the RHS vector $\mathbf{b}$ as the original input graph signal, and the voltage response vector $\mathbf{x}$ as the output after graph signal processing, the power grid system can be naturally regarded as a low-pass filter for graph signals. Consequently, the solutions obtained by solving the original and sparsified power grid problems using a unit excitation source can be understood as the impulse responses of low-pass filters commonly studied in classic Fourier analysis.

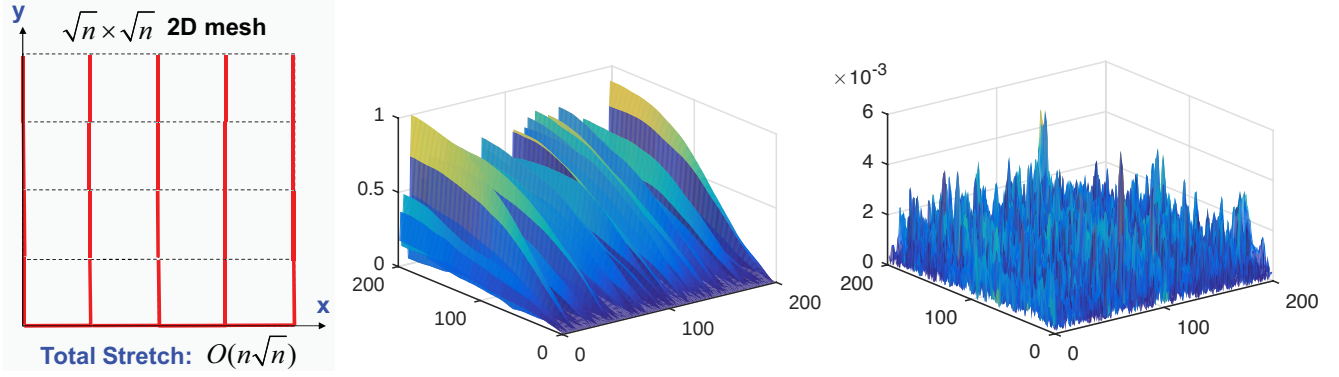


Fig. 10. Joule heat distributions before (middle) and after (rightmost) adding off-tree edges to the “hair comb” spanning tree (leftmost).

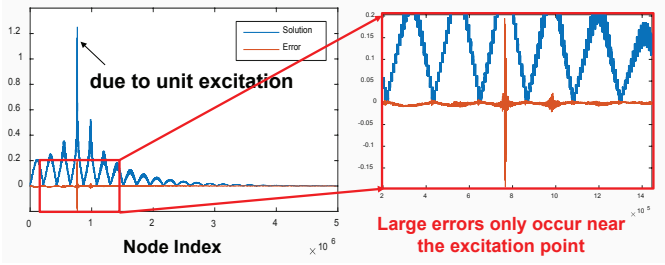


Fig. 11. Preservation of long range effects in the sparsifier.

Fig. 11 obviously indicates the good preservation of long range effects or low-frequency components on the spectral sparsifier obtained using the proposed method.

E. An SDD Matrix Solver with Similarity-Aware Sparsification

The spectral sparsifier obtained by the proposed similarity-aware algorithm is also leveraged as a preconditioner in a PCG solver. The RHS input vector b is generated randomly and the solver is set to converge to an accuracy level $\|Ax - b\| < 10^{-3}\|b\|$ for all test cases. “ $|V|$ ” and “ $|E|$ ” denote the numbers of nodes and edges in the original graph, whereas “ $|E_{\sigma^2}|$ ”, “ N_{σ^2} ” and “ T_{σ^2} ” denote the number of edges in the sparsifier, the number of PCG iterations required for converging to the desired accuracy level, and the total time of graph sparsification for achieving the spectral similarity of σ^2 , respectively. As observed in all test cases, there are very clear trade-offs between the graph density, computation time, and spectral similarity for all spectral sparsifiers extracted using the proposed method: sparsifiers with higher spectral similarities (smaller σ^2) allow converging to the required solution accuracy level in much fewer PCG iterations, but need to retain more edges in the subgraphs and thus require longer time to compute (sparsify).

Similar runtime scalability is observed from Table V for solving sparse matrices from [8]. In all test cases, the proposed spectral graph sparsification algorithm can find tree-like ultra-sparsifiers with high spectral similarity.

F. A Scalable Spectral Graph Partitioner

It has been shown that by applying only a few inverse power iterations, the approximate Fiedler vector (u_f) that corre-

TABLE V
RESULTS OF ITERATIVE SDD MATRIX SOLVER.

Graphs	$ V $	$ E $	$\frac{ E_{50} }{ V }$	N_{50}	T_{50}	$\frac{ E_{200} }{ V }$	N_{200}	T_{200}
G3_circuit	1.6E6	3.0E6	1.11	21	20s	1.05	37	8s
thermal2	1.2E6	3.7E6	1.14	20	23s	1.06	36	9s
ecology2	1.0E6	2.0E6	1.14	20	16s	1.06	40	5s
tmt_sym	0.7E6	2.2E6	1.21	19	16s	1.14	38	4s
paraboli_fem	0.5E6	1.6E6	1.22	18	16s	1.09	38	3s

sponds to the smallest nonzero eigenvalue of the (normalized) graph Laplacian matrix can be obtained for obtaining high-quality graph partitioning solution [28]. Therefore, using the spectral sparsifiers computed by the proposed spectral sparsification algorithm can immediately accelerate the PCG solver for inverse power iterations, leading to scalable performance for graph partitioning problems [28]. In fact, if the spectral sparsifier is already a good approximation of the original graph, its Fiedler vector can be directly used for partitioning the original graph.

We implement the accelerated spectral graph partitioning algorithm, and test it with sparse matrices in [8] and several 2D mesh graphs synthesized with random edge weights. As shown in Table VI, the graphs associated with sparse matrices have been partitioned into two pieces using sign cut method [26] according to the approximate Fiedler vectors computed by a few steps of inverse power iterations. The direct solver [7] and the preconditioned iterative solver are invoked within each inverse power iteration for updating the approximate Fiedler vectors u_f and $\tilde{u}_f$, respectively. $\frac{|V_+|}{|V|}$ denotes the ratio of nodes assigned with positive and negative signs according to the approximate Fiedler vector, and “Rel.Err.” denotes the relative error of the proposed solver compared to the direct solver computed by $\frac{|V_{dif}|}{|V|}$, where $|V_{dif}|$ denotes the number of nodes with different signs in u_f and $\tilde{u}_f$. “ T_D ” (“ T_I ”) and “ M_D ” (“ M_I ”) denote the total solution time (excluding sparsification time) and memory cost of the direct (iterative) method. We extract sparsifiers with $\sigma^2 \leq 200$ for all test cases.

It can be observed that the proposed preconditioned spectral graph partitioner only results in a very small portion of nodes (0.07% to 4%) assigned with different signs when comparing with the original spectral graph partitioner, while

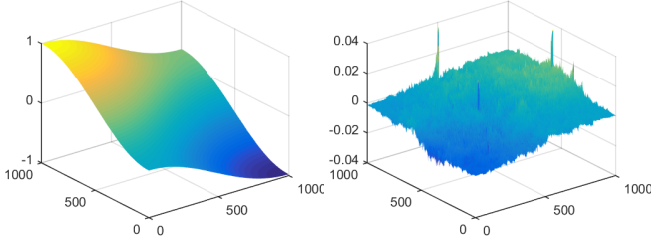


Fig. 12. The approximate Fiedler vector (left) and its magnitude error (right) for “mesh_1M”.

TABLE VI
RESULTS OF SPECTRAL GRAPH PARTITIONING.

Test Cases	$ V $	$\frac{ V_+ }{ V_- }$	$T_D (M_D)$	$T_I (M_I)$	Rel.Err.
G3_circuit	1.6E6	1.35	52.3s (2.3G)	7.6s (0.3G)	2.2E-2
thermal2	1.2E6	1.00	13.0s (0.9G)	3.0s (0.2G)	6.8E-4
ecology2	1.0E6	1.03	12.1s (0.7G)	3.4s (0.2G)	8.9E-3
tmt_sym	0.7E6	0.99	10.2s (0.6G)	1.9s (0.1G)	2.1E-2
paraboli_fem	0.5E6	0.98	8.8s (0.4G)	2.4s (0.1G)	3.9E-2
mesh_1M	1.0E6	1.01	10.2s (0.7G)	1.7s (0.2G)	3.3E-3
mesh_4M	4.5E6	0.99	49.6s (3.0G)	8.2s (0.7G)	7.5E-3
mesh_9M	9.0E6	0.99	138.5s (6.9G)	13.3s (1.5G)	7.8E-4

achieving significant runtime and memory savings (4-10 $\times$). The approximate Fiedler vector computed by our fast solver for the test case “mesh_1M” is also illustrated in Fig. 12, showing rather good agreement with the true solution.

G. Sparsification of Other Complex networks

As shown in Table VII, a few finite element, protein, data and social networks have been spectrally sparsified to achieve $\sigma^2 \approx 100$ using the proposed similarity-aware method. “ T_{tot} ” is the total time for extracting the sparsifier, “ $\frac{\lambda_1}{\lambda_{\min}}$ ” denotes the ratio of the largest generalized eigenvalues before and after adding off-tree edges into the spanning tree sparsifier, and $T_{eig}^o(T_{eig}^s)$ denotes the time for computing the first ten eigenvectors of the original (sparsified) graph Laplacians using the “eigs” function in Matlab. Since spectral sparsifiers can well approximate the spectral (structural) properties of the original graph, the sparsified graphs can be leveraged for accelerating many numerical and graph-related tasks. For example, spectral clustering (partitioning) using the original “RCV-80NN” (80-nearest-neighbor) graph can not be performed on our server

TABLE VII
RESULTS OF COMPLEX NETWORK SPARSIFICATION.

Test Cases	$ V $	$ E $	T_{tot}	$\frac{ E }{ E_s }$	$\frac{\lambda_1}{\lambda_{\min}}$	$T_{eig}^o(T_{eig}^s)$
fe_tooth	7.8E4	4.5E5	3.0s	5 $\times$	8E3	14.5s (2.7s)
appu	1.4E4	9.2E5	5.4s	25 $\times$	1E4	2,400s (15s)
coAuthorsDBLP	3.0E5	1.0E6	7.2s	3 $\times$	1E3	2,047s (36s)
auto	4.5E5	3.3E6	29.0s	5 $\times$	5E4	N/A (54s)
RCV-80NN	1.9E5	1.2E7	46.5s	36 $\times$	3E4	N/A (170s)

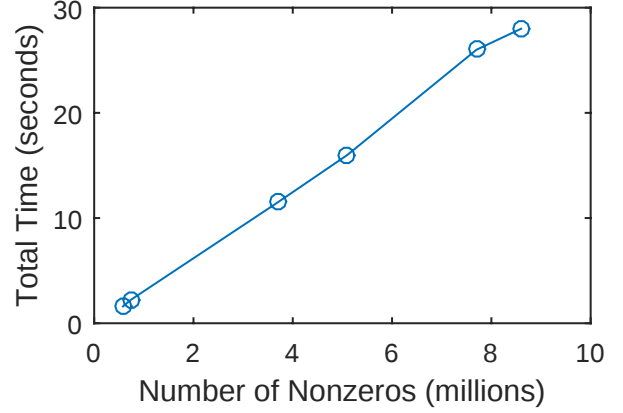


Fig. 13. Runtime scalability of the proposed similarity-aware spectral sparsification approach.

with 50GB memory, while it only takes a few minutes using the sparsified one.

H. Nearly-linear Runtime Scalability

Our results show that the proposed method can extract the similarity-aware spectral sparsifier in nearly-linear time as shown in Fig. 13. It should be noted that each spectral sparsifier needs to be extracted once and can be reused or incrementally updated many times [14], [34].

VI. CONCLUSIONS

This paper introduces a nearly-linear time and practically efficient spectral graph sparsification algorithm that can be immediately leveraged to develop nearly-linear time sparse matrix solvers and spectral graph (data) partitioning (clustering) algorithms. A novel spectral perturbation based approach is proposed for constructing an ultra-sparse spectral graph sparsifier by adding the most spectrally-critical off-tree edges back to the initial spanning tree subgraph, so that key spectral properties of the original graph can be very well approximated. Additionally, we also propose a similarity-aware spectral graph sparsification framework that leverages efficient spectral off-tree edge embedding and filtering schemes to construct spectral sparsifiers with guaranteed spectral similarity (relative condition number) level. An iterative graph densification scheme is introduced to facilitate efficient and effective filtering of off-tree edges for highly ill-conditioned problems. Extensive experimental results show the runtime of the SDD solver and the spectral graph partitioner scales nearly-linearly with the graph size for a variety of large-scale, real-world problems, such as VLSI power grid analysis, circuit simulation, finite element problems, transportation and social networks, etc. For instance, a sparse matrix with 40 million unknowns and 180 million nonzeros can be solved within two minutes using a single CPU core and about 6GB memory.

VII. ACKNOWLEDGMENTS

This work is supported in part by the National Science Foundation under Grants CCF-1350206 (CAREER), CCF-

1318694 (SHF), CCF-1909105 (SHF), CCF-1618364 (SHF), and a gift money from Keysight Technologies.

REFERENCES

- [1] I. Abraham and O. Neiman. Using petal-decompositions to build a low stretch spanning tree. In *Proceedings of the forty-fourth annual ACM symposium on Theory of computing (STOC)*, pages 395–406. ACM, 2012.
- [2] J. Batson, D. Spielman, and N. Srivastava. Twice-Ramanujan Sparsifiers. *SIAM Journal on Computing*, 41(6):1704–1721, 2012.
- [3] J. Batson, D. A. Spielman, N. Srivastava, and S.-H. Teng. Spectral sparsification of graphs: theory and algorithms. *Communications of the ACM*, 56(8):87–94, 2013.
- [4] A. Benczúr and D. Karger. Approximating st minimum cuts in $\delta(n^2)$ time. In *Proc. ACM STOC*, pages 47–55, 1996.
- [5] P. Christiano, J. Kelner, A. Madry, D. Spielman, and S. Teng. Electrical flows, laplacian systems, and faster approximation of maximum flow in undirected graphs. In *Proc. ACM STOC*, pages 273–282, 2011.
- [6] M. B. Cohen, J. Kelner, J. Peebles, R. Peng, A. B. Rao, A. Sidford, and A. Vladu. Almost-linear-time algorithms for Markov chains and new spectral primitives for directed graphs. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing*, pages 410–419. ACM, 2017.
- [7] T. Davis. *CHOLMOD: sparse supernodal Cholesky factorization and update/downdate*. [Online]. Available: <http://www.cise.ufl.edu/research/sparse/cholmod/>, 2008.
- [8] T. Davis and Y. Hu. The University of Florida sparse matrix collection. *ACM Trans. on Math. Soft. (TOMS)*, 38(1):1, 2011.
- [9] M. Defferrard, X. Bresson, and P. Vandergheynst. Convolutional neural networks on graphs with fast localized spectral filtering. In *Advances in Neural Information Processing Systems*, pages 3844–3852, 2016.
- [10] M. Elkin, Y. Emek, D. Spielman, and S. Teng. Lower-stretch spanning trees. *SIAM Journal on Computing*, 38(2):608–628, 2008.
- [11] Z. Feng. Spectral graph sparsification in nearly-linear time leveraging efficient spectral perturbation analysis. In *Design Automation Conference (DAC), 2016 53rd ACM/EDAC/IEEE*, pages 1–6. IEEE, 2016.
- [12] Z. Feng. Similarity-aware spectral sparsification by edge filtering. In *Design Automation Conference (DAC), 2018 55th ACM/EDAC/IEEE*, pages 1–6. IEEE, 2018.
- [13] L. Han, X. Zhao, and Z. Feng. An efficient graph sparsification approach to scalable harmonic balance (HB) analysis of strongly nonlinear RF circuits. In *Proc. IEEE/ACM ICCAD*, pages 494–499, 2013.
- [14] L. Han, X. Zhao, and Z. Feng. An Adaptive Graph Sparsification Approach to Scalable Harmonic Balance Analysis of Strongly Nonlinear Post-Layout RF Circuits. *Computer-Aided Design of Integrated Circuits and Systems, IEEE Transactions on*, 34(2):173–185, 2015.
- [15] A. Kolla, Y. Makarychev, A. Saberi, and S. Teng. Subgraph sparsification and nearly optimal ultrasparsifiers. In *Proc. ACM STOC*, pages 57–66, 2010.
- [16] Y. Koren. On spectral graph drawing. In *International Computing and Combinatorics Conference*, pages 496–508. Springer, 2003.
- [17] I. Koutis, G. Miller, and R. Peng. Approaching Optimality for Solving SDD Linear Systems. In *Proc. IEEE FOCS*, pages 235–244, 2010.
- [18] Y. T. Lee and H. Sun. An SDP-based Algorithm for Linear-sized Spectral Sparsification. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing, STOC 2017*, pages 678–687, New York, NY, USA, 2017. ACM.
- [19] O. Livne and A. Brandt. Lean algebraic multigrid (LAMG): Fast graph Laplacian linear solver. *SIAM Journal on Scientific Computing*, 34(4):B499–B522, 2012.
- [20] S. R. Nassif. *IBM power grid benchmarks*. [Online]. Available: <http://dropzone.tamu.edu/pli/PGBench/>, 2008.
- [21] R. Peng. *Algorithm Design Using Spectral Graph Theory*. PhD thesis, Carnegie Mellon University, 2013.
- [22] R. Peng, H. Sun, and L. Zanetti. Partitioning well-clustered graphs: Spectral clustering works. In *Proceedings of The 28th Conference on Learning Theory (COLT)*, pages 1423–1455, 2015.
- [23] Y. Saad. *Numerical Methods for Large Eigenvalue Problems: Revised Edition*, volume 66. Siam, 2011.
- [24] D. I. Shuman, S. K. Narang, P. Frossard, A. Ortega, and P. Vandergheynst. The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains. *IEEE Signal Processing Magazine*, 30(3):83–98, 2013.
- [25] D. Spielman and N. Srivastava. Graph sparsification by effective resistances. *SIAM Journal on Computing*, 40(6):1913–1926, 2011.
- [26] D. Spielman and S. Teng. Spectral partitioning works: Planar graphs and finite element meshes. In *Foundations of Computer Science (FOCS), 1996. Proceedings., 37th Annual Symposium on*, pages 96–105. IEEE, 1996.
- [27] D. Spielman and S. Teng. Spectral sparsification of graphs. *SIAM Journal on Computing*, 40(4):981–1025, 2011.
- [28] D. Spielman and S. Teng. Nearly linear time algorithms for preconditioning and solving symmetric, diagonally dominant linear systems. *SIAM Journal on Matrix Analysis and Applications*, 35(3):835–885, 2014.
- [29] D. Spielman and J. Woo. A note on preconditioning by low-stretch spanning trees. *arXiv preprint arXiv:0903.2816*, 2009.
- [30] S.-H. Teng. Scalable algorithms for data and network analysis. *Foundations and Trends® in Theoretical Computer Science*, 12(1–2):1–274, 2016.
- [31] J. Yang and Z. Li. *THU power grid benchmarks*. [Online]. Available: <http://tiger.cs.tsinghua.edu.cn/PGBench/>.
- [32] X. Zhao and Z. Feng. GPSCP: a general-purpose support-circuit preconditioning approach to large-scale SPICE-accurate nonlinear circuit simulations. In *Proc. IEEE/ACM ICCAD*, pages 429–435, 2012.
- [33] X. Zhao and Z. Feng. Towards efficient SPICE-accurate nonlinear circuit simulation with on-the-fly support-circuit preconditioners. In *Proc. IEEE/ACM DAC*, pages 1119–1124, 2012.
- [34] X. Zhao, L. Han, and Z. Feng. A Performance-Guided Graph Sparsification Approach to Scalable and Robust SPICE-Accurate Integrated Circuit Simulations. *Computer-Aided Design of Integrated Circuits and Systems, IEEE Transactions on*, 34(10):1639–1651, 2015.
- [35] Z. Zhao and Z. Feng. A spectral graph sparsification approach to scalable vectorless power grid integrity verification. In *Proceedings of the 54th Annual Design Automation Conference 2017*, page 68. ACM, 2017.
- [36] Z. Zhao and Z. Feng. Effective-resistance preserving spectral reduction of graphs. In *Proceedings of the 56th Annual Design Automation Conference (DAC) 2019*, page 109. ACM, 2019.
- [37] Z. Zhao, Y. Wang, and Z. Feng. SAMG: Sparsified Graph Theoretic Algebraic Multigrid for Solving Large Symmetric Diagonally Dominant (SDD) Matrices. In *Proceedings of the 36th International Conference on Computer-Aided Design (ICCAD)*. ACM, 2017.
- [38] X. Zhu, Z. Ghahramani, and J. Lafferty. Semi-supervised learning using gaussian fields and harmonic functions. In *Proc. of ICML*, volume 3, pages 912–919, 2003.

PLACE
PHOTO
HERE

Zhuo Feng (S'03-M'10-SM'13) received the B.Eng. degree in information engineering from Xi'an Jiaotong University, Xi'an, China, in 2003, the M.Eng. degree in electrical engineering from National University of Singapore, Singapore, in 2005, and the Ph.D. degree in electrical and computer engineering from Texas A&M University, College Station, TX, in 2009. He is currently an associate professor at Stevens Institute of Technology. His research interests include high-performance spectral methods, very large scale integration (VLSI) and computer-aided design (CAD), scalable hardware and software systems, as well as heterogeneous parallel computing.

He received a Faculty Early Career Development (CAREER) Award from the National Science Foundation (NSF) in 2014, a Best Paper Award from ACM/IEEE Design Automation Conference (DAC) in 2013, and two Best Paper Award Nominations from IEEE/ACM International Conference on Computer-Aided Design (ICCAD) in 2006 and 2008. He is the principle investigator of the CUDA Research Center at Michigan Technological University named by Nvidia Corporation. He has served on the technical program committees of major international conferences related to electronic design automation (EDA), including DAC, ASP-DAC, ISQED, and VLSI-DAT, and has been a technical referee for many leading IEEE/ACM journals in VLSI and parallel computing. In 2016, he became a co-founder of LeapLinear Solutions to provide highly scalable software solutions for solving sparse matrices and analyzing graphs (networks) with billions of elements, based on the latest breakthroughs in spectral graph theory.