

# Achievable Refined Asymptotics for Successive Refinement Using Gaussian Codebooks

Lin Bai, Zhuangfei Wu and Lin Zhou

## Abstract

We study the mismatched successive refinement problem where one uses Gaussian codebooks to compress an arbitrary memoryless source with successive minimum Euclidean distance encoding under the quadratic distortion measure. Specifically, we derive achievable refined asymptotics under both the joint excess-distortion probability (JEP) and the separate excess-distortion probabilities (SEP) criteria. For both second-order and moderate deviations asymptotics, we consider two types of codebooks: the spherical codebook where each codeword is drawn independently and uniformly from the surface of a sphere and the i.i.d. Gaussian codebook where each component of each codeword is drawn independently from a Gaussian distribution. We establish the achievable second-order rate-region under JEP and we show that under SEP any memoryless source satisfying mild moment conditions is strongly successively refinable. When specialized to a Gaussian memoryless source (GMS), our results provide an alternative achievability proof with specific code design. We show that under JEP and SEP, the same moderate deviations constant is achievable. For large deviations asymptotics, we only consider the i.i.d. Gaussian codebook since the i.i.d. Gaussian codebook has better performance than the spherical codebook in this regime for the one layer mismatched rate-distortion problem (Zhou, Tan, Motani, TIT, 2019). We derive achievable exponents of both JEP and SEP and specialize our results to a GMS, which appears to be a novel result of independent interest.

## I. INTRODUCTION

The successive refinement problem [3] was motivated by diverse applications such as image and video compression and clinical diagnosis using X-rays. As shown in Figure 1, in this problem, there are two layers of encoders and decoders. For each  $i \in \{1, 2\}$ , the encoder  $f_i$  has access to a source sequence  $X^n$  and compresses it into a message  $S_i$ . Two decoders aim to recover the source sequence with different distortion requirements and different access to compressed information. Specifically, decoder  $\phi_1$  aims to reproduce the source sequence  $X^n$  within distortion level  $D_1$  using the compressed information  $S_1$  from encoder  $f_1$  and the decoder  $\phi_2$  aims to reproduce  $X^n$  within a finer distortion level  $D_2 < D_1$  with the additional access to the compressed information  $S_2$  from encoder  $f_2$ . For simplicity, let the reproduced versions at decoders  $\phi_1$  and  $\phi_2$  be  $\hat{X}_1^n$  and  $\hat{X}_2^n$ , respectively.

To evaluate the performance of a coding scheme, there are two different performance criteria for successive refinement: the joint excess-distortion probability (JEP) that measures the probability that either decoder fails to decode  $X^n$  within the desired distortion level and the separate excess-distortion probabilities (SEP) that measure the decoding failure of two decoders separately. For any discrete memoryless source (DMS), Rimoldi [3] derived the rate-distortion region that asymptotically characterizes the rate requirements of both encoders to ensure reliable recovery at decoders with vanishing JEP. Subsequently, Kanlis and Narayan [4] refined Rimoldi's result by showing that for any rate pair strictly inside the rate-distortion region, the JEP decays exponentially fast to zero and characterized the optimal decay rate. Koshelev [5] and Equitz-Cover [6] studied the so-called successive refinability property which shows that the rate-distortion region can be reduced to the case where rates of both encoders are bounded by rates of a single layer rate-distortion function with desired distortion levels under certain conditions on the source distribution and the distortion measures. For example, a Gaussian memoryless source (GMS) under the quadratic distortion measure is successively refinable [6]. Recently, Zhou, Tan and Motani [7] refined Rimoldi's results by deriving second-order and moderate deviations asymptotics for any DMS and GMS. Under SEP, Tuncel and Rose [8] derived error exponents for any DMS, which implied that the rate-distortion region remains the same. The authors of [8] also discovered an interesting tradeoff between the exponents of SEP and identified the conditions under which the exponents of the two layers are successively refinable. Under SEP, No, Ingber and Weissman [9] derived achievable second-order asymptotics for both a DMS and a GMS and extended the successive refinability property to the stronger second-order asymptotic case.

The above studies of successive refinement are very insightful. However, all these works assume that the distribution of the source sequence  $X^n$  is perfectly known, which we term as the matched case. Such an assumption is impractical since usually it is challenging to obtain the exact source distribution before compressing a source. Thus, one should use coding schemes ignorant of the source distribution. This direction was pioneered by Lapidoth [10] who proposed to compress an arbitrary memoryless source using i.i.d. Gaussian codebooks with minimum Euclidean distance encoding under the quadratic distortion measure for the rate-distortion problem, i.e., the first layer of successive refinement in Figure 1. Specifically, Lapidoth [10, Theorem 3] showed that for any ergodic source with finite second moment  $\sigma^2$ , the minimal compression rate that guarantees

This work has been partially presented at ISIT 2021 [1] and ISIT 2022 [2].

L. Bai, Z. Wu and L. Zhou are with the School of Cyber Science and Technology, Beihang University, Beijing, China, 100191 (Emails: {l.bai,zhuangfeiwu,lzhou}@buaa.edu.cn).

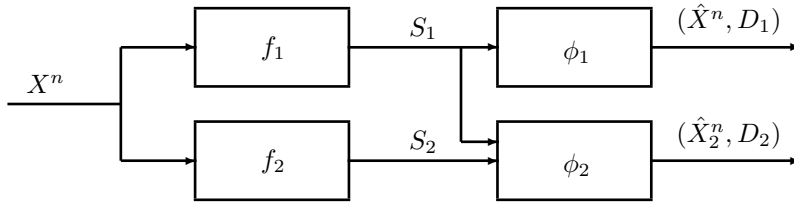


Fig. 1. System Model for Successive Refinement.

a vanishing excess-distortion probability is exactly the rate-distortion function for a GMS. Recently, Zhou, Tan and Motani [11] refined Lapidoth's results by deriving ensemble tight refined asymptotics for the same setting using both i.i.d. Gaussian codebooks and spherical codebooks.

One might wonder whether it is possible to generalize the the results in [10], [11] to the successive refinement problem. Specifically, can one propose a coding scheme to compress an arbitrary memoryless source using Gaussian codebooks for the successive refinement problem and ensure universal good performance under the quadratic distortion measure? In this paper, we answer this question affirmatively. Our main contributions are summarized as follows.

#### A. Main Contributions

We propose to use Gaussian codebooks to compress an arbitrary memoryless source with successive minimum Euclidean distance encoding under the quadratic distortion measure. Specifically, we consider two types of codebooks: the spherical codebook and the i.i.d. Gaussian codebook. The codewords of a spherical codebook are generated independently and uniformly from the surface of a sphere while each codeword of an i.i.d. Gaussian codebook is drawn independently from a product Gaussian distribution. We consider two types of performance criterion: ensemble JEP and ensemble SEP. Similar to [10], [11], ensemble means that the probability is calculated not only with respect to the distribution of the source but also over the random codebooks. Under the above setting, we derive achievable refined asymptotics under both ensemble JEP and SEP performance criteria.

We first derive achievable second-order and moderate deviations asymptotics for both spherical and i.i.d. Gaussian codebooks. Our results complement existing literature [7], [9]–[11]. Specifically, our results generalize the refined asymptotics analyses of mismatched rate-distortion problem [11] to the more complicated successive refinement setting. Similar to [11], we find that both spherical and i.i.d. Gaussian codebooks achieve the same second-order and moderate deviations asymptotics under both JEP and SEP. By letting the blocklength tend to infinity, a corollary of our result states that asymptotically the achievable rate-distortion region for any memoryless source under our mismatched coding scheme equals the rate-distortion region of the GMS in the matched successive refinement problem, which generalizes the classical result of Lapidoth [10, Theorem 3] to the successive refinement setting. Furthermore, our results generalize [9] and [7] for the matched successive refinement problem to the mismatched case. Under SEP, we find that any memoryless source is strongly successively refinable [9, Definition 4] under mild conditions using our mismatched coding scheme. Finally, when specializing to a GMS, our results for second-order asymptotics under JEP and SEP provide alternative achievability proofs with explicit code design for the results in [7, Theorem 20] and [9, Theorem 7], respectively.

We next derive achievable large deviations asymptotics for the i.i.d. Gaussian codebook. We do not consider spherical codebook in this regime because Zhou, Tan and Motani [11, Lemma 4] showed that i.i.d. Gaussian codebook has strictly larger excess-distortion exponent than the spherical codebook for the mismatched rate-distortion problem. We derive the achievable excess-distortion exponents of both JEP and SEP and show the exponents are all positive for any rate pair strictly inside the rate-distortion region of a GMS in the matched case. Note that in our conference version [2], we used a mismatched coding scheme where the number of codewords of both encoders are invariant of their rates and were not able to ensure positive exponent under either SEP or JEP for all rate pairs inside the rate-distortion region. In this paper, we manage to solve the problem by slightly changing the design of the mismatched coding scheme and allowing the number of codewords of both encoders to be a function of their rates (See Section III-C for detailed discussions.) To our best knowledge, our result is the first achievable large deviations analysis for a continuous memoryless source for the successive refinement problem, whose matched counterpart is not even available for a GMS. Furthermore, our results generalize [11, Theorem 3] for the i.i.d. Gaussian codebook to the successive refinement setting and generalize [4], [8] to the mismatched case.

#### B. Other Related Works

We briefly summarize other works on matched successive refinement and mismatched lossy source coding. Effros [12] generalized Rimoldi's characterization of the rate-distortion region [3] to the case of discrete stationary ergodic and non-ergodic sources. Kostina and Tuncel [13] studied successive refinement for abstract sources and derived non-asymptotic converse bounds

that are tight for second-order asymptotics under both JEP and SEP criteria. Different from the mismatched setting considered in this paper where the source distribution is unknown, Lapidoth also considered another case of mismatched setting for lossy source coding, where the encoder and decoder use different distortion measures [10, Theorem 1]. Kanabar and Scarlett [14] revisited the problem in [10, Theorem 1] and derived the achievable rate-distortion function using superposition coding.

### C. Organization of the Rest of the Paper

The rest of the paper is organized as follows. In Section II, we set up the notation, formulate the problem and present necessary definitions. In Section III, we present our achievable refined asymptotic results under both JEP and SEP and discuss the significance of our results. The proof of our results are presented in Sections IV to VI. Finally, in Section VII, we conclude the paper and discuss future research directions. For smooth presentation, we defer the proofs of all supporting lemmas to the appendices.

## II. PROBLEM FORMULATION

### Notation

Random variables are in capital (e.g.,  $X$ ) and their realizations are in lower case (e.g.,  $x$ ). Random vectors of length  $n$  and their particular realizations are denoted as  $X^n := (X_1, \dots, X_n)$  and  $x^n = (x_1, \dots, x_n)$ , respectively. We use calligraphic font (e.g.,  $\mathcal{X}$ ) to denote all sets. We use  $\mathbb{R}, \mathbb{R}_+, \mathbb{N}$  to denote the set of real numbers, positive real numbers and integers respectively. For any two integers  $(a, b) \in \mathbb{N}^2$ , we use  $[a : b]$  to denote the set of integers between  $a$  and  $b$ , and we use  $[a]$  to denote  $[1 : a]$ . We use logarithm with base  $e$ . Gaussian complementary cumulative distribution function (cdf) and its inverse are denoted as  $Q(\cdot)$  and  $Q^{-1}(\cdot)$ , respectively. We use  $\|x^n\| = \sqrt{\sum_i x_i^2}$  to denote the  $\ell_2$  norm of a vector  $x^n \in \mathbb{R}^n$ . The quadratic distortion measure for any two sequences  $(x^n, y^n) \in (\mathbb{R}^n)^2$  is defined as  $d(x^n, y^n) := \frac{1}{n} \|x^n - y^n\|^2 = \frac{1}{n} \sum_{i \in [n]} (x_i - y_i)^2$ . Given any real number  $t \in \mathbb{R}$ , we use  $\Lambda_X(t)$  to denote its cumulant generating function and use  $\Lambda_X^*(t)$  to denote the Fenchel-Legendre transform of the cumulant generating function of the random variable  $X$ , i.e.,  $\Lambda_X(t) = \log \mathbb{E}[\exp(tX)]$  and  $\Lambda_X^*(t) = \sup_{\theta \geq 0} \{\theta t - \Lambda_X(\theta)\}$ . Finally, we use  $|a|^+$  to denote  $\max\{0, a\}$ .

### A. Problem Formulation

Consider a memoryless source with distribution  $P_X$  defined on an alphabet  $\mathcal{X}$  satisfying the following moment constraints

$$\mathbb{E}[X^2] = \sigma^2, \quad \zeta := \mathbb{E}[X^4] < \infty, \quad \mathbb{E}[X^6] < \infty. \quad (1)$$

In this paper, we generalize the rate-distortion saddle-point problem [10, Theorem 3] to the successive refinement setting [3]. Specifically, we study the successive refinement problem where one is constrained to use Gaussian codebooks (either spherical or i.i.d.) and the minimal Euclidean distance encoding to compress an arbitrary memoryless source  $X^n$  under the quadratic distortion measure. Consistent with [10], [11], we name our problem as mismatched successive refinement. Without loss of generality, we assume that the desired distortion levels at the two decoders satisfy  $\sigma^2 > D_1 > D_2$ . A definition of a code is as follows.

**Definition 1.** An  $(n, M_1, M_2)$ -code for the mismatched successive refinement problem consists of:

- a set of  $M_1$  codewords  $\{Y^n(i)\}_{i \in [M_1]}$  known by encoders  $(f_1, f_2)$  and decoders  $(\phi_1, \phi_2)$ ,
- a set of  $M_2$  codewords  $\{Z^n(i, j)\}_{j \in [M_2]}$  known by the encoder  $f_2$  and the decoder  $\phi_2$  for each  $i \in [M_1]$  and each codeword  $Y^n(i)$ ,
- two encoders  $f_1$  and  $f_2$  that use successive minimum Euclidean distance encoding to compresses the source sequence  $X^n$ , i.e.,

$$f_1(X^n) := \arg \min_{i \in [M_1]} d(X^n, Y^n(i)), \quad (2)$$

$$f_2(X^n) := \arg \min_{j \in [M_2]} d(X^n, Z^n(f_1(X^n), j)), \quad (3)$$

- two decoders  $\phi_1$  and  $\phi_2$  that operate as follows:

$$\phi_1(f_1(X^n)) = Y^n(f_1(X^n)), \quad (4)$$

$$\phi_2(f_1(X^n), f_2(X^n)) = Z^n(f_1(X^n), f_2(X^n)). \quad (5)$$

For simplicity, throughout the paper, we use  $\hat{X}_1^n$  and  $Y^n(f_1(X^n))$  interchangeably to denote the reproduced source sequence of the first decoder  $\phi_1$ , and similarly we use  $\hat{X}_2^n$  and  $Z^n(f_1(X^n), f_2(X^n))$  interchangeably.

To specify the codewords in Definition 1, we need to define the following distributions that are functions of the two parameters: a vector  $c^n = (c_1, \dots, c_n) \in \mathbb{R}_+^n$  and a positive real number  $P \in \mathbb{R}_+$ .

- We first define a uniform distribution over the surface of a sphere with center  $c^n$  and radius  $\sqrt{nP}$ , i.e. for any  $u^n = (u_1, \dots, u_n) \in \mathbb{R}_+^n$ ,

$$f_{\text{sp}}(u^n | c^n, P) = \frac{1\{\|u^n - c^n\|^2 = nP\}}{S_n(\sqrt{nP})}, \quad (6)$$

where  $1\{\cdot\}$  is the indicator function,  $S_n(r) = n\pi^{n/2}r^{n-1}/\Gamma(\frac{n+2}{2})$  is the surface area of an  $n$ -dimensional sphere with radius  $r$ , and  $\Gamma(\cdot)$  is the Gamma function.

- We also define a product Gaussian distribution, i.e., for any  $u^n = (u_1, \dots, u_n) \in \mathbb{R}_+^n$ ,

$$f_{\text{iid}}(u^n | c^n, P) = \prod_{i \in [n]} \frac{\exp\left(-\frac{(u_i - c_i)^2}{2P}\right)}{\sqrt{2\pi P}}. \quad (7)$$

Next we specify the codebooks used in our mismatched coding scheme. Let  $\lambda \in \mathbb{R}_+$  be a design parameter to be specified,  $P_Y := \sigma^2 - \lambda D_1$  and  $P_Z := \lambda D_1 - D_2$ . Similar to [11], we consider both spherical and i.i.d. Gaussian codebooks. Since both encoders can use either spherical or i.i.d. Gaussian codebooks, there are in total four different combinations of the codebooks. For ease of notation, throughout the paper, we use  $\dagger$  to denote the type of the codebook used by encoder  $f_1$  and  $\ddagger$  to denote the type of the codebook used by encoder  $f_2$ . Note that  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$  where ‘‘sp’’ is short for ‘‘spherical’’. Specifically, for any  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$ , encoder  $f_1$  uses a random codebook with  $M_1$  independent codewords  $(Y^n(1), \dots, Y^n(M_1))$ , where each codeword  $Y^n(i)$  is generated according to the distribution  $f_{\dagger}(Y^n(i) | \mathbf{0}^n, P_Y)$  where  $\mathbf{0}^n$  denotes the length- $n$  vector with all elements of 0; for each  $i \in [M_1]$  and  $Y^n(i)$ , encoder  $f_2$  uses a random codebook with  $M_2$  independent codewords  $(Z^n(i, 1), \dots, Z^n(i, M_2))$ , where each codeword  $Z^n(i, j)$  is generated according to the distribution  $f_{\ddagger}(Z^n(i, j) | Y^n(i), P_Z)$ . For  $n = 2$ , we illustrate encoders’ codebooks in Fig. 2.

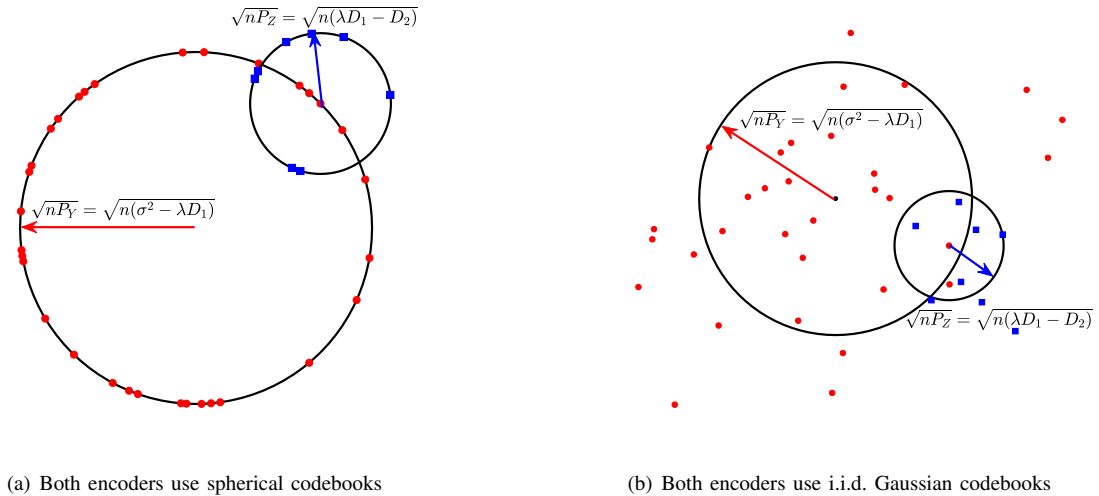


Fig. 2. Illustration of codewords when both encoders use the same kind of codebooks. The red dots denote the codewords of encoder  $f_1$  and the blue squares denote the codewords of encoder  $f_2$ . In a spherical codebook, the codewords of  $f_1$  distribute uniformly over the surface of the sphere with center of the origin and the radius of  $\sqrt{nP_Y} = \sqrt{n(\sigma^2 - \lambda D_1)}$ . When  $f_1(X^n) = i$ , given the codeword  $Y^n(i)$ , the codewords for  $f_2$  distribute uniformly over the surface of the sphere with center  $Y^n(i)$  and the radius  $\sqrt{nP_Z} = \sqrt{n(\lambda D_1 - D_2)}$ . In an i.i.d. Gaussian codebook, the codewords of  $f_1$  are generated independently and each codeword is generated i.i.d. from the Gaussian distribution with mean 0 and variance  $\sigma^2 - \lambda D_1$ . The codewords distribute arbitrarily but concentrate on the surface of the sphere. When  $f_1(X^n) = i$ , given the codeword  $Y^n(i)$ , the codewords for encoder  $f_2$  are generated similarly from a Gaussian product distribution.

To evaluate the performance of the mismatched coding scheme, we consider the ensemble separate excess-distortion probabilities:

$$P_{\dagger}^n(D_1 | M_1, M_2) := \Pr\{d(X^n, \hat{X}_1^n) > D_1\}, \quad (8)$$

$$P_{\ddagger}^n(D_2 | M_1, M_2) := \Pr\{d(X^n, \hat{X}_2^n) > D_2\}, \quad (9)$$

and the ensemble joint-excess-distortion probability:

$$P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) := \Pr\{d(X^n, \hat{X}_1^n) > D_1 \text{ or } d(X^n, \hat{X}_2^n) > D_2\}. \quad (10)$$

Note that the probability terms average not only over the distribution of the source sequence  $X^n$ , but also over the random codebooks. These definitions are consistent with exiting works on mismatched communication [10], [11], [15], [16].

### B. The Rate-distortion Region

The rate-distortion region collects rate pairs of both encoders with which our mismatched code in Definition 1 ensures vanishing ensemble joint excess-distortion probability and vanishing ensemble separate excess-resolution probabilities. In the following, we define the rate-distortion region under JEP.

**Definition 2.** For any  $(\dagger, \ddagger) \in \{\text{sp, iid}\}^2$ , a rate pair  $(R_1, R_2)$  is said to be  $(D_1, D_2|\dagger, \ddagger)$ -achievable for mismatched successive refinement if there exists a sequence of  $(n, M_1, M_2)$ -codes using  $(\dagger, \ddagger)$  codebooks such that

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 \leq R_1, \quad (11)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 M_2 \leq R_1 + R_2, \quad (12)$$

and

$$\lim_{n \rightarrow \infty} P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) = 0. \quad (13)$$

The convex closure of the set of all  $(D_1, D_2|\dagger, \ddagger)$ -achievable rate pairs is called the rate-distortion region and denoted as  $\mathcal{R}_{\dagger, \ddagger}(D_1, D_2)$ .

As a corollary of our result in Theorem 1 by letting  $n \rightarrow \infty$ , one has the following inner bound to  $\mathcal{R}_{\dagger, \ddagger}(D_1, D_2)$ :

$$\mathcal{R}_{\text{inner}} := \left\{ (R_1, R_2) : R_1 \geq \frac{1}{2} \log \frac{\sigma^2}{D_1}, R_1 + R_2 \geq \frac{1}{2} \log \frac{\sigma^2}{D_2} \right\} \subseteq \mathcal{R}_{\dagger, \ddagger}(D_1, D_2). \quad (14)$$

Since  $P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) \geq \max\{P_{\dagger}^n(D_1 | M_1, M_2), P_{\ddagger}^n(D_2 | M_1, M_2)\}$ , the same inner bound holds under SEP. Note that  $\mathcal{R}_{\text{inner}}$  is the rate-distortion region for a GMS under the quadratic distortion measure in the matched successive refinement problem [6], [7]. The rate-distortion region is ensemble tight when both encoders use i.i.d. Gaussian codebooks where the ensemble converse proof is implied by the converse proof of the mismatched rate-distortion problem [10, Theorem 3]. Although we did not manage to prove the ensemble tightness of  $\mathcal{R}_{\text{inner}}$  when a spherical codebook is used by any encoder, we conjecture that  $\mathcal{R}_{\text{inner}}$  is also ensemble tight since the results in [11] showed that the ensemble optimal rate-distortion function equals that of GMS under the quadratic distortion measure, regardless of whether one uses spherical or i.i.d. Gaussian codebook. We leave the verification of this conjecture as future work.

### C. Definitions of Fundamental Limits

In this paper, we interested in refined asymptotics that include the second-order, moderate and large deviations. These analyses reveal the tradeoff between the rates of encoders and the blocklength under different performance criteria beyond the rate-distortion region. In this section, we present explicit definitions of fundamental limits of refined asymptotics.

Fix  $(R_1^*, R_2^*)$  as an arbitrary rate pair on the boundary of the region  $\mathcal{R}_{\text{inner}}(D_1, D_2)$ . In second-order asymptotics under the JEP criterion, we characterize how a rate pair approaches  $(R_1^*, R_2^*)$  with respect to the blocklength when a non-vanishing JEP is tolerated.

**Definition 3.** Given any  $\varepsilon \in (0, 1)$ , a pair  $(L_1, L_2)$  is said to be second-order  $(R_1^*, R_2^*, D_1, D_2, \varepsilon|\dagger, \ddagger)$ -achievable under JEP if there exists a sequence of  $(n, M_1, M_2)$ -codes in Definition 1 such that

$$\limsup_{n \rightarrow \infty} \frac{1}{\sqrt{n}} (\log M_1 - nR_1^*) \leq L_1, \quad (15)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{\sqrt{n}} (\log M_1 M_2 - nR_1^* - nR_2^*) \leq L_2, \quad (16)$$

and

$$\lim_{n \rightarrow \infty} P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) \leq \varepsilon. \quad (17)$$

The closure of the set of all second-order  $(R_1^*, R_2^*, D_1, D_2, \varepsilon|\dagger, \ddagger)$ -achievable rate pairs is denoted as  $\mathcal{L}(R_1^*, R_2^*, D_1, D_2, \varepsilon|\dagger, \ddagger)$ .

Under SEP, we only define the second-order coding rate for the corner point of rate-distortion region, which corresponds to the minimal rates of both encoders. This is because the second-order coding rates are not well defined for other points on the boundary of the rate-distortion region for at least one encoder.

**Definition 4.** A pair  $(L_1, L_2)$  is said to be second-order  $(D_1, D_2, \varepsilon_1, \varepsilon_2 | \dagger, \ddagger)$ -achievable under SEP if there exists a sequence of  $(n, M_1, M_2)$ -codes such that

$$\limsup_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \left( \log M_1 - \frac{n}{2} \log \frac{\sigma^2}{D_1} \right) \leq L_1, \quad (18)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \left( \log M_1 M_2 - \frac{n}{2} \log \frac{\sigma^2}{D_2} \right) \leq L_2, \quad (19)$$

and

$$\lim_{n \rightarrow \infty} P_{\dagger, \ddagger}^n(D_1 | M_1, M_2) \leq \varepsilon_1, \quad (20)$$

$$\lim_{n \rightarrow \infty} P_{\dagger, \ddagger}^n(D_2 | M_1, M_2) \leq \varepsilon_2. \quad (21)$$

The closure of the set of all second-order  $(D_1, D_2, \varepsilon_1, \varepsilon_2 | \dagger, \ddagger)$ -achievable rate pairs is called the  $(D_1, D_2, \varepsilon_1, \varepsilon_2 | \dagger, \ddagger)$ -achievable rate region and denoted as  $\mathcal{L}_{\text{SEP}}(D_1, D_2, \varepsilon_1, \varepsilon_2 | \dagger, \ddagger)$ .

In the moderate deviations regime, we are interested in a sequence of  $(n, M_1, M_2)$ -codes whose rates approach a boundary rate pair  $(R_1^*, R_2^*)$  and whose excess-distortion probabilities vanish simultaneously. The definitions of the moderate deviations constants under JEP and SEP are given as follows.

Let  $\theta_i, i \in [2]$  be two positive real numbers. Consider any sequence  $\{\zeta_n\}_{n \in \mathbb{N}}$  such that

$$\zeta_n \rightarrow 0 \text{ and } \sqrt{n}\zeta_n \rightarrow \infty \text{ as } n \rightarrow \infty. \quad (22)$$

**Definition 5.** A number  $v$  is said to be a  $(R_1^*, R_2^*, D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ -achievable moderate deviations constant under JEP if there exists a sequence of  $(n, M_1, M_2)$ -codes such that

$$\limsup_{n \rightarrow \infty} \frac{1}{n\zeta_n} (\log M_1 - nR_1^*) \leq \theta_1, \quad (23)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{n\zeta_n} (\log M_1 M_2 - n(R_1^* + R_2^*)) \leq \theta_1 + \theta_2, \quad (24)$$

and

$$\liminf_{n \rightarrow \infty} -\frac{\log P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2)}{n\zeta_n^2} \geq v. \quad (25)$$

The supremum of all  $(R_1^*, R_2^*, D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ -achievable moderate deviations constants is denoted as  $v_{\dagger, \ddagger}^*(D_1, D_2 | R_1^*, R_2^*, \theta_1, \theta_2)$ .

**Definition 6.** A pair  $(v_1, v_2)$  is said to be a  $(D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ -achievable moderate deviations constant pair under SEP if there exists a sequence of  $(n, M_1, M_2)$ -codes such that

$$\limsup_{n \rightarrow \infty} \frac{1}{n\zeta_n} \left( \log M_1 - \frac{n}{2} \log \frac{\sigma^2}{D_1} \right) \leq \theta_1, \quad (26)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{n\zeta_n} \left( \log M_1 M_2 - \frac{n}{2} \log \frac{\sigma^2}{D_2} \right) \leq \theta_1 + \theta_2, \quad (27)$$

and

$$\liminf_{n \rightarrow \infty} -\frac{\log P_{\dagger, \ddagger}^n(D_1 | M_1, M_2)}{n\zeta_n^2} \geq v_1, \quad (28)$$

$$\liminf_{n \rightarrow \infty} -\frac{\log P_{\dagger, \ddagger}^n(D_2 | M_1, M_2)}{n\zeta_n^2} \geq v_2. \quad (29)$$

The convex closure of the set of all  $(D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ -achievable moderate deviations constant pairs is called the  $(D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ -achievable moderate deviations constant region and denoted as  $\mathcal{V}(D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger)$ .

We next define the exponents of ensemble JEP and SEP when both encoders use i.i.d. Gaussian codebooks.

**Definition 7.** A non-negative real number  $E$  is said to be a  $(D_1, D_2, R_1, R_2)$ -achievable exponent under JEP if there exists a sequence of  $(n, M_1, M_2)$ -codes such that

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 \leq R_1, \quad (30)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 M_2 \leq R_1 + R_2, \quad (31)$$

and

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log P_{\text{iid}}^n(D_1, D_2 | M_1, M_2) \geq E. \quad (32)$$

The supremum of all  $(D_1, D_2, R_1, R_2)$  achievable exponents is denoted as  $E^*(D_1, D_2 | R_1, R_2)$ .

**Definition 8.** A pair  $(E_1, E_2)$  is said to be  $(D_1, D_2, R_1, R_2)$ -achievable exponents under SEP if there exists a sequence of  $(n, M_1, M_2)$ -codes such that

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 \leq R_1, \quad (33)$$

$$\limsup_{n \rightarrow \infty} \frac{1}{n} \log M_1 M_2 \leq R_1 + R_2, \quad (34)$$

and

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log P_{\text{iid}}^n(D_1 | M_1, M_2) \geq E_1, \quad (35)$$

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log P_{\text{iid}}^n(D_2 | M_1, M_2) \geq E_2. \quad (36)$$

The convex closure of the set of all  $(D_1, D_2, R_1, R_2)$ -achievable exponents is denoted as  $\mathcal{E}(D_1, D_2, R_1, R_2)$ .

### III. MAIN RESULTS

In this section, we present our main results concerning the achievability analyses of second-order, moderate and large deviations asymptotics under both JEP and SEP. We consider all four combinations of spherical and i.i.d. Gaussian codebooks for both second-order and moderate deviations analyses and study large deviations only when both encoders use i.i.d. Gaussian codebooks.

#### A. Second-Order Asymptotics

Recall the definition of the ‘‘mismatched’’ dispersion in [11]:

$$V(\sigma^2, \zeta) := \frac{\zeta - \sigma^4}{4\sigma^4} = \frac{\text{Var}[X^2]}{4(\mathbb{E}[X^2])^2}. \quad (37)$$

Consider an arbitrary memoryless source that satisfies the moment constraints in (1). We first present the result under JEP.

**Theorem 1.** Given any  $\varepsilon \in (0, 1)$ , for any  $\lambda \in (\frac{D_2}{D_1}, 1]$  and  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$ , there exists a sequence of  $(n, M_1, M_2)$ -codes using Gaussian codebooks such that

$$\log M_1 = \frac{n}{2} \log \frac{\sigma^2}{\lambda D_1} + \sqrt{nV(\sigma^2, \zeta)}Q^{-1}(\varepsilon) + O(\log n), \quad (38)$$

$$\log M_1 M_2 = \frac{n}{2} \log \frac{\sigma^2}{D_2} + \sqrt{nV(\sigma^2, \zeta)}Q^{-1}(\varepsilon) + O(\log n), \quad (39)$$

and

$$\lim_{n \rightarrow \infty} P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) \leq \varepsilon. \quad (40)$$

The proof of Theorem 1 is provided in Section IV. A few remarks are in order.

Theorem 1 generalizes the achievability results in [11, Theorem 1] for the mismatched rate-distortion problem to the successive refinement setting. For any  $\lambda \in (\frac{D_2}{D_1}, 1]$ , when the target rate pair is  $(R_1^*, R_2^*) = (\frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}, \frac{1}{2} \log \frac{\lambda D_1}{D_2})$ , the pair  $(L_1, L_2) = (\sqrt{V(\sigma^2, \zeta)}Q^{-1}(\varepsilon), \sqrt{V(\sigma^2, \zeta)}Q^{-1}(\varepsilon))$  is second-order  $(R_1^*, R_2^*, D_1, D_2, \varepsilon | \dagger, \ddagger)$ -achievable (cf. Definition 3). This result generalizes [11, Theorem 1] by showing that all four combinations of spherical and i.i.d. Gaussian codebooks achieve the same second-order asymptotics.

At the first glance, Theorem 1 is not in the same form when presenting second-order asymptotics as [7, Theorem 20] for a GMS in the matched case. However, with proper choice of the parameter  $\lambda$  in Theorem 1, we have the following inner bound to the second-order coding region  $\mathcal{L}(R_1^*, R_2^*, D_1, D_2, \varepsilon | \dagger, \ddagger)$ .

- Case (i): Let  $\lambda \in (\frac{D_2}{D_1}, 1)$ ,  $R_1^* = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1} > \frac{1}{2} \log \frac{\sigma^2}{D_1}$ ,  $R_1^* + R_2^* = \frac{1}{2} \log \frac{\sigma^2}{D_2}$ . It follows that

$$\left\{ (L_1, L_2) : L_2 \geq \sqrt{V(\sigma^2, \zeta)}Q^{-1}(\varepsilon) \right\} \subseteq \mathcal{L}(R_1^*, R_2^*, D_1, D_2, \varepsilon | \dagger, \ddagger). \quad (41)$$

- Case (ii): Let  $\lambda = 1$ ,  $R_1^* = \frac{1}{2} \log \frac{\sigma^2}{D_1}$  and  $R_1^* + R_2^* > \frac{1}{2} \log \frac{\sigma^2}{D_2}$ . It follows that

$$\left\{ (L_1, L_2) : L_1 \geq \sqrt{V(\sigma^2, \zeta)}Q^{-1}(\varepsilon) \right\} \subseteq \mathcal{L}(R_1^*, R_2^*, D_1, D_2, \varepsilon | \dagger, \ddagger). \quad (42)$$

- Case (iii): Let  $\lambda = 1$ ,  $R_1^* = \frac{1}{2} \log \frac{\sigma^2}{D_1}$  and  $R_1^* + R_2^* = \frac{1}{2} \log \frac{\sigma^2}{D_2}$ . It follows that

$$\left\{ (L_1, L_2) : \min\{L_1, L_2\} \geq \sqrt{V(\sigma^2, \zeta)} Q^{-1}(\varepsilon) \right\} \subseteq \mathcal{L}(R_1^*, R_2^*, D_1, D_2, \varepsilon | \dagger, \ddagger). \quad (43)$$

If one uses a codebook with  $\lambda = 1$  as done in our ISIT paper [1], we could only prove the results for case (ii) and (iii). The slight modification of the power of codewords used by both encoders with parameter  $\lambda \in (\frac{D_2}{D_1}, 1]$  allows to derive achievable second-order asymptotics for all three cases of interest, especially for case (i) when the rate of encoder  $f_1$  is large.

When specialized to a GMS, the mismatched dispersion satisfies  $V(\sigma^2, \zeta) = \frac{1}{2}$ . This implies that our proof of Theorem 1 is an alternative achievability proof for [7, Theorem 20] with specific code design. Specifically, the achievability proof in [7, Theorem 20] used a covering lemma in [17] that bounds the minimal number of required codewords to cover a ball *without* providing the location of each codeword. In contrast, our proof of Theorem 1 specifies that the same second-order asymptotic performance can be achieved with an arbitrary combination of spherical and i.i.d. Gaussian codebooks using successive minimum Euclidean distance encoding.

We next discuss the optimality of second-order asymptotics in Theorem 1. In general, we cannot prove the ensemble optimality of Theorem 1. However, when both encoders use i.i.d. Gaussian codebooks, the sum rate is second-order asymptotically optimal. The reason is as follows. From the code definition (cf. Definition 1) and codebook generation, we find that codewords used by encoder  $f_2$  and decoder  $\phi_2$  is actually generated independently from an i.i.d. Gaussian distribution with mean 0 and variance  $\sigma^2 - D_2$ . This is precisely the i.i.d. Gaussian codebook of the mismatched rate-distortion problem. The converse part of [11, Theorem 1] implies that it is necessary to have  $\log M_1 M_2 \geq \frac{n}{2} \log \frac{\sigma^2}{D_2} + \sqrt{nV(\sigma^2, \zeta)} Q^{-1}(\varepsilon) + O(\log n)$  to ensure that the joint excess-distortion probability is no greater than  $\varepsilon$ . Similarly, for case (iii), our second-order asymptotics is ensemble tight when both encoders use i.i.d. Gaussian codebooks. For other cases, the ensemble optimality is left as future work.

We next present the result under SEP.

**Theorem 2.** *Given any  $\varepsilon_1, \varepsilon_2 \in (0, 1)^2$ , for any  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$ ,*

$$\left\{ (L_1, L_2) : L_1 \geq \sqrt{V(\sigma^2, \zeta)} Q^{-1}(\min\{\varepsilon_1, \varepsilon_2\}), L_2 \geq \sqrt{V(\sigma^2, \zeta)} Q^{-1}(\min\{\varepsilon_1, \varepsilon_2\}) \right\} \subseteq \mathcal{L}_{\text{SEP}}(D_1, D_2, \varepsilon_1, \varepsilon_2 | \dagger, \ddagger). \quad (44)$$

The proof of Theorem 2 follows from the proof of Theorem 1 with  $\lambda = 1$  and  $\varepsilon = \min\{\varepsilon_1, \varepsilon_2\}$ . A few remarks are as follows.

Note that the minimum of the tolerable excess-distortion probabilities  $(\varepsilon_1, \varepsilon_2)$  dominates the second-order achievable rate of both encoders. This is because under our mismatched coding scheme, only a non-excess-distortion event of decoder  $\phi_1$  could guarantee a non-excess-distortion event of decoder  $\phi_2$  with proper rate choices due to our layered coding scheme. When  $\varepsilon_1 = \varepsilon_2$  and both encoders use i.i.d. Gaussian codebooks, Theorem 2 is ensemble tight where the ensemble converse proof follows from that of the rate-distortion problem [11]. For other cases, the ensemble optimality is left as future work.

Theorem 2 generalize the achievability part of the second-order asymptotic results in [9] for the matched case to the mismatched scenario. When specialized to a GMS, we provide an alternative proof for [9, Theorem 7] by constructing a structured codebook with specific code design. It is important to note that the results in [9, Theorem 7] holds also when  $\min\{\varepsilon_1, \varepsilon_2\}$  dominates the second-order coding rate since a similar layered coding scheme based on sphere covering was used<sup>1</sup>.

Theorem 2 implies that when  $\varepsilon_1 = \varepsilon_2 = \varepsilon$  for some  $\varepsilon \in (0, 1)$ , any memoryless source satisfying (1) is strongly successive refinable [9, Definition 4] under the quadratic distortion measure using our mismatched coding scheme. An equivalent expression of Theorem 2 is that there exists a sequence of  $(n, M_1, M_2)$  codes such that

$$\log M_1 = \frac{n}{2} \log \frac{\sigma^2}{D_1} + \sqrt{nV(\sigma^2, \zeta)} Q^{-1}(\varepsilon) + O(\log n), \quad (45)$$

$$\log M_1 M_2 = \frac{n}{2} \log \frac{\sigma^2}{D_2} + \sqrt{nV(\sigma^2, \zeta)} Q^{-1}(\varepsilon) + O(\log n), \quad (46)$$

and

$$\lim_{n \rightarrow \infty} P_{\dagger}^n(D_1 | M_1) \leq \varepsilon, \quad (47)$$

$$\lim_{n \rightarrow \infty} P_{\ddagger}^n(D_2 | M_1, M_2) \leq \varepsilon. \quad (48)$$

Such a result is named strongly successive refinable since the sum rate in (46) is precisely the rate required to achieve (48) even without the first layer of encoders and decoders.

<sup>1</sup>We remark that the claim in [9, Theorem 7] was flawed since  $\varepsilon_1$  and  $\varepsilon_2$  were used as the parameter of the  $Q^{-1}(\cdot)$  function in the second-order coding rates. This is because, in order not to incur an excess-distortion event at decoder  $\phi_2$  for a sequence  $x^n$ , decoder  $\phi_1$  should not incur an excess-distortion event since otherwise, the ‘‘correct’’ decoding of decoder  $\phi_2$  is not guaranteed under the layered coding scheme.



### B. Moderate Deviation Asymptotics

Consider an arbitrary memoryless source with distribution  $P_X$  satisfying (1) such that i)  $\Lambda_{X^2}(\theta)$  is finite for some positive number  $\theta$  and ii) the mismatched dispersion  $V(\sigma^2, \zeta)$  is finite.

**Theorem 3.** *For any rate pair  $(R_1^*, R_2^*)$  on the boundary of  $\mathcal{R}_{\text{inner}}$ , any  $(\dagger, \ddagger) \in \{\text{sp, iid}\}^2$  and any real numbers  $\lambda \in (\frac{D_2}{D_1}, 1]$ ,  $(\theta_1, \theta_2) \in \mathbb{R}_+^2$ ,*

$$v_{\dagger, \ddagger}^*(D_1, D_2 | R_1^*, R_2^*, \theta_1, \theta_2) \geq \frac{\theta_1^2}{2V(\sigma^2, \zeta)}. \quad (49)$$

The proof of Theorem 3 is provided in Sections V-B and V-C. When specialized to a GMS,  $V(\sigma^2, \zeta) = \frac{1}{2}$ . Our results in Theorem 3 recover the results of [7, Theorem 21, Cases (ii) and (iii)]. The reason why we could not recover the optimal moderate deviations constant for a GMS in Case (i) where  $R_1^* \in (\frac{1}{2} \log \frac{\sigma^2}{D_1}, \frac{1}{2} \log \frac{\sigma^2}{D_2})$  and  $R_2^* = \frac{1}{2} \log \frac{\sigma^2}{D_2}$  is that under our mismatched coding scheme, the dominant error event is the excess-distortion event at decoder  $\phi_1$  regardless of the rates of both encoders.

We next present the achievable moderate deviations constants under SEP.

**Theorem 4.** *For any  $(\dagger, \ddagger) \in \{\text{sp, iid}\}^2$ ,  $(\theta_1, \theta_2) \in \mathbb{R}_+^2$  and positive  $V(\sigma^2, \zeta)$ , the achievable moderate deviations constant under SEP satisfy*

$$\left\{ (v_1, v_2) : v_1 \geq \frac{\theta_1^2}{2V(\sigma^2, \zeta)}, v_2 \geq \frac{\theta_1^2}{2V(\sigma^2, \zeta)} \right\} \subseteq \mathcal{V}(D_1, D_2, \theta_1, \theta_2 | \dagger, \ddagger). \quad (50)$$

The proof of Theorem 4 is provided in Section V-E.

### C. Large Deviation Asymptotics

We only derive the exponent of ensemble JEP and SEP when i.i.d. Gaussian codebooks are used by both encoders since the large deviations performance of an i.i.d. Gaussian codebook is strictly better than the spherical codebook in mismatched rate-distortion problem (cf. [11, Lemma 4]). To present our results, we need the following definitions. Given any  $(s, w, P, D) \in \mathbb{R}_+^4$ , define the following functions

$$R_{\text{iid}}(s, w, P, D) := \frac{1}{2} \log(1 + 2s) + \frac{sw}{(1 + 2s)P} - \frac{sD}{P}, \quad (51)$$

$$s^*(w, P, D) := \max \left\{ 0, \frac{P - 2D + \sqrt{P^2 + 4wD}}{4D} \right\}, \quad (52)$$

$$R_{\text{iid}}(w, P, D) := R_{\text{iid}}(s^*(w, P, D), w, P, D). \quad (53)$$

We remark that  $R_{\text{iid}}(w, P_Y, D_1)$  is the exponential decay rate of the non-excess-distortion probability with respect to the distortion level  $D_1$  for a source sequence  $x^n$  with power  $w = \frac{1}{n} \|x^n\|^2$  when its reproduction sequence is generated from  $f_{\text{iid}}(Y^n | \mathbf{0}^n, P_Y)$  (cf. (7)), i.e.,

$$\lim_{n \rightarrow \infty} -\frac{1}{n} \log \Pr_{f_{\text{iid}}(Y^n | \mathbf{0}^n, P_Y)} \{d(x^n, Y^n) \leq D_1\} = R_{\text{iid}}(w, P_Y, D_1). \quad (54)$$

Furthermore,  $R_{\text{iid}}(l, P_Z, D_2)$  is the the exponential decay rate of the non-excess-distortion probability with respect to the distortion level  $D_2$  for any source sequence  $x^n$  whose quadratic distortion with respect to the output codeword  $\hat{x}_1^n$  of encoder  $f_1$  is  $l := d(x^n, \hat{x}_1^n)$  when its reproduction sequence is generated from  $f_{\text{iid}}(Z^n | \hat{x}_1^n, P_Z)$ , i.e.,

$$\lim_{n \rightarrow \infty} -\frac{1}{n} \log \Pr_{f_{\text{iid}}(Z^n | \hat{x}_1^n, P_Z)} \{d(x^n, Z^n) \leq D_2\} = R_{\text{iid}}(l, P_Z, D_2). \quad (55)$$

Recall that  $\Lambda_{X^2}^*(t)$  is the Fenchel-Legendre transform of the cumulant generating function of  $X^2$ , which is also known as the large deviation rate function [18, Ch. 2.3].

We first present the achievable exponent of ensemble JEP under our mismatched coding scheme.

**Theorem 5.** *Given any  $(R_1, R_2) \in \mathbb{R}_+^2$ , let  $\lambda = \min \left\{ \frac{D_2 \exp\{2R_2\}}{D_1}, 1 \right\}$  and let  $\alpha^*(R_1, R_2)$  be the solution of  $\alpha$  to  $R_1 = R_{\text{iid}}(\alpha, P_Y, \lambda D_1)$ . The joint excess-distortion exponent  $E^*(D_1, D_2 | R_1, R_2)$  satisfies:*

$$E^*(D_1, D_2 | R_1, R_2) \geq \Lambda_{X^2}^*(\alpha^*(R_1, R_2)). \quad (56)$$

The proof of Theorem 5 is provided in Section VI-B, which generalizes the proof of [11, Theorem 3] for the rate-distortion problem to the successive refinement setting. We make the following remarks.

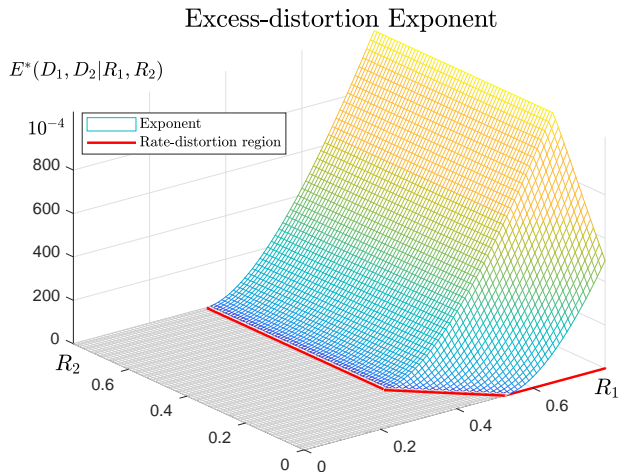


Fig. 3. Illustration of excess-distortion exponent  $E^*(D_1, D_2|R_1, R_2)$  when  $P_X \sim \mathcal{N}(0, \sigma^2)$  with  $\sigma^2 = 1$ . The exponent maintain positive in rate-distortion region.

The joint excess-distortion exponent  $\Lambda_{X^2}^*(\alpha^*(R_1, R_2))$  depends solely on  $R_1$  if  $R_2$  is large enough. Intuitively, this is because when the rate  $R_2$  of encoder  $f_2$  is large, the number of codewords used by  $f_2$  is sufficient to  $D_2$ -cover the ball with center  $\hat{X}_1^n$  and radius  $D_1$ . In this case, the excess-distortion probability of the second decoder  $\phi_2$  with respect to the distortion level  $D_2$  vanishes doubly exponentially fast (cf. (154) to (157)) and the joint excess-distortion event is dominated by the excess-distortion event of decoder  $\phi_1$  (cf. (164)).

The exponent  $\Lambda_{X^2}^*(\alpha^*(R_1, R_2))$  is positive if the rate pair  $(R_1, R_2)$  is strictly inside the rate region  $\mathcal{R}_{\text{inner}}$  (cf. (14)). The reason is as follows. It follows from the definition of  $\mathcal{R}_{\text{inner}}$  that

$$\mathcal{R}_{\text{inner}} = \bigcup_{\eta \in (\frac{D_2}{D_1}, 1]} \left\{ (R_1, R_2) : R_1 \geq \frac{1}{2} \log \frac{\sigma^2}{\eta D_1} \text{ and } R_2 \geq \frac{1}{2} \log \frac{\eta D_1}{D_2} \right\}. \quad (57)$$

Thus, it suffices to show that  $\Lambda_{X^2}^*(\alpha^*(R_1, R_2)) > 0$  if  $R_1 > \frac{1}{2} \log \frac{\sigma^2}{\eta D_1}$  and  $R_2 > \frac{1}{2} \log \frac{\eta D_1}{D_2}$  for any  $\eta \in (\frac{D_2}{D_1}, 1]$ . We justify the above point as follows. Given any  $\eta \in (\frac{D_2}{D_1}, 1]$ , if  $R_1 > \frac{1}{2} \log \frac{\sigma^2}{\eta D_1}$  and  $R_2 > \frac{1}{2} \log \frac{\eta D_1}{D_2}$ , we have  $\lambda > \min \left\{ \frac{D_2}{D_1} \frac{\eta D_1}{D_2}, 1 \right\} = \eta$ . Note that  $R_{\text{iid}}(w, P, D)$  increases in  $w$  for  $w \geq |D - P|^+$  and decreases in  $D$  for  $D < w + P$  (cf. Lemma 10) and  $R_{\text{iid}}(\sigma^2, P_Y, \eta D_1) = \frac{1}{2} \log \frac{\sigma^2}{\eta D_1}$ . Thus, the solution  $\alpha^*(R_1, R_2)$  such that the equality  $R_1 = R_{\text{iid}}(\alpha, P_Y, \lambda D_1)$  holds satisfies  $\alpha^*(R_1, R_2) > \sigma^2$ . The justification is completed by noting that  $\Lambda_{X^2}^*(\alpha) > 0$  if  $\alpha > \sigma^2$ .

When specialized to a GMS,  $\Lambda_{X^2}^*(\alpha_2) = \sup_{\theta \in \mathbb{R}} \left\{ \alpha_2 \theta + \frac{1}{2} \log(1 - 2\sigma^2 \theta) \right\} = \frac{1}{2} \left( \frac{\alpha_2}{\sigma^2} - \log \frac{\alpha_2}{\sigma^2} - 1 \right)$ . To our best knowledge, this appears to be the first characterization of the excess-distortion exponent of successive refinement for continuous memoryless sources. To illustrate the exponent, we plot the  $\Lambda_{X^2}^*(\alpha^*(R_1, R_2))$  for various values of  $(R_1, R_2)$  in Fig. 3 for a GMS. It is left as future work to check whether our achievable exponent is tight or not. To do so, one might generalize the result in [19], especially the converse part, to the successive refinement setting.

One might wonder why we use a coding scheme where the powers of codewords  $P_Y = \sigma^2 - \lambda D_1$  and  $P_Z = \lambda D_1 - D_2$  both have a parameter  $\lambda$ , in contrast to the mismatched rate-distortion case where one uses codewords of fixed powers  $\sigma^2 - D_1$  without any dummy variable [11]. As discussed in the second remark of Theorem 1, such a code design allows us to derive results for all cases of interest in second-order asymptotics. For large deviations analysis, as we demonstrate above, this codebook design allows us to obtain positive exponent under JEP for all rate pairs strictly inside the rate region  $\mathcal{R}_{\text{inner}}$ , which is impossible for the codebook design with  $\lambda = 1$  as done in our previous ISIT paper [2]. To discuss in detail, we first recall the main result in [2].

**Theorem 6** ([2, Theorem 1]). *Consider the mismatched code in Definition 1 where the codebook is designed with parameter  $\lambda = 1$ . Given any  $(R_1, R_2) \in \mathbb{R}_+^2$ , let  $\alpha_1$  be the solution to  $R_1 = R_{\text{iid}}(\alpha_1, P_Y, D_1)$ ,  $\gamma_2$  be the solution to  $R_2 = R_{\text{iid}}(\gamma_2, P_Z, D_2)$  and  $\alpha_2$  be the solution to  $R_1 = R_{\text{iid}}(\alpha_2, P_Y, \gamma_2)$ . The corresponding joint excess-distortion exponent  $E_{\lambda=1}^*(D_1, D_2|R_1, R_2)$  satisfies*

- Case i): If  $R_1 > \frac{1}{2} \log \frac{\sigma^2}{D_1}$  and  $R_2 > \frac{1}{2} \log \frac{D_1}{D_2}$ ,

$$E_{\lambda=1}^*(D_1, D_2|R_1, R_2) \geq \Lambda_{X^2}^*(\alpha_1) > 0. \quad (58)$$

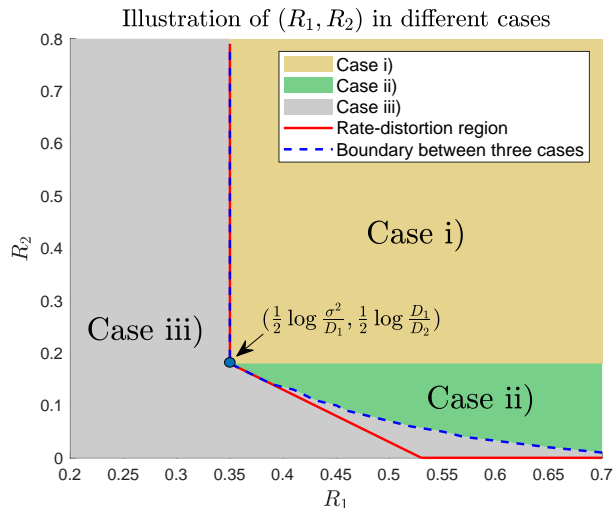


Fig. 4. Illustration of different cases in Theorem 6. The exponent  $E_{\lambda=1}^*(D_1, D_2|R_1, R_2)$  is positive in case i) and case ii) but equals to 0 in case iii).

- *Case ii):* If  $\frac{1}{2} \log \frac{D_1}{D_2} > R_2 > R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2)$  and  $R_1 > R_{\text{iid}}(\max\{\sigma^2, \gamma_2 - P_Y\}, P_Y, \gamma_2)$ ,

$$E_{\lambda=1}^*(D_1, D_2|R_1, R_2) \geq \Lambda_{X^2}^*(\alpha_2) > 0. \quad (59)$$

- *Case iii):* Otherwise,  $E_{\lambda=1}^*(D_1, D_2|R_1, R_2) = 0$ .

The condition for Case ii) is valid since  $R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2) < \frac{1}{2} \log \frac{D_1}{D_2}$  and  $R_{\text{iid}}(\max\{\sigma^2, \gamma_2 - P_Y\}, P_Y, \gamma_2) \geq \frac{1}{2} \log \frac{\sigma^2}{D_1}$  (cf. Appendix A). For ease of understanding, we illustrate all three cases of Theorem 6 in Fig. 4 where  $\mathcal{R}_{\text{inner}}$  is denoted as the region above the red line.

Note that if the rate pair  $(R_1, R_2) \in \mathcal{R}_{\text{inner}}$  such that  $R_2 < R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2) < \frac{1}{2} \log \frac{D_1}{D_2}$  and  $R_1 > R_{\text{iid}}(\max\{\sigma^2, \gamma_2 - P_Y\}, P_Y, \gamma_2) > \frac{1}{2} \log \frac{\sigma^2}{D_1}$ , the exponent  $E_{\lambda=1}^*(D_1, D_2|R_1, R_2) = 0$ . Intuitively, this is because using the  $\lambda = 1$  code, regardless of the rate  $R_1 > \frac{1}{2} \log \frac{\sigma^2}{D_1}$  of encoder  $f_1$ , the distortion between a source sequence  $x^n$  and the output  $\hat{x}_1^n$  of  $f_1$  is roughly  $D_1$ . In this case, a rate  $R_2 < \frac{1}{2} \log \frac{D_1}{D_2}$  of for encoder  $f_2$  is not sufficient to  $D_2$ -cover the distortion ball of the source sequence with radius  $D_1$ . This problem can be resolved by introducing a rate related parameter  $\lambda \in (\frac{D_2}{D_1}, 1]$  into the codebook design as we do in the present paper. This way, the average power of codewords for encoder  $f_1$  is  $P_Y = \sigma^2 - \lambda D_1$ , hence the achievable distortion level of encoder  $f_1$  reduces to  $\lambda D_1$  for  $R_1 = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1} > \frac{1}{2} \log \frac{\sigma^2}{D_1}$ . Furthermore, the average power of codewords for encoder  $f_2$  is now  $P_Z = \lambda D_1 - D_2$  so that encoder  $f_2$  is able to  $D_2$ -cover the distortion ball of a source sequence with radius  $\lambda D_1$  with rate  $R_2 > \frac{1}{2} \log \frac{\lambda D_1}{D_2}$ , which is smaller than  $\frac{1}{2} \log \frac{D_1}{D_2}$ . As shown in Fig. 5, our present rate-dependent coding scheme grants a positive exponent  $E^*(D_1, D_2|R_1, R_2)$  for all  $(R_1, R_2) \in \mathcal{R}_{\text{inner}}$ .

We next present achievable exponents of ensemble SEP. Recall that  $\lambda = \min \left\{ \frac{D_2 \exp\{2R_2\}}{D_1}, 1 \right\}$ .

**Theorem 7.** Given any  $(R_1, R_2) \in \mathbb{R}_+^2$ , let  $\alpha_1^*(R_1)$  be the solution of  $\alpha$  to  $R_1 = R_{\text{iid}}(\alpha, P_Y, D_1)$ . The following results hold.

- If  $R_2 \leq \frac{1}{2} \log \frac{D_1}{D_2}$ , let  $\alpha_2^*(R_1)$  be the solution of  $\alpha$  to  $R_1 = R_{\text{iid}}(\alpha, P_Y, \lambda D_1)$ . The exponent region satisfies

$$\{(E_1, E_2) : E_1 \geq \Lambda_{X^2}^*(\alpha_1^*(R_1)), E_2 \geq \Lambda_{X^2}^*(\alpha_2^*(R_1))\} \subseteq \mathcal{E}(D_1, D_2, R_1, R_2). \quad (60)$$

- If  $R_2 > \frac{1}{2} \log \frac{D_1}{D_2}$ , note that  $\lambda = 1$ , let  $\gamma^*(R_2)$  be the solution of  $\gamma$  to  $R_2 = R_{\text{iid}}(\gamma, P_Z, D_2)$  and let  $\alpha_2^*(R_1, R_2)$  be the solution of  $\alpha$  to  $R_1 = R_{\text{iid}}(\alpha, P_Y, \gamma^*(R_2))$ . The exponent region satisfies

$$\{(E_1, E_2) : E_1 \geq \Lambda_{X^2}^*(\alpha_1^*(R_1)), E_2 \geq \Lambda_{X^2}^*(\alpha_2^*(R_1, R_2))\} \subseteq \mathcal{E}(D_1, D_2, R_1, R_2). \quad (61)$$

The proof of Theorem 7 is provided in Section VI-C. For ease of notation, let  $E^*(D_1|R_1, R_2) := \Lambda_{X^2}^*(\alpha_1^*(R_1))$  and let  $E^*(D_2|R_1, R_2)$  be

$$E^*(D_2|R_1, R_2) := \begin{cases} \Lambda_{X^2}^*(\alpha_2^*(R_1)) & \text{if } R_2 \leq \frac{1}{2} \log \frac{D_1}{D_2}, \\ \Lambda_{X^2}^*(\alpha_2^*(R_1, R_2)) & \text{otherwise.} \end{cases} \quad (62)$$

We discuss the condition under which  $E^*(D_1|R_1, R_2)$  and  $E^*(D_2|R_1, R_2)$  are positive. The exponent  $E^*(D_1|R_1, R_2) > 0$  if  $R_1 > R_{\text{iid}}(\sigma^2, P_Y, D_1)$ . This is because  $\Lambda_{X^2}^*(a) > 0$  when  $a > \sigma^2$  and  $R_{\text{iid}}(l, P, D)$  increases in  $l$  for  $l \geq |D - P|^+$  (cf. Lemma 10, Claim i)). The exponent  $E^*(D_2|R_1, R_2) > 0$  if the rate pair  $(R_1, R_2)$  is strictly inside the rate region  $\mathcal{R}_{\text{inner}}$ , which is justified in Appendix B. Since  $R_{\text{iid}}(w, P, D)$  decreases in  $D$  for  $D < l + P$  (cf. Lemma 10, Claim 1)),

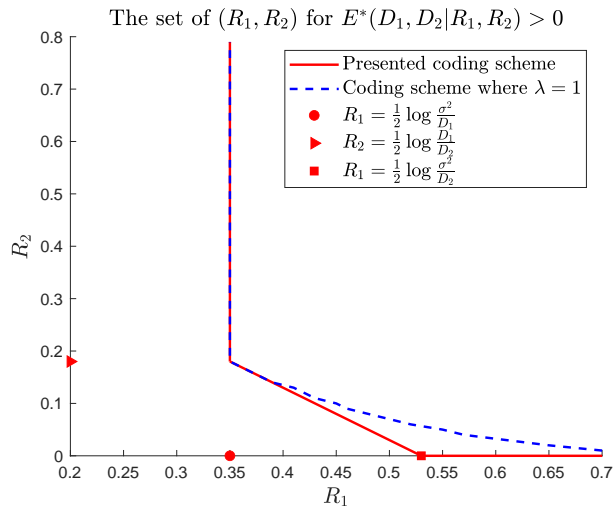


Fig. 5. Comparison of the set of rate pairs  $(R_1, R_2)$  that ensure a positive JEP exponent  $E^*(D_1, D_2|R_1, R_2)$  for a GMS  $P_X \sim \mathcal{N}(0, 1)$  between our present coding scheme in Theorem 5 and coding scheme in Theorem 6 where  $\lambda = 1$ . Note that such rate pairs are above the boundary denoted by red and blue dotted lines for the two coding schemes, respectively.

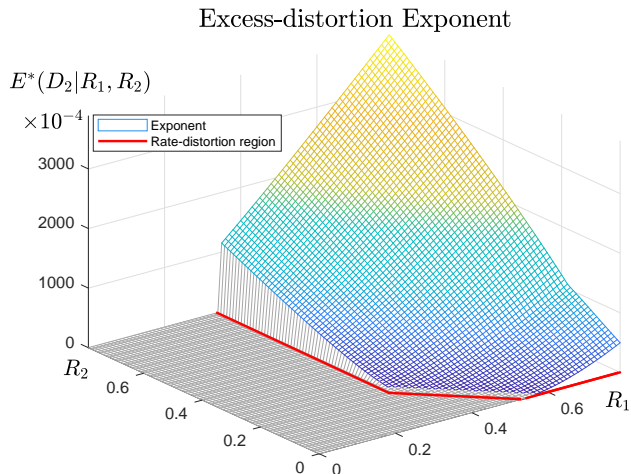


Fig. 6. Illustration of excess-distortion exponent  $E^*(D_2|R_1, R_2)$  when  $P_X \sim \mathcal{N}(0, 1)$ .

$R_1 > R_{\text{iid}}(\sigma^2, P_Y, D_1) \geq R_{\text{iid}}(\sigma^2, P_Y, \lambda D_1)$ . Thus, we conclude that  $E^*(D_2|R_1, R_2) > 0$  implies  $E^*(D_1|R_1, R_2) > 0$ . Combining the above arguments, we find that both  $E^*(D_1|R_1, R_2)$  and  $E^*(D_2|R_1, R_2)$  are positive if  $(R_1, R_2)$  is strictly inside the rate region  $\mathcal{R}_{\text{inner}}$ .

When specialized to a GMS,  $\Lambda_{X^2}^*(\alpha_2) = \frac{1}{2} \left( \frac{\alpha_2}{\sigma^2} - \log \frac{\alpha_2}{\sigma^2} - 1 \right)$ . This result appears the first attempt to derive a large deviations result for GMS under SEP in the successive refinement problem. It is interesting future work to check whether our exponents are tight or not. To illustrate the exponent, we plot  $E^*(D_2|R_1, R_2)$  in Fig. 6 for a GMS.

#### IV. PROOF OF SECOND-ORDER ASYMPTOTICS UNDER JEP (THEOREM 1)

##### A. Preliminaries

Recall that  $P_Y = \sigma^2 - \lambda D_1$  and  $P_Z = \lambda D_1 - D_2$ . For any  $\varepsilon \in (0, 1)$ , let

$$V := \text{Var}[X^2] = \zeta - \sigma^4, \quad (63)$$

$$a_n := \sqrt{\frac{V \log n}{n}}, \quad (64)$$

$$b_n := \sqrt{\frac{V}{n}} Q^{-1}(\varepsilon). \quad (65)$$

In subsequent analysis, for simplicity, let the random variable  $W$  denote the normalized  $\ell_2$  norm of source sequence, i.e.,  $\frac{\|X^n\|^2}{n}$ . We use  $f_W$  to denote the distribution of random variable  $W$  and use  $w$  as a particular realization of  $W$ . Similarly, we define the random variable  $L$  as the quadratic distortion of the first layer, i.e.,  $L = d(X^n, \hat{X}_1^n)$ . Furthermore, we use  $f_L$  to denote the induced distribution of the random variable  $L$  and use  $l$  as a particular realization of  $L$ .

For any  $(x^n, y^n)$  and  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$ , define following non-excess-distortion probabilities

$$\Psi_{\dagger}(n, w, D) := \Pr_{f_{\dagger}(\cdot|\mathbf{0}^n, P_Y)} \{d(x^n, Y^n) \leq D\}, \quad (66)$$

$$\Phi_{\ddagger}(n, x^n, y^n) := \Pr_{f_{\ddagger}(\cdot|y^n, P_Z)} \{d(x^n, Z^n) \leq D_2\}, \quad (67)$$

and define two constants

$$\beta_1 := \sqrt{P_Z} - \sqrt{D_2}, \quad (68)$$

$$\beta_2 := \sqrt{P_Z} + \sqrt{D_2}. \quad (69)$$

It follows that

$$\beta_1^2 \leq |P_Z - D_2|. \quad (70)$$

We justify (70) as follows. Note that  $\beta_1^2 = \lambda D_1 - 2\sqrt{P_Z}\sqrt{D_2}$ . If  $\lambda D_1 \geq 2D_2$ ,  $\sqrt{P_Z} \geq \sqrt{D_2}$ ,  $|P_Z - D_2| = \lambda D_1 - 2D_2$  and thus

$$\beta_1^2 = \lambda D_1 - 2\sqrt{P_Z}\sqrt{D_2} \quad (71)$$

$$\leq \lambda D_1 - 2D_2 \quad (72)$$

$$= |P_Z - D_2|. \quad (73)$$

If  $\lambda D_1 < 2D_2$ ,  $\sqrt{P_Z} < \sqrt{D_2}$ ,  $|P_Z - D_2| = 2D_2 - \lambda D_1$  and thus

$$\beta_1^2 - |P_Z - D_2| = \lambda D_1 - 2\sqrt{P_Z}\sqrt{D_2} - 2D_2 + \lambda D_1 \quad (74)$$

$$= 2(P_Z - \sqrt{P_Z}\sqrt{D_2}) \quad (75)$$

$$= 2\sqrt{P_Z}(\sqrt{P_Z} - \sqrt{D_2}) \quad (76)$$

$$< 0. \quad (77)$$

Note that (66) are valid since  $\Pr_{f_{\dagger}(\cdot|\mathbf{0}^n, P_Y)} \{d(x^n, Y^n) \leq D\}$  depends on  $x^n$  only through its normalized  $\ell_2$  norm  $w = \frac{\|x^n\|^2}{n}$ . We find that  $\Phi_{\text{sp}}(n, x^n, y^n)$  depends on  $(x^n, y^n)$  only through their quadratic distortion  $l := d(x^n, y^n)$ . Similarly to [20, Theorem 37], we obtain the following lemma.

**Lemma 8.** Recall that  $|x|^+ = \max\{x, 0\}$ . For any  $(x^n, y^n)$  such that  $\sqrt{l} \in [|\beta_1|^+, \beta_2]$

$$\begin{aligned} \Phi_{\text{sp}}(n, x^n, y^n) &\geq \frac{\Gamma(\frac{n+2}{2})}{\sqrt{\pi n} \Gamma(\frac{n+1}{2})} \left(1 - \frac{(l + P_Z - D_2)^2}{4lP_Z}\right)^{\frac{n-1}{2}} \\ &=: \underline{h}(n, l), \end{aligned} \quad (78)$$

and otherwise  $\Phi_{\text{sp}}(n, x^n, y^n) = 0$ .

The proof of Lemma 8 is available in Appendix C.

We also need the following function

$$\kappa(s, w, P) := \frac{(P(1+2s) + 2w)^2}{P(1+2s)^3}. \quad (79)$$

Recall the definition of  $R_{\text{iid}}(w, P, D)$ ,  $s^*(w, P, D)$  and  $\kappa(s, w, P)$  in (52), (53) and (79), respectively. Similar to Zhou et. al [11, cf. (89)], using the strong large deviations theorem in [18, Th. 3.7.4], noting that  $\Phi_{\text{iid}}(n, x^n, y^n)$  depends on  $(x^n, y^n)$  only through their quadratic distortion  $l = d(x^n, y^n)$ , we obtain

$$\Phi_{\text{iid}}(n, l) \sim \frac{\exp\{-nR_{\text{iid}}(l, P_Z, D_2)\}}{s^*(l, P_Z, D_2)\sqrt{\kappa(s^*(l, P_Z, D_2), l, P_Z, D_2)}}. \quad (80)$$

Finally, note that for any  $(\dagger, \ddagger) \in \{\text{sp}, \text{iid}\}^2$ , the ensemble JEP satisfies

$$P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2) \leq \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1 \text{ or } d(X^n, \hat{X}_2^n) > D_2\} \quad (81)$$

$$= \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} + \Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\}. \quad (82)$$

We next further upper bound (82).

### B. When Both Encoders Use Spherical Codebooks

We first consider the case where both encoders use spherical codebooks where  $(\dagger, \ddagger) = \{\text{sp}, \text{sp}\}$ . Note that the first term in (82) is similar to the mismatched rate-distortion problem studied in [11, Section IV. B], except that i) the distortion level is replaced from  $D$  to  $\lambda D_1$ , and ii) the power of codebook is changed from  $P_Y = \sigma^2 - D_1$  to  $P_Y = \sigma^2 - \lambda D_1$ . Choose  $M_1$  such that

$$\log M_1 = \frac{n}{2} \log \frac{\sigma^2}{\lambda D_1} + \sqrt{nV(\sigma^2, \zeta)} Q^{-1}(\varepsilon) + O(\log n). \quad (83)$$

Similar to [11, cf. (43)-(58)], we have that

$$\Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} \leq \varepsilon + O\left(\frac{1}{\sqrt{n}}\right). \quad (84)$$

Thus, we focus on the analysis of the second term in (82). For ease of notation, we use  $\mathbf{Y}$  to denote the random codebooks  $(Y^n(1), \dots, Y^n(M_1))$  of the first encoder and use  $\mathbf{y}$  for a particular realization. Recall that given the source sequence  $x^n$  and a particular realization of the codebook  $\mathbf{y}$ , the compressed index of the encoder  $f_1$  is  $f_1(x^n)$  and the reproduced source sequence of the first encoder is

$$\hat{x}_1^n = y^n(f_1(x^n)) = \min_{i \in [M_1]} d(x^n, y^n(i)). \quad (85)$$

It follows that

$$\begin{aligned} & \Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\} \\ &= \int_{\substack{x^n, \mathbf{y}: \\ d(x^n, \hat{x}_1^n) \leq \lambda D_1}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{sp}}(y^n(i) | \mathbf{0}^n, P_Y) \times \Pr\{\forall j \in [M_2] : d(x^n, Z^n(f_1(x^n), j)) > D_2\} dx^n d\mathbf{y} \end{aligned} \quad (86)$$

$$= \int_{\substack{x^n, \mathbf{y}: \\ d(x^n, \hat{x}_1^n) \leq \lambda D_1}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{sp}}(y^n(i) | \mathbf{0}^n, P_Y) \times (1 - \Phi_{\text{sp}}(n, x^n, \hat{x}_1^n))^{M_2} dx^n d\mathbf{y} \quad (87)$$

$$\begin{aligned} &= \Pr\{d(X^n, \hat{X}_1^n) < (|\beta_1|^+)^2\} + \int_{x^n, \mathbf{y}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{sp}}(y^n(i) | \mathbf{0}^n, P_Y) \times \mathbf{1}\{d(x^n, \hat{x}_1^n) \in [(|\beta_1|^+)^2, \lambda D_1]\} \\ &\quad \times (1 - \Phi_{\text{sp}}(n, x^n, \hat{x}_1^n))^{M_2} dx^n d\mathbf{y}, \end{aligned} \quad (88)$$

where (87) follows since given  $x^n, \mathbf{y}$  and thus  $\hat{x}_1^n$ , the codewords  $(Z^n(\hat{x}_1^n, 1), \dots, Z^n(\hat{x}_1^n, M_2))$  are independent and generated by the same distribution  $f_{\text{sp}}(\cdot | \hat{x}_1^n, \lambda D_1 - D_2)$  and (88) follows from the results in Lemma 8.

Recall that  $l = d(x^n, y^n)$  is the quadratic distortion between  $x^n$  and  $y^n$ . The second term in (88) can be further upper bounded by

$$\int_{(|\beta_1|^+)^2}^{\lambda D_1} f_L(l) (1 - \underline{h}(n, l))^{M_2} dl \quad (89)$$

$$\leq \int_{(|\beta_1|^+)^2}^{|P_Z - D_2|} f_L(l) dl + \int_{|P_Z - D_2|}^{\lambda D_1} f_L(l) (1 - \underline{h}(n, l))^{M_2} dl \quad (90)$$

$$\leq \int_{(|\beta_1|^+)^2}^{|P_Z - D_2|} f_L(l) dl + \int_{|P_Z - D_2|}^{\lambda D_1} f_L(l) \exp\{-M_2 \underline{h}(n, l)\} dl \quad (91)$$

$$\leq \int_{(|\beta_1|^+)^2}^{|P_Z - D_2|} f_L(l) dl + \exp\{-M_2 \underline{h}(n, \lambda D_1)\}, \quad (92)$$

where (89) follows from the result in (78), (90) follows since  $\beta_1^2 \leq |P_Z - D_2|$  (cf. (70)) and  $\underline{h}(n, l) \in [0, 1]$ , (91) follows from that  $(1 - a)^M \leq \exp\{-Ma\}$  for any  $a \in [0, 1)$  and (92) follows since  $\underline{h}(n, l)$  is a decreasing function of  $l$  if  $l \geq |P_Z - D_2|$ .

Combining (88) and (92), we have

$$\Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\} \leq \Pr\{d(X^n, \hat{X}_1^n) \leq |P_Z - D_2|\} + \exp\{-M_2 \underline{h}(n, \lambda D_1)\}. \quad (93)$$

Choose  $M_2$  such that

$$\log M_2 = -\log \underline{h}(n, \lambda D_1) + \log(\log \sqrt{n}) \quad (94)$$

$$= \frac{n}{2} \log \frac{\lambda D_1}{D_2} + O(\log n), \quad (95)$$

where (95) follows from the definition of  $\underline{h}(n, l)$  in (78) and the fact that  $\Gamma\left(\frac{n+2}{2}\right)/\Gamma\left(\frac{n+1}{2}\right) = O(\sqrt{n})$ . With the choice of  $M_2$  in (94), we have

$$\exp\{-M_2 \underline{h}(n, \lambda D_1)\} = \frac{1}{\sqrt{n}}. \quad (96)$$

To upper bound the first term in (93), similarly to [11, Section IV. C], we define the sets

$$\mathcal{P} := \{r \in \mathbb{R} : b < r - \sigma^2 \leq a_n\}, \quad (97)$$

$$\mathcal{Q} := \{r \in \mathbb{R} : r + P_Y - |P_Z - D_2| \geq 0\}, \quad (98)$$

where the value of  $b$  is to be specified.

Recall that  $w = \frac{\|x^n\|^2}{n}$  is the normalized  $\ell_2$  norm of  $x^n$ . Furthermore, we need the following definition:

$$R_{\text{sp}}(w, P, D) := -\frac{1}{2} \log \left( 1 - \frac{(w + P - D)^2}{4wP} \right). \quad (99)$$

Recall the definition of  $\Psi_{\text{sp}}(n, w, D)$  in (66). It follows from [11, cf. (63)-(68)] that

$$\begin{aligned} \Psi_{\text{sp}}(n, w, |P_Z - D_2|) &\leq \frac{1}{\sqrt{\pi}} \frac{\Gamma\left(\frac{n}{2}\right)}{\Gamma\left(\frac{n-1}{2}\right)} \exp\{-(n-3)R_{\text{sp}}(w, P_Y, |P_Z - D_2|)\} \\ &=: \bar{g}(n, w, |P_Z - D_2|), \end{aligned} \quad (100)$$

and similar to [11, cf. (69)-(77)], we have

$$\begin{aligned} &\Pr\{d(X^n, \hat{X}_1^n) \geq |P_Z - D_2|\} \\ &= \int_0^\infty (1 - \Psi_{\text{sp}}(n, w, |P_Z - D_2|))^{M_1} f_W(w) dw \end{aligned} \quad (101)$$

$$\geq \left(1 - \frac{1}{\sqrt{n}}\right) \Pr\left\{W \in \mathcal{P} \cap \mathcal{Q}, \log M_1 \leq -\log 2 - \log \bar{g}(n, \sigma^2 + b, |P_Z - D_2|) - \frac{1}{2} \log n\right\}. \quad (102)$$

We next further lower bound the probability term in (102) and show that the probability term tends to 1 asymptotically. Note that  $R_{\text{sp}}(w, P, D)$  is a decreasing function of  $D$  and is an increasing function of  $w$ . For  $w_1 = \sigma^2$  and  $\lambda D_1$ , we have  $R_{\text{sp}}(w_1, P_Y, \lambda D_1) = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}$ . Recall that  $P_Z = \lambda D_1 - D_2$ , since  $|\lambda D_1 - 2D_2| < \lambda D_1$ , if we choose  $w_2 \in \mathbb{R}_+$  such that

$$R_{\text{sp}}(w_2, P_Y, |\lambda D_1 - 2D_2|) = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}, \quad (103)$$

it follows that  $w_2 < w_1 = \sigma^2$ . Set  $w_3 = \frac{w_1 + w_2}{2}$ . Thus  $w_2 < w_3 < \sigma^2$  and

$$R_{\text{sp}}(w_3, P_Y, |\lambda D_1 - 2D_2|) > R_{\text{sp}}(w_2, P_Y, |\lambda D_1 - 2D_2|) \quad (104)$$

$$= \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}. \quad (105)$$

Set the value of  $b$  as

$$b := \frac{w_2 - \sigma^2}{2}. \quad (106)$$

Using the definition of  $\bar{g}(n, w)$  in (100), it follows that for some  $\delta > 0$ ,

$$\begin{aligned} &-\log \bar{g}(n, \sigma^2 + b, |P_Z - D_2|) \\ &= nR_{\text{sp}}(w_3, P_Y, |\lambda D_1 - 2D_2|) + O(\log n) \end{aligned} \quad (107)$$

$$= \frac{n}{2} \log \frac{\sigma^2}{\lambda D_1} + n\delta + O(\log n), \quad (108)$$

where (107) follows since  $\Gamma\left(\frac{n}{2}\right)/\Gamma\left(\frac{n-1}{2}\right) = O(\sqrt{n})$  and  $P_Z = \lambda D_1 - D_2$ , and (108) follows from the result in (105).

Combining (83) and (108) and invoking the weak law of large numbers, we conclude that

$$\begin{aligned} &\lim_{n \rightarrow \infty} \Pr \left\{ \log M_1 \leq -\log 2 - \log \bar{g}(n, \sigma^2 + b) - \frac{1}{2} \log n \right\} \\ &= 1. \end{aligned} \quad (109)$$

Note that (109) follows since (108) implies that the dominant term in the right-hand side is strictly larger than  $\frac{n}{2} \log \frac{\sigma^2}{\lambda D_1}$ , which is the dominant term of  $\log M_1$  (cf. (83)). Similar to [11, Lemma 5], using the weak law of large numbers, the Berry-Esseen theorem [21], [22] and the definition of  $b$ , we conclude that

$$\Pr\{W \in \mathcal{P} \cap \mathcal{Q}\} \geq 1 - O\left(\frac{1}{\sqrt{n}}\right). \quad (110)$$

Finally, combining (83), (88), (95), (96) and (110), we have

$$\lim_{n \rightarrow \infty} \Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\} = 0. \quad (111)$$

The proof of Theorem 1 when both encoders use spherical codebooks completed by combining (82), (84), (111).

### C. When Both Encoders Use i.i.d. Gaussian Codebooks

We next present the proof when both encoders use i.i.d. Gaussian codebooks, i.e.,  $(\dagger, \ddagger) = \{\text{iid}, \text{iid}\}$ . Similar to the case when both encoders use spherical codebooks, the first term in (82) is similar to the mismatched rate-distortion problem studied in [11, Section IV. D]. Choose  $M_1$  such that

$$\log M_1 = \frac{n}{2} \log \frac{\sigma^2}{\lambda D_1} + \sqrt{nV(\sigma^2, \zeta)}Q^{-1}(\varepsilon) + O(\log n). \quad (112)$$

Similar to [11, cf. (90)-(103)], we have that

$$\Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} \leq \varepsilon + O\left(\frac{1}{\sqrt{n}}\right). \quad (113)$$

The second term in (82) is upper bounded as follows.

$$\begin{aligned} & \Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\} \\ &= \int_{d(x^n, \hat{x}_1^n) \leq \lambda D_1} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i) | \mathbf{0}^n, P_Y) \times \Pr\{\forall j \in [M_2]: d(x^n, Z^n(f_1(x^n), j)) > D_2\} dx^n d\mathbf{y} \end{aligned} \quad (114)$$

$$= \int_{d(x^n, \hat{x}_1^n) \leq \lambda D_1} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i) | \mathbf{0}^n, P_Y) \times (1 - \Phi_{\text{iid}}(n, x^n, \hat{x}_1^n))^{M_2} dx^n d\mathbf{y}, \quad (115)$$

$$= \int_0^{\lambda D_1} f_L(l) (1 - \Phi_{\text{iid}}(n, l))^{M_2} dl \quad (116)$$

$$\leq \int_0^{|P_Z - D_2|} f_L(l) dl + \int_{|P_Z - D_2|}^{\lambda D_1} f_L(l) (1 - \Phi_{\text{iid}}(n, l))^{M_2} dl \quad (117)$$

$$\leq \int_0^{|P_Z - D_2|} f_L(l) dl + \int_{|P_Z - D_2|}^{\lambda D_1} f_L(l) \exp\{-M_2 \Phi_{\text{iid}}(n, l)\} dl \quad (118)$$

$$\leq \Pr\{d(X^n, \hat{X}_1^n) \leq |P_Z - D_2|\} + \exp\{-M_2 \Phi_{\text{iid}}(n, \lambda D_1)\}, \quad (119)$$

where (115) follows since given  $x^n, \mathbf{y}$  and thus  $\hat{x}_1^n$ , the codewords  $(Z^n(\hat{x}_1^n, 1), \dots, Z^n(\hat{x}_1^n, M_2))$  are independent and generated by the same distribution  $f_{\text{iid}}(\cdot | \hat{x}_1^n, \lambda D_1 - D_2)$ , (116) follows from (80), (117) follows since  $\Phi_{\text{iid}}(n, l) \leq 1$ , (118) follows since  $(1 - a)^M \leq \exp\{-Ma\}$  for any  $a \in [0, 1]$  and (119) since  $\Phi_{\text{iid}}(n, l)$  is a decreasing function of  $l$  if  $l \geq |P_Z - D_2|$ .

Choose  $M_2$  such that

$$\log M_2 = -\log \Phi_{\text{iid}}(n, \lambda D_1) + \log(\log \sqrt{n}) \quad (120)$$

$$= \frac{n}{2} \log \frac{\lambda D_1}{D_2} + O(\log n). \quad (121)$$

It follows that

$$\exp\{-M_2 \Phi_{\text{iid}}(n, \lambda D_1)\} = \frac{1}{\sqrt{n}}. \quad (122)$$

The analysis of the first term in (119) is similar to spherical codebook (cf. (97) to (110)) except the following two points: i) replace  $\bar{g}(n, w)$  with  $\Psi_{\text{iid}}(n, w, |P_Z - D_2|)$  and ii) replace  $\mathcal{P} \cap \mathcal{Q}$  with  $\mathcal{P}$ . Hence, we have

$$\lim_{n \rightarrow \infty} \Pr\{d(X^n, \hat{X}_1^n) \leq \lambda D_1, d(X^n, \hat{X}_2^n) > D_2\} = 0. \quad (123)$$

The proof of Theorem 1 when both encoders use i.i.d. Gaussian codebooks is completed by combining (82), (113), (123).



#### D. When Two Encoders Use Different Codebooks

We next prove Theorem 1 when different types of codebooks are used in encoders  $f_1$  and  $f_2$ . When  $(\dagger, \ddagger) = \{\text{iid}, \text{sp}\}$ , to bound the first term in (82), the steps are exactly the same as the case  $(\dagger, \ddagger) = \{\text{iid}, \text{iid}\}$  until (113). To upper bound the second term in (82), the steps are exactly the same as (86)-(111). When  $(\dagger, \ddagger) = \{\text{sp}, \text{iid}\}$ , the proof is exactly the same as the case  $(\dagger, \ddagger) = \{\text{sp}, \text{sp}\}$  until (84). To upper bound the second term in (82), the proof is exactly the same as (114)-(123).

### V. PROOF OF MODERATE DEVIATION ASYMPTOTICS

#### A. Preliminaries

Recall the following version of the Chernoff bound [23, 25, Th. B.4.1]

**Lemma 9.** *Given an i.i.d. sequence  $X^n$ , suppose that the cumulant generating function  $\Lambda_X^*(\theta)$  is finite for some positive number  $\theta$ . For any  $t > \mathbb{E}[X]$ ,*

$$\Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i > t \right\} \leq \exp\{-n\Lambda_X^*(t)\}, \quad (124)$$

and for any  $t < \mathbb{E}(X)$ ,

$$\Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i < t \right\} \leq \exp\{-n\Lambda_X^*(t)\}. \quad (125)$$

In both cases,  $\exp\{-n\Lambda_X^*(t)\} > 0$ .

In other words, the probability decays exponentially fast if the threshold  $t$  deviates from the mean by a constant.

#### B. When Both Encoders Use Spherical Codebook Under JEP

For any  $\theta_1 > 0$ , let

$$c_n := 2\sigma^2\theta_1\zeta_n. \quad (126)$$

The proof follows from Section IV-B until (93) with  $c_n$  taking place  $b_n$ . Combine (82) and (93), we have that

$$P_{\text{sp,sp}}^n(D_1, D_2 | M_1, M_2) \leq \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} + \Pr\{d(X^n, \hat{X}_1^n) \leq |P_Z - D_2|\} + \exp\{-M_2 \underline{h}(n, \lambda D_1)\}. \quad (127)$$

Note that the first term in (127) is similar to the mismatched rate-distortion problem studied in [11, Section V. B] except that the distortion level is replaced from  $D_1$  to  $\lambda D_1$  and the power of codebook is replaced from  $P_Y = \sigma^2 - D_1$  to  $P_Y = \sigma^2 - \lambda D_1$ .

Choose  $M_1$  such that

$$\log M_1 = n \left( \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1} + \theta_1 \zeta_n \right), \quad (128)$$

Similar to [11, cf. (107)-(115)], we have that

$$\Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} \leq \exp\{-nt_1\} + \exp \left\{ -\frac{n\theta_1^2 \zeta_n^2}{2V(\sigma^2, \zeta)} + o(n\theta_1^2 \zeta_n^2) \right\} + \exp\{-n(\theta_1 \zeta_n)^{3/2} + o(\zeta_n)\} \quad (129)$$

for some  $t_1 > 0$ .

To upper bound the third term in (127), for any  $\theta_2 > 0$ , we choose  $M_2$  such that

$$\log M_2 = n \left( \frac{1}{2} \log \frac{\lambda D_1}{D_2} + \theta_2 \zeta_n \right). \quad (130)$$

With the conditions on  $\zeta_n$  in (22) and the choice of  $M_2$  in (130), it follows that

$$\exp\{-M_2 \underline{h}(n, \lambda D_1)\} = \exp\{-n\theta_2 \zeta_n + o(\zeta_n)\}. \quad (131)$$

To upper bound the second term in (127), similarly to [11, Section V. C], we define the set

$$\mathcal{P}' := \{r \in \mathbb{R} : b < r - \sigma^2 \leq 2c_n\}. \quad (132)$$

Following the similar proof in (102), with  $\mathcal{P}'$  in place of  $\mathcal{P}$ ,  $\exp\{-n(\theta_1 \zeta_n)^{3/2}\}$  in place of  $\frac{1}{\sqrt{n}}$  and  $n(\theta_1 \zeta_n)^{3/2}$  in place of  $\frac{1}{2} \log n$ , we have that

$$\begin{aligned} & \Pr\{d(X^n, \hat{X}_1^n) \geq |P_Z - D_2|\} \\ & \geq \left(1 - \exp\{-n(\theta_1 \zeta_n)^{3/2}\}\right) \Pr \left\{ W \in \mathcal{P}' \cap \mathcal{Q}, \log M_1 \leq -\log 2 - \log \bar{g}(n, \sigma^2 + b, |P_Z - D_2|) - n(\theta_1 \zeta_n)^{3/2} \right\}. \end{aligned} \quad (133)$$

Similarly from (103) to (109), with the same choice of  $b$  in (106), we show that

$$\lim_{n \rightarrow \infty} \Pr \left\{ \log M_1 \leq -\log 2 - \log \bar{g}(n, \sigma^2 + b) - n(\theta_1 \zeta_n)^{3/2} \right\} = 1. \quad (134)$$

Invoking Lemma 9, and moderate deviations theorem in [18, Th. 3.7.1], we have that

$$\Pr \left\{ W \in \mathcal{P}' \cap \mathcal{Q} \right\} \geq \Pr \{ W \in \mathcal{P}' \} - \Pr \{ W \notin \mathcal{Q} \} \quad (135)$$

$$= \Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i^2 > \sigma^2 + b \right\} - \Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i^2 > \sigma^2 + 2c_n \right\} - \Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i^2 < |P_Z - D_2| - P_Y \right\} \quad (136)$$

$$\geq (1 - \exp\{-nt_2\}) - \exp \left\{ -\frac{4n\theta_1^2 \zeta_n^2}{2V(\sigma^2, \zeta)} + o(n\zeta_n^2) \right\} - \Pr \left\{ \frac{1}{n} \sum_{i=1}^n X_i^2 < \sigma^2 - 2P_Y \right\} \quad (137)$$

$$\geq (1 - \exp\{-nt_2\}) - \exp \left\{ -\frac{4n\theta_1^2 \zeta_n^2}{2V(\sigma^2, \zeta)} + o(n\zeta_n^2) \right\} - \exp\{-nt_3\} \quad (138)$$

for some  $t_2 > 0$  and  $t_3 > 0$ . Combining the results in (127)-(131), (133), (134) and (138), we conclude that

$$\liminf_{n \rightarrow \infty} -\frac{1}{n\zeta_n^2} \log P_{\text{sp,sp}}^n(D_1, D_2 | M_1, M_2) \geq \frac{\theta_1^2}{2V(\sigma^2, \zeta)}. \quad (139)$$

### C. When Both Encoders Use the i.i.d. Gaussian codebook Under JEP

We next present the proof when both encoders use i.i.d. Gaussian codebooks, i.e.,  $(\dagger, \ddagger) = \{\text{iid}, \text{iid}\}$ . The proof follows from Section IV-C until (119). The rest of the proof is omitted since it is similar to Section V-B except for following two points: i) replace  $\bar{g}(n, w)$  with  $\Psi_{\text{iid}}(n, w, |P_Z - D_2|)$ , ii) replace  $\mathcal{P}' \cap \mathcal{Q}$  with  $\mathcal{P}'$ .

### D. When Two Encoders Use Different Codebooks Under JEP

We next prove Theorem 3 when different types of codebooks are used by encoders  $f_1$  and  $f_2$ . When  $(\dagger, \ddagger) = \{\text{sp}, \text{iid}\}$ , the proof is exactly the same as the case  $(\dagger, \ddagger) = \{\text{sp}, \text{sp}\}$  until (129). The rest of the proof is exactly the same as the case  $(\dagger, \ddagger) = \{\text{iid}, \text{iid}\}$ . When  $(\dagger, \ddagger) = \{\text{iid}, \text{sp}\}$ , to bound the term  $\Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\}$ , the steps are exactly the same as the case  $(\dagger, \ddagger) = \{\text{iid}, \text{iid}\}$ . The rest of the proof are exactly the same as (130)-(138).

### E. Under SEP

Under ensemble SEP, each layer of encoder and decoder only consider their own performance. Set  $\lambda = 1$ . Thus,  $P_Y = \sigma^2 - D_1$  and  $P_Z = D_1 - D_2$ . Note that  $v_{\dagger}^*$  is exactly the moderate deviations constant in rate-distortion problem [11, Section V.B], thus we only calculate  $v_{\ddagger}^*$  in following section.

The excess-distortion probability  $P_{\dagger, \ddagger}^n(D_2 | M_1, M_2)$  satisfies

$$P_{\dagger, \ddagger}^n(D_2 | M_1, M_2) = \Pr\{d(X^n, \hat{X}_2^n) > D_2\} \quad (140)$$

$$\leq \Pr\{d(X^n, \hat{X}_1^n) > D_1 \text{ or } d(X^n, \hat{X}_2^n) > D_2\} \quad (141)$$

$$= P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2). \quad (142)$$

Recalling the results in V-B, with the choice of  $M_1$  in and  $M_2$  in , we have that

$$\liminf_{n \rightarrow \infty} -\frac{1}{n\zeta_n^2} \log P_{\dagger, \ddagger}^n(D_2 | M_1, M_2) \geq \frac{\theta_1^2}{2V(\sigma^2, \zeta)}. \quad (143)$$

## VI. PROOF OF LARGE DEVIATION ASYMPTOTICS

### A. Preliminaries

Recall the definition of  $\Psi_{\text{iid}}(\cdot)$  in (66),  $\Phi_{\text{iid}}(\cdot)$  in (67) and the fact that  $\Phi_{\text{iid}}$  depends on  $(x^n, y^n)$  only through their quadratic distortion  $l = d(x^n, y^n)$  (cf. (80)). Similarly, we have that  $\Psi_{\text{iid}}(n, x^n, D)$  depends on  $x^n$  only through its normalized  $\ell_2$ -norm  $w = \frac{\|x^n\|^2}{n}$ :

$$\Psi_{\text{iid}}(n, w, D) \sim \frac{\exp\{-nR_{\text{iid}}(w, P_Y, D)\}}{s^*(w, P_Y, D)\sqrt{\kappa(w, P_Y, D)}}. \quad (144)$$

We use following properties of  $R_{\text{iid}}(l, P, D)$  (cf. (52) and cf. (53)) in the proof.

**Lemma 10.** *The following results hold.*

- i) Given  $\lambda \in (\frac{D_2}{D_1}, 1]$ ,  $R_{\text{iid}}(l, P, D) = 0$  if  $l = |D - P|^+$ ,  $R_{\text{iid}}(\sigma^2, P_Y, \lambda D_1) = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}$  and  $R_{\text{iid}}(\lambda D_1, P_Z, D_2) = \frac{1}{2} \log \frac{\lambda D_1}{D_2}$ .
- ii)  $s^*(l, P, D) > 0$  if and only if  $l > |D - P|^+$ ;
- iii)  $R_{\text{iid}}(l, P, D) = \sup_{s \geq 0} R_{\text{iid}}(l, P, D)$  and thus  $R_{\text{iid}}(l, P, D)$  increases in  $l$  when  $l \geq |D - P|^+$  and decreases in  $D$  when  $D \leq l + P$ .
- iv)  $\Lambda_{X^2}^*(t) > 0$  if and only if  $t > \sigma^2 = \mathbb{E}[X^2]$ .

The proof of Lemma 10 is similar to [11, Lemma 7] and thus omitted.

### B. Proof under JEP (Theorem 5)

Fix  $\lambda \in (\frac{D_2}{D_1}, 1]$ . It follows that  $\lambda D_1 > |D_2 - P_Z|^+$ . Using (80), for any  $l \leq \lambda D_1$ , any positive  $\delta$  and sufficiently large  $n$ , we have

$$\Phi_{\text{iid}}(n, l) \geq \Phi_{\text{iid}}(n, \lambda D_1) \quad (145)$$

$$\geq \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}. \quad (146)$$

It follows from the definition of the ensemble JEP  $P_{\dagger, \ddagger}^n(D_1, D_2 | M_1, M_2)$  in (10) that

$$P_{\text{iid}, \text{iid}}^n(D_1, D_2 | M_1, M_2) = \Pr\{d(X^n, \hat{X}_1^n) > D_1\} + \Pr\{d(X^n, \hat{X}_1^n) \leq D_1, d(X^n, \hat{X}_2^n) > D_2\}. \quad (147)$$

For  $\lambda \in (\frac{D_2}{D_1}, 1)$ , the second term in (147) can be further upper bounded as follows,

$$\begin{aligned} & \Pr\{d(X^n, \hat{X}_1^n) \leq D_1, d(X^n, \hat{X}_2^n) > D_2\} \\ &= \int_{\substack{x^n, \mathbf{y}: \\ d(x^n, \hat{x}_1^n) \leq D_1}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i) | \mathbf{0}^n, P_Y) \times \Pr\{\forall j \in [M_2]: d(x^n, Z^n(f_1(x^n), j)) > D_2\} dx^n d\mathbf{y} \end{aligned} \quad (148)$$

$$= \int_{\substack{x^n, \mathbf{y}: \\ d(x^n, \hat{x}_1^n) \leq D_1}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i) | \mathbf{0}^n, P_Y) \times (1 - \Phi_{\text{iid}}(n, x^n, \hat{x}_1^n))^{M_2} dx^n d\mathbf{y} \quad (149)$$

$$= \int_0^{D_1} f_L(l) (1 - \Phi_{\text{iid}}(n, l))^{M_2} dl, \quad (150)$$

$$\leq \int_0^{\lambda D_1} f_L(l) (1 - \Phi_{\text{iid}}(n, l))^{M_2} dl + \Pr\{D_1 \geq d(X^n, \hat{X}_1^n) > \lambda D_1\} \quad (151)$$

$$\leq \int_0^{\lambda D_1} f_L(l) (1 - \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\})^{M_2} dl + \Pr\{D_1 \geq d(X^n, \hat{X}_1^n) > \lambda D_1\} \quad (152)$$

$$\leq \exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\} + \Pr\{D_1 \geq d(X^n, \hat{X}_1^n) > \lambda D_1\}, \quad (153)$$

where (149) follows from the definition of  $\Phi_{\text{iid}}(\cdot)$ , (150) follows since  $\Phi_{\text{iid}}(n, x^n, y^n)$  depends on  $x^n$  and  $y^n$  only through their quadratic distortion  $l = \frac{1}{n} \|x^n - y^n\|^2$ , (151) follows since  $\Phi_{\text{iid}}(n, x^n, y^n) \geq 0$ , (152) follows from (146) and (153) follows since  $(1 - a)^M \leq \exp\{-Ma\}$  for any  $a \in [0, 1]$ .

Combining the result in (147) and (153), we have

$$P_{\text{iid}, \text{iid}}^n(D_1, D_2 | M_1, M_2) \leq \exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\} + \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\}. \quad (154)$$

Choose  $M_2$  such that

$$\log M_2 = n(1 + 2\delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2) \quad (155)$$

$$= n(1 + 2\delta) \frac{1}{2} \log \frac{\lambda D_1}{D_2}. \quad (156)$$

It follows that

$$\exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\} = \exp\{\exp\{-n\delta R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\}, \quad (157)$$

which vanishes doubly exponentially fast since  $\lambda D_1 > |D_2 - P_Z|^+$  and the Claims i), ii) and iii) of Lemma 10 ensures that  $R_{\text{iid}}(\lambda D_1, P_Z, D_2) > 0$ .

Finally, we bound the second term in (154). Fix  $\alpha_2$  such that  $\alpha_2 > |\lambda D_1 - P_Y|^+$ . Using (144), for any  $w \leq \alpha_2$ , any positive  $\delta$  and sufficiently large  $n$ , we have

$$\Psi_{\text{iid}}(n, w, \lambda D_1) \geq \Psi_{\text{iid}}(n, \alpha_2, \lambda D_1) \quad (158)$$

$$\geq \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1)\}. \quad (159)$$

It follows that

$$\Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} = \mathbb{E}_{f_X^n} [(1 - \Pr\{d(X^n, Y^n) \leq \lambda D_1 | X^n\})] \quad (160)$$

$$= \int_0^\infty (1 - \Psi_{\text{iid}}(n, w, \lambda D_1))^{M_1} f_W(w) dw \quad (161)$$

$$\leq \int_0^{\alpha_2} (1 - \Psi_{\text{iid}}(n, \alpha_2, \lambda D_1))^{M_1} f_W(w) dw + \Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_2\right\} \quad (162)$$

$$\leq \int_0^{\alpha_2} (1 - \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1)\})^{M_1} f_W(w) dw + \Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_2\right\} \quad (163)$$

$$\leq \exp\left\{-M_1 \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1)\}\right\} + \Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_2\right\}, \quad (164)$$

where (161) follows from the definition of  $\Psi_{\text{iid}}(\cdot)$  in (66), (162) follows since  $(1 - \Psi_{\text{iid}}(n, w, \lambda D_1)) \leq 1$ , (163) follows from (159), and (164) follows since  $(1 - a)^M \leq \exp -Ma$  for any  $a \in [0, 1)$ .

Choose  $M_1$  such that

$$\log M_1 = n(1 + 2\delta)R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1). \quad (165)$$

The first term of (164) vanishes doubly exponentially since  $\alpha_2 > |\lambda D_1 - P_Y|^+$  and Lemma 10 implies that  $R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1) > 0$ . Using Cramér's Theorem [18, Th. 2.2.3] and the definition of  $\Lambda_{X^2}^*(\cdot)$ , we have

$$\Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_2\right\} \leq \exp\{-n\Lambda_{X^2}^*(\alpha_2)\}. \quad (166)$$

Combining the results in (154), (164) and (166), we have

$$\begin{aligned} P_{\text{iid, iid}}^n(D_1, D_2 | M_1, M_2) &\leq \exp\left\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\right\} \\ &\quad + \exp\left\{-M_1 \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1)\}\right\} + \exp\{-n\Lambda_{X^2}^*(\alpha_2)\}, \end{aligned} \quad (167)$$

where the the first two terms in (167) vanish doubly exponentially fast with the choice of  $M_2$  in (156) and  $M_1$  in (165).

Recall that  $\Lambda_{X^2}^*(t) = 0$  if  $t \leq \sigma^2$ ,  $R_{\text{iid}}(\sigma^2, P_Y, \lambda D_1) = \frac{1}{2} \log \frac{\sigma^2}{\lambda D_1}$  and  $R_{\text{iid}}(\lambda D_1, P_Z, D_2) = \frac{1}{2} \log \frac{\lambda D_1}{D_2}$ . Letting  $\delta \downarrow 0$ , we conclude that for any  $\lambda \in (\frac{D_2}{D_1}, 1]$ ,

$$E^*(D_1, D_2 | R_1, R_2) \geq \Lambda_{X^2}^*(\alpha_2), \quad (168)$$

where  $R_1$  is determined from  $R_1 = R_{\text{iid}}(\alpha_2, P_Y, \lambda D_1)$  and  $R_2$  is determined from  $R_2 = \frac{1}{2} \log \frac{\lambda D_1}{D_2}$ . The proof Theorem 5 is now completed.

### C. Proof under SEP (Theorem 7)

We start with the proof of  $P_{\text{iid}}^n(D_1 | M_1, M_2)$ . Fix  $\alpha_1 > |D_1 - P_Y|^+$ . Using (144), for any  $w \leq \alpha_1$ , any positive  $\delta$  and sufficiently large  $n$ , we have

$$\Psi_{\text{iid}}(n, w, D_1) \geq \Psi_{\text{iid}}(n, \alpha_1, D_1) \quad (169)$$

$$\geq \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_1, P_Y, D_1)\}. \quad (170)$$

Recall the definition of  $P_{\text{iid}}^n(D_1 | M_1, M_2)$  in (8). Similar to [11, cf. (154)-(158)],

$$P_{\text{iid}}^n(D_1 | M_1, M_2) = \Pr\{d(X^n, \hat{X}_1^n) > D_1\} \quad (171)$$

$$\leq \exp\left\{-M_1 \exp\{-n(1 + \delta)R_{\text{iid}}(\alpha_1, P_Y, D_1)\}\right\} + \Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_1\right\}. \quad (172)$$

Choose  $M_1$  such that

$$\log M_1 = n(1 + 2\delta)R_{\text{iid}}(\alpha_1, P_Y, D_1). \quad (173)$$

The first term of (172) vanishes doubly exponentially fast which follows from Lemma 10 and the fact that  $\alpha_1 > |D_1 - P_Y|^+$ .

Invoking the definition of Cramér's Theorem [18, Th. 2.2.3] and the definition of  $\Lambda_{X^2}^*(\cdot)$ , we obtain that

$$\Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_1\right\} \leq \exp\{-n\Lambda_{X^2}^*(\alpha_1)\}. \quad (174)$$

Recall that  $\Lambda_{X^2}^*(t) = 0$  if  $t \leq \sigma^2$  and  $|D_1 - P_Y|^+ < \sigma^2$ . Letting  $\delta \downarrow 0$ , we conclude that for any  $\alpha > |D_1 - P_Y|^+$ ,

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log P_{\text{iid}}^n(D_1|M_1, M_2) \geq \Lambda_{X^2}^*(\alpha), \quad (175)$$

where  $R_1$  is determined by of  $R_1 = R_{\text{iid}}(\alpha_1, P_Y, D_1)$ .

We next analyze  $P_{\ddagger}^n(D_2|M_1, M_2)$  when  $R_2 \leq \frac{1}{2} \log \frac{D_1}{D_2}$ . Fix  $\lambda \in (\frac{D_2}{D_1}, 1]$ , it follows that  $\lambda D_1 > |D_2 - P_Z|^+$ . Using (80), for any  $l \leq \lambda D_1$ , any positive  $\delta$  and sufficiently large  $n$ , we have

$$\Phi_{\text{iid}}(n, l) \geq \Phi_{\text{iid}}(n, \lambda D_1) \quad (176)$$

$$\geq \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}. \quad (177)$$

Recall the definition of  $P_{\ddagger}^n(D_2|M_1, M_2)$  in (9), we have

$$\begin{aligned} P_{\text{iid}}^n(D_2|M_1, M_2) &= \Pr\{d(X^n, \hat{X}_2^n) > D_2\} \end{aligned} \quad (178)$$

$$= \int_{x^n, \mathbf{y}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i)|\mathbf{0}^n, P_Y) \times \Pr\{\forall j \in [M_2]: d(x^n, Z^n(f_1(x^n), j)) > D_2\} dx^n d\mathbf{y} \quad (179)$$

$$= \int_{x^n, \mathbf{y}} P_X^n(x^n) \prod_{i \in [M_1]} f_{\text{iid}}(y^n(i)|\mathbf{0}^n, P_Y) \times (1 - \Phi_{\text{iid}}(n, x^n, \hat{x}_1^n))^{M_2} dx^n d\mathbf{y} \quad (180)$$

$$= \int_0^\infty f_L(l)(1 - \Phi_{\text{iid}}(n, l))^{M_2} dl \quad (181)$$

$$\leq \int_0^{\lambda D_1} f_L(l)(1 - \Phi_{\text{iid}}(n, l))^{M_2} dl + \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} \quad (182)$$

$$\leq \int_0^{\lambda D_1} f_L(l)(1 - \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\})^{M_2} dl + \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\} \quad (183)$$

$$\leq \exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\lambda D_1, P_Z, D_2)\}\} + \Pr\{d(X^n, \hat{X}_1^n) > \lambda D_1\}, \quad (184)$$

where (180) follows from the definition of  $\Phi_{\text{iid}}(\cdot)$ , (181) follows since  $\Phi_{\text{iid}}(n, x^n, y^n)$  depends on  $x^n$  and  $y^n$  only through  $l = \frac{1}{n} \|x^n - y^n\|^2$ , (182) follows since  $\Phi_{\text{iid}}(n, x^n, y^n) \geq 0$ , (183) follows from (177) and (184) follows since  $(1 - a)^M \leq \exp\{-Ma\}$  for any  $a \in [0, 1]$ .

Note that (184) is the same as (154), the rest of the proof follows from (156) to (168) and thus omitted.

Finally, we study the case when  $R_2 > \frac{1}{2} \log \frac{D_1}{D_2}$ . Since parameter  $\lambda$  is introduced to adapt the situation that  $R_1$  is large but  $R_2$  is small, we set  $\lambda = 1$  in this case. Fix  $\gamma > \frac{D_1}{D_2}$ . Using (80), for any  $l \leq \gamma$ , any positive  $\delta$  and sufficiently large  $n$ , we have

$$\Omega(n, l) \geq \Omega(n, \gamma) \quad (185)$$

$$\geq \exp\{-n(1 + \delta)R_{\text{iid}}(\gamma, P_Z, D_2)\}. \quad (186)$$

Similar to the case where  $R_2 \leq \frac{1}{2} \log \frac{D_1}{D_2}$ , the excess-distortion probability  $P_{\ddagger}^n(D_2|M_1, M_2)$  can be upper bounded as follows,

$$P_{\text{iid}}^n(D_2|M_1, M_2) = \int_0^\infty f_L(l)(1 - \Phi_{\text{iid}}(n, l))^{M_2} dl \quad (187)$$

$$\leq \int_0^\gamma f_L(l)(1 - \Omega(n, l))^{M_2} dl + \Pr\{d(X^n, \hat{X}_1^n) > \gamma\} \quad (188)$$

$$\leq \int_0^\gamma f_L(l)(1 - \exp\{-n(1 + \delta)R_{\text{iid}}(\gamma, P_Z, D_2)\})^{M_2} dl + \Pr\{d(X^n, \hat{X}_1^n) > \gamma\} \quad (189)$$

$$\leq \exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\gamma, P_Z, D_2)\}\} + \Pr\{d(X^n, \hat{X}_1^n) > \gamma\}. \quad (190)$$

Choose  $M_2$  such that

$$\log M_2 = n(1 + 2\delta)R_{\text{iid}}(\gamma, P_Z, D_2). \quad (191)$$

It follows that

$$\exp\{-M_2 \exp\{-n(1 + \delta)R_{\text{iid}}(\gamma, P_Z, D_2)\}\} = \exp\{\exp\{-n\delta R_{\text{iid}}(\gamma, P_Z, D_2)\}\}, \quad (192)$$

which vanishes doubly exponentially fast since  $\gamma > |D_2 - P_Z|^+$  and Lemma 10 ensure that  $R_{\text{iid}}(\gamma, P_Z, D_2) > 0$ .

Note that  $\Pr\{d(X^n, \hat{X}_1^n) > \gamma\}$  is similar to the second term in (154), except we change the distortion level to from  $\lambda D_1$  to  $\gamma$ . Fix  $\alpha_2$  such that  $\alpha_2 > |\gamma - P_Y|^+$ . Similarly to (161)-(164), we have

$$\Pr\{d(X^n, \hat{X}_1^n) > \gamma\} \leq \exp\{-M_1 \exp\{-n(1+\delta)R_{\text{iid}}(\alpha_2, P_Y, \gamma)\}\} + \Pr\left\{\frac{1}{n} \sum_{i=1}^n X_i^2 \geq \alpha_2\right\}. \quad (193)$$

Choose  $M_1$  such that

$$\log M_1 = n(1+\delta)R_{\text{iid}}(\alpha_2, P_Y, \gamma). \quad (194)$$

It follows that the first term of (193) vanishes doubly exponentially since  $\alpha_2 > |\gamma - P_Y|^+$  and Lemma 10 implies that  $R_{\text{iid}}(\alpha_2, P_Y, \gamma) > 0$ . The rest of the proof is similar to (166)-(168) and thus omitted.

## VII. CONCLUSION

We derived achievable refined asymptotics for the mismatched successive refinement problem where one uses Gaussian codebooks and successive minimum Euclidean distance encoding to compress an arbitrary memoryless source satisfying mild moment constraints. We studied the performance of all four combinations of spherical and i.i.d. Gaussian codebooks in both second-order and moderate deviations asymptotics. For large deviations, we only studied the case where both encoders use i.i.d. Gaussian codebooks and showed that our derived exponent under JEP and exponents under SEP are all positive for rate pairs strictly inside the rate-distortion region of a GMS in the matched case.

There are several future research directions. Firstly, one can verify the ensemble tightness of our results, including the ensemble tightness of  $R_{\text{inner}}$ , second-order, large and moderate deviations, especially when either encoder uses a spherical codebook. Secondly, for a GMS under quadratic distortion measures in the matched successive refinement problem, it is worthwhile to derive exact large deviations asymptotics under both JEP and SEP and check whether our result is optimal when specialized to a GMS. Finally, one could generalize the results in this paper to derived refined asymptotics for mismatched settings of other multiterminal lossy source coding problems, e.g., the Kaspi problem [24]-[26], the lossy Gray-Wyner problem [27], [28] and the multiple descriptions problem [29]-[31].

## APPENDIX

### A. Justification of the Conditions in Case (ii) of Theorem 6

Recall that  $\lambda = 1$ ,  $P_Y = \sigma^2 - D_1$  and  $P_Z = D_1 - D_2$ . Recall that the condition for rate  $R_2$  is  $\frac{1}{2} \log \frac{D_1}{D_2} > R_2 > R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2)$ , which is valid since  $\frac{1}{2} \log \frac{D_1}{D_2} > R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2)$ . The reason is as follows. It follows from Claim iii) of Lemma 10 that  $R_{\text{iid}}(l, P, D)$  increases in  $l$  for  $l \geq |D - P|^+$ . Furthermore,  $|D_2 - P_Z|^+ = \max\{0, 2D_2 - D_1\} < D_1$  since  $D_2 < D_1$ . Thus, it follows that  $R_{\text{iid}}(|D_2 - P_Z|^+, P_Z, D_2) < R_{\text{iid}}(D_1, P_Z, D_2) = \frac{1}{2} \log \frac{D_1}{D_2}$ .

The condition on  $R_1$  is valid since  $R_{\text{iid}}(\max\{\sigma^2, \gamma_2 - P_Y\}, P_Y, \gamma_2) > \frac{1}{2} \log \frac{\sigma^2}{D_1}$ . The reason is as follows. Recall that  $\gamma_2$  is the solution to  $R_2 = R_{\text{iid}}(\gamma_2, P_Z, D_2)$ . It follows that  $\gamma_2 < D_1$  since  $R_{\text{iid}}(l, P, D)$  increases in  $l$  for  $l \geq |D - P|^+$ ,  $R_{\text{iid}}(\gamma_2, P_Z, D_2) < \frac{1}{2} \log \frac{D_1}{D_2}$  and  $R_{\text{iid}}(D_1, P_Z, D_2) = \frac{1}{2} \log \frac{D_1}{D_2}$ . Furthermore, since  $R_{\text{iid}}(l, P, D)$  decreases in  $D$  for  $D < l + P$  (cf. Claim iii) of Lemma 10),  $R_{\text{iid}}(\max\{\sigma^2, \gamma_2 - P_Y\}, P_Y, \gamma_2) > R_{\text{iid}}(\sigma^2, P_Y, D_1) = \frac{1}{2} \log \frac{\sigma^2}{D_1}$ .

### B. Condition for Positive Exponents Under SEP

We prove a sufficient condition on the rate pair  $(R_1, R_2)$  that ensures positive excess-distortion exponent  $E^*(D_2|R_1, R_2)$ . When  $R_2 \leq \frac{1}{2} \log \frac{D_1}{D_2}$ , since  $E^*(D_2|R_1, R_2) = E^*(D_1, D_2|R_1, R_2)$ , it follows from the positivity analysis of  $E^*(D_1, D_2|R_1, R_2)$  that  $E^*(D_2|R_1, R_2)$  is positive if  $(R_1, R_2) \in \mathcal{R}_{\text{inner}}$ .

When  $R_2 > \frac{1}{2} \log \frac{D_1}{D_2}$ , the rate pair  $(R_1, R_2) \in \mathcal{R}_{\text{inner}}$  if and only if  $R_1 \geq \frac{1}{2} \log \frac{\sigma^2}{D_1}$ . Recall that  $\gamma^*(R_2)$  is the solution of  $\gamma$  to  $R_2 = R_{\text{iid}}(\gamma, P_Z, D_2)$ . Thus,  $\gamma^*(R_2) > D_1$  since  $R_{\text{iid}}(l, P, D)$  increases in  $l$  when  $l > |D - P|^+$  and  $R_{\text{iid}}(D_1, P_Z, D_2) = \frac{1}{2} \log \frac{D_1}{D_2}$ . Recall that  $\alpha_2^*(R_1, R_2)$  is the solution of  $\alpha$  to  $R_1 = R_{\text{iid}}(\alpha, P_Y, \gamma^*(R_2))$ . When  $R_1 > \frac{1}{2} \log \frac{\sigma^2}{D_1} = R_{\text{iid}}(\sigma^2, P_Y, D_1)$ , since  $\gamma^*(R_2) > D_1$  and  $R_{\text{iid}}(l, P, D)$  increase in  $l$  when  $l > |D - P|^+$  and decreases in  $D$  when  $D < l + P$  (cf. Claim iii) of Lemma 10), we conclude that  $\alpha_2^*(R_1, R_2) > \sigma^2$ . Therefore,  $E^*(D_2|R_1, R_2) > \Lambda_{X^2}^*(\alpha_2^*(R_1, R_2)) > \Lambda_{X^2}^*(\sigma^2) > 0$ .

### C. Proof of Lemma 8

Recall the definition of  $\Phi_{\text{sp}}(n, x^n, y^n)$  in (67),  $\beta_1$  in (68) and  $\beta_2$  in (69).

Note that  $\Phi_{\text{sp}}(n, x^n, y^n)$  depends on  $(x^n, y^n)$  only through their quadratic distortion  $l = d(x^n, y^n)$ . Similarly to [20, Theorem 37],  $\Phi_{\text{sp}}(n, x^n, y^n) = 0$  if  $\sqrt{l} \leq |\beta_1|^+$  or  $\sqrt{l} \geq \beta_2$ . Let  $S_n(r) = \frac{n\pi^{\frac{n}{2}}}{\Gamma(\frac{n}{2}+1)} r^{n-1}$  be the surface area of an  $n$ -dimensional sphere of

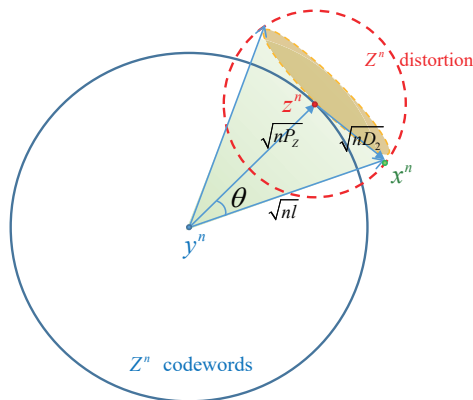


Fig. 7. Geometry of the excess-distortion probability calculation of encoder  $f_2$ .

radius  $r$  and  $S_n(r, \theta)$  be the surface area of an  $n$ -dimensional polar cap of radius  $r$  and polar angle  $\theta$ . For  $\sqrt{l} \in [\max\{0, \beta_1\}, \beta_2]$ , similarly to [20, Theorem 37],

$$\Phi_{\text{sp}}(n, l) = \frac{S_n(l, \theta)}{S_n(l)} \quad (195)$$

$$\geq \frac{\Gamma(\frac{n}{2} + 1)}{\sqrt{\pi n} \Gamma(\frac{n-1}{2} + 1)} (\sin \theta)^{n-1} \quad (196)$$

$$= \frac{\Gamma(\frac{n+2}{2})}{\sqrt{\pi n} \Gamma(\frac{n+1}{2})} \left( 1 - \frac{(l + P_Z - D_2)^2}{4lP_Z} \right)^{\frac{n-1}{2}} \quad (197)$$

$$= \underline{h}(n, l), \quad (198)$$

where (196) follows since  $S_n(r, \theta) \geq \frac{\pi^{\frac{n-1}{2}}}{\Gamma(\frac{n-1}{2} + 1)} (r \sin \theta)^{n-1}$  (cf. Fig. 7) and (197) follows from the law of cosines.

## REFERENCES

- [1] L. Bai, Z. Wu, and L. Zhou, "Achievable second-order asymptotics for successive refinement using Gaussian codebooks," in *IEEE ISIT*, 2021, pp. 2888–2893.
- [2] Z. Wu, L. Bai, and L. Zhou, "Excess-distortion exponents for successive refinement using Gaussian codebooks," in *IEEE ISIT*, 2022, p. 0.
- [3] B. Rimoldi, "Successive refinement of information: characterization of the achievable rates," *IEEE Trans. Inf. Theory*, vol. 40, no. 1, pp. 253–259, 1994.
- [4] A. Kanlis and P. Narayan, "Error exponents for successive refinement by partitioning," *IEEE Trans. Inf. Theory*, vol. 42, no. 1, pp. 275–282, 1996.
- [5] V. Koshchev, "Estimation of mean error for a discrete successive-approximation scheme," *Problemy Peredači Informacii*, vol. 17, no. 3, pp. 20–33, 1981.
- [6] W. H. Equitz and T. M. Cover, "Successive refinement of information," *IEEE Trans. Inf. Theory*, vol. 37, no. 2, pp. 269–275, 1991.
- [7] L. Zhou, V. Y. F. Tan, and M. Motani, "Second-order and moderate deviation asymptotics for successive refinement," *IEEE Trans. Inf. Theory*, vol. 63, no. 5, pp. 2896–2921, 2017.
- [8] E. Tuncel and K. Rose, "Error exponents in scalable source coding," *IEEE Trans. Inf. Theory*, vol. 49, no. 1, pp. 289–296, 2003.
- [9] A. No, A. Ingber, and T. Weissman, "Strong successive refinability and rate-distortion-complexity tradeoff," *IEEE Trans. Inf. Theory*, vol. 62, no. 6, pp. 3618–3635, 2016.
- [10] A. Lapidath, "On the role of mismatch in rate distortion theory," *IEEE Trans. Inf. Theory*, vol. 43, no. 1, pp. 38–47, 1997.
- [11] L. Zhou, V. Y. Tan, and M. Motani, "Refined asymptotics for rate-distortion using Gaussian codebooks for arbitrary sources," *IEEE Trans. Inf. Theory*, vol. 65, no. 5, pp. 3145–3159, 2018.
- [12] M. Effros, "Distortion-rate bounds for fixed- and variable-rate multiresolution source codes," *IEEE Trans. Inf. Theory*, vol. 45, no. 6, pp. 1887–1910, 1999.
- [13] V. Kostina and E. Tuncel, "Successive refinement of abstract sources," *IEEE Trans. Inf. Theory*, vol. 65, no. 10, pp. 6385–6398, 2019.
- [14] M. Kanabar and J. Scarlett, "Mismatched rate-distortion theory: Ensembles, bounds, and general alphabets," *arXiv preprint arXiv:2203.15193*, 2022.
- [15] A. Lapidath, "Nearest neighbor decoding for additive non-Gaussian noise channels," *IEEE Trans. Inf. Theory*, vol. 42, no. 5, pp. 1520–1529, 1996.
- [16] J. Scarlett, V. Y. F. Tan, and G. Durisi, "The dispersion of nearest-neighbor decoding for additive non-Gaussian channels," *IEEE Trans. Inf. Theory*, vol. 63, no. 1, pp. 81–92, 2017.
- [17] J.-L. Verger-Gaugry, "Covering a ball with smaller equal balls in  $\mathbb{R}^n$ ," *Discrete Comput. Geometry*, vol. 33, no. 1, pp. 143–155, 2005.
- [18] A. Dembo and O. Zeitouni, *Large Deviations Techniques and Applications*. Springer, 2009, vol. 38.
- [19] S. Ihara and M. Kubo, "Error exponent for coding of memoryless Gaussian sources with a fidelity criterion," *IEICE Trans. Fundamentals*, vol. 83, no. 10, pp. 1891–1897, 2000.
- [20] V. Kostina and S. Verdú, "Fixed-length lossy compression in the finite blocklength regime," *IEEE Trans. Inf. Theory*, vol. 58, no. 6, pp. 3309–3338, 2012.
- [21] A. C. Berry, "The accuracy of the Gaussian approximation to the sum of independent variates," *Trans. Am. Math. Soc.*, vol. 49, no. 1, pp. 122–136, 1941.
- [22] C.-G. Esseen, *On the Liapounoff limit of error in the theory of probability*. Almqvist & Wiksell, 1942.
- [23] N. Bouleau and D. Lépingle, *Numerical Methods for Stochastic Processes*. Wiley, 1993.

- [24] A. Kaspi, "Rate-distortion function when side-information may be present at the decoder," *IEEE Trans. Inf. Theory*, vol. 40, no. 6, pp. 2031–2034, 1994.
- [25] L. Zhou and M. Motani, "Non-asymptotic converse bounds and refined asymptotics for two lossy source coding problems," *To appear in IEEE Trans. Inf. Theory*, 2017.
- [26] —, "Kaspi problem revisited: Non-asymptotic converse bound and second-order asymptotics," in *IEEE Globecom*, 2017.
- [27] R. Gray and A. Wyner, "Source coding for a simple network," *Bell Syst. Tech. J.*, vol. 53, no. 9, pp. 1681–1721, 1974.
- [28] L. Zhou, V. Y. F. Tan, and M. Motani, "Discrete lossy Gray-Wyner revisited: Second-order asymptotics, large and moderate deviations," *IEEE Trans. Inf. Theory*, vol. 63, no. 3, pp. 1766–1791, 2017.
- [29] R. Ahlswede, "On multiple descriptions and team guessing," *IEEE Trans. Inf. Theory*, vol. 32, no. 4, pp. 543–549, 1986.
- [30] L. Ozarow, "On a source-coding problem with two channels and three receivers," *Bell Syst. Tech. J.*, vol. 59, no. 10, pp. 1909–1921, 1980.
- [31] L. Zhou and M. Motani, "On the multiple description coding with one semi-deterministic distortion measure," in *IEEE Globecom*, 2017.