

Symbolic-Numeric Computation of Integrals in Successive Galerkin Approximation of Hamilton-Jacobi-Bellman Equation

Tomoyuki Iori

Abstract—This paper proposes an efficient symbolic-numeric method to compute the integrals in the successive Galerkin approximation (SGA) of the Hamilton-Jacobi-Bellman (HJB) equation. A solution of the HJB equation is first approximated with a linear combination of the Hermite polynomials. The coefficients of the combination are then computed by iteratively solving a linear equation, which consists of the integrals of the Hermite polynomials multiplied by nonlinear functions. The recursive structure of the Hermite polynomials is inherited by the integrals, and their recurrence relations can be computed by using the symbolic computation of differential operators. By using the recurrence relations, all the integrals can be computed from a part of them that are numerically evaluated. A numerical example is provided to show the efficiency of the proposed method compared to a standard numerical integration method.

I. INTRODUCTION

For general nonlinear systems, it is well-known that the optimal feedback controller with infinite horizon is provided by a solution of the Hamilton-Jacobi-Bellman (HJB) equation [1]. In the case of linear systems with a quadratic performance index, the HJB equation reduces to a matrix equation called the Riccati equation, which can be solved efficiently. However, for nonlinear cases, the HJB equation is formulated as a nonlinear partial differential equation (PDE), which is extremely difficult to solve analytically. Hence, there have been many studies on numerical approximation techniques of a solution of the HJB equation.

One possibility is to approximate a solution of the HJB equation by the Taylor-series approximation [2]–[4]. By substituting the truncated Taylor-series expansion of a solution to the HJB equation, a finite number of algebraic equations for the coefficients of the truncated expansion can be obtained. Moreover, in [4], a recursive closed form procedure for computing the coefficients is proposed under several conditions.

The stable manifold method [5] is one of the most promising techniques. In this method, a sequence of trajectories that converges to a trajectory on the stable manifold is iteratively computed. After sufficient number of iterations, the trajectory can be viewed as an approximation of the Hamiltonian flow on the stable manifold, and thus, it approximately gives the optimal feedback controller.

This work was partly supported by JSPS KAKENHI Grant Numbers JP21K21285 and 22K17855.

T. Iori is with the Department of Information and Physical Sciences, Graduate School of Information Science and Technology, Osaka University, 1-5 Yamadaoka, Suita, Osaka 565-0871, Japan
t-iori@ist.osaka-u.ac.jp

Another approach is to solve a linear PDE called the generalized HJB (GHJB) equation iteratively, which is called a successive approximation approach (SAA) [6]. As the GHJB equation is still difficult to solve, the GHJB equation and its solution is further approximated by using multiple basis functions, which is called the successive Galerkin approximation (SGA). It is proved in [6] that the solutions of the SGA converges to a solution of the HJB as the number of basis functions and iterations go to infinity. Several modified versions of the SAA have been studied [7]–[9].

One main issue of the SGA is the computation of integrals associated with the inner product of a function space. Even if all the integrals can be computed offline, their computational cost may still be too high to complete within a reasonable amount of computing power and time. Therefore, it is still important to seek an efficient method for computing the inner products or the integrals of nonlinear functions.

In recent years, the symbolic computation of differential operators has been intensively studied [10]–[13], and its applications can be found in statistics [14], [15], moment problems [16]. In the theory of D-modules [17], the solutions of PDEs are characterized by an infinite set of differential operators called an ideal. It can be proven that any ideal is represented by a finite number of differential operators, and thus, it can be computed symbolically by using the computer algebra systems (CASs) such as Singular [18], Macaulay2 [19], and Risa/Asir [20]. In particular, a specific type of ideals called holonomic ideals and their solutions called holonomic functions are the main objects manipulated by the symbolic computation. More specifically, for the integral of a holonomic function, a holonomic ideal that the integral satisfies can be computed exactly from a holonomic ideal that the integrand satisfies. This provides a great advantage in the design of algorithms because the integral of a general nonlinear function cannot be computed exactly. In addition to differential equations, recurrence equations can also be treated by the symbolic computation by converting them to differential equations via the Mellin transform [11], [13].

In this paper, we propose a method to compute recurrence relations satisfied by the integrals required for the SGA. The expansion of a solution of the HJB equation with Hermite polynomials, which is holonomic as an infinite sequence of functions is considered. In addition, the plant dynamics is assumed to be described by holonomic functions. These problem settings allow us to compute a set of recurrence

relations that are satisfied by the integrals for the SGA. Once the recurrence equations are computed, any number of the integrals can be readily computed just by substituting several initial values to the recurrence equations. Moreover, in contrast to the earlier methods [7], [8], the proposed method can consider the nonlinearities of the plant dynamics exactly in the computation of the integrals.

Notations: Let \mathbf{N} be the set of positive integers and \mathbf{R} be the field of real numbers. For $(i_1, \dots, i_p) \in \mathbf{N}^p$ and $(x_1, \dots, x_n) \in \mathbf{R}^n$, $F(i; x) = F(i_1, \dots, i_p; x_1, \dots, x_n)$ denotes a function that is defined on a subset of $\mathbf{N}^p \times \mathbf{R}^n$. If $p = 0$ or $n = 0$, $F(i; x)$ or $F(i; x)$ are simply written as $F(i)$ or $F(x)$, respectively. The symbols $S_{i_j}, S_{i_j}^{-1}$ ($j \in \{1, \dots, p\}$), and ∂_{x_j} ($j \in \{1, \dots, p\}$) denote the shift operators for i_j and the differential operator for x_j , respectively. That is, $S_{i_j} \bullet F(i; x) = F(i_1, \dots, i_j + 1, \dots, i_p; x)$, $S_{i_j}^{-1} \bullet F(i; x) = F(i_1, \dots, i_j - 1, \dots, i_p; x)$, and $\partial_{x_j} \bullet F(i; x) = \partial F / \partial x_j(i; x)$, where \bullet denotes the action of a differential or difference operator on a function. Let $\mathbf{R}[x]$ be the set of all polynomials in x_1, \dots, x_n with coefficients in \mathbf{R} . The symbol $\mathbf{R}[x]\langle \partial_x \rangle$ denotes the noncommutative ring of differential operators with coefficients in $\mathbf{R}[x]$. Similarly, $\mathbf{R}[i]\langle S_i \rangle$ denotes the noncommutative ring of difference operators with coefficients in $\mathbf{R}[i]$. The symbols $\mathbf{R}[x]\langle \partial_x \rangle$ and $\mathbf{R}[i]\langle S_i \rangle$ are also denoted by \mathcal{D}_n and \mathcal{O}_p , respectively, if the indeterminates x and i are clearly specified according to the context. If $\mathcal{P} \bullet f = 0$ for $\mathcal{P} \in \mathcal{D}_n$, \mathcal{P} is said to *annihilate* a function f and f is a *solution* of \mathcal{P} . If $E \bullet f = 0$ for $E \in \mathcal{O}_p$, E is said to *annihilate* f and f is a *solution* of E .

II. PROBLEM SETTING

Consider the optimal control problem of a nonlinear system:

$$\dot{x} = f(x) + g(x)u$$

with a performance index defined as

$$J(x, u) := \int_0^\infty q(x(t)) + \|u(t)\|_R^2 dt,$$

where $x \in \mathbf{R}^n$ and $u \in \mathbf{R}^m$ are the state and input of the system, respectively. The nonlinear functions $f: \mathbf{R}^n \rightarrow \mathbf{R}^n$, $g: \mathbf{R}^n \rightarrow \mathbf{R}^{n \times m}$, and $q: \mathbf{R}^n \rightarrow \mathbf{R}$ are assumed to consist of holonomic functions, which will be defined in Section III. It is also assumed that $q(x) \geq 0$ ($x \in \mathbf{R}^n$) and $R \in \mathbf{R}^{m \times m}$ be positive definite.

For a given feedback law $u(x)$, the performance index for the closed loop trajectory $\phi(t)$ is defined as

$$V(x_0, u(\cdot)) := \int_0^\infty q(\phi(t)) + \|u(\phi(t))\|_R^2 dt,$$

where $\phi(0) = x_0$. The optimal feedback law $u^*(x)$ is given as

$$u^* = -\frac{1}{2}R^{-1}g^\top \frac{\partial V^*}{\partial x},$$

where $V^*: \mathbf{R}^n \rightarrow \mathbf{R}$ is a solution of the HJB equation

$$\text{HJB}(V^*) := \frac{\partial V^*}{\partial x} f + q - \frac{1}{4} \frac{\partial V^*}{\partial x} g R^{-1} g^\top \frac{\partial V^*}{\partial x} = 0,$$

such that $V^*(0) = 0$.

In the SAA, a solution of the HJB equation is iteratively approximated by solving the GHJB equation defined as

$$\text{GHJB}(V, u) := \frac{\partial V}{\partial x} (f + gu) + q + \|u\|_R^2 = 0.$$

As the GHJB equation is still difficult to solve, the iteration $V^{(l)}$ is further approximated by using a finite number of basis functions $\phi_1(x), \dots, \phi_N(x)$ as

$$V^{(l)}(x) := \sum_{i=1}^N v_i^{(l)} \phi_i(x) = \Phi^\top(x) v^{(l)} \quad \left(v_i^{(l)} \in \mathbf{R} \right), \quad (1)$$

where $\Phi(x) := [\phi_1(x) \ \dots \ \phi_N(x)]^\top$ and $v^{(l)} := [v_1^{(l)} \ \dots \ v_N^{(l)}]^\top$. This also yields a representation of $u^{(l+1)}$ as

$$\begin{aligned} u^{(l+1)}(x) &= -\frac{1}{2}R^{-1}g^\top(x) \frac{\partial V^{(l)}}{\partial x}(x) \\ &= -\frac{1}{2}R^{-1}g^\top(x) \frac{\partial \Phi^\top}{\partial x}(x) v^{(l)}. \end{aligned} \quad (2)$$

The functional equation $\text{GHJB}(V^{(l)}, u^{(l)}) = 0$ is then approximated with the following finite number of algebraic equations for $v_i^{(l)}$:

$$\left\langle \text{GHJB}(V^{(l)}, u^{(l)}), \phi_k \right\rangle = 0 \quad (p = 1, \dots, N), \quad (3)$$

where $\langle \cdot, \cdot \rangle$ is an inner product of functions defined as

$$\langle f(x), g(x) \rangle := \int_{\mathbf{R}^n} w(x) f(x) g(x) dx$$

with a weighting function $w(x) > 0$ ($x \in \mathbf{R}^n$). By substituting (1) and (2) into (3), we obtain

$$\begin{aligned} \left\langle \text{GHJB}(V^{(l)}, u^{(l)}), \phi_k \right\rangle &= \sum_{i=1}^N v_i^{(l)} \left\langle \frac{\partial \phi_i}{\partial x} f, \phi_k \right\rangle \\ &\quad - \frac{1}{2} \sum_{i=1}^N v_i^{(l)} \sum_{j=1}^N v_j^{(l-1)} \left\langle \frac{\partial \phi_i}{\partial x} G R^{-1} G^\top \frac{\partial \phi_j}{\partial x}, \phi_k \right\rangle \\ &\quad + \langle q, \phi_k \rangle + \frac{1}{4} \sum_{i=1}^N v_i^{(l-1)} \sum_{j=1}^N v_j^{(l-1)} \left\langle \frac{\partial \phi_i}{\partial x} G R^{-1} G^\top \frac{\partial \phi_j}{\partial x}, \phi_k \right\rangle. \end{aligned}$$

Now, let us define

$$\begin{aligned} a(i, j, k) &:= \left\langle \frac{\partial \phi_i}{\partial x} G R^{-1} G^\top \frac{\partial \phi_j}{\partial x}, \phi_k \right\rangle, \\ b(i, k) &:= \left\langle \frac{\partial \phi_i}{\partial x} f, \phi_k \right\rangle, \quad c(k) := \langle q(x), \phi_k(x) \rangle. \end{aligned} \quad (4)$$

In addition, let A_k be the $N \times N$ matrix having $a(i, j, k)$ as its (i, j) -component and b_k be the N -dimensional vector having $b(i, k)$ as its i -th component. The approximated GHJB equation (3) is then rewritten as the following linear equations for $v^{(l)}$:

$$\begin{aligned} \text{LE}(v^{(l)}, v^{(l-1)}) &:= \\ v^{(l)\top} \left(b_k - \frac{1}{2} A_k v^{(l-1)} \right) + c(k) + \frac{1}{4} \left\| v^{(l-1)} \right\|_{A_k}^2 &= 0 \end{aligned}$$

$$(k = 1, \dots, N). \quad (5)$$

In what follows, for a given $N \in \mathbf{N}$, A_N , B_N , and C_N denote the sets of the integrals required to define (5), that is,

$$\begin{aligned} A_N &:= \{a(i, j, k) \mid i, j, k \in \{1, \dots, N\}\}, \\ B_N &:= \{b(i, k) \mid i, k \in \{1, \dots, N\}\}, \\ C_N &:= \{c(k) \mid k \in \{1, \dots, N\}\}. \end{aligned}$$

Once the integrals A_N , B_N , and C_N are computed, the SGA procedure can be performed by solving the linear equation (5) iteratively, which is summarized as Algorithm 1.

Although A_N , B_N , and C_N are never computed again in the iteration, they are defined as integrals of nonlinear functions, which are extremely difficult to compute analytically. Hence, we have to rely on numerical integration methods, which leads to high computational cost. However, if the basis functions have some recurrence relations such as those of the orthogonal polynomials, we can expect that the elements of A_N , B_N , and C_N may also have similar recursive relations. Such recursive relations can be computed by using the symbolic computation of differential operators, which will be briefly introduced in the next section.

III. HOLONOMIC FUNCTIONS AND IDEALS

This section is devoted to introducing some definitions and lemmas related to the symbolic computation of differential operators, referring to [11], [12]. In this section, $x = [x_1 \ \dots \ x_n]^T \in \mathbf{R}^n$, $s = [s_1 \ \dots \ s_p]^T \in \mathbf{R}^p$, and $i = [i_1 \ \dots \ i_p]^T \in \mathbf{Z}^p$. Let \mathcal{D}_n and \mathcal{D}_{n+p} denote $\mathbf{R}[x]\langle\partial_x\rangle$ and $\mathbf{R}[x, s]\langle\partial_x, \partial_s\rangle$, respectively. Furthermore, let $\mathcal{D}_n\langle i, \mathbf{S}_i, \mathbf{S}_i^{-1}\rangle$ denote \mathcal{D}_n -algebra generated by i , $\mathbf{S}_i = [\mathbf{S}_{i_1} \ \dots \ \mathbf{S}_{i_p}]^T$, and $\mathbf{S}_i^{-1} = [\mathbf{S}_{i_1}^{-1} \ \dots \ \mathbf{S}_{i_p}^{-1}]^T$.

Consider a set of PDEs for an unknown function $f(x)$:

$$\mathcal{P}_1 \bullet f = \dots \mathcal{P}_d \bullet f = 0, \quad (6)$$

where $\mathcal{P}_1, \dots, \mathcal{P}_d \in \mathcal{D}_n$. For any solution f of (6) and any differential operator $Q \in \mathcal{D}_n$, it is obvious that $Q\mathcal{P}_j \bullet f = Q \bullet 0 = 0$, which leads to consider a left ideal $I \subset \mathcal{D}_n$ defined as $I := \{Q_1\mathcal{P}_1 + \dots + Q_d\mathcal{P}_d \in \mathcal{D}_n \mid Q_1, \dots, Q_d \in \mathcal{D}_n\}$. In this paper, the adjective ‘‘left’’ is omitted because all ideals in this paper are left ideals.

Definition 1 (Holonomic ideal of \mathcal{D}_n): An ideal $I \subset \mathcal{D}_n$ is holonomic if the quotient \mathcal{D}_n/I , which can be viewed as a left \mathcal{D}_n -module, has the dimension n .

Algorithm 1 Successive Galerkin approximation

Input: Initial guess $v^{(0)}$, sets of integrals A_N , B_N , and C_N , error tolerance ϵ , max iteration l_{\max}

Output: Approximation of optimal value function $V^{(l)}(x) = \Phi^T(x)v^{(l)}$

- 1: $l \leftarrow 0$
 - 2: **while** $\text{LE}(v^{(l)}, v^{(l)}) > \epsilon$ and $l < l_{\max}$ **do**
 - 3: Solve linear equations (5) and compute $v^{(l+1)}$
 - 4: $l \leftarrow l + 1$
 - 5: **return** $V^{(l)} = \Phi^T(x)v^{(l)}$
-

For the definition of the dimension of left \mathcal{D}_n -modules, see [10], [12], [17]. The notion of holonomic ideals plays an important role in the symbolic computation of differential operators because of its finiteness [10].

The solutions of holonomic ideals are called holonomic functions and include most nonlinear functions appears in systems and control theory [22], [23].

Definition 2 (Holonomic function): An analytic function $f(x)$ is said to be holonomic if f is annihilated by a holonomic ideal $I \subset \mathcal{D}_n$, that is, $\mathcal{P} \bullet f = 0$ for all $\mathcal{P} \in I$.

The class of holonomic functions is closed under multiplication and integration; the product of two holonomic functions and the integral of a holonomic function are also holonomic [11].

Lemma 1: For two holonomic functions $f(x)$ and $g(x)$, their product $(f \cdot g)(x)$ is holonomic.

Lemma 2: Suppose a holonomic function $f(x)$ is rapidly decreasing with respect to x_1 , that is, $\lim_{x_1 \rightarrow \infty} x_1^i \partial_{x_1}^j f(x) = 0$ for any nonnegative integers i, j . Then, the integral $\int_{-\infty}^{\infty} f(x) dx_1$ is holonomic as a function of $[x_2, \dots, x_n]^T$.

Recurrence relations of infinite sequences can be converted into PDEs and manipulated by the symbolic computation of differential operators through the Mellin transform.

Definition 3 (Mellin transform between ∂ and \mathbf{S}): A mapping $\mu: \mathcal{D}_{n+p} \rightarrow \mathcal{D}_n\langle i, \mathbf{S}_i, \mathbf{S}_i^{-1}\rangle$ defined as

$$\mu(s_j) = \mathbf{S}_{i_j}, \quad \mu(\partial_{s_j}) = -i_j \mathbf{S}_{i_j}^{-1} \quad (7)$$

is called the *Mellin transform*, and a mapping $\hat{\mu}: \mathcal{D}_n\langle i, \mathbf{S}_i\rangle \rightarrow \mathcal{D}_{n+p}$ defined as

$$\hat{\mu}(i_j) = -\partial_{s_j} s_j = -s_j \partial_{s_j} - 1, \quad \hat{\mu}(\mathbf{S}_{i_j}) = s_j \quad (8)$$

is called the *inverse Mellin transform*.

The Mellin transform is related to the multivariate z-transformation \mathcal{Z} between a multivariate function and an infinite sequence of functions:

$$\begin{aligned} \mathcal{Z}[f](s, x) &:= \sum_{i_1=0}^{\infty} \dots \sum_{i_p=0}^{\infty} f(i; x) s_1^{-i_1-1} \dots s_p^{-i_p-1}, \\ \mathcal{Z}^{-1}[g](i; x) &:= \int_C g(s, x) s_1^{i_1} \dots s_p^{i_p} ds, \end{aligned}$$

where C is the product of unit circles centered at the origin of the complex plane. It is readily seen that

$$\hat{\mu}(i) \bullet \mathcal{Z}[f] = \mathcal{Z}[if], \quad \hat{\mu}(\mathbf{S}_i) \bullet \mathcal{Z}[f] = \mathcal{Z}[\mathbf{S}_i f].$$

IV. RECURRENCE EQUATIONS OF INTEGRALS

Hereafter, suppose $n = 1$ for simplicity and that the i -th basis function $\phi_i(x)$ in (1) is the Hermite polynomial $H(i; x)$ of degree i . For multi-dimensional cases, each basis function can be defined as the product of the Hermite polynomials $H(i_1; x_1)H(i_2; x_2) \dots H(i_n; x_n)$, and the following discussions can be applied to with appropriate modifications, which will be a part of future work.

With the weighting function $w(x) = \exp(-x^2)$, the z-transforms of integrals (4) are obtained as follows.

$$\mathcal{Z}[a](s, t, v) = \int_{-\infty}^{\infty} \frac{1}{R} \left\{ e^{-x^2} g^2(x) \mathcal{Z}[\partial_x H](s, x) \right.$$

$$\mathcal{Z}[\partial_x H](t, x) \mathcal{Z}[H](u, x) \Big\} dx, \quad (9)$$

$$\mathcal{Z}[b](s, v) = \int_{-\infty}^{\infty} e^{-x^2} \mathcal{Z}[\partial_x H](s, x) f(x) \mathcal{Z}[H](u, x) dx, \quad (10)$$

$$\mathcal{Z}[c](v) = \int_{-\infty}^{\infty} e^{-x^2} q(x) \mathcal{Z}[H](u, x) dx. \quad (11)$$

If all the factors of the integrands in (9)–(11) are holonomic, these z-transforms are also holonomic. Moreover, for each of (9)–(11), some differential operators that annihilates it can be computed by using the symbolic computation (for detailed algorithms, see [10]–[12]). Accordingly, we can obtain some recurrence relations from the differential operators via the Mellin transform (7).

To this end, we next show that the z-transforms of the Hermite polynomials and their derivatives are holonomic. The Hermite polynomials satisfy the following difference-differential equations:

$$(\partial_x^2 - 2x\partial_x + 2i) \bullet H(i; x) = 0, \quad (12)$$

$$(S_i^2 - 2xS_i + 2(i+1)) \bullet H(i; x) = 0. \quad (13)$$

By the inverse Mellin transform (8), the following two differential operators are obtained.

$$(\partial_x^2 - 2x\partial_x - 2s\partial_s - 2) \bullet \mathcal{Z}[H](s, x) = 0, \quad (14)$$

$$(s^2 - 2xs - 2s\partial_s) \bullet \mathcal{Z}[H](s, x) = 0. \quad (15)$$

Moreover, it can be readily verified that (14) and (15) generate a holonomic ideal by using a CAS. Hence, from Definition 2, $\mathcal{Z}[H](s, x)$ is holonomic.

Lemma 3: The z-transform of the Hermite polynomials $\mathcal{Z}[H](s, x)$ is holonomic.

As the derivative $\partial_x H(i; x)$ also appears in (9) and (10), we next show that $\partial_x H(i; x)$ is holonomic. To this end, the following equality satisfied by $H(i; x)$ is useful:

$$\partial_x H(i; x) = 2iH(i-1; x).$$

From (12), $(\partial_x^2 - 2x\partial_x + 2(i-1)) \bullet H(i-1; x) = 0$ holds. As $2i$ and $\partial_x^2 - 2x\partial_x + 2(i-1)$ commute, we have

$$\begin{aligned} 0 &= 2i(\partial_x^2 - 2x\partial_x + 2(i-1)) \bullet H(i-1; x) \\ &= (\partial_x^2 - 2x\partial_x + 2(i-1)) \bullet 2iH(i-1; x) \\ &= (\partial_x^2 - 2x\partial_x + 2(i-1)) \bullet \partial_x H(i; x). \end{aligned} \quad (16)$$

On the other hand, $(S_i^2 - 2xS_i + 2i) \bullet H(i-1; x) = 0$ holds from (13). By multiplying the both sides by $2(i+1)(i+2)$ from the left, we obtain

$$\begin{aligned} 0 &= 2(i+1)(i+2)(S_i^2 - 2xS_i + 2i) \bullet H(i-1; x) \\ &= ((i+1)S_i^2 - 2x(i+2)S_i + 2(i+1)(i+2)) \\ &\quad \bullet 2iH(i-1; x), \\ &= ((i+1)S_i^2 - 2x(i+2)S_i + 2(i+1)(i+2)) \\ &\quad \bullet \partial_x H(i; x), \end{aligned} \quad (17)$$

where the equalities $(i+2)S_i^2 = S_i^2 i$ and $(i+1)S_i = S_i i$ are used for deriving the second line. Eventually, we obtain the

differential operators that annihilates $\mathcal{Z}[\partial_x H](s, x)$ as the inverse Mellin transform of (16) and (17), that is,

$$\hat{\mu}(\partial_x^2 - 2x\partial_x + 2(i-1)) = \partial_x^2 - 2x\partial_x - 2s\partial_s - 4, \quad (18)$$

$$\begin{aligned} \hat{\mu}((i+1)S_i^2 - 2x(i+2)S_i + 2(i+1)(i+2)) \\ = 2s^2\partial_s^2 + (2s^2x - s^3)\partial_s - 2s^2. \end{aligned} \quad (19)$$

We can confirm that the differential operators in (18) and (19) generate a holonomic ideal by using a CAS and prove the following lemma.

Lemma 4: The z-transform $\mathcal{Z}[\partial_x H](s, x)$ is holonomic.

As each factor of the integrands in (9)–(11) is holonomic, the integrands are also holonomic (Lemma 1). Here, the following assumption is made.

Assumption 1: All the integrands in (9)–(11) are rapidly decreasing with respect to x .

Note that Assumption 1 holds as long as f , g , and q are of exponential growth. Hence, (9)–(11) are holonomic (Lemma 2), and the differential operators annihilating them can be computed by symbolic computation [11]. Consequently, recurrence relations satisfied by $a(i, j, k)$, $b(i, k)$, and $c(k)$ can be obtained from the differential operators via the Mellin transform (7). The whole procedure is summarized in Algorithm 2.

V. NUMERICAL EXAMPLE

This section presents a numerical example to show the efficiency of the proposed method. In the following demonstration, Risa/Asir and Julia are used to perform symbolic computation and numerical computation, respectively, of the proposed method. In addition, Maple is used to perform an existing numerical integration method for comparison. All computations are performed on a PC(Intel(R) Core(TM) i9-10920X CPU @ 3.50GHz; RAM: 64 GB).

Algorithm 2 Derivation of recurrence relations satisfied by $a[i, j, k]$, $b[i, k]$, and $c[k]$

Input: Sets of differential operators $\mathcal{G}_f, \mathcal{G}_g, \mathcal{G}_q \subset \mathcal{D}_1$ that annihilate $f(x), g(x), q(x)$, respectively, and $\mathcal{G}_H, \mathcal{G}_{\partial H} \subset \mathcal{D}_2$ that annihilate $\mathcal{Z}[H](s, x), \mathcal{Z}[\partial_x H](s, x)$, respectively

Output: Set of difference operators $\mathcal{G}_a \subset \mathcal{O}_3$, $\mathcal{G}_b \subset \mathcal{O}_2$, and $\mathcal{G}_c \subset \mathcal{O}_1$ that annihilate $a(i, j, k)$, $b(i, k)$, and $c(k)$, respectively

- 1: Compute sets of differential operators $\mathcal{J}_a \subset \mathcal{D}_4$, $\mathcal{J}_b \subset \mathcal{D}_3$, and $\mathcal{J}_c \subset \mathcal{D}_2$ that annihilate the integrands of (9), (10), and (11), respectively, from inputs and $\partial_x^2 + 2x$ that annihilates $\exp(-x^2)$
 - 2: Compute sets of differential operators $\mathcal{K}_a \subset \mathcal{D}_3$, $\mathcal{K}_b \subset \mathcal{D}_2$, and $\mathcal{K}_c \subset \mathcal{D}$ that annihilates $\mathcal{Z}[a]$, $\mathcal{Z}[b]$, and $\mathcal{Z}[c]$ from \mathcal{J}_a , \mathcal{J}_b , and \mathcal{J}_c , respectively
 - 3: Compute sets of difference operators \mathcal{G}_a , \mathcal{G}_b , and \mathcal{G}_c from \mathcal{K}_a , \mathcal{K}_b , and \mathcal{K}_c , respectively, via Mellin transform (7)
-

A. Problem setting

Consider the nonlinear optimal control problem of the nonlinear scalar system:

$$\dot{x} = \sin(x) + u(x), \quad J = \int_0^\infty \frac{1}{2}x^2(t) + \frac{1}{2}u^2(t)dt. \quad (20)$$

The nonlinear functions $\sin(x)$ and x^2 are holonomic, which are annihilated by differential operators $\partial_x^2 + 1$ and ∂_x^3 , respectively.

To perform the SGA (Algorithm 1), the following integrals need to be computed:

$$\begin{aligned} a(i, j, k) &= \langle 2\partial_x H(i; x)\partial_x H(j; x), H(k; x) \rangle, \\ b(i, k) &= \langle \partial_x H(i; x) \sin(x), H(k; x) \rangle, \\ c(k) &= \frac{1}{2} \langle x^2, H(k; x) \rangle. \end{aligned}$$

B. Symbolic part

To obtain the recurrence relations satisfied by $a(i, j, k)$, $b(i, k)$, and $c(k)$, Algorithm 2 can be applied to the inputs $\mathcal{G}_f = \{\partial_x^2 + 1\}$, $\mathcal{G}_g = \{0\}$, $\mathcal{G}_q = \{\partial_x^3\}$, \mathcal{G}_H being the set of (14) and (15), and $\mathcal{G}_{\partial H}$ being the set of (18) and (19). For example, $\mathcal{J}_a \subset \mathbf{R}[x, s, t, v] \langle \partial_x, \partial_s, \partial_t, \partial_v \rangle$ is obtained as the set of 19 differential operators including

$$\begin{aligned} &\partial_x + 2s\partial_s^2 + (2sx - s^2 + 2)\partial_s \\ &+ 2t\partial_t + (2tx - t^2 + 2)\partial_t + v - 2s - 2t, \end{aligned} \quad (21)$$

where the remaining elements are omitted due to the space limit. It can be seen that (21) is invariant under the interchange of s and t , which is consistent with the integrand of (9) being invariant under the interchange of $i = \mu(-s\partial_s - 1)$ and $j = \mu(-t\partial_t - 1)$. As the output of Algorithm 2, we obtain \mathcal{G}_a , \mathcal{G}_b , and \mathcal{G}_c as listed in Table I. Note that $c(k)$ for this numerical example can be computed analytically as

$$c(k) = \begin{cases} \sqrt{\pi} & (k = 2) \\ 0 & (\text{otherwise}), \end{cases}$$

which obviously satisfies $\mathcal{S}_k^3 \bullet c(k) = c(k+3) = 0$ for $k \in \mathbf{N}$.

C. Numerical part

From the recurrence relations obtained from the output of Algorithm 2, the sets of integrals A_N , B_N , and C_N can be computed recursively. Note that for a certain set of indices,

TABLE I: Difference operators annihilating integrals $a(i, j, k)$, $b(i, k)$, and $c(k)$

\mathcal{G}_a	$(j+1)(-j+i+k+1)\mathcal{S}_i + (i+1)(-j+i-k-1)\mathcal{S}_j$ $(k+1)(-k+i+j)\mathcal{S}_j - (j+2)(-j+i+k)\mathcal{S}_k$ $(-j+i+k+1)(-k-3-j+i)\mathcal{S}_k^2 + 4(k+2)(k+1)(i+j-k-1)$
\mathcal{G}_b	$i(2i-2k-5)\mathcal{S}_i\mathcal{S}_k + (i+1)\mathcal{S}_k^2 - 4(k+1)(i+1)(i-k-2)$ $i(2i-2k-5)\mathcal{S}_i^2 + (i+2)(2i-2k+1)\mathcal{S}_k^2 + 4(i+2)(-k-1+i)(2i^2-4ik+2k^2-5i+3k-2)$ $(k+1)(-2k+2i-7)\mathcal{S}_i + i(i+1)(-k-1+i)\mathcal{S}_k^3 + 4(i+1)(i^3 + (-3k-7)i^2 + (3k^2+13k+\frac{53}{4})i - k^3 - 6k^2 - 11k - 6)\mathcal{S}_k$
\mathcal{G}_c	\mathcal{S}_k^3

the coefficients of the shift operators \mathcal{S}_i , \mathcal{S}_j , and \mathcal{S}_k in each difference operator may vanish, which indicates that the difference operator does not imply any recurrence relation on the set of indices.

For example, the recurrence relation obtained from the second element of \mathcal{G}_a in Table I:

$$\begin{aligned} &(k+1)(-k+i+j)a(i, j+1, k) \\ &- (j+2)(-j+i+k)a(i, j, k+1) = 0 \end{aligned} \quad (22)$$

can be used to compute one of $a(i, j+1, k)$ and $a(i, j, k+1)$ from the other. However, when the indices i, j , and k satisfy $i+j-k=0$, the first term of (22) vanishes regardless of the value $a(i, j+1, k)$, which just indicates $(j+2)(-j+i+k)a(i, j, k+1) = 0$, and does not give any information about the other values of A_N . For this reason, to compute all values of A_N , its several elements must be computed by using a numerical integration method. In this example, the following ten values are required: $a(1, 1, 1) = a(1, 1, 2) = a(2, 1, 2) = a(1, 2, 2) = a(4, 1, 1) = a(4, 1, 2) = a(1, 4, 1) = a(1, 4, 2) = 0$, $a(2, 1, 1) = a(1, 2, 1) = 56.7$. Similarly, to compute all values of B_N , the following eight values are required: $b(1, 2) = b(2, 1) = b(3, 2) = b(4, 1) = 0$, $b(1, 1) = 2.76$, $b(1, 3) = -2.76$, $b(3, 1) = 24.8$, $b(3, 3) = 107$.

D. Results and comparison

For $N = 10, 15$, the computational time of the proposed method is compared to that of an existing numerical integration method implemented in Maple with four significant digits. The computational times are summarized in Table II. As can be seen, the total times of the proposed method to compute A_N and B_N are much smaller than those of the existing method for both cases of $N = 10, 15$. In particular, the numerical part of the proposed method is finished within one second because it just consists of recursive substitutions.

The SGA (Algorithm 1) is performed with the integrals A_N , B_N , and C_N for $N = 4, 6, \dots, 14$. The initial guess $v^{(0)}$ is set to

$$v_k^{(0)} = \begin{cases} \frac{1+\sqrt{2}}{8} & (k = 2) \\ 0 & (\text{otherwise}), \end{cases}$$

which corresponds to $V^{(0)}(x) = v_2^{(0)}H(2; x)$ and is equal to the value function $V(x) = (1 + \sqrt{2})x^2/2$ of the linearized system $\dot{x} = x + u$ with J in (20) up to a constant. Figure 1 shows $V^{(0)}(x)$ and $V^*(x)$ obtained for $N = 4, 6, \dots, 14$, where the constant term of each value function is adjusted so

TABLE II: Comparison of computational times [s] with numerical integration

	Proposed	Maple
Recurrence relations	47.7	N/A
$N = 10$		
$a(i, j, k)$	1.42×10^{-3}	98.2
$b(i, k)$	3.26×10^{-4}	1.43×10^2
Total	47.7	2.44×10^2
$N = 15$		
$a(i, j, k)$	1.51×10^{-2}	2.28×10^2
$b(i, k)$	6.26×10^{-4}	3.39×10^2
Total	47.7	5.67×10^2

that $V^*(0) = 0$. In Fig. 2, $\text{HJB}(V^{(0)}(x))$ and $\text{HJB}(V^*(x))$ of the value functions for $N = 4, 8, 14$ are depicted. As can be seen, the region where $\text{HJB}(V^*(x)) \simeq 0$ glows as N increases, which indicates that A_N and B_N are computed validly by the proposed method. Finally, the state and input trajectories with $x(0) = 4$ are illustrated in Fig. 3, which shows that the feedback law obtained from $V^*(x)$ with $N = 14$ stabilizes the system while suppressing the magnitude of the input.

VI. CONCLUSION

In this paper, a symbolic-numeric computation method for the integrals in the successive approximation algorithm has been proposed. The successive approximation algorithm approximates a solution of Hamilton-Jacobi-Bellman equation by iteratively solving a linear equation, which is defined with multiple integrals of nonlinear functions. By using the symbolic computation of differential operators and the Mellin transform of difference-differential operators, a set of recurrence relations satisfied by the integrals can be computed. From a finite number of the integrals computed by numerical integration, the other integrals can be computed up to any number by using the recurrence relations.

Future work directions of this study includes the extension of the proposed method to the case of multi-dimensional systems. Moreover, the approximation with another orthogonal polynomial such as the Chebyshev polynomials could be included.

REFERENCES

- [1] J. A. E. Bryson and Y.-C. Ho *Applied Optimal Control*, John Wiley & Sons, 1st edition, 1975.
- [2] D. L. Lukes, "Optimal regulation of nonlinear dynamical systems," *SIAM Journal on Control*, vol. 7, no. 1, pp. 75–100, 1969.

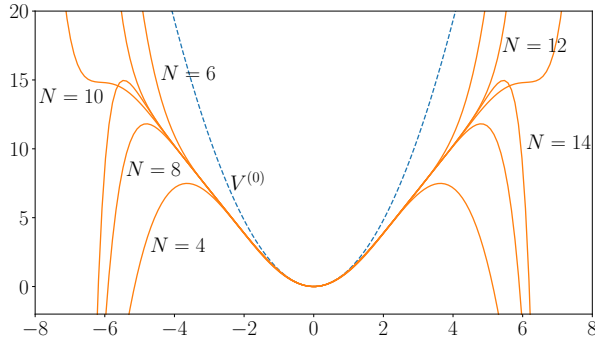


Fig. 1: Value functions

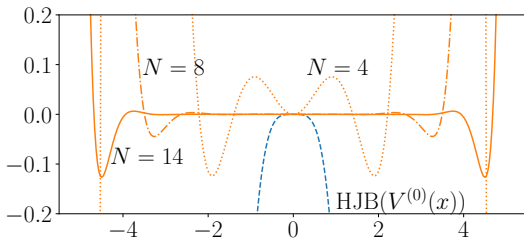


Fig. 2: Evaluation of HJB equation

- [3] W. L. Garrard, "Suboptimal feedback control for nonlinear systems," *Automatica*, vol. 8, no. 2, pp. 219–221, 1972.
- [4] H. Almubarak, N. Sadegh, and D. G. Taylor, "Infinite horizon nonlinear quadratic cost regulator," *Proceedings of the American Control Conference*, vol. 2019-July, pp. 5570–5575, 2019.
- [5] N. Sakamoto and A. J. van der Schaft, "Analytical approximation methods for the stabilizing solution of the Hamilton-Jacobi equation," *IEEE Transactions on Automatic Control*, vol. 53, no. 10, pp. 2335–2350, 2008.
- [6] R. W. Beard, G. N. Saridis, and J. T. Wen, "Galerkin approximations of the generalized Hamilton-Jacobi-Bellman equation," *Automatica*, vol. 33, no. 12, pp. 2159–2177, 1997.
- [7] H. Mizuno and K. Fujimoto, "Approximate solution to Hamilton-Jacobi equation based on Chebyshev polynomials," *Transactions of the Society of Instrument and Control Engineers*, vol. 44, no. 2, pp. 113–118, 2008.
- [8] D. Kalise and K. Kunisch, "Polynomial approximation of high-dimensional Hamilton-Jacobi-Bellman equations and applications to feedback control of semilinear parabolic PDES," *SIAM Journal on Scientific Computing*, vol. 40, no. 2, pp. A629–A652, 2018.
- [9] I. Maruta, S. Nishida, and K. Fujimoto, "A Study on Numerical Solutions of Hamilton-Jacobi-Bellman Equations Based on Successive Approximation Approach," *SICE Journal of Control, Measurement, and System Integration*, vol. 13, no. 3, pp. 157–163, 2020.
- [10] M. Saito, B. Sturmfels, and N. Takayama *Gröbner Deformations of Hypergeometric Differential Equations*, Springer-Verlag, 2000.
- [11] T. Oaku, Y. Shiraki, and N. Takayama, "Algebraic algorithms for D-modules and numerical analysis," *Computer Mathematics (Proceedings of ASCM 2003)*, vol. 10, pp. 23–39, 2003.
- [12] T. Hibi ed. *Gröbner Bases: Statistics and Software Systems*, Springer Japan, 1st edition, 2013.
- [13] T. Oaku, "Algorithms for D-modules, integration, and generalized functions with applications to statistics," *Advanced Studies in Pure Mathematics*, vol. 77, pp. 253–352, 2018.
- [14] H. Nakayama, K. Nishiyama, M. Noro, K. Ohara, T. Sei, N. Takayama, and A. Takemura, "Holonomic gradient descent and its application to the Fisher-Bingham integral," *Advances in Applied Mathematics*, vol. 47, no. 3, pp. 639–658, 2011.
- [15] A. Kume and T. Sei, "On the exact maximum likelihood inference of Fisher-Bingham distributions using an adjusted holonomic gradient method," *Statistics and Computing*, vol. 28, no. 4, pp. 835–847, 2018.
- [16] F. Bréhard, M. Joldes, and J.-B. Lasserre, "On a moment problem with holonomic functions," in *Proceedings of the 44th International Symposium on Symbolic and Algebraic Computation*, pp. 66–73, 2019.
- [17] S. C. Coutinho *A Primer of Algebraic D-Modules*, Cambridge University Press, 1995.
- [18] W. Decker, G.-M. Greuel, G. Pfister, and H. Schönemann, "SINGULAR 4-2-0 —A computer algebra system for polynomial computations," 2019.
- [19] D. R. Grayson and M. E. Stillman, "Macaulay2, a software system for research in algebraic geometry," 2020.
- [20] M. Noro, N. Takayama, H. Nakayama, K. Nishiyama, and K. Ohara, "Risa/Asir: A computer algebra system," 2020.
- [21] R. W. Beard, G. N. Saridis, and J. T. Wen, "Approximate Solutions to the Time-Invariant," *Journal of Optimization theory and application*, vol. 96, no. 3, pp. 589–626, 1998.
- [22] C. Koutschan, "Advanced applications of the holonomic systems approach," Ph.D. dissertation, Johannes Kepler University Linz, 2009.
- [23] T. Iori and T. Ohtsuka, "Nonlinear Bayesian filtering via holonomic gradient method with quasi moment generating function," *Asian Journal of Control*, 2022.

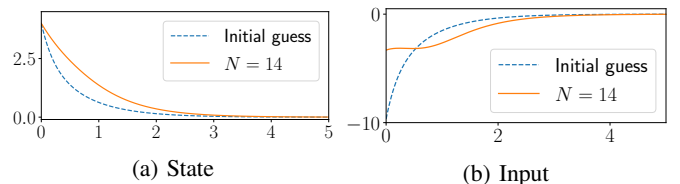


Fig. 3: Trajectories with $x(0) = 4$