

ESTIMATING DIFFERENTIAL ENTROPY USING RECURSIVE COPULA SPLITTING

GIL ARIEL AND YORAM LOUZOUN

ABSTRACT. A method for estimating the Shannon differential entropy of multidimensional random variables using independent samples is described. The method is based on decomposing the distribution into a product of the marginal distributions and the joint dependency, also known as the copula.

The entropy of marginals is estimated using one-dimensional methods. The entropy of the copula, which always has a compact support, is estimated recursively by splitting the data along statistically dependent dimensions. Numerical examples demonstrate that the method is accurate for distributions with compact and non-compact supports, which is imperative when the support is not known or of mixed type (in different dimensions).

At high dimensions (larger than 20), our method is not only more accurate, but also significantly more efficient than existing approaches.

1. INTRODUCTION

Differential entropy (DE) is used in a range of fields and disciplines, including signal processing and machine learning, evaluation of independence [3] and feature selection [21, 17, 35]. The problem is also related to dimension reduction, independent component analysis [7] and quantifying order in physical systems that are out-of-equilibrium [1, 23]. The DE of a multi-dimensional distribution with density $p(x) : \mathbb{R}^D \rightarrow \mathbb{R}$ is defined as,

$$(1.1) \quad H = - \int_{\mathbb{R}^n} p(x) \ln p(x) dx.$$

Despite a large number of suggested algorithms, the problem of estimating the DE from independent sampling of the distributions remains a challenge in high dimensions. Broadly speaking, algorithms can be classified as one of two approaches: binning and sample-spacing methods, or their multidimensional analogues - partitioning and nearest-neighbor

(NN) methods . In 1D, the most straight-forward method is to partition the support of the distribution into bins and either calculate the entropy of the histogram or use it for plug-in estimates [11, 2, 30]. This amounts to approximating $p(x)$ as a piece-wise constant function (i.e., assuming that the distribution is uniform in each subset in the partition). This works well if the support of the underlying distribution is bounded and given. If the support is not known or is unbounded, it can to be estimated as well, for example using the minimal and maximal observations. In such cases, sample-spacing methods [2] that use the spacings between adjacent samples are advantageous. Overall, the literature provides a good arsenal of tools for estimating 1D entropy including rigorous bounds on convergence rates (given some further assumptions of p). See [2, 26] for reviews.

Estimating entropy in higher dimensions is significantly more challenging [4, 26]. Binning methods become impractical as having M bins in each dimension implies M^D bins overall. Beyond the computational costs, most such bins will often have 1 or 0 samples, leading to a significant underestimate of the entropy. In order to overcome this difficulty, Stowell and Plumley [32] suggested partitioning the data using a k -D partitioning tree-hierarchy (k DP). In each level of the tree, the data is divided into two parts with an equal number of samples. The splitting continues recursively across the different dimensions (see below for a discussion on the stopping criteria). The construction essentially partitions the support of p into bins that are multi-dimensional rectangles whose sides are aligned with the principal axes. The DE is then calculated assuming a uniform distribution in each rectangle. As shown below, this strategy works well at low dimensions (typically 2-3) and only if the support is known. The method is highly efficient, as constructing the partition tree has an $O(N \log N)$ efficiency (N for finding medians times $\log N$ for the depth of the tree). In particular, there is no explicit dependence on the dimension.

Spacing methods are generalized using the set of k nearest neighbors to each sample (k NN) [19, 20, 9, 22]. These are used to locally approximate the density, typically using kernels [16, 11, 29, 28, 25, 8]. As shown below, k NN schemes perform well at moderately high dimensions (up to 10-15) for distributions with unbounded support. However, they fail completely when p has a compact support and become increasingly inefficient with the dimension. Broadly speaking, algorithms for approximating k NN in D -dimensions have an efficiency of $\epsilon^{-D} N \log N$, where ϵ is the required accuracy [14]. Also see [30] for a method utilizing boundary corrections for compact domain. Other approaches for

entropy estimation include variations and improvements of k NN (e.g. [29, 7, 8]), Voronoi-based partitions [24] (which are also prohibitively expensive at very high dimensions), Parzen windows [21] and ensemble estimators [31].

Here, we follow the approach of Stowell and Plumbley [32], partitioning space using trees. However, we add an important modification that significantly enhances the accuracy of the method. The main idea is to decompose the density $p(x)$ into a product of marginal (1D) densities and a copula. The copula is computed over the compact support of the one dimensional cumulative distributions. As such, the multidimensional DE estimates become the combination of one dimensional estimates, and a multi-dimensional estimate on a compact support, even if the support of the original distribution was not compact. We term the proposed method as Copula Decomposition Entropy Estimate (CADEE).

Following Sklar’s theorem [15, 5], any continuous multi-dimensional density $p(x)$ can be written uniquely as

$$(1.2) \quad p(x) = p_1(x_1) \cdots p_D(x_D) c(x_1, \dots, x_D),$$

where, $x = (x_1, \dots, x_D)$, $p_k(\cdot)$ denotes the marginal distribution of the k ’th dimension and $c(u_1, \dots, u_D)$ is the density of the copula, i.e., a probability density on the hyper-square $[0, 1]^D$ whose marginals are all uniform on $[0, 1]$,

$$(1.3) \quad \left[\prod_{j=1 \dots D, j \neq k} \int du_j \right] c(u_1, \dots, u_D) = 1,$$

for all k . Substituting (1.2) into (1.1) yields,

$$(1.4) \quad H = \sum_{k=1}^D H_k + H_c,$$

where H_k is the entropy of the k ’th marginal, to be computed using appropriate 1D estimators, and H_c is the entropy of the copula. Using Sklar’s theorem has been previously suggested as a method for calculating the mutual information between variables, which is identical to the copula entropy H_c [3, 10, 13, 34]. The new approach here is in showing that H_c can be efficiently estimated recursively, similar to the k DP approach.

Splitting the overall estimation into the marginal and copula contributions has several major advantages. First, a large fraction of the entropy is computed by a sum of simpler 1D estimates. Second, the support of the copula is compact, which is exactly the premise for

which partitioning methods are most adequate. Third, the decomposition brings-forth a natural, improved criterion for terminating the tree-partitioning and for dimension reduction using pairwise independence.

The following sections are organized as follows. Section 2 describes the outline of the CADEE algorithm. In order to demonstrate its wide applicability, several examples in which the DE can be calculated analytically are presented. In addition, our results are compared to previously suggested methods. Section 3 discusses implementation issues and the algorithm's computational cost. We conclude in section 4.

2. CADEE METHOD

The main idea proposed here is to write the entropy H as a sum of D 1D marginal entropies, and the entropy of the copula. Analytically, the copula is obtained by a change of variables,

$$(2.5) \quad c(u_1, \dots, u_D) = p(F_1(x_1), \dots, F_D(x_D)),$$

where $F_k(\cdot)$ is the cumulative distribution function of the k 'th marginal, $F_k(t) = \int_{-\infty}^t p_k(x)dx$. Let $x^i = (x_1^i, \dots, x_D^i) \in \mathbb{R}^D$, $i = 1 \dots N$ denote N independent samples from a real D -dimensional random variable (RV) with density $p(x)$. We would like to use the samples x^i in order to obtain samples from the copula density $c(u_1, \dots, u_D)$. From (2.5), this can be obtained by finding the rank (in increasing order) of samples along each dimension. In the following, this operation will be referred to as a rank transformation. This is the empirical analogue of the integral transform where one plugs the sample into the cumulative distribution function. More formally, for each $k = 1 \dots D$, let σ_k denote a permutation of $\{1 \dots N\}$ that arranges x_k^1, \dots, x_k^N in increasing order, i.e., $x_k^{\sigma_k^i} \leq x_k^{\sigma_k^j}$ for $i \leq j$. Then, taking

$$(2.6) \quad u_k^i = \frac{1}{N}(\sigma_k^i - 1/2),$$

yields N samples $u^i = (u_1^i, \dots, u_D^i) \in [0, 1]^D$, $i = 1 \dots N$ from the distribution $c(u_1, \dots, u_D)$. Note that the samples are not independent. In particular, they correspond to N distinct points from the uniform grid, $u^i \in \{1/2N, 3/2N, 1 - 1/2N\}^D$.

1D entropies are estimated using either uniform binning or sample-spacing methods, depending on whether the support of the marginal is known to be compact (bins) or unbounded/unknown (spacing). The main challenge lies in evaluating the DE of high-dimensional copulas

[3, 6]. In order to overcome this difficulty, we compute it recursively, following the k DP approach. Let $k \in \{1, \dots, D\}$ be one of the spatial dimensions, to be chosen either sequentially, randomly, or using the pairwise correlation matrix (described below). The copula samples u^i are split into two equal parts (note that the median in each dimension is $1/2$). Denote the two halves as $v_j^i = \{u_j^i | u_k^i \leq 1/2\}$ and $w_j^i = \{u_j^i | u_k^i > 1/2\}$. Then, scaling the halves as $2v_j^i$ and $2w_j^i - 1$, we get two sample sets for two new copulas, each with $N/2$ points. A simple calculation shows that

$$(2.7) \quad H_c = \frac{1}{2}(H_{2v} + H_{2w-1}),$$

where H_{2v} is the entropy estimate obtained using the set of points $2v_j^i$ and H_{2w-1} is the entropy estimate obtained using the set of points $2w_j^i - 1$. The marginals of each half may no longer be uniformly distributed in $[0, 1]$, which suggests continuing recursively, i.e., the entropy of each half is decomposed using Sklar's theorem, etc. See Fig. 1 for a schematic sketch of the method.

A key question is finding a stopping condition for the recursion. In [32], Stowell and Plumbley apply a statistical test for uniformity of x_k , the dimension used for splitting. This condition is meaningless for our method as copulas have uniform marginals by construction. In fact, this suggests that one reason for the relatively poor k DP estimates at high D is the rather simplistic stopping criterion, requiring that only one of the marginals is statistically similar to a uniform RV.

In principle, we would like to stop the recursion once the copula cannot be statistically distinguished from the uniform distribution on $[0, 1]^D$. However, reliable statistical tests for uniformity at high D are essentially equivalent to evaluating the copula entropy [16, 3, 6]. As a result, we relax the stopping condition to only test for pairwise dependence. The precise test for that will be further discussed. Calculating pairwise dependencies also allows a dimension reduction approach: if the matrix of pairwise-dependent dimensions can be split into blocks, then each block can be treated independently.

In order to demonstrate the applicability of the method described above, we study the results of our algorithm for several distributions for which the DE (1.1) can be computed analytically. Figures 2 and 3 show numerical results for H and the running time as a function of dimension using an implementation in Matlab. Five different distributions are studied. Three have a compact support in $[0, 1]^D$ (Fig. 2):

- **C1**: A uniform distribution.
- **C2**: Dependent pairs. The dimensions are divided into pairs. The density in each pair is $p(x, y) = x + y$, supported on $[0, 1]^2$. Different pairs are independent.
- **C3**: Independent boxes. Uniform density in a set consisting of D small hypercubes, $\cup_{k=1}^D [(k-1)/D, k/D]^D$.

Two examples have an unbounded support (Fig. 3):

- **UB1**: Gaussian distribution. The covariance is chosen to be a randomly rotated diagonal matrix with eigenvalues k^{-2} , $k = 1 \dots D$. Then, the samples are rotated to a random orthonormal basis in \mathbb{R}^D . The support of the distribution is \mathbb{R}^D .
- **UB2**: Power-law distribution. Each dimension k is sampled independently from a density $x^{-2-2/k}$, $k = 1 \dots D$ in $[1, \infty)$. Then, the samples are rotated to a random orthonormal basis in \mathbb{R}^D . The support of the distribution is a 2^{-D} fraction of \mathbb{R}^D that is not aligned with the principal axes.

Results with our method are compared to three off-the-shelf algorithms:

- (1) The k DP algorithm [28]. We use the C implementation available in [33].
- (2) The k NN algorithm based on the Kozachenko-Leonenko estimator [19]. We use the C implementation available in [27].
- (3) A lossless compression approach [1, 23]. Following [1], samples are binned into 256 equal bins in each dimension, and the data is converted into an $N \times D$ matrix of 8-bit unsigned integers. The matrix is compressed using the LZW algorithm (implemented in Matlab's `imwrite` function to a gif file). In order to estimate the entropy, the file size is interpolated linearly between a constant matrix (minimal entropy) and a random matrix with independent uniformly distributed values (maximal entropy), both of the same size.

Theoretically, in order to get rigorous convergence of estimators, the number of samples should grow exponentially with the dimension [2]. Since this requirement is impractical at very high dimensions, we consider an under-sampled case and only use $N = 10,000D^2$ samples. Each method was tested at increasing dimensions until a running time of about 3 hours was reached (per run, on a standard PC) or the implementation ran out of memory. In such cases, no results are reported for this and following dimensions. See also Tables 1 and 2 for numerical results for $D = 10$ and 20.

For compact distributions, it is well known that k NN methods may fail completely. This can be seen even for the most simple examples such as uniform distributions (example C1). Surprisingly, k NN works well in example C3. k DP and compression methods are precise for uniform distribution, which is a reference case for these methods. For examples C2 and C3, both are highly inaccurate at $D > 5$. In comparison, CADEE shows very good accuracy up to $D = 30 - 50$, depending on the example.

For unbounded distributions, k DP and compression methods do not provide meaningful results for $D > 3$. Both CADEE and k NN provide good estimates up to $D = 20$ (k NN is slightly better), but diverge slowly at higher dimensions (CADEE is better). Numerical tests suggest this is primarily due to the relatively small number of samples, which severely under-samples the distributions at high D . Comparing running times, the recursive copula splitting method is significantly more efficient at high dimensions. Simulations suggest a polynomial running time (see Section 3 for details), while k NN is exponential in D , becoming prohibitively inefficient at $D > 30$.

3. IMPLEMENTATION DETAILS

The following is a pseudo-code implementation of the algorithm described above. Recall that for every i , $(x_1^i, \dots, x_D^i) \in \mathbb{R}^D$ is an independent sample.

```

function COPULAH( $\{x_k^i\}$ ,  $D$ ,  $N$ ,  $level = 0$ )
   $H \leftarrow 0$ 
  for  $k = 1$  to  $D$  do
     $u_k \leftarrow \text{rank}(x_k)/N$  ▷ Calculate rank (by sorting)
     $H \leftarrow H + \text{H1D}(\{u_k^i\}, N, level)$  ▷ entropy of marginal  $k$ 
  end for

  if  $D = 1$  or  $N \leq \min \text{\#samples}$  then
    return  $H$ 
  end if

  ▷  $A$  is the matrix of pairwise independence
   $A_{ij} = \text{true}$  if  $x^i$  and  $x^j$  are statistically independent
   $n_{\text{blocks}} \leftarrow \#$  of blocks in  $A$ .
  if  $n_{\text{blocks}} > 1$  then ▷ Split dimensions
    for  $j = 1$  to  $n_{\text{blocks}}$  do
       $v \leftarrow$  elements in block  $j$ 

```

```

         $H \leftarrow H + \text{copulaH}(\{u_k^i\}_{k \in v}^{i=1 \dots N}, \dim(v), N, \text{level})$ 
    end for
    return  $H$ 
else ▷ No independent blocks
     $k \leftarrow$  choose a dim for splitting
     $L = \{i | u_k^i \leq 1/2\}$ 
     $\{v_j^i\} = \{2u_j^i | i \in L, j = 1 \dots D\}$ 
     $H \leftarrow H + \text{copulaH}(\{v_j^i\}, D, N/2, \text{level} + 1) / 2$ 

     $R = \{i | u_k^i > 1/2\}$ 
     $\{w_j^i\} = \{2u_j^i - 1 | i \in R, j = 1 \dots D\}$ 
     $H \leftarrow H + \text{copulaH}(\{w_j^i\}, D, N/2, \text{level} + 1) / 2$ 
end if
end function

```

Several steps in the above algorithm should be addressed.

- (1) The rank of an array x is the order in which values appear. Since the support of all marginals in the copula is $[0, 1]$, we take $\text{rank}(x) = \{1/2, 3/2, N-1/2\}$. For example, $\text{rank}([-2, 0, -3]) = \{3/2, 5/2, 1/2\}$. This implies that the minimal and maximal samples are not mapped into $\{0, 1\}$, which would artificially change the support of the distribution. The rank transformation is easily done using sorting.
- (2) 1D entropy: One-dimensional entropy of compact distributions (whose support is $[0, 1]$) is estimated using a histogram with uniformly spaced bins. The number of bins can be taken to depend of N , and order $N^{1/3}$ is typically used, or using a more complex method, e.g. [18]. For $\text{level} = 0$, the distribution may not be compact, and the entropy is estimated using m_N -spacings (see [2], Eq. (16)).
- (3) Finding blocks in the adjacency matrix A : Let A be a matrix whose entries are 0 and 1, where $A_{kl} = 1$ implies that u^k and u^l are independent. By construction, A is symmetric. Let D denote the diagonal matrix whose diagonal elements are the sums of rows of A . Then, $L = A - D$ is the Laplacian associated with the graph described by A . In particular, the sum of all rows of L is zero. We seek a rational basis for the kernel of a matrix L : Let $\ker(L)$ denote the kernel of a matrix L . By a rational basis we mean an orthogonal basis (for $\ker(L)$), in which all the coordinates are either 0 or 1 and the number of 1's is minimal. In each vector in the basis, components with

1's form a cluster (or block), which is pair-wise independent of all other marginals. In Matlab, this can be obtained using the command `null(L,'r')`. For example, consider the adjacency matrix

$$A = \begin{pmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \\ 1 & 0 & 1 \end{pmatrix},$$

whose graph Laplacian is

$$D = \begin{pmatrix} 2 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 2 \end{pmatrix}, \quad L = A - D = \begin{pmatrix} -1 & 0 & 1 \\ 0 & 0 & 0 \\ 1 & 0 & -1 \end{pmatrix},$$

A rational basis for the kernel of L (which is $2D$) is

$$\left\{ \begin{pmatrix} 1 \\ 0 \\ 1 \end{pmatrix}, \begin{pmatrix} 0 \\ 1 \\ 0 \end{pmatrix} \right\},$$

which corresponds to two blocks - components 1+3 and component 2.

Pairwise independence is determined as follows.

- (1) Calculate the Spearman correlation matrix of the samples $\{x_k\}$, denoted R . Note that this is the same as the Pearson correlation matrix of the ranked data $\{u_k\}$.
- (2) Several mathematical and statistical software (e.g. Matlab, R) calculate the P-value of the correlation matrix. Alternatively, assuming normality and independence (which does not hold), the distribution of elements in R is asymptotically given by the t-distribution with $N - 2$ degrees of freedom. Denoting the cumulative function of the t-distribution with n degrees of freedom by $T_n(z)$, two marginals (k, l) are considered uncorrelated if $|R_{kl}| > T_{n-2}^{-1}(1 - \alpha/2)$, where α is the acceptance threshold. We take the standard $\alpha = 0.05$. Note that because we do $D(D - 1)/2$ tests, the probability of observing independent vectors by chance grows with D . This can be corrected by looking at the statistics of the maximal value for R (in absolute value), which tends to a Gumbel distribution [12]. This approach (using Gumbel) is not used because below we also consider independence between blocks.
- (3) Pairwise independence using mutual information: Two 1D RVs X and Y are independent if and only if their mutual information vanishes, $I(X, Y) = H(X, Y) - H(X) - H(Y) = 0$ [11]. In our case, the marginals are $U(0, 1)$ and $H(X) = H(Y) = 0$,

hence $I(X, Y) = H(X, Y)$. This suggests a statistical test for the hypothesis that X and Y are independent as follows. Suppose X and Y are independent. Draw N independent samples and plot the density of the 2D entropy $H(X, Y)$. For a given acceptance threshold α , find the cutoff value $H_{2,c}$ such that $P(H(X, Y) < H_{2,c}) = 1 - \alpha$. Figure A.1 shows the distribution for different values of N . With $\alpha = 0.05$, the cutoff can be approximated by $H_{2,c} = -0.75N^{0.62}$. Accordingly, any pair of marginals which were found to be statistically uncorrelated, are also tested for independence using their mutual information (see below).

- (4) 2D entropy: Two-dimensional entropy (which, in our case, is always compact with support $[0, 1]^2$) is estimated using a 2D histogram with uniformly spaced bins in each dimension.

As a final note, we address the choice of which dimension should be used for splitting in the recursion step. We suggest splitting the dimension which shows the strongest correlations with other marginals. To this end, we square the elements in the correlation matrix R and sum the rows. We pick the column with the largest sum (or the first of them if several are equal).

Lastly, we consider the computational cost of the algorithm, which has four components whose efficiency requires consideration:

- (1) Sorting of 1D samples: In the first level, samples may be unbounded and sorting can cost $O(N \log N)$. However, for the next levels, the samples are approximately uniformly distributed in $[0, 1]$ and bucket sort works with an average cost of $O(N)$. This is multiplied by the number of levels, which is $O(\log N)$. As all D dimensions need to be sorted, the overall cost of sorting is $O(DN \log N)$.
- (2) Calculating 1D entropies. Since the data is already sorted, calculating the entropy using either binning or spacing has a cost $O(N)$ per dimension, per level. Overall $O(DN \log N)$.
- (3) Pairwise correlations: $D(D - 1)/2$ pre-sorted pairs, each costs $O(N)$ per level. Overall $O(D^2N \log N)$.
- (4) Pairwise entropy: The worst-case is that all pairs are uncorrelated but dependent, which implies that all pairwise mutual information need to be calculated at all levels. However, pre-sorting again reduces the cost of calculating histograms to $O(N)$ per level. With $O(\log N)$ levels, the cost is $O(D^2N \log N)$.

Overall, the cost of the algorithm is $O(D^2 N \log N)$. The bottleneck is due to the stopping criterion for the recursion. A simpler test may reduce the cost by a factor D . However, in addition to the added accuracy, checking for pairwise independence allows, for some distributions, splitting the samples into several lower dimensional estimates which is both efficient and more accurate.

4. SUMMARY

We presented a new algorithm for estimating the differential entropy of high-dimensional distributions using independent samples. The method applies the idea of decoupling the entropy to a sum of 1D contributions, corresponding to the entropy of marginals, and the entropy of the copula, describing the dependence between the variables. Marginal densities are estimated using known methods for scalar distributions. The entropy of the copula is estimated recursively, similar to the k -D partitioning tree method. Our numerical examples demonstrate the applicability of our method up to a dimension of 50, showing improved accuracy and efficiency compared to previously suggested schemes. The main disadvantage of the algorithm is the assumption that pair-wise independent components of the data are truly independent. This approximations may clearly fail for particularly chosen setups. Here, we focused on the presentation of the algorithm and demonstrating its advantages. We now plan to develop rigorous proofs of consistency and analysis of convergence rates. In addition, we suggest using the recursive copula splitting scheme for other applications requiring estimation of copulas and evaluation of mutual dependencies between RVs, for example, in financial applications and neural signal processing algorithms.

To conclude, our numerical experiments suggest that k NN methods are favorable for unbounded distributions up to about dimension 20. At higher dimensions k NN becomes both inaccurate and highly inefficient. For distribution with compact support, or when the support is mixed or unknown, the proposed CADEE method is significantly more robust. At higher dimensions, the CADEE method provides reliable estimates even under severe under-sampling and at a reasonable computational cost.

A Matlab code is available at arielg333.wixsite.com/personal/cadee.

ACKNOWLEDGMENTS

GA thanks partial support from The Israel Science Foundation Grant No. 373/16 and The Deutsche Forschungsgemeinschaft (The German Research Foundation DFG) Grant No. BA1222/7-1.

REFERENCES

- [1] R. Avinery, M. Kornreich, and R. Beck. Universal and efficient entropy estimation using a compression algorithm. *arXiv*, page 1709.10164, 2017.
- [2] J. Beirlant, E. J. Dudewicz, L. Gyrfi, and E. C. Van der Meulen. Nonparametric entropy estimation: An overview. *International Journal of Mathematical and Statistical Sciences*, 6(1):17–39, 1997.
- [3] R. S. Calsaverini and R. Vicente. An information-theoretic approach to statistical dependence: Copula information. *Europhysics Letters*, 88(6):68003, 2009.
- [4] G. A. Darbellay and I. Vajda. Estimation of the information by an adaptive partitioning of the observation space. *IEEE Transactions on Information Theory*, 45(4):1315–1321, 1999.
- [5] F. Durante and C. Sempi. Copula theory: an introduction. *Copula theory and its applications*, pages 3–33, 2010.
- [6] P. Embrechts and M. Hofert. Statistical inference for copulas in high dimensions: A simulation study. *ASTIN Bulletin: The Journal of the IAA*, 43(2):81–95, 2013.
- [7] L. Faivishevsky and J. Goldberger. Ica based on a smooth estimation of the differential entropy. page 433, 2009.
- [8] W. Gao, S. Oh, and P. Viswanath. Breaking the bandwidth barrier: Geometrical adaptive entropy estimation. *Advances in Neural Information Processing Systems*, page 2460, 2016.
- [9] W. Gao, S. Oh, and P. Viswanath. Density functional estimators with k-nearest neighbor bandwidths. In *2017 IEEE International Symposium on Information Theory (ISIT)*, pages 1351–1355, 2017.
- [10] M.T. Giraud, L. Sacerdote, and R. Sirovich. Nonparametric estimation of mutual information through the entropy of the linkage. *Entropy*, 15:5154–5177, 2013.
- [11] C. Granger and J.L. Lin. Using the mutual information coefficient to identify lags in nonlinear models. journal of time series analysis. *Journal of time series analysis*, 15(4):371, 1994.
- [12] F. Han, S. Chen, and H. Liu. Distribution-free tests of independence in high dimensions. *Biometrika*, 104(4):813–828, 2017.
- [13] Z. Hao and V.P. Singh. Integrating entropy and copula theories for hydrologic modeling and analysis. *Entropy*, 17:2253–2280, 2015.
- [14] P. Indyk, R. Kleinberg, S. Mahabadi, and Y. Yuan. Simultaneous nearest neighbor search. *arXiv Letters*, page arXiv:1604.02188, 2016.
- [15] P. Jaworski, F. Durante, W.K. Hardle, and T. Rychlik. *Copula theory and its applications*. Springer, New York, 2010.
- [16] H. Joe. Estimation of entropy and other functionals of a multivariate density. *Annals of the Institute of Statistical Mathematics*, 41(4):683, 1989.

- [17] M. A. Kerroum, A. Hammouch, and D. Aboutajdine. Textural feature selection by joint mutual information based on gaussian mixture model for multispectral image classification. *Pattern Recognition Letters*, 31(10):1168, 2010.
- [18] K.H. Knuth. Optimal data-based binning for histograms. *arXiv*, page 0605197, 2006.
- [19] L.F. Kozachenko and N.N. Leonenko. Sample estimate of the entropy of a random vector. *Problemy Peredachi Informatsii*, 23(2):9–16, 1987.
- [20] A. Kraskov, H. Stgbauer, and P. Grassberger. Estimating mutual information. *Physical review E*, 66(6):066138, 2004.
- [21] N. Kwak and C. H. Choi. Input feature selection by mutual information based on parzen window. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 12:1667, 2002.
- [22] W.M. Lord, J. Sun, and E.M. Bollt. Geometric k-nearest neighbor estimation of entropy and mutual information. *Chaos*, 28(3):033114, 2018.
- [23] S. Martiniani, P. M. Chaikin, and D. Levine. Quantifying hidden order out of equilibrium. *Phys. Rev. X*, 9:011031, 2019.
- [24] E.G. Miller. A new class of entropy estimators for multi-dimensional densities. In *IEEE International Conference on Acoustics, Speech, and Signal Processing, 2003. Proceedings. (ICASSP'03)*, volume 3, page 011031, 2003.
- [25] U. Ozertem, I. Uysal, and D. Erdogmus. Continuously differentiable sample-spacing entropy estimates. *IEEE Transactions on Neural Networks*, 19(11):1978, 2008.
- [26] L. Paninski. Estimation of entropy and mutual information. *Neural computation*, 15(6):1191, 2003.
- [27] Kalle Rytanen. *TIM, A C++ library for efficient estimation of information-theoretic measures from time-series in arbitrary dimensions*.
- [28] S. Shwartz, M. Zibulevsky, and Y.Y. Schechner. Fast kernel entropy estimation and optimization. *Signal Processing*, 85:1045–1058, 2005.
- [29] H. Singh, N. Misra, V. Hnizdo, A. Fedorowicz, and E. Demchuk. Nearest neighbor estimates of entropy. *American journal of mathematical and management sciences*, 23(3-4):301, 2003.
- [30] K. Sricharan, R. Raich, and A.O. Hero, III. Empirical estimation of entropy functionals with confidence. *arXiv*, page 1191, 2010.
- [31] K. Sricharan, D. Wei, and A.O. Hero. Ensemble estimators for multivariate entropy estimation. *IEEE transactions on information theory*, 59(7):4374–4388, 2013.
- [32] D. Stowell and M.D. Plumbley. Fast multidimensional entropy estimation by k-d partitioning. *IEEE Signal Processing Letters*, 16(6):537–540, 2009.
- [33] Dan Stowell. *k-d partitioning entropy estimator: A fast estimator for the entropy of multidimensional data distributions*.
- [34] T. Xue. Transfer entropy estimation via copula. *Advances in Engineering Research*, 138:887, 2017.
- [35] S. Zhu, D. Wang, K. Yu, T. Li, and Y. Gong. Feature selection for gene expression using model-based entropy. *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, 7(1):25, 2010.

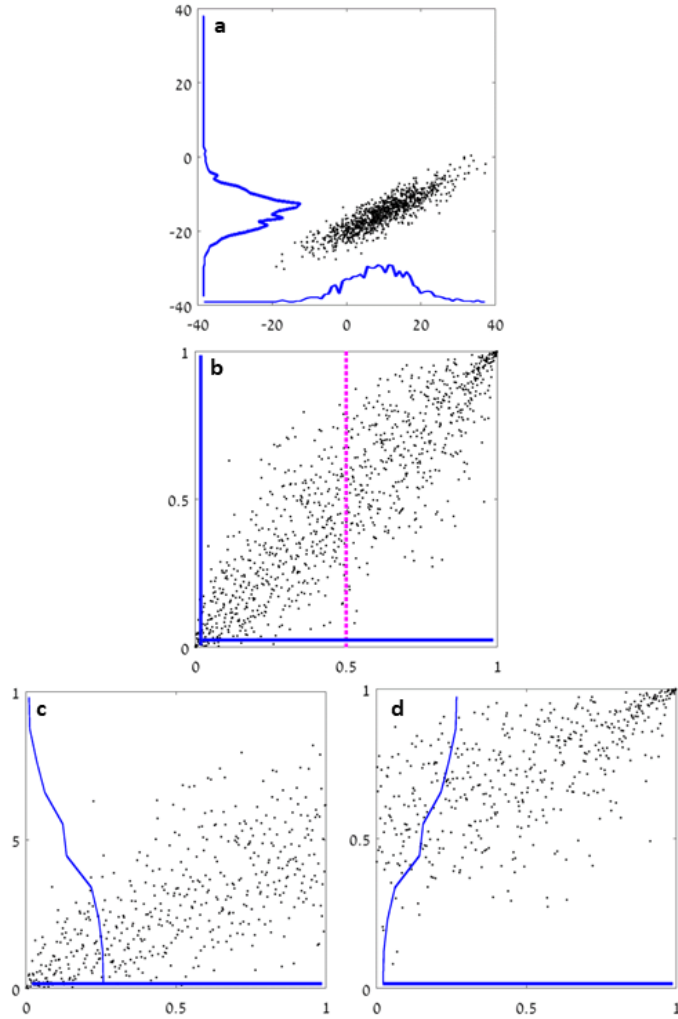


FIGURE 1. A schematic sketch of the proposed method. **a.** A sample of 1000 points from a 2D Gaussian distribution. The blue lines depict the empirical density (obtained using uniform bins). **b.** Following the rank transform (numbering the sorted data in each dimension), the same data provides samples for the copula in $[0, 1]^2$. Splitting the data according to the median in one of the axes (always at 0.5) yields **c** (left half) and **d** (right half). The blue lines depict the empirical density in each half. Continue recursively.

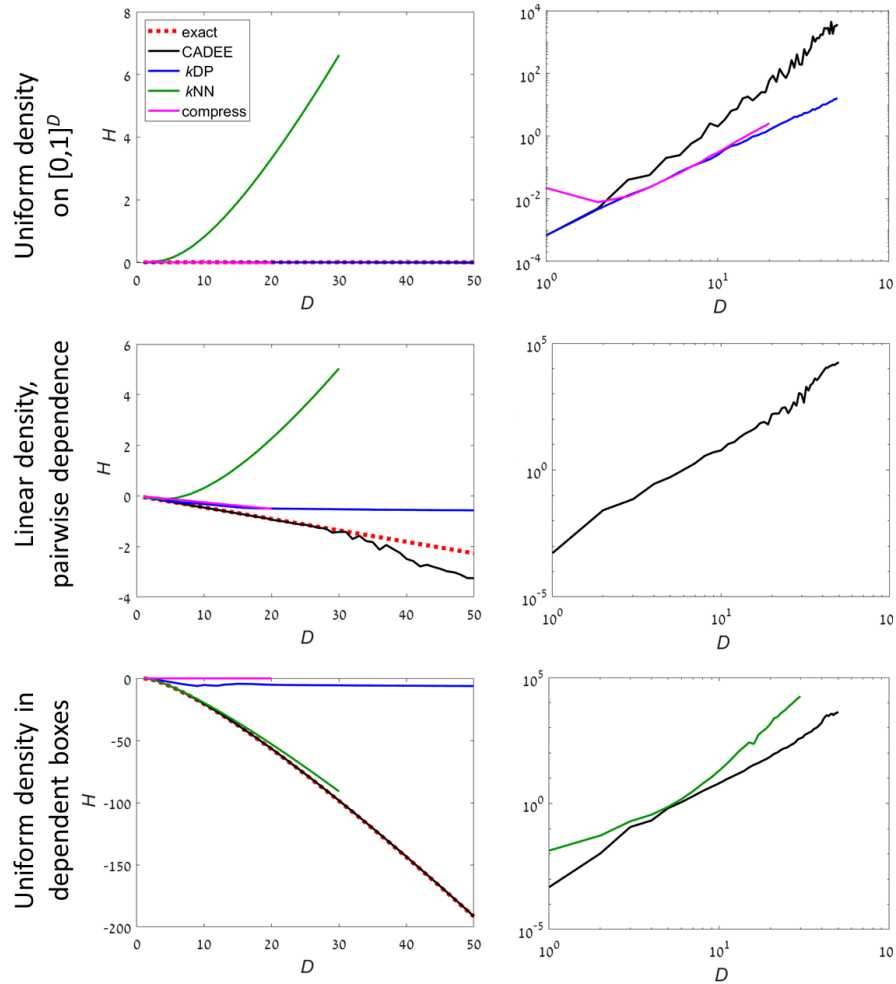


FIGURE 2. Estimating the entropy for given analytically-computable examples (dashed red line) with compact distributions ($[0, 1]^D$). Black: using the recursive copula splitting method, Blue: k DP, Green: k NN, magenta: lossless compression (magenta). Left: The estimated entropy as a function of dimension. Right: Running times (on a log-log scale), showing only relevant methods. The number of samples is $N = 10,000D^2$. See also Tables 1 and 2 for detailed numerical results with $D = 10$ and 20.

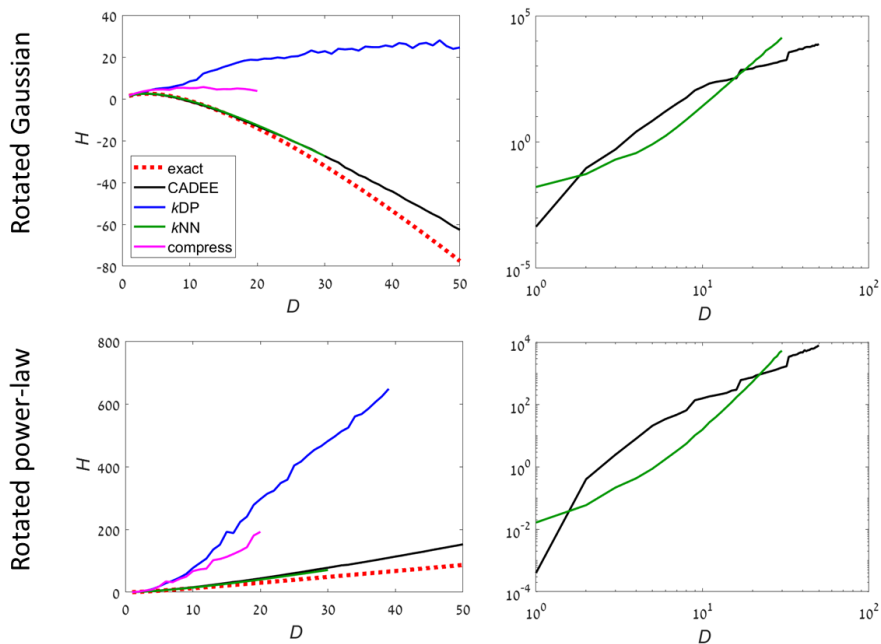


FIGURE 3. Estimating the entropy for given analytically-computable examples (dashed red line) with non-compact distributions. Black: using the recursive copula splitting method, Blue: k DP, Green: k NN, magenta: lossless compression (magenta). Left: The estimated entropy as a function of dimension. Right: Running times (on a log-log scale), showing only relevant methods. The number of samples is $N = 10,000D^2$. The inaccuracy of our and the k NN method is primarily due to the relatively small number of samples. See also Tables 1 and 2 for detailed numerical results with $D = 10$ and 20.

TABLE 1. Estimating the entropy for given analytically-computable examples at $D = 10$.

Example	exact	CADEE	k DP	k NN	compression
C1 - uniform	0	-1.5e-3	-7.16e-4	0.81	-4.3e-2
C2 - pairs	-0.45	-0.46	-0.32	0.30	-0.25
C3 - boxes	-20.7	-20.6	-5.3	-19.7	1.3e-4
UB1 - Gauss	-0.915	-1.3	9.1	-0.9	5.1
UB2 - power-law	12.6	15.7	92.3	14.7	67.2

TABLE 2. Estimating the entropy for given analytically-computable examples at $D = 20$.

Example	exact	CADEE	k DP	k NN	compression
C1 - uniform	0	-2.9e-3	-3.4e-4	3.3	-1.1e-2
C2 - pairs	-0.91	-0.98	-0.50	2.3	-0.43
C3 - boxes	-56.9	-60.6	-5.15	-52.9	5.8e-3
UB1 - Gauss	-14.0	-14.4	18.6	-12.6	5.0
UB2 - power-law	30.2	47.2	296.6	40.3	131.6

ADDITIONAL PSEUDO-CODE USED FOR NUMERICAL EXAMPLES

Multiple methods can be used for estimating the 1D entropy, we applied the following pseudo-code.

```

function H1D( $\{u^i\}$ ,  $N$ ,  $level$ )
  if  $level = 0$  then
     $M_n \leftarrow \text{round}(N^{1/3})$  ▷  $M_n$  Spacing method
     $\Delta^i \leftarrow u^{M_n+i} - u^i, i = 1, \dots, N - M_n$ 
     $H \leftarrow \left[ \sum_{i=1}^{M_n} \ln \Delta^i + (N - M_n) \ln(N/M_n) \right] / N$ 
  else ▷ Uniform bins in  $[0, 1]$ 
     $N_{\text{bins}} \leftarrow \min\{\text{max\#bins}, N^{0.4}, N/10\}$ 
     $edges \leftarrow [0, 1/N_{\text{bins}}, 2/N_{\text{bins}}, \dots, 1]$  ▷ Histogram with bins  $edges$ 
     $counts \leftarrow \text{Histogram}(\{u^i\}, edges)$ 
     $p \leftarrow counts \cdot N_{\text{bins}} / (\sum counts)$  ▷ Normalize
     $H \leftarrow - [\sum p \ln(p)] / N_{\text{bins}}$  ▷ where  $0 \ln 0 = 0$ 
  end if
  return  $H$ 
end function

```

We suggest the following pseudo-code for estimating independence of two 1D RVs (already the rank vectors), which was used in the numerical examples.

```

function AREINDEPENDENT( $X, Y, N$ )
   $R = \text{corr}(X, Y)$  ▷ Pearson correlation
   $I \leftarrow (\text{P-value}(R, N) < \alpha)$  ▷ true if statistically uncorrelated
  if  $I = \text{false}$  then
     $H_2 = \text{H2D}(X, Y)$  ▷ Calculate 2D entropy
    if  $H_2 N^{0.62} < -0.75$  then
       $I \leftarrow \text{true}$ 
    end if
  end if
end function

function H2D( $X, Y, N$ )
  ▷ calc 2D histogram using uniform bins
   $N_{\text{bins}} \leftarrow \min\{\text{max\#bins}, N^{0.2}, N/10\}$ 
   $edges \leftarrow [0, 1/N_{\text{bins}}, 2/N_{\text{bins}}, \dots, 1]$  ▷ Histogram with bins  $edges$  per dim
   $counts \leftarrow \text{2D Histogram}(X, Y, edges)$ 
   $p \leftarrow counts \cdot N_{\text{bins}}^2 / (\sum counts)$  ▷ Normalize

```

$$H \leftarrow - [\sum p \ln(p)] / N_{\text{bins}}^2$$
end function

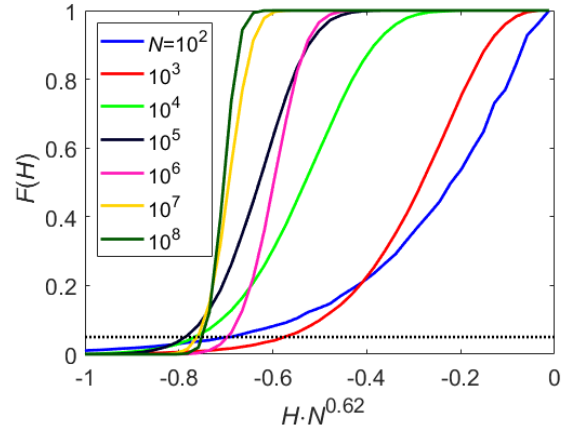


FIGURE A.1. Numerical evaluation of the cumulative distribution function for the entropy of two scalar, independent, uniformly distributed random variables. After scaling with the sample size, we find that $P(HN^{-0.62} < -0.75)$ is approximately 0.05. Hence, it can be considered as a statistics for accepting the hypothesis that the random variables are independent.

DEPARTMENT OF MATHEMATICS, BAR ILAN UNIVERSITY, RAMAT GAN, ISRAEL

E-mail address: ariegl@math.biu.ac.il

E-mail address: louzouy@math.biu.ac.il