

Learning Autocomplete Systems as a Communication Game

Mina Lee¹, Tatsunori B. Hashimoto^{1,2}, Percy Liang¹

¹ Department of Computer Science ² Department of Statistics
Stanford University
{minalee, pliang}@cs.stanford.edu thashim@stanford.edu

Abstract

We study textual autocomplete—the task of predicting a full sentence from a partial sentence—as a human-machine communication game. Specifically, we consider three competing goals for effective communication: use as few tokens as possible (efficiency), transmit sentences faithfully (accuracy), and be learnable to humans (interpretability). We propose an unsupervised approach which tackles all three desiderata by constraining the communication scheme to *keywords* extracted from a source sentence for interpretability and optimizing the efficiency-accuracy tradeoff. Our experiments show that this approach results in an autocomplete system that is 52% more accurate at a given efficiency level compared to baselines, is robust to user variations, and saves time by nearly 50% compared to typing full sentences.

1 Introduction

Suppose a user wants to write a sentence “I will be 10 minutes late.” Ideally, she would type just a few keywords such as “10 minutes late” and an autocomplete system would be able to infer the intended sentence (Figure 1). Existing left-to-right autocomplete systems [1, 32] can often be inefficient, as the prefix of a sentence (e.g. “I will be”) fails to capture the core meaning of the sentence. Besides the practical goal of building a better *autocomplete* system, we are interested in exploring the tradeoffs inherent to such communication schemes between the efficiency of typing keywords, accuracy of reconstruction, and interpretability of keywords.

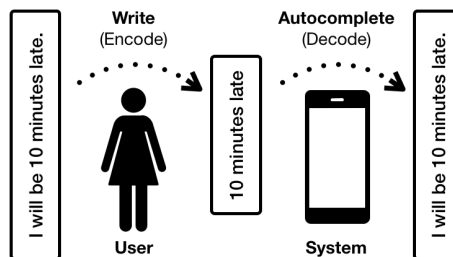


Figure 1: We consider a communication game in which a user encodes a sentence into a sequence of keywords, and the system seeks to decode the sentence given only the keywords.

One approach to learn such schemes is to collect a supervised dataset of keywords-sentence pairs as a training set, but (i) it would be expensive to collect such data from users, and (ii) a static dataset would not capture a real user’s natural predilection to adapt to the system [34]. Another approach is to avoid supervision and jointly learn a user-system communication scheme to directly optimize the combination of efficiency and accuracy. However, learning in this way can lead to communication schemes that are uninterpretable to humans [21, 27] (see Appendix A for additional related work).

In this work, we propose a simple, unsupervised approach to an autocomplete system that is efficient, accurate, and interpretable. For interpretability, we restrict keywords to be subsequences of their source sentences based on the intuition that humans can infer most of the original meaning from a few keywords. We then apply multi-objective optimization approaches to directly control and achieve desirable tradeoffs between efficiency and accuracy.

We observe that naively optimizing a linear combination of efficiency and accuracy terms is unstable and leads to suboptimal schemes. Thus, we propose a new objective which optimizes for communication efficiency under an accuracy constraint. We show this new objective is more stable and efficient than the linear objective at all accuracy levels.

As a proof-of-concept, we build an autocomplete system within this framework which allows a user to write sentences by specifying keywords. We empirically show that our framework produces communication schemes that are 52.16% more accurate than rule-based baselines when specifying 77.37% of sentences, and 11.73% more accurate than a naive, weighted optimization approach when specifying 53.38% of sentences. Finally, we demonstrate that humans can easily adapt to the keyword-based autocomplete system and save nearly 50% of time compared to typing a full sentence in our user study.

2 Approach

Consider a communication game in which the goal is for a user to communicate a *target* sequence $x = (x_1, \dots, x_m)$ to a system by passing a sequence of *keywords* $z = (z_1, \dots, z_n)$. The user generates keywords z using an encoding strategy $q_\alpha(z | x)$, and the system attempts to guess the target sequence x via a decoding strategy $p_\beta(x | z)$.

A good communication *scheme* (q_α, p_β) should be both *efficient* and *accurate*. Specifically, we prefer schemes that use fewer keywords (cost), and the target sentence x to be reconstructed with high probability (loss) where

$$\text{cost}(x, \alpha) = \mathbb{E}_{q_\alpha(z|x)}[\#\text{tokens}(z)] \quad (1)$$

$$\text{loss}(x, \alpha, \beta) = \mathbb{E}_{q_\alpha(z|x)}[-\log p_\beta(x | z)]. \quad (2)$$

Based on our assumption that humans have an intuitive sense of retaining important keywords, we restrict the set of schemes to be a (potentially noncontiguous) *subsequence* of the target sentence. Our hypothesis is that such subsequence schemes naturally ensure interpretability, as efficient human and machine communication schemes are both likely to involve keeping important content words.

Modeling with autoencoders. To learn communication schemes without supervision, we model the cooperative communication between a user and system through an encoder-decoder framework. Concretely, we model the user’s encoding strategy $q_\alpha(z | x)$ with an encoder which encodes the target sentence x into the keywords z by keeping a subset of the tokens. This stochastic encoder $q_\alpha(z | x)$ is defined by a model which returns the probability of each token retained in the final subsequence z . Then, we sample from Bernoulli distributions according to these probabilities to either keep or drop the tokens independently (see Appendix B for an example).

We model the autocomplete system’s decoding strategy $p_\beta(x | z)$ as a probabilistic model which conditions on the keywords z and returns a distribution over predictions x . We use a standard sequence-to-sequence model with attention and copying for the decoder, but any model architecture can be used (see Appendix C for details).

Multi-objective optimization. Our goal now is to learn encoder-decoder pairs which optimally balance the communication cost and reconstruction loss. The simplest approach to balancing efficiency and accuracy is to weight $\text{cost}(x, \alpha)$ and $\text{loss}(x, \alpha, \beta)$ linearly using a weight λ as follows,

$$\min_{\alpha, \beta} \mathbb{E}[\text{cost}(x, \alpha)] + \lambda \mathbb{E}[\text{loss}(x, \alpha, \beta)], \quad (3)$$

where the expectation is taken over the population distribution of source sentences x , which is omitted to simplify notation. However, we observe that naively weighting and searching over λ is suboptimal and highly unstable—even slight changes to the weighting results in degenerate schemes which keep all or none of its tokens. This instability motivates us to develop a new stable objective.

Our main technical contribution is to draw inspiration from the multi-objective optimization literature and view the tradeoff as a sequence of constrained optimization problems, where we minimize the expected cost subject to varying expected reconstruction error constraints ϵ ,

$$\min_{\alpha, \beta} \mathbb{E}[\text{cost}(x, \alpha)] \quad \text{subject to } \mathbb{E}[\text{loss}(x, \alpha, \beta)] \leq \epsilon. \quad (4)$$

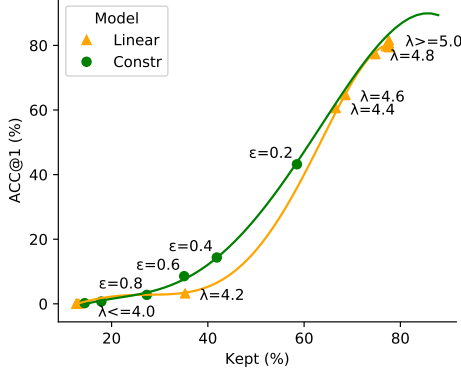


Figure 2: Our constrained objective (**Constr**) learns more efficient and accurate schemes than the unconstrained objective (**Linear**).

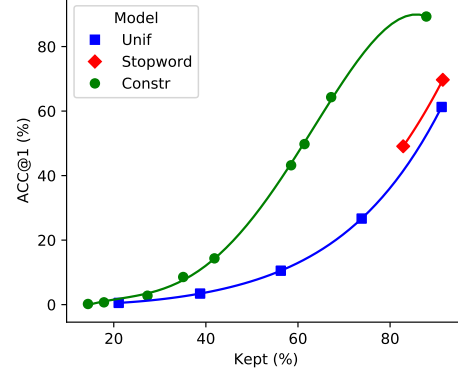


Figure 3: Our models (**Constr**) improve the tradeoff between accuracy and efficiency compared to the baselines (**Unif** and **Stopword**).

This greatly improves the stability of the training procedure. We empirically observe that the model initially keeps most of the tokens to meet the constraints, and slowly learns to drop uninformative words from the keywords to minimize the cost. Furthermore, ϵ in Eq (4) allows us to directly control the maximum reconstruction error of resulting schemes, whereas λ in Eq (3) is not directly related to any of our desiderata.

To optimize the constrained objective, we consider the Lagrangian of Eq (4),

$$\min_{\alpha, \beta} \max_{\lambda \geq 0} J(\alpha, \beta, \lambda) \quad \text{where } J(\alpha, \beta, \lambda) = \mathbb{E}[\text{cost}(x, \alpha)] + \lambda(\mathbb{E}[\text{loss}(x, \alpha, \beta)] - \epsilon). \quad (5)$$

Much like the objective in Eq (3) we can compute unbiased gradients by replacing the expectations with their averages over random minibatches. Although gradient descent guarantees convergence on Eq (5) only when the objective is convex, we find that not only is the optimization stable, the resulting solution achieves better performance than the weighting approach in Eq (3).

Optimization. Optimization with respect to $q_\alpha(z | x)$ is challenging as z is discrete, and thus, we cannot differentiate α through z via the chain rule. Because of this, we use the stochastic REINFORCE estimate [37] as follows:

$$\nabla_\alpha J(\alpha, \beta, \lambda) = \mathbb{E}[\mathbb{E}_{q_\alpha(z|x)}[\nabla_\alpha \log q_\alpha(z | x) \cdot G(x, z)]] \quad (6)$$

$$G(x, z) = \underbrace{\# \text{tokens}(z)}_{\text{per-example cost}} + \lambda \underbrace{(-\log p_\beta(x | z) - \epsilon)}_{\text{per-example loss}}. \quad (7)$$

We perform joint updates on (α, β, λ) , where β and λ are updated via standard gradient computations, while α uses an unbiased, stochastic gradient estimate where we approximate the expectation in Eq (6). We use a single sample from $q_\alpha(z | x)$ and moving-average of rewards as a baseline to reduce variance.

3 Experiments

We evaluate our approach by training an autocomplete system on 500K randomly sampled sentences from Yelp reviews [38] (see Appendix C for details). We quantify the *efficiency* of a communication scheme (q_α, p_β) by the retention rate of tokens, which is measured as the fraction of tokens that are kept in the keywords. The *accuracy* of a scheme is measured as the fraction of sentences generated by greedily decoding the model that *exactly matches* the target sentence.

Effectiveness of constrained objective. We first show that the linear objective in Eq (3) is sub-optimal compared to the constrained objective in Eq (4). Figure 2 compares the achievable accuracy and efficiency tradeoffs for the two objectives, which shows that the constrained objective results in more efficient schemes than the linear objective at every accuracy level (e.g. 11.73% more accurate at a 53.38% retention rate).

Sentence	She's absolutely wonderful.		
Keywords	wonderful (under-specified)	she wonderful	she's absolutely wonderful (over-specified)
Suggestions	The entire experience was wonderful. Great service and wonderful food. Great food and wonderful service.	She's absolutely wonderful. She's simply wonderful. She's a wonderful doctor.	She's absolutely wonderful. And she's absolutely wonderful and she's absolutely wonderful
Sentence	Great find for casual dining!		
Keywords	great dining (under-specified)	find casual dining	great find for casual dining (over-specified)
Suggestions	What a great dining experience. Overall a great dining experience. A great dining experience.	Great find for casual dining. Perfect find for casual dining. Great find for casual dining...	Great find for casual dining. Great find for casual dining... Great find in casual dining.

Table 1: Examples from the autocomplete task. The three columns contain keywords provided by different users and corresponding top three suggested sentences generated by our model.

We also observe that the linear objective is highly unstable as a function of the tradeoff parameter λ and requires careful tuning. Even slight changes to λ results in degenerate schemes that keep all or none of the tokens (e.g. $\lambda \leq 4.2$ and $\lambda \geq 4.4$). On the other hand, the constrained objective is substantially more stable as a function of ϵ (e.g. points for ϵ are more evenly spaced than λ).

Efficiency-accuracy tradeoff. We quantify the efficiency-accuracy tradeoff compared to two rule-based baselines: Unif and Stopword. The Unif encoder randomly keeps tokens to generate keywords with the probability δ . The Stopword encoder keeps all tokens but drops stop words (e.g. ‘the’, ‘a’, ‘or’) all the time ($\delta = 0$) or half of the time ($\delta = 0.5$). The corresponding decoders for these encoders are optimized using gradient descent to minimize the reconstruction error (i.e. $\text{loss}(x, \alpha, \beta)$).

Figure 3 shows that two baselines achieve similar tradeoff curves, while the constrained model achieves a substantial 52.16% improvement in accuracy at a 77.37% retention rate compared to Unif, thereby showing the benefits of jointly training the encoder and decoder.

Robustness and analysis. We provide additional experimental results on the robustness of learned communication schemes as well as in-depth analysis on the correlation between the retention rates of tokens and their properties, which we defer to Appendix D and E for space.

User study. We recruited 100 crowdworkers on Amazon Mechanical Turk (AMT) and measured completion times and accuracies for typing randomly sampled sentences from the Yelp corpus. Each user was shown alternating autocomplete and writing tasks across 50 sentences (see Appendix G for user interface). For the autocomplete task, we gave users a target sentence and asked them to type a set of keywords into the system. The users were shown the top three suggestions from the autocomplete system, and were asked to mark whether each of these three suggestions was semantically equivalent to the target sentence. For the writing task, we gave users a target sentence and asked them to either type the sentence verbatim or a sentence that preserves the meaning of the target sentence.

Table 1 shows two examples of the autocomplete task and actual user-provided keywords. Each column contains a set of keywords and its corresponding top three suggestions generated by the autocomplete system with beam search. We observe that the system is likely to propose generic sentences for under-specified keywords (left column) and almost the same sentences for over-specified keywords (right column). For properly specified keywords (middle column), the system completes sentences accordingly by adding a verb, adverb, adjective, preposition, capitalization, and punctuation.

Overall, the autocomplete system achieved high accuracy in reconstructing the keywords. Users marked the top suggestion from the autocomplete system to be semantically equivalent to the target 80.6% of the time, and one of the top 3 was semantically equivalent 90.11% of the time. The model also achieved a high exact match accuracy of 18.39%. Furthermore, the system was efficient, as users spent 3.86 seconds typing keywords compared to 5.76 seconds for full sentences on average. The variance of the typing time was 0.08 second for keywords and 0.12 second for full sentences, indicating that choosing and typing keywords for the system did not incur much overhead.

Acknowledgments

We thank the reviewers and Yunseok Jang for their insightful comments. This work was supported by NSF CAREER Award IIS-1552635 and an Intuit Research Award.

Reproducibility

All code, data and experiments are available on CodaLab at <https://bit.ly/353fbyn>.

References

- [1] Z. Bar-Yossef and N. Kraus. Context-sensitive query auto-completion. In *World Wide Web (WWW)*, pages 107–116, 2011.
- [2] C. Baziotis, I. Androutsopoulos, I. Konstas, and A. Potamianos. Seq³: Differentiable sequence-to-sequence autoencoder for unsupervised abstractive sentence compression. In *North American Association for Computational Linguistics (NAACL)*, 2019.
- [3] S. R. Bowman, L. Vilnis, O. Vinyals, A. M. Dai, R. Jozefowicz, and S. Bengio. Generating sentences from a continuous space. In *Computational Natural Language Learning (CoNLL)*, pages 10–21, 2016.
- [4] T. Cohn and M. Lapata. Sentence compression beyond word deletion. In *International Conference on Computational Linguistics (COLING)*, pages 137–144, 2008.
- [5] A. Das, S. Kottur, J. M. Moura, S. Lee, and D. Batra. Learning cooperative visual dialog agents with deep reinforcement learning. In *International Conference on Computer Vision (ICCV)*, 2017.
- [6] J. Devlin, M. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [7] W. Fedus, I. Goodfellow, and A. M. Dai. Maskgan: Better text generation via filling in the. In *International Conference on Learning Representations (ICLR)*, 2018.
- [8] T. Fevry and J. Phang. Unsupervised sentence compression using denoising auto-encoders. In *Computational Natural Language Learning (CoNLL)*, pages 413–422, 2018.
- [9] K. Filippova and Y. Altun. Overcoming the lack of parallel data in sentence compression. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2013.
- [10] J. Foerster, Y. M. Assael, N. de Freitas, and S. Whiteson. Learning to communicate with deep multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2137–2145, 2016.
- [11] M. Frank and N. D. Goodman. Predicting pragmatic reasoning in language games. *Science*, 336:998–998, 2012.
- [12] D. Golland, P. Liang, and D. Klein. A game-theoretic approach to generating spatial descriptions. In *Empirical Methods in Natural Language Processing (EMNLP)*, pages 410–419, 2010.
- [13] N. D. Goodman and M. C. Frank. Pragmatic language interpretation as probabilistic inference. *Trends in Cognitive Sciences*, 20(11):818–829, 2016.
- [14] K. Guu, T. B. Hashimoto, Y. Oren, and P. Liang. Generating sentences by editing prototypes. *Transactions of the Association for Computational Linguistics (TACL)*, 0, 2018.
- [15] F. Khani, N. D. Goodman, and P. Liang. Planning, inference and pragmatics in sequential language games. *Transactions of the Association for Computational Linguistics (TACL)*, 0, 2018.
- [16] D. Kingma and J. Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [17] K. Knight and D. Marcu. Summarization beyond sentence extraction: A probabilistic approach to sentence compression. *Artificial Intelligence*, 139:91–107, 2002.
- [18] A. Lazaridou, A. Peysakhovich, and M. Baroni. Multi-agent cooperation and the emergence of (natural) language. In *International Conference on Learning Representations (ICLR)*, 2017.

- [19] R. Levy. Communicative efficiency, uniform information density, and the rational speech act theory. In *Proceedings of the 40th Annual Meeting of the Cognitive Science Society*, pages 684–689, 2018.
- [20] R. Levy and T. F. Jaeger. Speakers optimize information density through syntactic reduction. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 849–856, 2007.
- [21] M. Lewis, D. Yarats, Y. N. Dauphin, D. Parikh, and D. Batra. Deal or no deal? end-to-end learning for negotiation dialogues. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2017.
- [22] G. Little and R. C. Miller. Keyword programming in java. In *Automated Software Engineering (ASE)*, 2007.
- [23] M. Luong, H. Pham, and C. D. Manning. Effective approaches to attention-based neural machine translation. In *Empirical Methods in Natural Language Processing (EMNLP)*, pages 1412–1421, 2015.
- [24] Y. Miao and P. Blunsom. Language as a latent variable: Discrete generative models for sentence compression. In *Empirical Methods in Natural Language Processing (EMNLP)*, pages 319–328, 2016.
- [25] R. C. Miller, V. H. Chou, M. Bernstein, G. Little, M. V. Kleek, D. Karger, and mc schraefel. Inky: a sloppy command line for the web with rich visual feedback. In *User Interface Software and Technology (UIST)*, pages 131–140, 2008.
- [26] W. Monroe and C. Potts. Learning in the Rational Speech Acts model. In *Proceedings of 20th Amsterdam Colloquium*, 2015.
- [27] I. Mordatch and P. Abbeel. Emergence of grounded compositional language in multi-agent populations. In *Association for the Advancement of Artificial Intelligence (AAAI)*, 2018.
- [28] A. See, P. J. Liu, and C. D. Manning. Get to the point: Summarization with pointer-generator networks. In *Association for Computational Linguistics (ACL)*, 2017.
- [29] N. J. Smith, N. D. Goodman, and M. C. Frank. Learning and using language via recursive pragmatic reasoning about other agents. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 3039–3047, 2013.
- [30] S. Sukhbaatar, R. Fergus, et al. Learning multiagent communication with backpropagation. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2244–2252, 2016.
- [31] I. Sutskever, O. Vinyals, and Q. V. Le. Sequence to sequence learning with neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 3104–3112, 2014.
- [32] A. Svyatkovskiy, Y. Zhao, S. Fu, and N. Sundaresan. Pythia: AI-assisted code completion system. In *International Conference on Knowledge Discovery and Data Mining (KDD)*, 2019.
- [33] J. Turner and E. Charniak. Supervised and unsupervised learning for sentence compression. In *Association for Computational Linguistics (ACL)*, pages 290–297, 2005.
- [34] S. I. Wang, P. Liang, and C. Manning. Learning language games through interaction. In *Association for Computational Linguistics (ACL)*, 2016.
- [35] Y. Wang, B. Dai, L. Kong, X. Ma, S. M. Erfani, J. Bailey, S. Xia, L. Song, and H. Zha. Learning deep hidden nonlinear dynamics from aggregate data. In *Uncertainty in Artificial Intelligence (UAI)*, 2018.
- [36] P. West, A. Holtzman, J. Buys, and Y. Choi. Bottlesum: Self-supervised and unsupervised sentence summarization using the information bottleneck principle. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2019.
- [37] R. J. Williams. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine learning*, 8(3):229–256, 1992.
- [38] Yelp. Yelp Dataset Challenge, Round 8. https://www.yelp.com/dataset_challenge, 2017.

A Related work

Our goal of learning efficient communication schemes in an autocomplete task is closely related to a rich literature on communication and compression.

Learning communication schemes. Tradeoffs between communication efficiency (both information theoretically and computationally) and accuracy have been studied both in the machine learning [20] and cognitive science [19] literatures, where much of the focus has been on understanding the characteristics of efficient human communication. Our work differs in that we are learning schemes based on objective efficiency and accuracy metrics, while taking human interpretability into account.

Approaches to learning communication schemes based on rational speech acts (RSA) combine intuitions on human communication efficiency (i.e. pragmatics) with an explicit computational algorithm for generating communication schemes [12, 11, 29, 26, 13, 15]. RSA differs from our approach in that it requires a base listener or speaker, which ensures that the resulting schemes are interpretable. In contrast, we constrain our schemes to be keywords and optimize the resulting schemes.

There is a growing literature on learning communication schemes through two-player games. Such problems have been explored in negotiation [21], cooperative communication [5], and multi-agent games [27]. The majority of these approaches optimize a single, task-oriented metric (i.e. accuracy). In contrast, our work explicitly considers the tradeoff between task efficiency and accuracy, and shows that using sufficiently restricted schemes results in a simple algorithm for making effective tradeoffs.

Sentence compression and summarization. Our task can be seen as a restricted form of sentence compression or extractive summarization, where the compressed form is a sequence of keywords extracted from its original sentence.

Most work on sentence compression aims to find a short, grammatical summary of an existing sentence [17, 4]. The constraint that the compressed sentence must be *grammatical* results in substantial differences from our work. Much of the challenge stems from the need for supervised verbose-compressed pairs [9] and the difficulty of incorporating unsupervised information [33, 24, 8]. Our work does not require that compressed sentences be grammatical, thus allowing us to consider unsupervised approaches.

There have been recent attempts to frame unsupervised summarization as an autoencoder problem [24, 8, 35, 2]. However, most of these work uses continuous representations for the compressed form which does not fulfill our interpretability desideratum. West et al. [36] propose to summarize a sentence by extracting keywords from the sentence by maximizing the probability to predict next sentence. This approach is closely related to our approach, but differs in that it focuses on the global summarization rather than compressing each sentence independently.

Masked language models, such as the recently popular BERT [6] and maskGAN [7], treat sentence generation as a series of masked token prediction problems. This is related to our task of identifying a longer sentence which originally generated a keyword sequence, but differs in that it uses explicit knowledge of the number and location of blanks. None of these approaches study the communication efficiency or compression rate tradeoffs implied by the masking and unmasking tasks.

Some work attempts to compress a sentence into a vector, such as the sentence variational autoencoder [3]. Their focus is to learn embeddings, whereas we are interested in the communication aspect, where continuous representations are not interpretable and not a medium users can output. There is also some work that learns a communication scheme in an unsupervised manner [10, 30, 18, 27]. Lazaridou et al. [18] attempt to make the scheme more interpretable by putting humans in the loop, whereas we enforce interpretability structurally by restricting the scheme to keywords.

Applications. Autocomplete systems have been widely used for email autocomplete such as Gmail’s Smart Compose and code autocomplete such as Pythia [32] and Deep TabNine.¹ However, most of these systems focus on the left-to-right autocomplete setting where inputs are always the leftmost tokens in an input sequence, and the task is to predict the next token(s). This setting

¹<https://tabnine.com>

is inherently interpretable (much like the keyword constraint) but does not serve as an efficient communication mechanism, since a prefix of tokens rarely specifies the full meaning of a sentence.

Some work considers the keyword-based autocomplete setting in programming [22, 25], but resorts to heuristics to restrict the search space and uses a hand-engineered scoring function to match keywords to target sentences. Our work differs in that it does not require experts to define available search space or design a matching algorithm specific to each domain.

B Illustrative example of generating keywords

Sentence: I will be 10 minutes late.

x	<shift>	i	will	be	10	minutes	late	.
p	0	.1	.2	0	.9	.7	.8	0
m	0	0	0	0	1	1	1	0
z					10	minutes	late	

Keywords: 10 minutes late

Given a target sentence, our encoder first tokenizes the sentence into a sequence of tokens $x = (x_1, \dots, x_m)$, predicts a probability p_i for each token x_i , and decides whether to keep each token ($m_i = 1$) or not ($m_i = 0$) by sampling from Bernoulli distributions according to the probability. The kept tokens become the keywords $z = (z_1, \dots, z_n)$.

C Details on experiments

Data. We train all models on 500K sentences and test on 10K sentences of at most 16 tokens, randomly sampled from the Yelp restaurant reviews corpus [38]. This dataset consists of many short, colloquial expressions that users may wish to autocomplete when writing reviews. We segment the reviews into sentences following the same procedure as Guu et al. [14] while treating capitalization as a separate, special token (e.g. $I \rightarrow \text{<shift> i}$) to emulate the keystrokes necessary for typing.

Choice of evaluation metrics. We use exact match as our accuracy metric. Other metrics such as the mean reciprocal rank (MRR) and BLEU are not considered because the time for choosing from top n suggestions or revising wrong suggestions is likely to incur a large variance in the experiment results. In the user study, we additionally measure accuracy up to paraphrasing using user feedback.

Implementation. For our encoder, we jointly train 300-dimensional word embedding and encode a sequence of tokens (i.e. target sentence) using a uni-directional LSTM with 300 hidden units. Then, we use a linear layer to output a probability of keeping each token and sample from Bernoulli distributions according to these probabilities. Finally, we output a sequence of kept tokens as keywords.

For our decoder, we use a standard sequence-to-sequence model [31] with global attention [23] and copy mechanisms [28]. Concretely, we jointly train 300-dimensional word embedding and encode a sequence of tokens (i.e. keywords) using a bi-directional LSTM with 300 hidden units. We use another uni-directional LSTM with 300 hidden units, which takes the embedding of each token at each time step, concatenated by the last hidden state of the LSTM, to either generate next token from a fixed vocabulary or copy one of the input tokens.

All parameters are initialized by sampling from a uniform distribution between -0.1 and 0.1 . For optimization, we use the Adam optimizer [16] with a learning rate of 0.001 for the encoder and decoder and 0.01 for λ , a minibatch size of 128, and the initial value of 5 for λ .

D Robustness of learned schemes

We quantify the robustness of communication schemes by measuring how well a decoder that was trained with respect to one encoder works with another encoder. From Table 2, we first observe

Encoder	Kept (%)	Decoder (ACC@1 (%))						
		Unif(0.1)	Unif(0.3)	Unif(0.5)	Constr(0.8)	Constr(0.6)	Constr(0.4)	Constr(0.2)
Unif ($\delta=0.1$)	21.34	0.65	0.54	0.71	0.23	0.57	0.70	0.68
Unif ($\delta=0.3$)	38.85	2.68	2.88	3.56	1.89	2.37	2.51	3.68
Unif ($\delta=0.5$)	56.71	6.52	9.19	10.33	7.08	7.27	6.84	9.07
Constr ($\epsilon=0.8$)	25.48	1.05	1.29	1.42	1.15	1.56	2.00	2.18
Constr ($\epsilon=0.6$)	34.04	2.30	2.58	3.34	3.43	7.14	8.13	4.31
Constr ($\epsilon=0.4$)	41.87	3.76	4.55	6.14	8.70	14.45	13.13	7.66
Constr ($\epsilon=0.2$)	55.80	14.04	18.88	22.04	38.31	27.18	22.81	23.90

Table 2: We measure robustness as the performance of trained decoders with respect to different encoders. Selected uniform and constrained models have similar retention rates. The diagonal numbers represent the accuracy of matched encoder-decoder pairs.

the followings as sanity checks: our trained encoders select better keywords than uniform encoders. For instance, using keywords from the trained encoder with a 55% retention rate (Constr(0.2)) improves the performance of the Unif decoders by 200% compared to the matched uniform random encoder (Unif(0.5)). Furthermore, trained decoders are robust to being given more tokens than they were trained on (e.g. going from Unif(0.1) to Unif(0.5) encoders and Constr(0.8) to Constr(0.2) encoders), which ensures that users can increase the accuracy by passing more tokens.

We find that using loose constraints on reconstruction loss (i.e. large ϵ) improves robustness to mismatched encoders. For example, even though the matched encoder-decoder pair of Constr(0.8) gets much lower accuracy (1.15%) than that of Constr(0.2) (23.90%), the Constr(0.8) decoder achieves even higher accuracy (38.31%) than the matched encoder-decoder pair for Constr(0.2) (55.80%). In the user study, we used the Constr(0.6) model to balance decoder performance with performance under matching encoders.

E Analysis on learned schemes

Correlation with frequency. It is possible that the model simply drops frequent tokens and retains rare ones. We find that this is not the case as shown in Figure 4. While extremely frequent tokens are almost always dropped, tokens with moderate to low frequency have a wide range of behavior in terms of their retention rates. The figure indicates that there is not a strong correlation between the unigram frequency of a token on the x-axis and its corresponding retention rate from our model on the y-axis.

Correlation with part-of-speech. On the other hand, part-of-speech tags provide a stronger correlation to retention as shown in Table 3, with different part-of-speech tag categories resulting in large differences in retention rates. We broadly find higher retention rates for content words, and lower retention for determiners, conjunctions and pronouns. This observation matches our intuition of which tokens must be retained to capture the meaning of sentences.

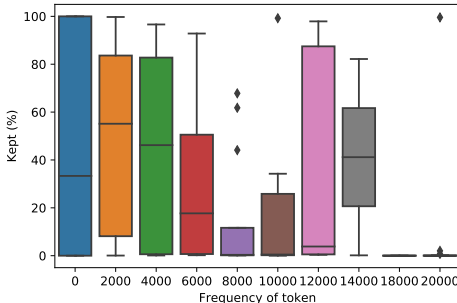


Figure 4: Correlation between the frequency and retention rates of tokens.

POS	Examples	Kept (%)
Determiner	the, a, this	3.96
Conjunction	and, but	4.85
Pronoun	it, you, we	9.79
Interjection	oh, wow	11.98
Verb	love, recommend	27.69
Preposition	by, with	29.77
Adverb	very, pretty	34.99
Adjective	delicious	35.92
Noun	service, food	40.04

Table 3: Part-of-speech tags in English and their percentages of being kept by our model.

Stability. Finally, we observe that random restarts of our procedure can learn different communication schemes. However, even if the learned schemes differ in terms of their retention rates for individual tokens, they achieve similar overall retention and accuracy across restarts, suggesting that there are many distinct near-optimal schemes. For example, two random runs of our procedure achieve essentially identical overall retention rates (32.08% and 33.52%) and accuracies (19.41% and 19.21%), but the average difference of token-level retention rates weighted by frequency is 11.35%.

F Details on user study

Data. We sampled 500 sentences from a held-out set from the Yelp corpus restricted to sentences that appear more than once. Each user was randomly assigned 50 sentences from the pool to type.

Filtered responses. We discarded 15 user responses where more than 20% of keywords are longer than target sentences (autocomplete task), and 9 user responses where more than 20% of paraphrased sentences are shorter than half of target sentences (writing task). Lastly, we filtered parts of user responses with exceptionally long time elapse (1.5 standard deviations above the mean, which is equivalent to 1.35 minutes for keywords and 1.43 minutes for sentences) to account for idle time.

G Interface for user study

Target sentence
I highly recommend this restaurant.

Enter keywords as fast as you can
Keywords are a **subset of words** in the target sentence. Try to use a **few** keywords.

Go

Mark suggested sentences as **good** or **bad**.

- Good:** paraphrased sentences that have **same meaning**.
- Bad:** sentences with **different meaning** or **grammatical errors**.

I highly recommend this restaurant.	✓	✗
I definitely recommend this restaurant.	✓	✗
Highly recommend this restaurant.	✓	✗

Figure 5: Autocomplete task interface.

AutoComplete
Target sentence
I look forward to returning!

Type the sentence as fast as you can
You can either copy the **same sentence verbatim** or create a **new sentence** with a **similar meaning**.

Sentences	Your sentence
Great place to visit!	Good place to visit!
The noodles were incredibly soft.	Noodles were incredibly soft and chewy.
My new favorite pizza place.	my new favorite pizza place

Next

Figure 6: Writing task interface.