

Experimental demonstration of one-shot coherence distillation: High-dimensional state conversions

Shao-Jie Xiong^{1,2}, Zhe Sun^{1,*}, Xiaofeng Li¹, Qi-Ping Su¹, Zhengjun Xi³, Li Yu¹, Jin-Shuang Jin¹, Jin-Ming Liu², Franco Nori^{4,5,†} and Chui-Ping Yang^{1,‡}

¹ Department of Physics, Hangzhou Normal University, Hangzhou 310036, China

² State Key Laboratory of Precision Spectroscopy, Department of Physics, East China Normal University, Shanghai 200062, China

³ College of Computer Science, Shaanxi Normal University, Xian 710062, China

⁴ Theoretical Quantum Physics Laboratory, RIKEN Cluster for Pioneering Research, Wako-shi, Saitama 351-0198, Japan and

⁵ Department of Physics, University of Michigan, Ann Arbor, MI 48109-1040, USA

We experimentally investigate problems of one-shot coherence distillation [Regula, Fang, Wang, and Adesso, Phys. Rev. Lett. 121, 010401 (2018)]. Based on a set of optical devices, we design a type of strictly incoherent operation (SIO), which is applicable in high-dimensional cases and can be applied to accomplish the transformations from higher-dimensional states to lower-dimensional states. Furthermore, a relatively complete process of the one-shot coherence distillation is experimentally demonstrated for three- and four-dimensional input states. Experimental data reveal an interesting result: higher coherence distillation rates (but defective) can be reached by tolerating a larger error ε . Our finding paves a fresh way in the experimental investigation of quantum coherence conversions through various incoherent operations.

Instruction.— Quantum coherence, exhibiting the fundamental feature of quantum superposition, marks the departure of quantum physics from classical physics. Recently, problems of quantum coherence have attracted considerable attention because these are essential for quantum foundations [1–12] and could also have practical applications in a wide variety of fields, such as quantum cryptography, quantum simulations, thermodynamics, quantum metrology, transport theory, and quantum biology [13–22]. In order to characterize quantum coherence in a mathematically rigorous and physically meaningful framework, the resource theory of quantum coherence was developed [1, 23–31]. In this setting, coherence is regarded as a quantum resource which provides necessary cost in accomplishing useful tasks. The free states, i.e., the incoherent states, are defined with diagonal density matrices in terms of the reference basis. Following that, free operations are incoherent operations that act unchangeably on the assemblage of all incoherent states. Many different definitions of incoherent operations are motivated by various physical and mathematical requirements, e.g., maximally incoherent operations (MIO) [23], incoherent operations (IO) [24], dephasing-covariant incoherent operations (DIO) [25], and strictly incoherent operations (SIO) [26]. The relations between each of these sets are nontrivial, i.e., $\text{SIO} \subseteq \text{IO} \subseteq \text{MIO}$ and $\text{SIO} \subseteq \text{DIO} \subseteq \text{MIO}$.

One of the most significant aspects in the coherence resource theory is to realize coherence conversions under incoherent operations. Many efforts have been devoted to explore the conditions for coherence manipulation and state transformation [32–34]. Quite recently, the experimental research on these problems was reported [35]. The authors realized a kind of SIO in two-dimensional (2D) space and implemented the state conversion on qubits

both with and without assistance.

A particularly important coherence conversion process is the so-called coherence distillation, which focuses on the interconversion between copies of a given state ρ and a canonical unit resource $|\Phi_m\rangle$ (m -dimensional maximally coherent state). The asymptotic version was introduced in [27], the authors used infinite copies of ρ and $|\Phi_m\rangle$ to check the asymptotical reversibility. The assisted distillation proposal was presented in [36], which is based on the interconversion between quantum correlation and quantum coherence. The assisted coherence distillation was experimentally tested in [37].

Note that the asymptotic distillation proposal lies on the assumed access to an unbounded number of independently and identically distributed copies of the considered system. In a realistic setting, only a finite supply of states are available. Moreover, it is a huge challenge to collectively manipulate coherent states over a large number of systems. Therefore, it is necessary to consider a more general scenario, i.e., the one-shot version of coherence distillation [38–41]. In particular, in the literature [38], the authors introduced a nonasymptotic coherence distillation, which requires a single copy of a quantum system and adopts an ε -error fidelity to characterize the distillation rate, achievable under a given class of incoherent operations with an error tolerance ε . This scenario greatly facilitates the experimental investigation.

Compared to the rapid development of theoretical work, there is a lack of experimental investigation on the problems of the quantum coherence conversion and the realization of different classes of incoherent operations. Especially for high-dimensional cases, there are few reports of the relevant experimental study. Whereas, realizing incoherent operations in high-dimensional systems is a crucial subject in the quantum coherence re-

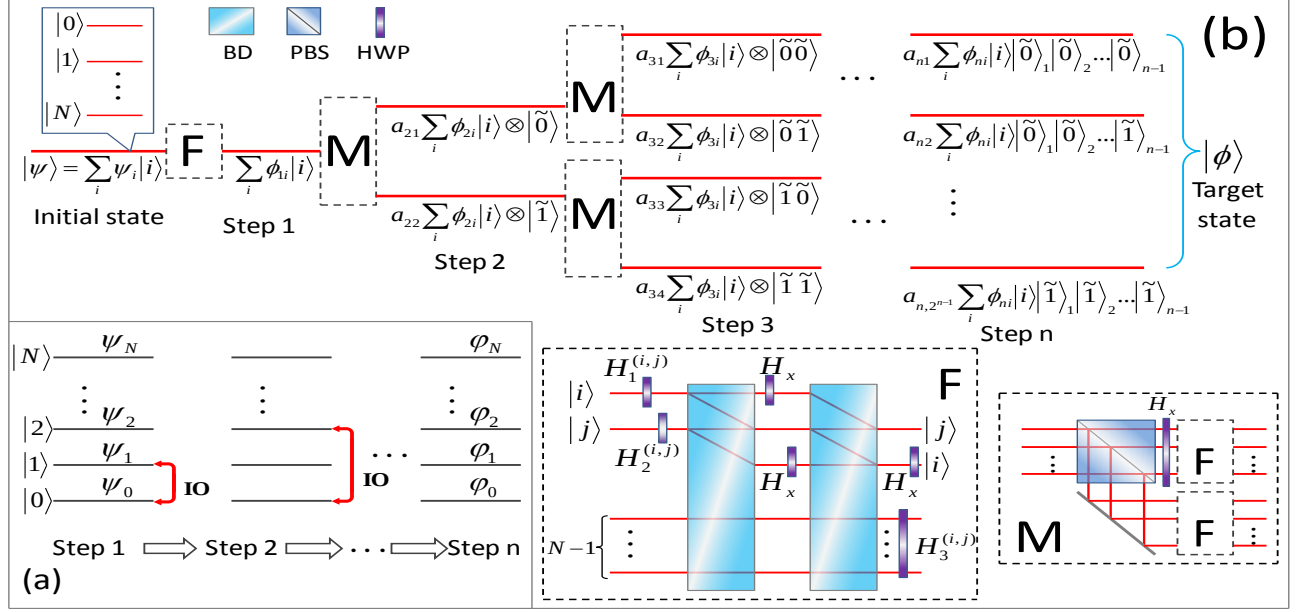


Figure 1. Experimental setup for realizing the multi-step proposal of the SIO, which implements the pure state transformation $|\psi\rangle = \sum_{i=0}^N \psi_i |i\rangle \rightarrow |\phi\rangle = \sum_{i=0}^{N'} \phi_i |i\rangle$, where $|i\rangle$ denotes the spatial modes and the dimensionality $N' \leq N$. The devices in the setup are half-wave plates (HWP), beam displacers (BD), and polarizing beam splitters (PBS). (a) Sketch of the multi-step proposal. At each step, only two components are manipulated. (b) Experimental setup of the proposal, where the module F presents the two-dimensional SIO working on the $|i\rangle$ and $|j\rangle$ spatial modes, holding the other $(N-1)$ modes unchanged. The angles of the HWP H_1^{ij} and H_2^{ij} are adjusted as needed. All the angles of the HWP H_x are set to $\pi/4$. The angle of H_3^{ij} is adjusted according to the outputs of i, j paths. In the module M , a PBS is employed to destroy the quantum coherence appearing in the ancillary modes. A pair of binary numbers $\tilde{0}$ and $\tilde{1}$ label the split path groups. A set of binary numbers encodes an ancillary mode corresponding to a group of spatial modes which carry the superposition information of the target state. The superposition coefficients ϕ_{ni} can be converted to the coefficients ϕ_i involved in the target state. In addition, a_{n1} , a_{n2} , $\dots$, and $a_{n,2^{n-1}}$ satisfy $\sum_k^{2^{n-1}} a_{nk}^2 = 1$.

source theory. For example, in coherence distillation, high-dimensional incoherent operations are indispensable to convert the higher-dimensional states into the lower-dimensional maximally coherent states. Motivated by the above, here we propose a linear optical setup to experimentally realize a type of incoherent operations which can be generalized to an arbitrarily high-dimensional space. As an example, three- and four-dimensional (3D and 4D) cases are taken into account in our experiment. Based on the proposed incoherent operation, we demonstrate the scenario of the one-shot coherence distillation experimentally [38]. To the best of our knowledge, this is the first experimental report on the one-shot coherence distillation via converting higher-dimensional states into lower-dimensional states. This proposal and observation might play important roles in the future study on quantum coherence manipulation in physical systems.

One-shot coherence distillation.— The concept of asymptotic coherence distillation was first put forward in [27]. In the asymptotic limit, an unbounded number of the state copies are needed, which is however quite dif-

ficult to achieve in a realistic setting. To overcome this difficulty, Regula and co-workers [38] introduced the one-shot coherence distillation tolerating an error ε , which is measured by

$$C_{d,\mathcal{O}}^{(1),\varepsilon}(\rho) := \log \max\{m \in \mathbb{N} | F_{\mathcal{O}}(\rho, |\Phi_m\rangle) \geq 1 - \varepsilon\}, \quad (1)$$

where the superscript “(1)” indicates that only a single copy of the given state ρ (or pure state $|\psi\rangle$) and the m -dimensional maximally coherent state $|\Phi_m\rangle$ are included. The asymptotic version is obtained in the limit $C_{d,\mathcal{O}}^{\infty,\varepsilon}(\rho) = \lim_{\varepsilon \rightarrow 0} \lim_{n \rightarrow \infty} C_{d,\mathcal{O}}^{(1),\varepsilon}(\rho^{\otimes n})/n$. The definition of the distillation fidelity $F_{\mathcal{O}}(\rho, |\Phi_m\rangle)$ is

$$F_{\mathcal{O}}(\rho, |\Phi_m\rangle) = \max_{A \in \mathcal{O}} \langle A(\rho), |\Phi_m\rangle \rangle, \quad (2)$$

where $\mathcal{O}$ denotes a class of incoherent operations and $\langle A, B \rangle = \text{Tr}(A^\dagger B)$ is the Hilbert-Schmidt inner product. This distillation fidelity describes the maximal conversion rate from a given state to the maximally coherent state $|\Phi_m\rangle$ by optimizing the incoherent operations. The value of $F_{\mathcal{O}}(\rho, |\Phi_m\rangle)$ depends on the structure of the given state, the chosen dimension m of $|\Phi_m\rangle$, and the type of

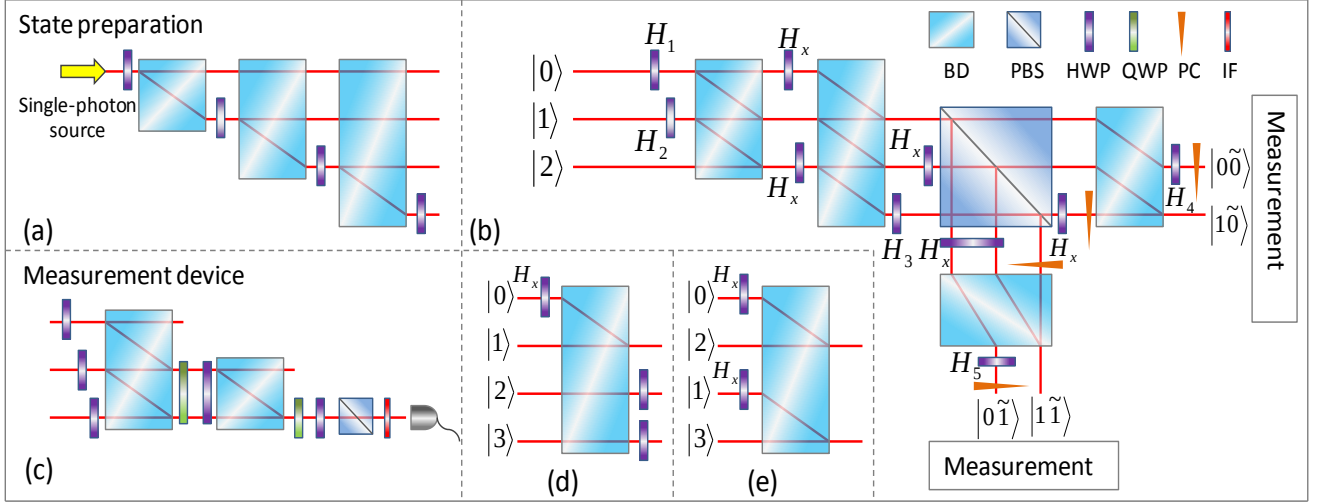


Figure 2. Simplified setup for the SIO converting the three- and four-dimensional pure states into the target states. (a) Device for preparing pure states with no higher than four dimensions. (b) Setup for the SIO converting a 3D pure state into a 2D pure state. The angles of the HWPs $H_{1,2,3,4,5}$ are adjusted as needed. All the angles of H_x are set to $\pi/4$, which perform the inversions between the polarization modes, i.e., $|H\rangle \rightarrow |V\rangle$ and $|V\rangle \rightarrow |H\rangle$. (c) Setup for the spatial tomography measurement on 3D states. (d) and (e) show the operations combining two paths into one path, which accomplish the dimension reductions. Some other devices in the setup are quarter-wave plates (QWP), phase compensators (PC), and interference filters (IF).

the incoherent operations. The error ε in Eq. (1) introduces rich meanings, such as the “purity” or “quality” to the distillable coherence. In practice, by tolerating a larger error ε (i.e., more defects), one can obtain a higher distillation rate (i.e., larger m).

The key step in the one-shot coherence distillation is to realize proper incoherent operations. We will design a linear optical device to experimentally realize the incoherent operation applicable for high-dimensional cases. In this letter, only pure-state conversions are studied for the following reasons: (i) Pure states are important resource in quantum tasks; (ii) Theoretical results are clear for pure states, e.g., the one-shot distillable coherence of pure states under MIO, DIO, IO, or SIO is exactly the same [38], and (iii) We will propose a SIO to accomplish the one-shot coherence distillation in pure states.

Pure state transformations under incoherent operations.— Let us start with a 2D SIO. In realistic settings, incoherent operations in a primary system are usually performed by introducing ancillary systems. In the linear optical setup, we employ the spatial modes of the photons, i.e., $|0\rangle$ and $|1\rangle$, to describe the primary system state, which facilitates the expansion to high-dimensional cases. The polarization modes $|V\rangle$ and $|H\rangle$ (i.e., vertical and horizontal modes) act as the ancillary system. The experimental setup is shown in the module **F** of Fig. 1, where the part of the $|i\rangle$ and $|j\rangle$ modes denotes the 2D SIO. Here, we select the modes $|0\rangle$ and $|1\rangle$, for example. We input a product state of the total system, i.e., $|\psi\rangle|V\rangle = (\alpha|0\rangle + \beta|1\rangle)|V\rangle$, with real

numbers α and β . The angles θ_1 and θ_2 of the half-wave plates (HWP) $H_{1,2}^{ij}$ are adjusted as needed. Then, the map $\Lambda(|\psi\rangle\langle\psi|) = K_1|\psi\rangle\langle\psi|K_1^\dagger + K_2|\psi\rangle\langle\psi|K_2^\dagger$ can be achieved with the Kraus operators

$$\begin{aligned} K_1 &= \sin 2\theta_1|0\rangle\langle 0| + \cos 2\theta_2|1\rangle\langle 1|, \\ K_2 &= \cos 2\theta_1|0\rangle\langle 1| + \sin 2\theta_2|1\rangle\langle 0|. \end{aligned} \quad (3)$$

When the parameters satisfy $|\alpha|^2 \sin(4\theta_1) = |\beta|^2 \sin(4\theta_2)$, one can obtain the pure output state, i.e., $\Lambda(|\psi\rangle\langle\psi|) = |\phi\rangle\langle\phi|$. According to the definition of SIO [32, 33], the operations described by the Kraus operators in Eq. (3) belong to a SIO.

For high-dimensional cases, we divide the operations into several steps. The sketch of the proposal is shown in Fig. 1(a), where the conversion from the input pure state $|\psi\rangle$ to the target pure state $|\phi\rangle$ can be realized by n steps. At each step, an incoherent operation (in fact, a SIO here) works on the two components ψ_i and ψ_j . Since this elementary operation belongs to a SIO, the following multi-step operation also belongs to a SIO [42].

In Fig. 1(b), we present an experimental setup for realizing our multi-step proposal. In the first step, a 2D SIO (see module **F**) works on the two components $|i\rangle$ and $|j\rangle$, holding the other components unchanged. After that, module **M** is introduced, where a polarization beam splitter (PBS) is employed to reset the superposed ancillary modes into a single one. Then, module **F** is repeatedly applied to manipulate another pair of spatial modes different from the pair in the previous step. At the n -th step, there are 2^{n-1} copies of the target state

corresponding to 2^{n-1} groups of spatial modes. One can obtain the target state, deterministically by performing spatial tomography on all the outputs, but probabilistically by reading part of the outputs. We implement the deterministic detection to complete the one-shot coherence distillation.

Experimental demonstration of the one-shot coherence distillation.— A single-photon source is produced by pumping a type I β -barium borate crystal with ultraviolet pulses at a 405-nm centered wavelength. One photon is directly detected as a trigger. The other one is prepared in a pure state of the spatial modes $|i\rangle$ ($i = 0, 1, 2, \dots$). Figure 2(a) shows the state preparation. A 3D pure state and a 4D pure state, with one undetermined superposition coefficient, are chosen as the input states.

Three-dimensional distillation.— The input state is chosen as

$$|\psi^3\rangle = \sqrt{\alpha}|2\rangle + \sqrt{(1-\alpha)/2}(|0\rangle + |1\rangle), \quad (4)$$

where $\alpha \in [0, 1]$. The superscript “3” denotes the dimensionality. Based on the distillation fidelity in Eq. (2), one should obtain the target states closest to the maximally coherent states by performing proper incoherent operations. In the region $\alpha \in [0, 1/2]$, the distillation fidelity $F_O(|\psi^3\rangle, |\Phi_2\rangle)$ is proved to be 1 [42]. Theoretically, $|\psi^3\rangle$ can be perfectly converted to the maximally coherent state, $|\Phi_2\rangle = (|0\rangle + |1\rangle)/\sqrt{2}$.

Figure 2(b) presents an experimental setup to accomplish the conversion from $|\psi^3\rangle$ to $|\Phi_2\rangle$. It is a simplified two-step version of the general proposal in Fig. 1(b). After the PBS, only one beam displacer (BD) is needed to combine two paths into one, resulting in a dimension reduction. By adjusting the parameters $\theta_{1,2,3,4,5}$, one obtains $|\Phi_2\rangle$ by doing a spatial tomography [see Fig. 2(c)]. In fact, the proposal in Fig. 2(b) provides a general SIO which can convert 3D pure states to 2D pure states. The parameterized Kraus operators are shown in [42].

In the region $\alpha \in (1/2, 1]$, the distillation fidelity becomes $F_O(|\psi^3\rangle, |\Phi_2\rangle) = \frac{1}{2}(\sqrt{\alpha} + \sqrt{1-\alpha})^2$ (see derivations in [42]), which implies that the maximally coherent state $|\Phi_2\rangle$ cannot be reached. Instead, a possible target state is $|\phi_{3 \rightarrow 2}\rangle = \sqrt{\alpha}|0\rangle + \sqrt{1-\alpha}|1\rangle$. We design a particularly simple device in Fig. 2(d), where three input paths ($|0\rangle$, $|1\rangle$, $|2\rangle$) are enough to accomplish the conversion $|\psi^3\rangle \rightarrow |\phi_{3 \rightarrow 2}\rangle$. A beam displacer is employed to combine the spatial modes $|0\rangle$ and $|1\rangle$. The angle of the HWP in the path of $|2\rangle$ is adjusted according to the initial superposition coefficients of $|0\rangle$ and $|1\rangle$. All the operations, performed on the spatial modes, belong to SIO, which can be verified by their Kraus-operator representation [42].

Figure 3(a) demonstrates the experimental data of $F_O(|\psi^3\rangle, |\Phi_2\rangle)$ and $F_O(|\psi^3\rangle, |\Phi_3\rangle)$ versus the superposition coefficient α . Here, the state $|\Phi_3\rangle$ is a 3D maximally coherent state, i.e., $|\Phi_3\rangle = (|0\rangle + |1\rangle + |2\rangle)/\sqrt{3}$. To obtain

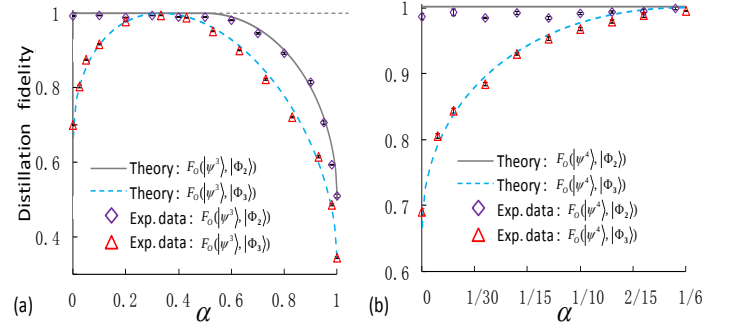


Figure 3. Experimental data of the distillation fidelity vs the superposition coefficient α . (a) Distillation fidelity of the 3D input state $|\psi^3\rangle$ given in Eq. (4). (b) Distillation fidelity of the 4D input state $|\psi^4\rangle$ given in Eq. (5). $|\Phi_2\rangle$ and $|\Phi_3\rangle$ are the maximally coherent states of 2D and 3D, respectively.

the fidelity $F_O(|\psi^3\rangle, |\Phi_3\rangle)$, we implement no operation except tomography measurements at the outputs. The experimental data are denoted by the triangles. To the fidelity $F_O(|\psi^3\rangle, |\Phi_2\rangle)$, the corresponding SIO is realized by the devices shown in Fig. 2(b, d). The dependence of the parameters $\theta_{1,2,3,4,5}$ [in Fig. 2(b)] on the coefficient α is shown in the Supplemental Material [42]. The experimental data for $F_O(|\psi^3\rangle, |\Phi_2\rangle)$, denoted by the rhombuses, agree well with the theoretical curve. In the region $\alpha \in [0, 1/2]$, $F_O(|\psi^3\rangle, |\Phi_2\rangle)$ approaches to 1; while in the region $\alpha \in [1/2, 1]$, $F_O(|\psi^3\rangle, |\Phi_2\rangle)$ decreases to $1/2$ for increasing values of α . According to Eq. (1), one can see that if a zero error $\varepsilon = 0$ is strictly required, the distillable coherence will be measured as $C_{d,O}^{(1),\varepsilon=0}(|\psi^3\rangle) = \log 2$ in the region $\alpha \in [0, 1/2]$, except at the point $\alpha = 1/3$ where $C_{d,O}^{(1),\varepsilon=0}(|\psi^3\rangle) = \log 3$. However, when $\alpha > 1/2$, the distillation fidelity cannot reach 1 any more, i.e., $C_{d,O}^{(1),\varepsilon=0}(|\psi^3\rangle) = 0$. This result implies that the ideal coherence resource cannot be distilled from the initial state. However, in practical tasks, a finite tolerance $\varepsilon \neq 0$ is usually accepted, then one can finish the tasks with a defective distillable coherence in larger regions of α . For example, if an accepted error is $\varepsilon = 0.1$, the distillable coherence will be $C_{d,O}^{(1),\varepsilon=0.1}(|\psi^3\rangle) = \log 3$ in a larger region about $\alpha \in [0.0838, 0.6495]$, and $C_{d,O}^{(1),\varepsilon=0.1}(|\psi^3\rangle) = \log 2$ in $\alpha \in [0, 0.0838] \cup (0.6495, 0.8]$. Such an example clearly presents the fact that in the one-shot distillation framework, one can obtain a higher rate of distillable coherence but with more defects by tolerating a larger error ε . Similar phenomena are also found in Fig. 3(b) where a 4D input state is investigated.

Four-dimensional distillation.— We choose a 4D input state (for $\alpha \in [0, 1/2]$)

$$|\psi^4\rangle = \sqrt{\alpha}(|0\rangle + |1\rangle) + \sqrt{1/2 - \alpha}(|2\rangle + |3\rangle). \quad (5)$$

For the 2D maximally coherent state $|\Phi_2\rangle$, the distil-

lation fidelity $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_2\rangle)$ is proved to be 1 [42] over the entire range $\alpha \in [0, 1/2]$. Thus a reasonable target state is $|\Phi_2\rangle = (|2\rangle + |3\rangle)/\sqrt{2}$. The general proposal shown in Fig. 1(b) can be employed to reach the target state. However, due to the special structure of $|\psi^4\rangle$, a simplified device in Fig. 2(e) is designed by using a BD to combine the paths $|0\rangle$ and $|1\rangle$ into the paths $|2\rangle$ and $|3\rangle$, respectively. This finishes the state conversion.

For the 3D maximally coherent state $|\Phi_3\rangle$, the distillation fidelity is $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle) = \frac{2}{3}(\sqrt{\alpha} + \sqrt{1-2\alpha})^2$ in the region of $\alpha \in [0, 1/6] \cup [1/3, 1/2]$ [42]. Therefore, a reasonable target state is $|\phi_{4 \rightarrow 3}\rangle = \sqrt{2\alpha}|1\rangle + \sqrt{(1/2 - \alpha)}(|2\rangle + |3\rangle)$. While, in the region $\alpha \in [1/6, 1/3]$, the fidelity is $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle) = 1$. Thus, the maximally coherent state $|\Phi_3\rangle$ becomes the target state.

The conversion $|\psi^4\rangle \rightarrow |\phi_{4 \rightarrow 3}\rangle$ can be accomplished through the devices in Fig. 2(d) by combining the path $|0\rangle$ into $|1\rangle$. However, it is much more complicated to realize the transformation $|\psi^4\rangle \rightarrow |\Phi_3\rangle$. It can be achieved either by the general method (in Fig. 1) with three steps, or by the simplified proposal in Fig. 2(b) with the extension to a four-path input and two more module **F** at the outputs.

In Fig. 3(b), we show the experimental data of the distillation fidelity $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_2\rangle)$ (denoted by rhombuses) and $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle)$ (denoted by triangles) versus the superposition coefficient α . In experiments, we test only the region $\alpha \in [0, 1/6]$, where one can see that if the zero error is strictly defined, the distillable coherence is measured by $C_d^{(1), \varepsilon=0}(|\psi^4\rangle) = \log 2$, except at the point of $\alpha = 1/6$, where $C_d^{(1), \varepsilon=0}(|\psi^4\rangle) = \log 3$. If a finite error $\varepsilon \neq 0$ is allowed, one will obtain a higher rate $C_d^{(1), \varepsilon}(|\psi^4\rangle) = \log 3$ in a wider region of α conditioned by $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle) \geq 1 - \varepsilon$.

Discussion.— We have studied the problems of implementing incoherent operations in a realistic optical system and demonstrated the one-shot coherence distillation process experimentally. Based on an optical setup, a general proposal was introduced to realize an important SIO applicable in high dimensions, which accomplishes pure-state conversions. Two sets of states were chosen as input state examples and their distillation fidelities were obtained analytically. We clearly presented the selection process of the target state and the experimental realization of the incoherent operations. Therefore, this experiment provides a relatively complete demonstration of the coherence distillation process. The experimental data reveal that one can obtain a higher coherence distillation rate (but with more defects) by tolerating a larger error ε . It is hence of significance in practical tasks. Additional unitary operations can be added onto the present setup to realize other kinds of incoherent operations. Our finding opens a window through which one can explore in depth the experimental implementation of quantum coherence conversions through various incoherent operations.

This work is supported by the NKRD of China (2016YFA0301802), the National Natural Science Foundation of China (NSFC) (11375003, 11775065, 11774076, 11174081, 61472114, 11974096, 61671280), the Zhejiang Natural Science Foundation (LY17A050003), and the Natural Science Foundation of Shanghai (16ZR1448300). This work is partially supported by MURI Center for Dynamic Magneto-Optics via the Air Force Office of Scientific Research (AFOSR) (FA9550-14-1-0040), Army Research Office (ARO) (Grant No. Grant No. W911NF-18-1-0358), Asian Office of Aerospace Research and Development (AOARD) (Grant No. FA2386-18-1-4045), Japan Science and Technology Agency (JST) (via the Q-LEAP program, and the CREST Grant No. JPMJCR1676), Japan Society for the Promotion of Science (JSPS) (JSPS-RFBR Grant No. 17-52-50023; JSPS-FWO Grant No. VS.059.18N), the RIKEN-AIST Challenge Research Fund, the Foundational Questions Institute (FQXi), and the NTT PHI Laboratory.

* sunzhe@hznu.edu.cn

† fnori@riken.jp

‡ yangcp@hznu.edu.cn

- [1] A. Streltsov, G. Adesso, and M. B. Plenio, Quantum coherence as a resource, *Rev. Mod. Phys.* **89**, 041003 (2017).
- [2] M. L. Hu, X. Y. Hu, J. C. Wang, Y. Peng, Y. R. Zhang, and H. Fan, Quantum coherence and geometric quantum discord, *Phys. Rep.* **762**, 1 (2018).
- [3] A. Streltsov, U. Singh, H. S. Dhar, M. N. Bera, and G. Adesso, Measuring quantum coherence with entanglement, *Phys. Rev. Lett.* **115**, 020403 (2015).
- [4] M. Lostaglio, K. Korzekwa, D. Jennings, and T. Rudolph, Quantum coherence, time-translation symmetry, and thermodynamics, *Phys. Rev. X* **5**, 021001 (2015).
- [5] T. R. Bromley, M. Cianciaruso, and G. Adesso, Frozen quantum coherence, *Phys. Rev. Lett.* **114**, 210401 (2015).
- [6] C. Napoli, T. R. Bromley, M. Cianciaruso, M. Piani, N. Johnston, and G. Adesso, Robustness of coherence: an operational and observable measure of quantum coherence, *Phys. Rev. Lett.* **116**, 150502 (2016).
- [7] Y. Yao, X. Xiao, L. Ge, and C. P. Sun, Quantum coherence in multipartite systems, *Phys. Rev. A* **92**, 022112 (2015).
- [8] M. Ringbauer, T. R. Bromley, M. Cianciaruso, L. Lami, W. Y. Sarah Lau, G. Adesso, A. G. White, A. Fedrizzi, and M. Piani, Certification and Quantification of Multilevel Quantum Coherence, *Phys. Rev. X* **8**, 041007 (2018).
- [9] L. Lami, B. Regula, and G. Adesso, Generic Bound Coherence under Strictly Incoherent Operations, *Phys. Rev. Lett.* **122**, 150402 (2019).
- [10] X. Wang, A. Miranowicz, Y.X. Liu, C.P. Sun, F. Nori, Sudden vanishing of spin squeezing under decoherence, *Phys. Rev. A* **81**, 022106 (2010).
- [11] W. Zhong, Z. Sun, J. Ma, X. Wang, F. Nori, Fisher information under decoherence in Bloch representation, *Phys. Rev. A* **87**, 022337 (2013).

- [12] W. Nie, Z. H. Peng, F. Nori, Y. X. Liu, Topological Quantum Coherence in a Symmetry-Protected Superatom, arXiv:1902.10883 (2019).
- [13] T. Sashki, Y. Yamamoto, and M. Koashi, Practical quantum key distribution protocol without monitoring signal disturbance, *Nature* **509**, 475 (2014).
- [14] I. Buluta, F. Nori, Quantum simulators, *Science* **326**, 108 (2009).
- [15] I. M. Georgescu, S. Ashhab, and F. Nori, Quantum simulation, *Rev. Mod. Phys.* **86**, 153 (2014).
- [16] K. D. Wu, Z. B. Hou, G. Y. Xiang, C. F. Li, G. C. Guo, D. Y. Dong, and F. Nori, Detecting Non-Markovianity via Quantified Coherence: Theory and Experiments. arXiv:1903.03359 (2019).
- [17] M. Lostaglio, D. Jennings, and T. Rudolph, Description of quantum coherence in thermodynamic processes requires constraints beyond free energy, *Nat. Commun.* **6**, 6383 (2015).
- [18] R. Demkowicz-Dobrzanski and L. Maccone, Using entanglement against noise in quantum metrology, *Phys. Rev. Lett.* **113**, 250801 (2014).
- [19] G. Kiesslich, E. Scholl, T. Brandes, F. Hohls, R. J. Haug, Noise enhancement due to quantum coherence in coupled quantum dots, *Phys. Rev. Lett.* **99**, 206602 (2007).
- [20] E. Romero, R. Augulis, V. Novoderezhkin, M. Ferretti, J. Thieme, D. Zigmantas, and R. van Grondelle, Quantum coherence in photosynthesis for efficient solar-energy conversion, *Nature Phys.* **10**, 676 (2014).
- [21] N. Lambert, Y. N. Chen, Y. C. Chen, C. M. Li, G. Y. Chen, and F. Nori, Quantum biology, *Nature Phys.* **9**, 10 (2013).
- [22] C. M. Li, N. Lambert, Y. N. Chen, G. Y. Chen, F. Nori, Witnessing Quantum Coherence: from solid-state to biological systems, *Sci. Rep.* **2**, 885 (2012).
- [23] J. Aberg, Quantifying superposition, arXiv:quant-ph/0612146.
- [24] T. Baumgratz, M. Cramer, and M. B. Plenio, Quantifying coherence, *Phys. Rev. Lett.* **113**, 140401 (2014).
- [25] E. Chitambar and G. Gour, Critical examination of incoherent operations and a physically consistent resource theory of quantum coherence, *Phys. Rev. Lett.* **117**, 030401 (2016).
- [26] F. G. S. L. Brandão and G. Gour, Reversible framework for quantum resource theories, *Phys. Rev. Lett.* **115**, 070503 (2015).
- [27] A. Winter and D. Yang, Operational resource theory of coherence, *Phys. Rev. Lett.* **116**, 120404 (2016).
- [28] F. Levi, and F. Mintert, A quantitative theory of coherent delocalization, *New J. Phys.* **16**, 033007 (2014).
- [29] Z. W. Liu, K. F. Bu, and R. Takagi, One-Shot Operational Quantum Resource Theory, *Phys. Rev. Lett.* **123**, 020401 (2019).
- [30] C. L. Liu and D. L. Zhou, Deterministic Coherence Distillation, *Phys. Rev. Lett.* **123**, 070402 (2019).
- [31] E. Chitambar and G. Gour, Quantum resource theories, *Rev. Mod. Phys.* **91**, 025001 (2019).
- [32] S. P. Du, Z. F. Bai, and Y. Guo, Erratum: Conditions for coherence transformations under incoherent operations, *Phys. Rev. A* **91**, 052120(2017).
- [33] E. Chitambar and G. Gour, Comparison of incoherent operations and measures of coherence, *Phys. Rev. A* **94**, 052336 (2016).
- [34] Z. J. Xi, Y. Luo, and L. H. Shao, Coherence manipulation under non-cohering operations, *J. Phys. A* **52**, 375301 (2019).
- [35] K. D. Wu, T. Theurer, G. Y. Xiang, C. F. Li, G. C. Guo, M. B. Plenio, and A. Streltsov, Quantum coherence and state conversion: theory and experiment, arXiv:1903.01479 (2019).
- [36] E. Chitambar, A. Streltsov, S. Rana, M. N. Bera, G. Adesso, and M. Lewenstein, Assisted distillation of quantum coherence, *Phys. Rev. Lett.* **116**, 070402 (2016).
- [37] K. D. Wu, Z. B. Hou, H. S. Zhong, Y. Yuan, G. Y. Xiang, C. F. Li, and G. C. Guo, Experimentally obtaining maximal coherence via assisted distillation process, *Optica* **4**, 454 (2017).
- [38] B. Regula, K. Fang, X. Wang, and G. Adesso, One-shot coherence distillation, *Phys. Rev. Lett.* **121**, 010401 (2018).
- [39] K. Fang, X. Wang, L. Lami, B. Regula, and G. Adesso, Probabilistic distillation of quantum coherence, *Phys. Rev. Lett.* **121**, 070404 (2018).
- [40] Q. Zhao, Y. C. Liu, X. Yuan, E. Chitambar, A. Winter, One-Shot Coherence Distillation: Towards Completing the Picture, *IEEE Trans. Inform. Theory* **65** 6441 (2019).
- [41] K. F. Bu, U. Singh, S. M. Fei, A. K. Pati, and J. D. Wu, Maximum relative entropy of coherence: an operational coherence measure, *Phys. Rev. Lett.* **119**, 150405 (2017).
- [42] See the Supplemental Material for some theoretical derivations and the parameters chosen in the experiment.

Supplemental Materials

KRAUS REPRESENTATION OF THE PROPOSED INCOHERENT OPERATIONS

Let us introduce the proposed SIO in detail. Figure 4 presents more clearly the experimental setup of the 2D SIO. For the state transformation in a 2D space $|\psi\rangle = \sum_{i=0}^1 \psi_i |i\rangle \rightarrow |\phi\rangle = \sum_{i=0}^1 \phi_i |i\rangle$, the Kraus-operator representation is $|\phi\rangle\langle\phi| = \sum_{i=1}^2 K_i |\psi\rangle\langle\psi| K_i^\dagger$, and the Kraus operators can be described as [32]

$$\begin{aligned} K_1 &= \sqrt{a} \frac{\phi_0}{\psi_0} |0\rangle\langle 0| + \sqrt{a} \frac{\phi_1}{\psi_1} |1\rangle\langle 1|, \\ K_2 &= \sqrt{1-a} \frac{\phi_0}{\psi_1} |0\rangle\langle 1| + \sqrt{1-a} \frac{\phi_1}{\psi_0} |1\rangle\langle 0|, \end{aligned} \quad (6)$$

where displayed $a = \frac{|\psi_0|^2 - |\phi_1|^2}{|\phi_0|^2 - |\phi_1|^2}$ and $0 \leq a \leq 1$, which is equivalent to ensure the majorization relation. A pure state $|\psi\rangle = \sum_{i=0}^N \psi_i |i\rangle$, majorized by another state $|\phi\rangle = \sum_{i=0}^N \phi_i |i\rangle$, should satisfy $\sum_{i=0}^k |\psi_i|^{2\downarrow} \leq \sum_{i=0}^k |\phi_i|^{2\downarrow}$, where $k \in [0, N]$ and the superscript “ $\downarrow$ ” indicates the descending order of the elements. The majorization relation is sufficient and necessary for SIO (or special IO)-dominated pure states conversions [33, 40].

The Kraus operators above can be rewritten as

$$\begin{aligned} K_1 &= \sin 2\theta_1 |0\rangle\langle 0| + \cos 2\theta_2 |1\rangle\langle 1|, \\ K_2 &= \cos 2\theta_1 |0\rangle\langle 1| + \sin 2\theta_2 |1\rangle\langle 0|. \end{aligned} \quad (7)$$

Actually, in the experiment we realize a map

$$\begin{aligned} |0V\rangle &\rightarrow \cos(2\theta_1) |1H\rangle + \sin(2\theta_1) |0V\rangle, \\ |1V\rangle &\rightarrow \cos(2\theta_2) |1V\rangle + \sin(2\theta_2) |0H\rangle, \end{aligned} \quad (8)$$

which can be translated into the Kraus-operator representation in Eq. (7). For a pure input state $|\psi\rangle = \alpha |0\rangle + \beta |1\rangle$, if the angles $\theta_{1,2}$ of the HWP (denoted by $H_{1,2}$ in Fig. 4) satisfy $|\alpha|^2 \sin(4\theta_1) = |\beta|^2 \sin(4\theta_2)$, one can obtain the pure state at the output, i.e.,

$$\begin{aligned} |\phi\rangle &= \frac{1}{Q} [\beta \sin(2\theta_2) |0\rangle + \alpha \cos(2\theta_1) |1\rangle], \\ Q &= \sqrt{|\beta|^2 \sin^2(2\theta_2) + |\alpha|^2 \cos^2(2\theta_1)}. \end{aligned} \quad (9)$$

Recall the definition of IO and SIO. For a chosen reference basis $\{|i\rangle\}$, the class of free states is denoted by $\mathcal{I}$. IO and SIO can be described by a set of Kraus operators $\{K_n\}$ satisfying $\sum_n K_n^\dagger K_n = 1$. For an IO, every Kraus operator should satisfy $K_n \mathcal{I} K_n^\dagger \subseteq \mathcal{I}$. While, for a SIO, an additional condition, i.e., $K_n^\dagger \mathcal{I} K_n \subseteq \mathcal{I}$, is needed. An operation is IO if and only if every column of K_n in the fixed basis $\{|i\rangle\}$ has at most one nonzero entry. More strictly, SIO requires that not only every column but also every line of K_n has at most one nonzero element [32, 33]. Therefore, the 2D operation proposed by us belongs to the SIO.

In order to consider the multi-step operations applicable to high-dimensional space, we introduce the SIO performed on the subspace spanned by the two modes $|i\rangle$ and $|j\rangle$, with its experiment setup in the module **F** of Fig. 1. The whole map, in the composite system of the spatial modes and the ancillary polarization modes ($|H\rangle$ and $|V\rangle$), reads

$$\begin{aligned} |iV\rangle &\rightarrow \cos 2\theta_1^{(i,j)} |jH\rangle + \sin 2\theta_1^{(i,j)} |iV\rangle, \\ |jV\rangle &\rightarrow \cos 2\theta_2^{(i,j)} |jV\rangle + \sin 2\theta_2^{(i,j)} |iH\rangle, \\ |kV\rangle &\rightarrow |k\rangle \left[\cos 2\theta_3^{(i,j)} |V\rangle + \sin 2\theta_3^{(i,j)} |H\rangle \right], \end{aligned} \quad (10)$$

where the parameters $\theta_1^{(i,j)}$ and $\theta_2^{(i,j)}$ correspond to the two HWPs H_1^{ij} and H_2^{ij} in the module **F**. The mode $|k\rangle$ ($k \neq i$ and j) denote the modes different from the i and j modes, and the angle $\theta_3^{(i,j)}$ corresponding to the HWP H_3^{ij} should be adjusted to prepare the same superposition structure of the polarization modes as those assisting the spatial modes of $|i\rangle$ and $|j\rangle$.

After this step, we realize the transformation

$$\sum_i \psi_i |i\rangle \rightarrow \phi_i |i\rangle + \phi_j |j\rangle + \sum_k \psi_k |k\rangle. \quad (11)$$

The Kraus operators can be expressed as

$$\begin{aligned} K_1^{(i,j)} &= \sin 2\theta_1^{(i,j)} |i\rangle\langle i| + \cos 2\theta_2^{(i,j)} |j\rangle\langle j| + \cos 2\theta_3^{(i,j)} I_k, \\ K_2^{(i,j)} &= \cos 2\theta_1^{(i,j)} |i\rangle\langle j| + \sin 2\theta_2^{(i,j)} |j\rangle\langle i| + \sin 2\theta_3^{(i,j)} I_k, \\ I_k &= \sum_{k \neq i,j} |k\rangle\langle k|, \end{aligned} \quad (12)$$

where the parameters

$$\begin{aligned} 2\theta_1^{(i,j)} &= \arcsin(\sqrt{a_{ij}} \frac{\phi_i}{\psi_i}), \\ 2\theta_2^{(i,j)} &= \arccos(\sqrt{a_{ij}} \frac{\phi_j}{\psi_j}), \\ 2\theta_3^{(i,j)} &= \arcsin \sqrt{a_{ij}}, \end{aligned} \quad (13)$$

with $a_{ij} = \frac{|\psi_i|^2 - |\phi_j|^2}{|\phi_i|^2 - |\phi_j|^2}$. As a consequence, in the multi-step proposal, the Kraus operators are implemented on different two-dimensional subspaces. One of the total Kraus operators can be described as $\mathbb{K}_l = \prod_{(i,j)} K_q^{(i,j)}$, with $q = 1, 2$ and the superscript (i, j) going through all the component modes necessary to complete the state transformation. Obviously, the class of $\{\mathbb{K}_l\}$ still belongs to the SIO, and the index of the operators is $l = 2, 4, \dots, 2^n$ (n is the number of the steps in Fig. 1). Therefore, we can finally obtain $\sum_l \mathbb{K}_l |\psi\rangle\langle\psi| \mathbb{K}_l^\dagger = |\phi\rangle\langle\phi|$.

STATE TRANSFORMATION FROM 3D STATE INTO 2D STATE

As an example, we consider the conversion $\psi_1 |0\rangle + \psi_2 |1\rangle + \psi_3 |2\rangle \rightarrow \phi_1 |0\rangle + \phi_2 |1\rangle$ with the help of the ancillary

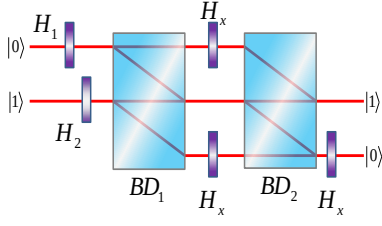


Figure 4. Experimental setup for a 2D SIO, which realizes the transformations between 2D pure states. $H_{1,2,x}$ denote the half-wave plates (HWP), and $BD_{1,2}$ denote the beam displacers (BD). The angle of H_x is set to $\pi/4$, and the angles of $H_{1,2}$ are set according to the target states.

modes. The devices in Fig. 3(b) realize the map as follows

$$\begin{aligned} |0V\rangle &\rightarrow \cos 2\theta_1 (\cos 2\theta_4 |\tilde{0}\tilde{0}H\rangle - \sin 2\theta_4 |\tilde{0}\tilde{0}V\rangle) + \sin 2\theta_1 |\tilde{1}\tilde{1}H\rangle, \\ |1V\rangle &\rightarrow \cos 2\theta_2 (\cos 2\theta_5 |\tilde{0}\tilde{1}H\rangle - \sin 2\theta_5 |\tilde{0}\tilde{1}V\rangle) + \sin 2\theta_2 |\tilde{1}\tilde{0}H\rangle, \\ |2V\rangle &\rightarrow \cos 2\theta_3 |\tilde{1}\tilde{0}V\rangle - \sin 2\theta_3 |\tilde{1}\tilde{1}V\rangle, \end{aligned} \quad (14)$$

where, $\tilde{0}$ and $\tilde{1}$ distinguish the two groups of the spatial modes split by the PBS, and both with the polarization modes $|H\rangle$ and $|V\rangle$ acting as the ancillary modes. Then the Kraus operators can be derived from the above map,

$$\begin{aligned} K_1 &= -\cos 2\theta_1 \sin 2\theta_4 |0\rangle\langle 0| + \cos 2\theta_3 |1\rangle\langle 2|, \\ K_2 &= \cos 2\theta_1 \cos 2\theta_4 |0\rangle\langle 0| + \sin 2\theta_2 |1\rangle\langle 1|, \\ K_3 &= -\cos 2\theta_2 \sin 2\theta_5 |0\rangle\langle 1| - \sin 2\theta_3 |1\rangle\langle 2|, \\ K_4 &= \sin 2\theta_1 |1\rangle\langle 0| + \cos 2\theta_2 \cos 2\theta_5 |0\rangle\langle 1|. \end{aligned} \quad (15)$$

These Kraus operators provide a general conversion process from 3D states into 2D states. In the experiment, we consider a special case, i.e., the input state is

$$|\psi^3\rangle = \sqrt{\alpha}|2\rangle + \sqrt{(1-\alpha)/2}(|0\rangle + |1\rangle), \quad (16)$$

with $\alpha \in [0, 1/2]$ and the target state is $|\phi\rangle = \frac{\sqrt{2}}{2}(|0\rangle + |1\rangle)$. The angles of the HWPs in Fig. 3(b) are set as

$$\begin{aligned} 2\theta_1 &= 2\theta_2 = \arccos \left[\frac{1}{\sqrt{2(1-\alpha)}} \right], \\ 2\theta_3 &= -\pi/4, \\ 2\theta_4 &= 2\theta_5 = -\arccos(\sqrt{1-2\alpha}). \end{aligned} \quad (17)$$

The output state of the whole system is

$$\frac{\sqrt{2}}{2}(|0\rangle + |1\rangle) \left[\sqrt{\frac{1-\alpha}{2}}(|\tilde{1}H\rangle + |\tilde{0}H\rangle) + \sqrt{\alpha}(|\tilde{0}V\rangle + |\tilde{1}V\rangle) \right], \quad (18)$$

from which we will obtain the target state by performing spatial tomography on the modes of $|0\rangle$ and $|1\rangle$. Note that the tomography has been done on both of the two groups of spatial modes to provide a deterministic transformation.

ANALYTICAL RESULTS OF THE DISTILLATION FIDELITY

For any pure state and the incoherent operation $\mathcal{O} \in \{\text{MIO, DIO, SIO, IO}\}$, the fidelity can also be described by the m -distillation norm [38]:

$$F_{\mathcal{O}}(|\psi\rangle, |\Phi_m\rangle) = \frac{1}{m} \|\psi\|_{[m]}^2, \quad (19)$$

where $\|\psi\|_{[m]}$ is the m -distillation norm

$$\|\psi\|_{[m]} = \min_{|\psi\rangle = |x\rangle + |y\rangle} \|x\|_{l_1} + \sqrt{m} \|y\|_{l_2}, \quad (20)$$

where $\|\bullet\|_{l_1}$ and $\|\bullet\|_{l_2}$ are the l_1 norm and l_2 norm. For a d -dimensional pure state, the m -distillation norm can be described as

$$\|\psi\|_{[m]} = \|\psi_{1:m-k^*}^\downarrow\|_{l_1} + \sqrt{k^*} \|\psi_{m-k^*+1:d}^\downarrow\|_{l_2}, \quad (21)$$

where $\psi_{1:k}^\downarrow$ denotes the vector consisting of the k largest (by magnitude) coefficients of $|\psi\rangle$, and analogously $\psi_{k+1:d}^\downarrow$ denotes the rest of the coefficients. The special number of k^* is defined by

$$k^* = \arg \min_{1 \leq k \leq m} (\|\psi_{m-k^*+1:d}^\downarrow\|_{l_2}^2 / k). \quad (22)$$

To consider the conversion from the input state

$$|\psi^3\rangle = \sqrt{\alpha}|2\rangle + \sqrt{(1-\alpha)/2}(|0\rangle + |1\rangle) \quad (23)$$

into a 2D target state, for $0 \leq \alpha \leq 1/2$, the distillation fidelity can be easily verified to be 1 by using the m -distillation norm presentation. It implies that the state $|\psi^3\rangle$ can be successfully converted to the 2D maximal coherence state $|\Phi_2\rangle = \sqrt{1/2}(|0\rangle + |1\rangle)$ by choosing a proper incoherent operation. While, for $1/2 < \alpha \leq 1$, it can be calculated that

$$\begin{aligned} \|\psi_{2-k+1:3}^{3\downarrow}\|_{l_2}^2 / k &= 1 - \alpha, \quad \text{for } k = 1, \\ \|\psi_{2-k+1:3}^{3\downarrow}\|_{l_2}^2 / k &= 1/2, \quad \text{for } k = 2. \end{aligned} \quad (24)$$

Thus we have $k^* = 1$, and

$$\begin{aligned} \|\psi^3\|_{[2]} &= \|\psi_{1:1}^\downarrow\|_{l_1} + \|\psi_{1+1:3}^\downarrow\|_{l_2} \\ &= \sqrt{\alpha} + \sqrt{1-\alpha}. \end{aligned} \quad (25)$$

Finally, the distillation fidelity becomes

$$\begin{aligned} F_{\mathcal{O}}(|\psi^3\rangle, |\Phi_2\rangle) &= \frac{1}{2} \|\psi^3\|_{[2]}^2 \\ &= \frac{1}{2} (\sqrt{\alpha} + \sqrt{1-\alpha})^2. \end{aligned} \quad (26)$$

Obviously, a reasonable target state is $|\phi_{3 \rightarrow 2}\rangle = \sqrt{\alpha}|0\rangle + \sqrt{1-\alpha}|1\rangle$, which can reach the distillation fidelity above.

In an analogous way, for the transformation from the input state $|\psi^4\rangle$ in Eq. (5) into a 3D target state, we can obtain the fidelity

$$\begin{aligned} F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle) &= \frac{1}{3} \| |\psi^4\rangle \|_{[3]}^2 \\ &= \left[\sqrt{\frac{2\alpha}{3}} + \sqrt{\frac{2-4\alpha}{3}} \right]^2 \end{aligned} \quad (27)$$

for $\alpha \in [0, 1/6] \cup [1/3, 1/2]$. Thus a possible target state is

$$|\phi_{4 \rightarrow 3}\rangle = \sqrt{2\alpha}|1\rangle + \sqrt{(1/2 - \alpha)}(|2\rangle + |3\rangle). \quad (28)$$

While, for $\alpha \in [1/6, 1/3]$, the optimal value $F_{\mathcal{O}}(|\psi^4\rangle, |\Phi_3\rangle) = 1$ can be reached, which means that in this region the achievable target state is the maximally coherent state $|\Phi_3\rangle = \sqrt{1/3}(|0\rangle + |1\rangle + |2\rangle)$.