

Automatically Generating Macro Research Reports from a Piece of News

Wenxin Hu^{1*}, Xiaofeng Zhang², Gang Yang³

¹Harbin Institute of Technology, Shenzhen

huwenxin@stu.hit.edu.com, zhangxiaofeng@hit.edu.com, yanggang@stu.hit.edu.com,

Abstract

Automatically generating macro research reports from economic news is an important yet challenging task. As we all know, it requires the macro analysts to write such reports within a short period of time after the important economic news are released. This motivates our work, i.e., using AI techniques to save manual cost. The goal of the proposed system is to generate macro research reports as the draft for macro analysts. Essentially, the core challenge is the long text generation issue. To address this issue, we propose a novel deep learning technique based approach which includes two components, i.e., outline generation and macro research report generation. For the model performance evaluation, we first crawl a large news-to-report dataset and then evaluate our approach on this dataset, and the generated reports are given for the subjective evaluation.

1 Introduction & Related Works

Nature language generation (NLG) is a fundamental yet challenging task in the domain of Natural Language Processing (NLP). NLG has long been studied in many applications such as dialogue system [Akasaki and Kaji, 2017; Serban *et al.*, 2016], machine translation [Chiang, 2010] and summarization [See *et al.*, 2017; Chen and Bansal, 2018]. One emerging application of NLG is the macro research report generation which usually takes short news as the input and outputs long reports.

Generally, the macro research reports could be classified into different categories such as company level research report, industry level research report and macro research report. Different type of reports may have different requirements. For macro research report, it usually requires the macro analysts or economists to release their reports as soon as possible after some important macro-economic news are released. This is very competitive and requires a high manual cost. This motivates us to propose this approach to automatically generate macro research reports from news.

Conventionally, text generation is one of the most important NLP tasks. Many research efforts have been made towards this end such as poem generation [Liu *et al.*, 2017] and novel writing [Yang *et al.*, 2011]. There are three main streams of generative based approaches, e.g., variational autoencoder based approach [Kingma and Welling, 2014], auto-regressive based approach and generative adversarial networks based approach. Many attempts have been made to utilize VAEs [Bowman *et al.*, 2016; Miao *et al.*, 2016] and GANs [Kusner and Hernandezlobato, 2016; Yu *et al.*, 2017] for the text generation task. However, the length of the output texts of these approaches are usually less than 40 words [Guo *et al.*, 2018]. That is, we need to seek a novel approach for this task to generate a much longer text from very short textual data.

Recently, sequence-to-sequence model [Dusek and Jurcicek, 2016] is proposed and this approach is a two-phase one. In the first phase, it generates a semantic representation according to the input sentences. In the second phase, many coherent sentences are generated according to the input sentences. However, this approach has two major shortcomings. First, the length of its output is comparably short (less than 140 words) which is not suitable for the generation of long macro-research reports. Second, the intermediate output of each iteration is susceptible to the output of its previous results which results in many repeat terms in the final output.

To cope with this challenge, we propose this novel approach to tackle the issue. If we generate long reports from very short text, there must exist many hidden information which is hard to directly model. Intuitively, macro analysts would draft outlines before writing the macro research reports. Inspired by this, we propose to learn the outlines from a pair of news and reports via deep neural networks. Then, we can generate the reports from outlines (feature dimension decreased) via a decoder process (feature dimension increased). The global loss function could then be proposed to minimize the loss from the input news to the generated reports.

2 The Proposed Approach

The framework of the proposed approach is illustrated in Figure 1. The general idea is briefly illustrated as follows. From the bottom, we have a pair of input, e.g., the input news and the corresponding reports. Through an attention component, more important terms are kept to form the outline of this re-

*Contact Author

port. The input news are embedded to word vectors and are sent to a Bi-LSTM module to learn the sequence order. The learned outline is then used to generate reports. We will detail our approach in the following subsections.

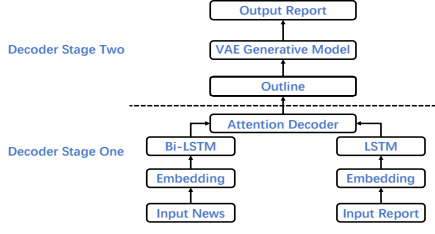


Figure 1: Framework of the proposed approach.

Let $X = \{x_1, \dots, x_m\}$ denote the input news with x_i is one of the N items contained in vocabulary $V = \{v_1, \dots, v_n\}$, $Y = \{y_1, \dots, y_L\}$ denote the corresponding macro research reports and $O = \{o_1, \dots, o_L\}$ denote the outline generated with L as its length.

2.1 Outline Generation

The outline is generated using the framework of sequence-to-sequence model [Xing *et al.*, 2017]. The input news is first embedded into a word vector and then is fed into a Bi-LSTM model to acquire its hidden state $H^e = \{h_1^e, \dots, h_t^e\}$, calculated as

$$h_t^e = f_{enc}(x_t, h_{t-1}^e) \parallel f_{enc}(x_t, h_{t+1}^e). \quad (1)$$

Then, the H^e is used to generate the outline.

To generate the outline, we adopt LSTM network to estimate the probability distribution over the vocabulary set. It outputs the next token based on the generated summary (denoted as a low dimensional vector) of input report Y . At each step t , the current hidden state s_t depends on both the token o_{t-1} and the hidden state s_{t-1} , written as

$$s_t^d = f_{dec}(\hat{o}_{t-1}, s_{t-1}^d) \quad (2)$$

To assign higher weights to more important terms, an attention mechanism is introduced here. Accordingly, the dot product of encoder hidden state h_j^e and decoder hidden state s_i^d is calculated as

$$e_{ij} = \text{score}(h_j^e, s_i^d) = h_j^e \cdot s_i^d. \quad (3)$$

Then, a softmax function is employed to calculate the weights based on the scores. The results are given as

$$\alpha_{ij} = \frac{\exp(e_{ij})}{\sum \exp(e_{ij})} \quad (4)$$

$$c_i = \sum_1^T \alpha_{ij} \cdot h_j^e \quad (5)$$

$$\hat{s}_t = \tanh(W_c[c_t; s_t]) \quad (6)$$

where c_i denote the context vector, $\hat{s}_t$ denote the attention state, and s_t is the decoder hidden state. Then, the probability

of the next token (term to be generated) o_t could be computed as $P(o_t|o_{<t}, x) = \text{softmax}(W_c \cdot \hat{s}_t)$. The objective function of this process is given as

$$\hat{L}_{outline}(\theta_E, \theta_O; x) = \sum_{i=1}^o -\log P(o_i = o^* | S) \quad (7)$$

2.2 Macro Research Report Generation

To generate the final report, we use both the news and the outline trained to generate the report. This process is also treated as a decoding process. The VAE based approach is employed as the decoding component. For the input of VAE, a mixture of news and outline is treated as the input. The original VAE model tends to learn the distribution of latent variables and samples data from this distribution. Its logarithm likelihood of sampled data x is acquired by maximizing the ELBO problem, given as $\log P(X) \geq E_{q(z|x)}[\log p(x|z)] - KL(q(z|x)||p(z))$. In this stage, the decoder hidden state h^d is updated as

$$h_t^d = f_{dec}(\hat{y}_{t-1}, h_{t-1}^d) \quad (8)$$

Similar objective function could be acquired, given as

$$\hat{L}_{report}(\theta_R; o) = \sum_{i=1}^y -\log P(y_i = y^* | H) \quad (9)$$

At last, the global loss function of the model could be designed by considering the cost of outline generation Eq. 7 and the cost of report generation Eq. 9. Accordingly, the global objective function is given as

$$\hat{L}_{model}(\theta_E, \theta_O, \theta_R; x) = \hat{L}_{outline} + \hat{L}_{report} \quad (10)$$

Experiments are evaluated on the crawled dataset, and a pair of news and the generated report are given in Figure 2 for subjective evaluation.

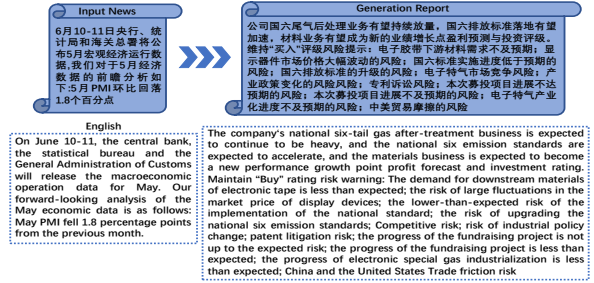


Figure 2: Sample results: one input news and the corresponding generated report.

3 Conclusion & Future Work

In this paper, we propose an approach which can automatically generating macro research report from economic news. This task is very challenging and we output the reports for subjective evaluations. In fact, we already computed the BLEU value which is widely adopted criterion in NLP. However, we have not implemented other state-of-the-art approaches due to the limit time. In the near future, we will implement the BLEU as well as other criteria for more approaches to evaluate model performance.

References

- [Akasaki and Kaji, 2017] Satoshi Akasaki and Nobuhiro Kaji. Chat detection in an intelligent assistant: Combining task-oriented and non-task-oriented spoken dialogue systems. In *Meeting of the Association for Computational Linguistics*, 2017.
- [Bowman *et al.*, 2016] Samuel R Bowman, Luke Vilnis, Oriol Vinyals, Andrew M Dai, Rafal Jozefowicz, and Samy Bengio. Generating sentences from a continuous space. *conference on computational natural language learning*, pages 10–21, 2016.
- [Chen and Bansal, 2018] Yenchun Chen and Mohit Bansal. Fast abstractive summarization with reinforce-selected sentence rewriting. *meeting of the association for computational linguistics*, 1:675–686, 2018.
- [Chiang, 2010] David Chiang. Learning to translate with source and target syntax. In *Meeting of the Association for Computational Linguistics*, 2010.
- [Dusek and Jurcicek, 2016] Ondřej Dusek and Filip Jurcicek. Sequence-to-sequence generation for spoken dialogue via deep syntax trees and strings. *meeting of the association for computational linguistics*, pages 45–51, 2016.
- [Guo *et al.*, 2018] Jiaxian Guo, Sidi Lu, Han Cai, Weinan Zhang, Jun Wang, and Yong Yu. Long text generation via adversarial training with leaked information. *national conference on artificial intelligence*, pages 5141–5148, 2018.
- [Kingma and Welling, 2014] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. *international conference on learning representations*, 2014.
- [Kusner and Hernandezlobato, 2016] Matt J Kusner and Jose Miguel Hernandezlobato. Gans for sequences of discrete elements with the gumbel-softmax distribution. *arXiv: Machine Learning*, 2016.
- [Liu *et al.*, 2017] Qinyun Liu, Zou Lin, Hongming Che, Haiyun Wang, Yunzhi Jin, and Hongji Yang. A creative computing based inspiration assistant to poem generation. In *International Conference on International Symposium on Pervasive Systems*, 2017.
- [Miao *et al.*, 2016] Yishu Miao, Lei Yu, and Phil Blunsom. Neural variational inference for text processing. *international conference on machine learning*, pages 1727–1736, 2016.
- [See *et al.*, 2017] Abigail See, Peter J Liu, and Christopher D Manning. Get to the point: Summarization with pointer-generator networks. *meeting of the association for computational linguistics*, 1:1073–1083, 2017.
- [Serban *et al.*, 2016] Iulian Vlad Serban, Tim Klinger, Gerald Tesauro, Kartik Talamadupula, Bowen Zhou, Yoshua Bengio, and Aaron C Courville. Multiresolution recurrent neural networks: An application to dialogue response generation. *national conference on artificial intelligence*, pages 3288–3294, 2016.
- [Xing *et al.*, 2017] Chen Xing, Wei Wu, Yu Wu, Jie Liu, Yalou Huang, Ming Zhou, and Weiying Ma. Topic aware neural response generation. *national conference on artificial intelligence*, pages 3351–3357, 2017.
- [Yang *et al.*, 2011] Jing Yang, Xu Yu, Zhi Qiang Xie, and Jian Pei Zhang. A novel virtual sample generation method based on gaussian distribution. *Knowledge-Based Systems*, 24(6):740–748, 2011.
- [Yu *et al.*, 2017] Lantao Yu, Weinan Zhang, Jun Wang, and Yong Yu. Seqgan: Sequence generative adversarial nets with policy gradient. *national conference on artificial intelligence*, pages 2852–2858, 2017.