

A New Model in Firefighting Theory^{*}

Rolf Klein¹, David Kübel¹, Elmar Langetepe¹, Jörg-Rüdiger Sack², and Barbara Schwarzwald¹

¹ Department of Computer Science, Universität Bonn, 53115 Bonn, Germany
{rklein,dkuebel,schwarzwald}@uni-bonn.de
elmar.langetepe@cs.uni-bonn.de

² School of Computer Science, Carleton University, Ottawa, ON K1S 5B6, Canada
sack@scs.carleton.ca

Abstract. Continuous and discrete models [2,6] for firefighting problems are well-studied in Theoretical Computer Science. We introduce a new, discrete, and more general framework based on a hexagonal cell graph to study firefighting problems in varied terrains. We present three different firefighting problems in the context of this model; for two of which, we provide efficient polynomial time algorithms and for the third, we show NP-completeness. We also discuss possible extensions of the model and their implications on the computational complexity.

Keywords: Cellular Automaton, Combinatorial Algorithms, Computational Complexity, Discrete Geometry, Fire Spread Models, Fire Behaviour Modeling, Firefighting, Forest Fire Simulation, Frontal Propagation, Graph Algorithms, Graph Theory, NP-completeness, Undecidability

1 Introduction and Model Definition

Fighting multiple wildfires simultaneously or predicting their propagation involves many parameters one can neither foresee nor control. For the study of problems in this context, several models have been suggested and investigated in different communities.

In Theoretical Computer Science or Mathematics, models have been investigated, where fire spreads in the Euclidean plane or along edges of a graph; see e. g. [2,6]. Research in these models usually focuses on proving tight lower and upper bounds on what can be achieved with limited resources: In continuous models, researchers have been analysing the building speed of barriers which slow down or even stop the fire's expansion; in discrete models, the number of firefighters available to block/contain/extinguish the fire has been considered. Tight bounds are only available for simple cases in these models, e. g. [9]. For a survey, we refer to [5].

In other communities, models have been developed to predict a fire's propagation in a given terrain. To make the forecast as realistic as possible, some

^{*} This work has been supported in part by DFG grant Kl 655/19 as part of a DACH project and by NSERC under grant no. RGPIN-2016-06253.

models incorporate thermodynamic or chemical parameters as well as weather conditions including wind speed and direction. Some of the models are capable to distinguish between fires at different heights such as ground fires and crown fires. For a survey on theoretical and (semi-) empirical models, see [12].

We introduce a new model with the aim to develop a simple, theoretical framework for fire propagation forecast in large varied terrains and prove some initial results.

Definition 1 (basic hexagonal model). *Given a partition of the plane into hexagonal cells. The state of cell c at time t is given by two non-negative integers, $x(c, t)$ and $y(c, t)$. Cell c is called burning at time t if $x(c, t) = 0$ and $y(c, t) > 0$ hold; alive if $x(c, t) > 0$ and $y(c, t) > 0$; or dead if $y(c, t) = 0$ holds. At the transition from time t to $t + 1$, the state of cell c changes as follows:*

- If c is alive at time t , then $x(c, t + 1) := \max\{x(c, t) - b, 0\}$, where b denotes the number of direct neighbours of c burning at time t .
- If c is burning at time t , then $y(c, t + 1) := y(c, t) - 1$.

Intuitively, x and y describe the (diminished) resistance against ignition and the (remaining) fuel of an individual cell at time t , respectively. Choosing suitable values for the cells, one can model natural properties of a given terrain: different types of ground and fuel; natural obstacles such as mountains or rivers. A cell of dry grassland might get small integers for both values such that it catches fire easily and burns down quickly. In contrast, we expect both values to be comparatively high for a moist forest such that the forest keeps burning for quite a while, once it caught fire. Figure 1 shows an example how a fire expands over time from a single source in a small lattice.

By this definition, our basic hexagonal model is a cellular automaton [13], whose cells can have state sets of different cardinality. We observe that in the basic hexagonal model a dead cell can never become alive or burning again. This is a major difference to cellular automata like *Conway's Game of Life* [7] or *Wolfram's model* [14]. Another difference is that cells can die from overpopulation in Conway's Game of Life, for which there is no equivalent rule in our model.

Organization of the paper. The rest of this paper is organized as follows. Section 2 discusses three problems in context of the basic hexagonal model and their algorithmic solutions. Variants of the basic model will be discussed in Section 3. We conclude with Section 4.

2 Results for the Basic Hexagonal Model

There is a multitude of interesting questions one can formulate within this model. In this paper, we will address the following three problems.

Suppose we restrict the hexagonal grid to a rectangular domain \mathcal{R} consisting of n cells. Let us assume that initially all cells along the right boundary of \mathcal{R} are on fire and all cells along the left boundary of \mathcal{R} represent a village that must be

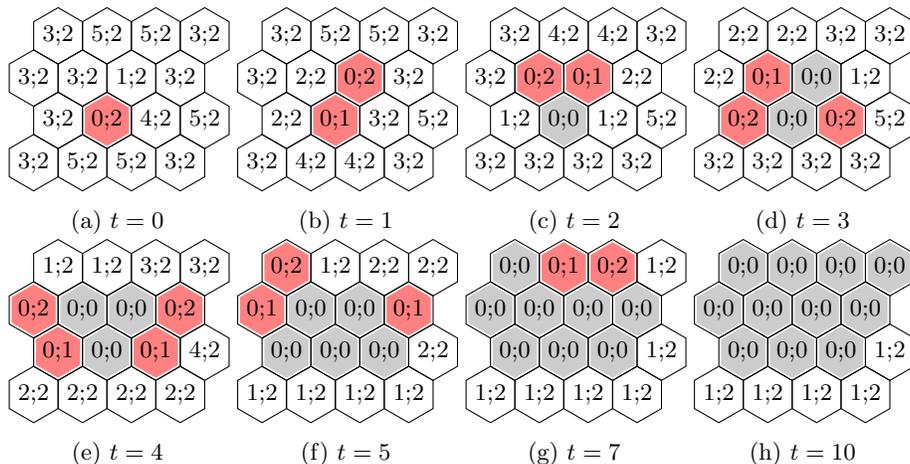



Fig. 1: Fire spreading in a hexagonal lattice. The x - and y -values are given in the cells as pairs of the form $x;y$ at time t . The state of the cells is indicated by colours: Burning cells are red, alive cells are white, and dead cells are grey. At time $t = 10$, the propagation stops and several living cells remain.

protected from the fire. To this end, we want to connect the upper to the lower boundary of \mathcal{R} by a path π of cells that separates the village on the left and the fire approaching from the right; see Figure 2a. To make π fire-resistant, we can fortify the cells on π by increasing their x -values.

In the *first version* of this problem, all cells on π will have their x -values raised by the same amount k . This corresponds to a fly-over by aircraft that douses each cell with the same amount of water. We want to compute the minimum k for which such a protecting path π exists. In Subsection 2.1, we present a solution that runs in time $O(n \log n \log Y)$ where Y is the maximum sum of y -values of direct neighbours over all cells in \mathcal{R} . Our algorithm is based on a fast propagation routine that is interesting in its own right for simulation purposes.

In the *second version* of the above problem, firefighters can increase x -values of cells individually. Now we are interested in finding a separating path π for which the sum of these x -increments of cells on π is minimal. Although this appears to be a shortest-path problem, we have not been able to apply a classic graph algorithm like Dijkstra for reasons that will be explained in Subsection 2.2. Our algorithm runs in time $O(n\sqrt{n} \log n)$, provided that all cells have identical y -values and each x -value is upper bounded by $2y + 1$.

In the *third version*, we no longer assume that cells along the right boundary of \mathcal{R} are on fire, while cells along the left edge have to be protected. Instead, the cells of the village are given by a set \mathcal{T} and the fire is allowed to start at cells of a set \mathcal{F} ; see Figure 2b. We now ask for a subset of \mathcal{F} with m cells that will, when put on fire, burn all cells of the village to the ground. More precisely, we are interested in answering the following decision problem: Are there m cells in

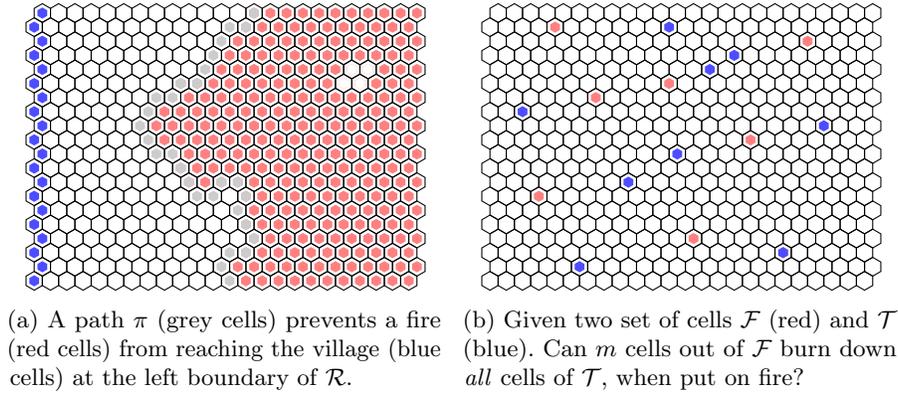Fig. 2: Problem variants on a rectangular finite domain \mathcal{R} .

\mathcal{F} which, when put on fire, will eventually ignite all cells in \mathcal{T} ? In [Subsection 2.3](#) we prove this problem to be NP-complete.

2.1 Homogeneous fortification

For this problem, consider a rectangular domain \mathcal{R} of our basic hexagonal model, in which all cells on the right boundary are on fire and all cells on the left boundary represent a village that must be protected. We call a path π connecting the lower to the upper boundary of \mathcal{R} a *separating path*. We call π a *protecting path* for k if increasing the x -value of all cells along π by k ensures that the fire never ignites a cell of the village. The natural optimization problem is to find the minimum k for which a protecting path exists.

To solve this problem, we study the corresponding decision problem: Given \mathcal{R} and k , does a protecting path π exist? For $k = 0$, it can be solved by simulating the fire propagation step-by-step, where all cells on the right boundary of \mathcal{R} are initially ignited. Consider the map at the end of the simulation: All cells are either alive or dead but none burning; all dead cells form a connected component including the initially burning cells on the right boundary of \mathcal{R} . If no protecting path for $k = 0$ exists, at least one of the village cells will be dead. However, if a protecting path for $k = 0$ exists, then some of the alive cells form a connected component that includes all village cells on the left boundary of \mathcal{R} , see [Figure 2a](#). The *fire border* of this component which are alive cells with a direct dead neighbour, form a protecting path π for $k = 0$.

This approach can be extended to solve the decision problem for larger values of k : First increase the x -value of all cells by k , then run the simulation algorithm. If a cell of the village is dead at the end of the simulation, no protecting path for k exists. Otherwise, consider the fire border of the connected set of alive cells that includes the village and induces the separating path π . By construction, all cells of π stay alive, when their x -value is increased by k . This holds even if all cells right of π are burning or dead. This also holds when the x -values of all cells

of $\mathcal{R} \setminus \pi$ remain untouched: Increasing the x -value of all burning cells is irrelevant for the survival of the village; increasing the x -value of any other alive cell is irrelevant as well, since only alive cells on π have burning or dead neighbours. Therefore, π is a protecting path in \mathcal{R} for k .

To solve the optimization problem, we combine the decision-algorithm with binary search. It remains to give a sensible upper bound on k and an efficient algorithm for the simulation of fire propagation. Let Y be the maximum sum of y -values of all direct neighbours of a cell, over all cells in the grid. As every cell's x -value can only be decreased by at most the sum of its neighbours y , we know that $0 < k \leq Y$ holds. A brute force step-by-step simulation over time results in an algorithm with a worst-case running time of $O(n^2 \cdot x_{max})$, where x_{max} is the maximal value of x over all cells. However, given the state of all burning or dead cells at a time t , one can determine the next cell to ignite. This intuition gives rise to an $O(n \log n)$ Dijkstra-inspired algorithm independent of the cells values, which uses a priority queue for the retrieval of the next cell to ignite. Details and proofs can be found in Appendix A.1.

Theorem 1. *Let \mathcal{R} be a rectangular domain, where all cells along the right boundary of \mathcal{R} are on fire and all cells along the left boundary have to be protected.*

The minimum k for which a protecting path exists can be found in time $O(n \log n \log Y)$ where Y denotes the maximum sum of y -values of all direct neighbours of a cell, over all cells.

2.2 Selective fortification

Similar to Subsection 2.1, consider a rectangular domain \mathcal{R} of our basic hexagonal model in which all cells on the right boundary are on fire and all cells on the left boundary represent a village that must be protected. We call a path π connecting the lower to the upper boundary a *separating path*. The path can be fortified to protect the village by individually increasing the x -value of each cell along π . For a given path π , we call the sum of those increments the *fortification cost* of π . The natural optimization problem is to find a separating path π that minimizes the fortification cost.

To begin with, observe that there is always a separating path with minimal fortification cost such that every cell along π has a direct, dead neighbour when the simulation ends: Any cell of π without a direct, dead neighbour can be excluded from π without increasing the fortification cost; all cells with a direct, dead neighbour that do not belong to π can be included to π since they do not require any fortification costs at all. Doing this, we obtain a separating path where all cells have dead neighbours. Therefore, we may restrict our search to separating paths to the right of which all cells are dead.

Moreover, this observation allows to compute the fortification costs of such a path: For a cell c of π , let Y_r be the sum of y -values of all neighbours of c to the right of π . The fortification cost of c is the minimum k such that $x(c, 0) + k = Y_r + 1$. The fortification cost of π is the sum of the fortification costs of all cells of π .

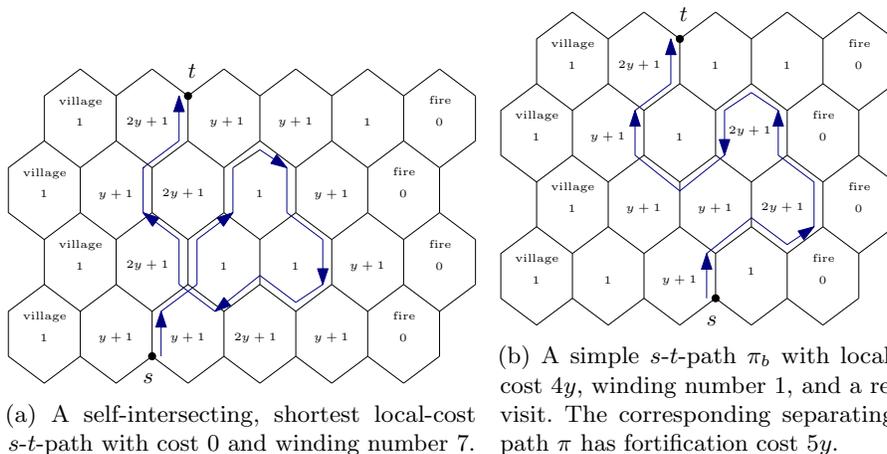


Fig. 4: Two example domains which illustrate problems (1) and (2) for standard shortest-path finding algorithms. All cells have the same y -value and x -values as denoted in the cells.

we can define the local-cost of an edge e at cell c depending on x_e and its type:

$$c(e, \text{type}) = \begin{cases} \max(0, y + 1 - x_e), & \text{if type} = r \\ \min(y, 2y + 1 - x_e), & \text{if type} = l_1 \\ y, & \text{if type} \in \{l_2, l_3, l_4\}. \end{cases}$$

Definition 2 (Shortest local-cost path). Let s, t be vertices in the border graph, where all cells have identical y -values and $0 < x(c, 0) < 2y(c, 0) + 1$ holds. Then, a shortest local-cost s - t -path is a path from s to t of minimum local edge cost as defined above.

Moreover, we call the difference between the number of r -edges and l_k -edges of a path π_b in the border graph the *winding number* of π_b .

In the following, we prove that there is a shortest local-cost path π_b with winding number one that neither has (1) self-intersections, as shown in Figure 4a, nor (2) revisits as shown in Figure 4b: Lemma 1 and Lemma 2 together prove (1), while Lemma 3 proves (2). Thus, the assigned local-cost of π_b are the true fortification costs of the corresponding separating path π .

Lemma 1. Let s, t be vertices on the upper and lower boundary of the border graph of \mathcal{R} and π_b be an s - t path. If π_b is simple, then it has winding number 1.

Proof. As all turns in the regular grid have exactly the same angle, the winding number is a measure of the turn angle of the path. For any right turn, the total angular turn of the path decreases by $\frac{\pi}{3}$ and every left turn increases the turn angle by $\frac{\pi}{3}$. A simple s - t -path has a turn angle of 0 as first and last edge are both vertical. Hence, the number of left turns equals the number of right turns

in π_b . Since the first edge is considered to be an r -edge, to assure that local-costs of the first cell are well defined, π_b has winding number 1. \square

Note that this does not directly solve our first problem, as it holds only for one direction: an s - t -path with winding number 1 might still contain intersections. The reverse holds because of our restrictions on the x - and y -values.

Lemma 2. *Any shortest local-cost s - t -path with winding number 1 is simple.*

Proof sketch. Assume π_b is a shortest local-cost s - t -path with winding number 1 and at least one intersection. Then, we prove a contradiction by constructing an intersection-free path π'_b with fewer costs.

Let π_b be given by the sequence $s, v_1, v_2, \dots, v_i, \dots, v_{n-1}, v_n, t$ of $n+2$ vertices in the border graph. Let $i < j$ be the smallest indices such that $v_i = v_j$ holds. By removing all vertices between v_i and v_{j+1} , we obtain a new path of which we show that its cost is strictly less than the cost of π_b .

While removed edges can no longer contribute to the cost of the path, removing them can change the type and hence the local cost of the edges from v up to the first unaffected r -edge after (v, v_{j+1}) . A detailed proof, which shows that the local-cost of π'_b is strictly less than the local-cost of π_b , can be found in [Appendix A.3](#).

All in all, repeated removal of loops results in a simple s - t -path with fewer costs than π_b which contradicts the assumption and completes the proof. \square

Lemma 3. *For any shortest local-cost s - t -path π with winding number 1, there exists a simple, shortest local-cost path without cell revisits that costs not more than π .*

Proof. Assume π_b is a shortest local-cost s - t -path with a winding number 1 where at least one cell on the left-hand of π_b is revisited. By [Lemma 2](#), π_b is free of intersections. Then, we prove a contradiction by constructing a cell-revisit-free path π'_b with local-costs no more than that of π_b .

Let e be the first edge on the path along a revisited cell c . Let the edges of c be numbered counter clockwise from 0 to 5, where e is edge 0. Then, the situation at e can be restricted to the following two cases, also illustrated in [Figure 5](#).

1. The last edge along c on π_b is edge 2 and 1 does not lie on π_b .
2. The last edge along c on π_b is edge 3 and at least one of the edges 1 and 2 does not lie on π_b .

Note that π_b can neither include edge 4 nor 5. If it included edge 5, π_b would not be intersection free. If it included edge 4 but not 5, the edge preceding e on π_b would also lie along a revisited cell and we assumed e to be the first such edge on π_b .

We can construct π'_b from π_b by removing cell visits as follows. In case 1, we can replace all edges on π_b after edge 0 and before edge 2 by edge 1. This adds at most cost $2y$ (y for the new edge 1, and another y for the change of type edge 2 to l_2). In case 2, we replace all edges on π_b between edge 0 and edge 3 including

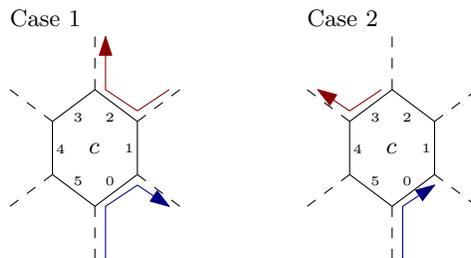


Fig. 5: Path π_b follows the blue edges upon its first visit of c and the red edges on its second visit. Cases are equivalent for rotation.

these two edges by edge 4 and 5. This also adds at most cost $2y$ (y for edge 4 and 5 each). However, as π_b is free of intersection by Lemma 2, we know for both cases that the removed part includes enough l_k edges with $k > 1$ to counter the cost of adding the new edges to the path. \square

Finally, we describe how to compute such a shortest local-cost path with a Dijkstra-inspired shortest-path algorithm tracking the winding number of the path: We use a priority queue of tuples (c, v, p, e, w) , where c is the minimum known local-cost of a path to a vertex v via a predecessor p , where the last edge (p, v) on the path has edge type e and the whole path has winding number w . Due to regularity of the lattice, we know that: the vertex degree and hence the number of possible predecessors is constant; the number of edge types is constant. Moreover, w is limited by the size of our grid: A non-intersecting path with a very high winding number roughly forms a spiral, where the winding number corresponds to the number of spiralling rounds; the maximum size of such a spiral is limited by the width w and height h of the grid. Thus, it suffices to consider tuples with $|w| \leq 6 \min(w, h) = O(\sqrt{n})$.

Altogether, our priority queue contains at most $O(n\sqrt{n})$ many items, which results in a runtime of $O(n\sqrt{n} \log n)$ to find a simple, shortest local-cost path from a specific starting vertex s on the lower boundary to any vertex t on the upper boundary. To find the optimal separating path π , we have to compare shortest paths for all pairs of s and t . We can do this in a single run of the algorithm by initialising our priority queue with the outgoing edges of all possible s . We can terminate as soon as the minimal entry in our priority queue is a tuple where v is one of the vertices along the upper boundary of our grid and w is 1. A pseudocode description of this algorithm can be found in Appendix A.4.

Theorem 2. *Let \mathcal{R} be a rectangular domain, where all cells have identical y -values and $0 < x(c, 0) \leq 2y(c, 0) + 1$ holds. All cells at the right boundary of \mathcal{R} are on fire and all cells along the left boundary have to be protected.*

Then, we can compute a separating path of minimum fortification cost in time $O(n\sqrt{n} \log n)$.

For arbitrary values of x and y , it is still open whether the optimization problem can be solved in polynomial time. While the definition of local-costs can be adjusted, problems (1) and (2) remain.

2.3 An NP-complete problem

In this section, we no longer assume that cells along the right boundary of \mathcal{R} are on fire, while cells along the left edge have to be protected. Instead, we consider two sets of cells \mathcal{F} , \mathcal{T} , where the fire is allowed to start from cells in \mathcal{F} to burn cells in \mathcal{T} . We consider the following decision problem: Are there m cells in \mathcal{F} which, when put on fire, will eventually ignite all cells in \mathcal{T} ?

We prove this problem to be NP-complete by reduction from planar vertex cover. The planar vertex cover problem is as follows: Given a planar graph G , a vertex cover for G is a subset of vertices that contains at least one endpoint of every edge. This problem was proven to be NP-complete, even for planar graphs with maximum vertex degree three [8].

Given a planar graph G with n vertices, we have to show how to obtain an instance of the fire expansion problem in polynomial time. For simplicity, we assume that, instead of the basic hexagonal mode, we can use a basic grid model where the same rules apply only that a rectilinear grid is used instead of the hexagonal one. Consider the *rectilinear grid*, which is the infinite plane graph with a vertex at every positive integer coordinate and an edge between every pair of vertices at unit distance. In a first step, we compute a planar grid embedding G_{\square} of G into the rectilinear grid such that the following holds: Disjoint vertices of G are mapped to disjoint integer coordinates; edges of G are mapped to rectilinear paths in the grid such that no two paths have a point in common, except, possibly, for the endpoints. The size of G_{\square} is polynomial in n and can be computed in polynomial time; see [4]. In a second step, we scale G_{\square} by a factor of two: a vertex at coordinates (a, b) is mapped to coordinates $(2a, 2b)$; edges of G_{\square} are stretched accordingly. This introduces *buffer coordinates* between different edges in the embedding of G_{\square} . Finally, we place a cell at every integer coordinate spanned by G_{\square} and set the (x, y) -values of the cell c as follows:

- If c corresponds to a vertex of G_{\square} (vertex-cell) set the weights to $(n, 1)$;
- if c corresponds to an edge of G_{\square} (edge-cell) set the weights to $(1, 1)$;
- set the weights of all remaining cells to $(0, 0)$.

Add all vertex-cells to \mathcal{F} and all edge-cells incident to a vertex-cell to \mathcal{T} . The size of the resulting instance and the construction time are polynomial in n .

It remains to prove that this instance has m cells that ignite all cells in \mathcal{T} iff G has a vertex cover of size m . On the one hand, if G has a vertex cover \mathcal{C} of size m , the corresponding vertex-cells can be chosen to put on fire. Due to the choice of values, they will ignite all adjacent edge-cells. Since \mathcal{C} is a vertex cover, all edge-cells will burn and therefore all cells in \mathcal{T} . On the other hand, assume there is a subset $\mathcal{S} \subset \mathcal{F}$ of size m that will eventually ignite all cells of \mathcal{T} . Due to the construction, all cells of \mathcal{S} are vertex-cells, so only vertex-cells are put on

fire. Observe that due to the choice of weights, a burning edge-cell can never ignite a neighbouring vertex-cell. Moreover, due to the buffer coordinates, any two edge-cells that belong to different edges of G_{\square} are separated by at least one cell of weight $(0,0)$. Consequently, every edge-cell in \mathcal{T} must be either ignited by its direct neighbouring vertex-cell or by a fire reaching it from the direct neighbouring edge-cell, emanating from a different vertex-cell. Since for every edge in G there is an edge-cell in \mathcal{T} , which is ignited via one of the adjacent vertex-cells of \mathcal{S} , the vertices of G corresponding to the vertex-cells in \mathcal{S} constitute a vertex cover of size m for G .

Certainly the problem is in NP, since the subset-certificate of cells \mathcal{S} can be verified in polynomial time via standard simulation. Thus, we obtain the following theorem.

Theorem 3. *Given an instance of the basic hexagonal model, $m \in \mathbb{N}$ and two finite sets of cells \mathcal{F}, \mathcal{T} . It is NP-complete to decide whether there is a subset $\mathcal{S} \subseteq \mathcal{F}$ with $|\mathcal{S}| \leq m$ such that putting all cells of \mathcal{S} on fire will eventually ignite all cells of \mathcal{T} .*

Note that the hardness proof requires \mathcal{T} to be possibly of size linear in $|\mathcal{F}|$. Restricting \mathcal{T} to a single cell, we obtain a problem that might very well be easier to solve. We do not know, whether this restricted problem is still NP-hard and leave this open. Definitely, the restricted problem becomes undecidable in simple variants of the basic model, as the following section shows.

3 Variants of Basic Hexagonal Model

Our basic hexagonal model can be modified in many ways to model different circumstances, environments or other known problems.

Certainly, the basic model can also be defined for other types of lattices, like the rectilinear square lattice. Thus, the model covers grid versions of firefighting problems, e. g. [3], as a special case: Set $x(c, 0) = 1$ and $y(c, 0) = \infty$ for each cell c and model the blocking of c at time t via $x(c, t) = \infty$. In general, the values for x and y could be replaced by positive (not necessarily monotone) functions of the simulation time.

Another natural generalization is to stack several layers of cells on top of each other. For every cell, the x - and y -values could be defined for each layer individually. These extensions allow to model fire expansion in different heights, such as crown or ground fires.

Environmental factors can also be modelled by slightly adjusting the transition rules. For example, wind can be modelled by letting a burning cell decrease its neighbours' x -values by different amounts per round, depending on the direction in which the neighbour lies and in which direction the wind blows. Cooling down or regrowth of greenery can be modelled by having cells regain their x - or y -values if no neighbouring cells are burning. However, even given regrowth, seemingly similar models, like Conway's Game of Life, remain distinct.

Still, these variants can lead to surprisingly complex problems: With only three layers of cells in an infinite lattice with a constant description complexity, the question if putting fire to cell c will eventually ignite cell c' becomes undecidable. The problem remains undecidable, even with a single layer, if we allow cells to recover their initial x -values over time; see Appendix A.2 for details.

Theorem 4. *In the version of our firefighting model, where regeneration or at least three layers of cells are allowed, there is no algorithm that can decide every instance of the following problem:*

Given a lattice with a finite description, a set of cells \mathcal{F} and a single cell v . Each cell of \mathcal{F} is set on fire at $t = 0$. Will cell v eventually catch fire?

4 Conclusion

In this paper, we present a new model for firefighting problems together with some solutions and hardness results. The basic hexagonal model is simple to understand and generalizes a discrete model that has been introduced before. It allows to incorporate additional parameters to model weather conditions or crown and ground fires. These extensions could be applied to single cells or the entire lattice.

Obvious questions are how to improve on the results and to widen their scopes. We did not address any *dynamic* aspects of firefighting, yet. How does the fire's propagation change, when single cells are fortified? Moreover, fortifying a path of cells takes time to refill an aircraft's water tanks and fly back and forth. Can this task be accomplished before the path is reached by the fire? Research on seemingly simple dynamic geometric problems [9, 10] seem to indicate that one should not hope for provably optimal results in the basic hexagonal model, but strive for good approximations.

Acknowledgements. We thank all anonymous reviewers for their helpful comments and suggestions.

References

1. Börger, E., Grädel, E., Gurevich, Y.: The Classical Decision Problem. Perspectives in Mathematical Logic, Springer (1997)
2. Bressan, A.: Differential inclusions and the control of forest fires. *Journal of Differential Equations* **243**(2), 179–207 (2007)
3. Develin, M., Hartke, S.G.: Fire containment in grids of dimension three and higher. *Discrete Applied Mathematics* **155**(17), 2257–2268 (2007)
4. Eiglsperger, M., Fekete, S.P., Klau, G.W.: Orthogonal graph drawing. In: *Drawing Graphs, Methods and Models*. pp. 121–171 (1999)
5. Finbow, S., MacGillivray, G.: The firefighter problem: a survey of results, directions and questions. *Australasian J. Combinatorics* **43**, 57–78 (2009)
6. Fomin, F.V., Heggernes, P., van Leeuwen, E.J.: The firefighter problem on graph classes. *Theoretical Computer Science* **613**, 38–50 (2016)

7. Gardner, M.: Mathematical games: The fantastic combinations of john conway's new solitaire game "life". *Scientific American* **223**, 120–123 (1970)
8. Garey, M.R., Johnson, D.S.: The rectilinear steiner tree problem in NP complete. *SIAM Journal of Applied Mathematics* **32**, 826–834 (1977)
9. Kim, S., Klein, R., Kübel, D., Langetepe, E., Schwarzwald, B.: Geometric fire-fighting in the half-plane. In: *Algorithms and Data Structures - 16th International Symposium, WADS 2019, Edmonton, AB, Canada, August 5-7, 2019, Proceedings, LNCS 11646*. pp. 481–494 (2019)
10. Klein, R., Langetepe, E., Schwarzwald, B., Levcopoulos, C., Lingas, A.: On a fire fighter's problem. *Int. J. Found. Comput. Sci.* **30**(2), 231–246 (2019)
11. Minsky, M.L.: Recursive unsolvability of post's problem of "tag" and other topics in theory of turing machines. *Annals of Mathematics* **74**(3), 437–455 (1961)
12. Pastor, E., Zárate, L., Planas, E., Arnaldos, J.: Mathematical models and calculation systems for the study of wildland fire behaviour. *Progress in Energy and Combustion Science* **29**(2), 139–153 (2003)
13. Toffoli, T., Margolus, N.: *Cellular automata machines: a new environment for modeling*. MIT press (1987)
14. Wolfram, S.: Statistical mechanics of cellular automata. *Reviews of modern physics* **55**(3), 601 (1983)

A Appendix

A.1 An algorithm for fast fire propagation

Theorem 5. *Given a bounded domain \mathcal{R} of n hexagonal cells and a subset of cells $\mathcal{F} \subseteq \mathcal{R}$, which are set on fire at time $t = 0$. Let $F(t)$ denote the set of alive cells adjacent to at least one burning cell at time t . The result of the fire propagation in the grid can be computed in $O(D_{end} \cdot \log F_{max}) = O(n \cdot \log n)$ time, where $F_{max} := \max_{t \geq 0} |F(t)|$ and D_{end} denotes the number of cells that are dead when no burning cell remains.*

Let \mathcal{N}_c be the set of neighbours of a cell c . Let *ignition time* $t_i(c)$ denote the moment in time when c ignites, i. e. the minimum t for which $x(c, t) = 0$ holds, or ∞ if no such t exists. More precisely, if such a value for t exists, then

$$t_i(c) = \min \left\{ t \in \mathbb{N} \mid x(c, 0) \leq \sum_{n \in \mathcal{N}_c} \max(0, \min(t - t_i(n), y(n, 0))) \right\}.$$

Having computing $t_i(c)$ for all c of the grid, it is possible to return the result of the fire propagation at any time t . All cells c with $t_i(c) = \infty$ never ignite.

Lemma 4. *Given $t_i(n)$ for all $n \in \mathcal{N}_c$, $t_i(c)$ can be calculated in constant time.*

Proof. The time during which a neighbour n burns corresponds to an interval $[t_i(n), t_i(n) + y(n, 0)]$, as illustrated in [Figure 6](#). As the number of neighbours is constant (at most 6), we can sweep over the constant number of start and endpoints of these intervals in ascending order and calculate $x(c, t)$ at each such point, until it reaches 0 (at some time t^+). The last interval start or endpoint before that is t^- . Between t^+ and t^- , $x(c)$ decreases by a constant amount each round, so we can directly calculate $t_i(c)$. If we reach the last interval endpoint without finding t^+ , then $t_i(c) = \infty$. \square

Now, let $N \subseteq \mathcal{N}_c$ be a subset of the neighbours of c for which t_i is known. We define the *predicted ignition time* $t_{pi}(N, c)$ to be the time at which c would ignite if the cells in N were the only neighbours of c . That is to say, we can define and compute $t_{pi}(N, c)$ in the same way as $t_i(c)$, just with a subset of \mathcal{N}_c . As we are working with a subset of the actual neighbours of c , it is clear, that $t_{pi}(N, c) \geq t_i(c)$ for any $N \subseteq \mathcal{N}_c$. Our algorithm is mostly based on the following intuitive observation: A neighbour n of c that ignites after c does not actually affect $t_i(c)$.

Lemma 5. *Let c be a cell and \mathcal{N}_c its neighbours. If $N = \{n \in \mathcal{N}_c \mid t_i(n) < t_i(c)\}$, then $t_{pi}(N, c) = t_i(c)$ holds.*

Proof. Obviously, if $N = \mathcal{N}_c$, then $t_{pi}(N, c) = t_i(c)$. Consider a cell $n_i \in \mathcal{N}_c$ that is not in N ; hence $t_i(n_i) \geq t_i(c) \Leftrightarrow t_i(c) - t_i(n_i) \leq 0$ holds and consequently

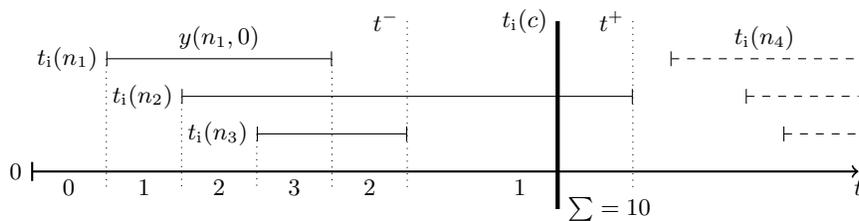


Fig. 6: A sweep to compute $t_i(c)$ in constant time. Solid intervals indicate neighbours that affect $t_{pi}(N, c)$, while dashed intervals indicate neighbouring cells that do not. If $x(c) = 10$, via sweep from left to right we can find $t_i(c) = 1 \cdot 1 + 1 \cdot 2 + 1 \cdot 3 + 1 \cdot 2 + 2 \cdot 1 = 10$ in constant time.

$\max(0, \min(t_i(c) - t_i(n), y(n, 0))) = 0$. This implies that n_i does not affect $t_i(c)$:

$$\begin{aligned} t_i(c) &= \min \left\{ t \in \mathbb{N} \mid x(c, 0) \leq \sum_{n \in \mathcal{N}_c} \max(0, \min(t - t_i(n), y(n, 0))) \right\} \\ &= \min \left\{ t \in \mathbb{N} \mid x(c, 0) \leq \sum_{n \in \mathcal{N}_c \setminus \{n_i\}} \max(0, \min(t - t_i(n), y(n, 0))) \right\} \\ &= t_{pi}(c, \mathcal{N}_c \setminus \{n_i\}). \end{aligned}$$

□

The idea of [procedure FastFirePropagation](#) is to compute t_i of all cells in ascending order; a min-ordered priority-queue \mathcal{Q} is used to store, update tuples (t_{pi}, c) and to extract them when $t_{pi} = t_i(c)$. The priority-queue provides the following two operations: `UPDATE(t'_{pi}, c)`, which checks whether \mathcal{Q} contains a tuple (t_{pi}, c) and inserts (t'_{pi}, c) if this is not the case; however, if $(t_{pi}, c) \in \mathcal{Q}$, the operation updates the tuple to $(\min\{t_{pi}, t'_{pi}\}, c)$. `EXTRACT-MIN()` removes a tuple $(t_{pi}, c) \in \mathcal{Q}$ from \mathcal{Q} where t_{pi} is minimal over all tuples of \mathcal{Q} and returns it.

We prove the correctness of this algorithm via the following loop invariant. As the algorithm terminates when \mathcal{Q} is empty, Invariant 1 and Invariant 3 together guarantee, that the algorithm correctly calculates $t_i(c)$ for all c .

Lemma 6 (loop invariant). *After the k -th iteration of the while-loop, the following conditions hold:*

1. For all $c \in C$, $t_i(c)$ has been computed correctly;
2. for any cell $c \in C$ and any $c' \notin C$, it is $t_i(c) \leq t_i(c')$;
3. for all cells $c \notin C$, if $(t_{pi}, c) \in \mathcal{Q}$, it is $t_{pi} = t_{pi}(\mathcal{N}_c \cap C, c)$; otherwise $t_{pi}(\mathcal{N}_c \cap C, c) = \infty$;
4. for any tuple $(t_{pi}, c) \in \mathcal{Q}$ where t_{pi} is minimal among all tuples in \mathcal{Q} , it is $t_{pi} = t_i(c)$ and $t_i(c)$ is minimal among all cells $c \notin C$.

Procedure FASTFIREPROPAGATION(\mathcal{F})

Input : Domain \mathcal{R} and set of initially burning cells $\mathcal{F} \subset \mathcal{R}$.**Output** : $t_i(c)$ is computed for all $c \in \mathcal{R}$ with $t_i(c) < \infty$. $C = \emptyset$ **foreach** cell $c \in \mathcal{F}$ **do**| UPDATE($0, c$)**while** \mathcal{Q} has node with finite value for t_{pi} **do**| $(t_{\text{pi}}, c) \leftarrow \text{EXTRACT-MIN}()$ | $t_i(c) \leftarrow t_{\text{pi}}$ | $C \leftarrow C \cup \{c\}$ | **foreach** neighbour $n \in \mathcal{N}_c$ with $n \notin C$ **do**| | $t'_{\text{pi}} \leftarrow t_{\text{pi}}(\mathcal{N}_n \cap C, n)$ | | **if** $t'_{\text{pi}} < \infty$ **then**| | | UPDATE(t'_{pi}, n)

Proof (by induction). After the initialization step, C is still empty; hence, part 1 and 2 of the invariant trivially hold. In addition, \mathcal{Q} contains a tuples $(0, c)$ for each $c \in \mathcal{F}$, which obviously satisfies part 4; moreover, for cells $c \notin \mathcal{F}$ it is $t_{\text{pi}}(\mathcal{N}_c \cap C, c) = \infty$, since $C = \emptyset$, which together satisfies part 3.

Assume that the invariant holds for $(k - 1)$ and consider the k -th iteration:

A tuple $(t_{\text{pi}}, c) \in \mathcal{Q}$ with a minimal t_{pi} among all tuples in \mathcal{Q} is extracted, c is added to C and $t_i(c) = t_{\text{pi}}$ is set. With part 4 of the induction hypothesis, we obtain that part 1 and 2 still hold after the k -th iteration.

Let c' be any cell $\notin C$. If c' is not a neighbour of c , part 3 still holds for c' by induction hypothesis since $\mathcal{N}_{c'} \cap C = \mathcal{N}_{c'} \cap (C \cup \{c\})$; otherwise part 3 holds for c' as its tuple gets updated during the while-loop.

It remains to show that part 4 still holds. Given $(t_{\text{pi}}, c^*) \in \mathcal{Q}$ where t_{pi} is minimal in \mathcal{Q} after the k -th iteration. If $t_{\text{pi}} = 0$, the invariant holds; hence, we may assume $t_{\text{pi}} > 0$. Further assume there is a cell $c \notin C$ such that $t_i(c) < t_{\text{pi}}$ and c has a minimal $t_i(c)$ among all cells not in C . Due to the fact that part 3 holds, we may conclude that $(t_{\text{pi}}(\mathcal{N}_c \cap C), c) \in \mathcal{Q}$.³ By Lemma 5 and minimality of (t_{pi}, c^*) in \mathcal{Q} , we obtain $t_{\text{pi}}(\{n \in \mathcal{N}_c \mid t_i(n) < t_i(c)\}, c) = t_i(c) < t_i(c^*) \leq t_{\text{pi}} \leq t_{\text{pi}}(\mathcal{N}_c \cap C, c)$, which gives a contradiction. Hence, part 4 holds. \square

The number of iterations is bounded by the number of cells that enter \mathcal{Q} , since one cell is extracted in each iteration; only cells with $t_i(c) < \infty$ ever enter \mathcal{Q} , which bounds it by D_{end} , which is the number of dead cells at the end of the simulation. In each iteration, C contains cells with $t_i(c) < t_j$ for some t_j and \mathcal{Q} contains cells that neighbour cells in C ; therefore the size of \mathcal{Q} after the iteration is bounded by $F(t_j)$ and by $F_{\text{max}} := \max_{t \geq 0} |F(t)|$ overall. Hence the procedure FastFirePropagation runs in $O(D_{\text{end}} \cdot \log F_{\text{max}}) = O(n \log n)$, which completes the proof of Theorem 5.

³ Otherwise $t_{\text{pi}}(\mathcal{N}_c \cap C, c) = \infty$, which would imply that there is a cell $c' \in \mathcal{N}_c$ such that $t_i(c') < t_i(c)$ which contradicts the choice of c .

A.2 Proof of Theorem 4

To prove the theorem, we show how to simulate computations of so-called *two-register machines* [1, 11] with our fire expansion model. A two-register machine M has exactly two registers r_1, r_2 that may contain an arbitrarily large natural number each. To manipulate the content of the registers, there are two types of instructions.

An *addition instruction* is a triple (i, r, j) where $i \neq j$ is the number of the instruction, $r \in \{r_1, r_2\}$ is a register and j is the number of the following instruction. When M processes the instruction, the value of register r is incremented by one. Afterwards, M continues with instruction number j .

A *subtraction instruction* is a quadruple (i, r, j, k) where $j \neq i \neq k$ are numbers of instructions and $r \in \{r_1, r_2\}$ is a register. When processing the instruction, M checks whether the content of register r is zero: If this is the case, then M proceeds with instruction I_j ; otherwise, M decrements r by one and proceeds with instruction I_k . Note that using subtraction instructions, it is possible to branch the control flow and simulate conditional statements.

In the following, with I_i we refer to the instruction with number i regardless of its type. A *program* for two-register machine is a finite sequence of instructions (I_1, \dots, I_n) ; we assume I_n to be a special instruction that causes the machine to halt. With M we refer to the program, as well as the two-register machine.

A *configuration* C of a two-register machine M is a triple (d_1, d_2, I_i) where $d_1, d_2 \in \mathbb{N}$ are the contents of the registers r_1, r_2 and I_i is the instruction that M is going to process next.

Geometric interpretation. For a two-register machine M and its program, there is a nice geometric interpretation. Imagine the first quadrant of the plane is divided into square boxes⁴ by the $\mathbb{N} \times \mathbb{N}$ grid; see Figure 7. Each of these boxes can be uniquely described by a tuple of integers coordinates (r_1, r_2) , where $(0, 0)$ corresponds to the bottom left most box. Respectively, the coordinates of each box can be interpreted as the content of the registers of M ; i. e., the box with coordinates $(3, 2)$ corresponds to the register contents 3 and 2.

Into the quadrant of the plane, we embed a directed graph $G_M = (V, E)$ as follows: In each box, a vertex v_i is created for each instruction I_i and placed along the diagonal from the upper-left to the bottom-right corner. To distinguish the vertices of a box c from those of a neighbouring box n , we use a superscript and write v_i^c and v_i^n . The directed edges of the graph run between vertices of the same or a neighbouring box and are introduced for each box c according to the following rules:

- For each addition instruction $I_i = (i, r, j)$ of M , insert a directed edge (v_i^c, v_j^n) where n is the right (upper) neighbour of c if $r = r_1$ ($r = r_2$).
- For each subtraction instruction $I_i = (i, r, j, k)$ of M , insert a directed edge between nodes of neighbouring boxes considering the following cases:

⁴ We use the term *box* to underline the difference to *cells* which contain the x and y -values in our model.

- Let $r = r_1$. If c has a left neighbour n , then add an edge (v_i^c, v_j^n) ; otherwise, add the edge (v_i^c, v_k^u) where u denotes the box above c .
- Let $r = r_2$. If c has a lower neighbour n , then add an edge (v_i^c, v_j^n) ; otherwise, add the edge (v_i^c, v_k^r) where r denotes the box right of c .

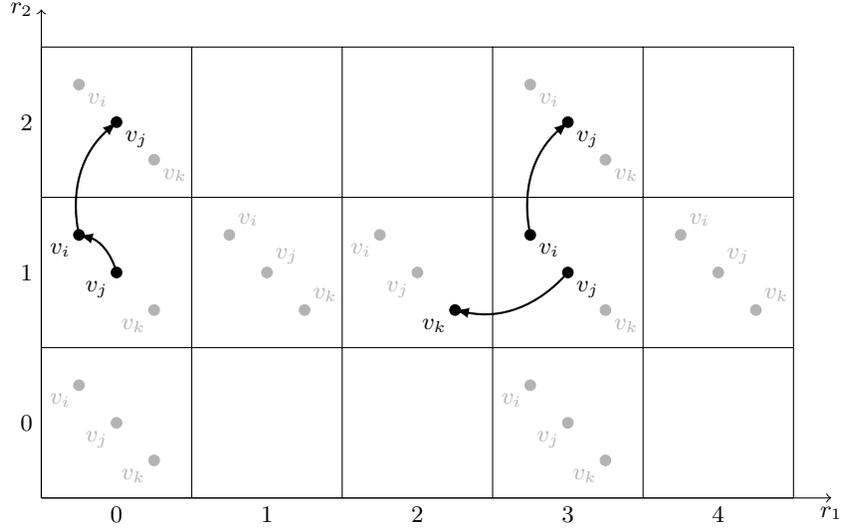


Fig. 7: In the geometric interpretation of a two-register machine, a vertex is created for each instruction and in every box; for simplicity, this has only been done for boxes with coordinates $(4, 2)$, $(1, 2)$ and their neighbouring boxes in this sketch. For the boxes with coordinates $(4, 2)$ and $(1, 2)$, the directed edges are given that result from the addition instruction $I_i = (i, r_2, j)$ and the subtraction instruction $I_j = (j, r_1, i, k)$.

Note that there are (countably) infinite many boxes, vertices and edges embedded in the plane, but the description itself is finite. Clearly, there is a one-to-one correspondence between vertices of G_M and configurations of M : A vertex v_i in a box with coordinates (d_1, d_2) corresponds to the configuration (d_1, d_2, I_i) of the two-register machine M and vice versa. Similarly, a sequence of configurations of M corresponds to a unique directed path in G_M and vice versa.

Simulation of two-register machines. Computations of a two-register machine can be simulated by expanding fire in an orthogonal square lattice. A very basic observation is that, with an appropriate choice of weights, we can force a fire to expand along a sequence of cells into a certain direction; see Figure 8. In the following, we call such a sequence of cells a *wire*. We now describe the layout and the cells of the orthogonal square lattice. We start with a subdivision of the first quadrant of the plane into boxes as described above and shown in Figure 7. To

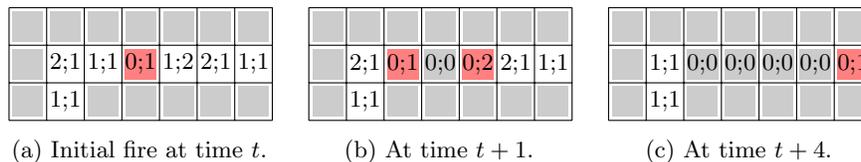



Fig. 8: Fire expanding along a wire. For all grey cells, we assume that $x = y = 0$. Note that due to choices for x and y , after a while the fire can only continue to expand to the right.

obtain the cells of the firefighting model, we refine the boxes using the following gadgets:

- The *crossing gadget* allows a fire to burn along one wire and cross another wire without causing it to burn;
- the *instruction gadget* implements a vertex v_i that corresponds to an instruction I_i in a box;
- the *box gadget* defines the basic layout of every box with the use of crossing and instruction gadgets;
- the *connector gadget* is used to link neighbouring box gadgets.

In the standard version of our model, it seems impossible to realize a *crossing gadget* since a fire burning along one wire tends to expand also along the other one. However, if we allow (i) either for a constant number of additional layers or (ii) regeneration of the x -values of cells, crossings can in fact be realized: (i) With three layers of cells, it is not difficult to realize a crossing within a $5 \times 5 \times 3$ cuboid as shown in Figure 9a. While one of the wires runs straight through the bottom layer, the second one bypasses it using the topmost layer such that both wires are separated by one dead cell. (ii) When cells are allowed to restore their original resistance values x over time, a crossing can be realized even in a two-dimensional lattice using 11×11 cells. The gadget shown in Figure 9b is based on the assumption that the following rule is added to the definition of the basic hexagonal model in Section 1: *If c is not burning at time t and $t + 1$ and has no direct burning neighbour at time t , then $x(c, t + 1) := \min\{x(c, 0), x(c, t) + 1\}$ and $y(c, t + 1) := \min\{y(c, 0), y(c, t) + 1\}$.*

The layout of an *instruction gadget* is given in Figure 10. Four cells with weights $(1; 2)$ along the boundary mark the positions where incoming wires will be connected to; hence, we call them *input cells*. Note that, due to the choice of these weights, a fire cannot ignite an input cell (and an attached wire) from inside the gadget. Moreover, a fire burning along an incoming wire will eventually reach the *central cell* with weights $(1; 1)$. Afterwards, the fire will continue to burn along the wire and reach the cell with weights $(1; 1)$ at the boundary which we call the *output cell*. To obtain the instruction gadget for a specific instruction, we rotate the gadget by a multiple of 90° such that the output cell points into the direction of the involved neighbouring box: For addition instructions to r_1

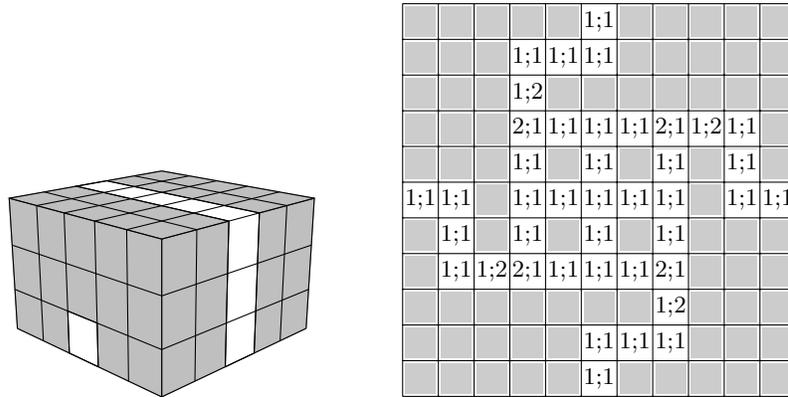

(a) A crossing gadget using three layers of cells. (b) A crossing of wires based on regeneration of x -values.

Fig. 9: Realization of a crossing gadget depending on the variant of the model.

(r_2), the output cell points to the right (upwards); for a subtraction instruction to r_1 (r_2), the output cell points to the left (downwards).

Given the layout of both, instruction and crossing gadgets, we now describe how a *box gadget* is constructed. Let n be the number of instructions of M . Start with an orthogonal square lattice of $23n \times 23n$ cells, where all cells get the weights $x = y = 0$. In a first step, we place n instruction gadgets along the diagonal from the top left to the bottom right cell. Then, we add (in- and output) wires and crossing gadgets as shown in Figure 11: In each direction and for each instruction gadget, the box gadget has an input and output wire, which can be used to connect the instruction gadget to a neighbouring box into this direction.

Finally, consider the layout of a *connector gadget* depicted in Figure 12b. The gadget is used to systematically connect an instruction gadget to either an instruction gadget of the same box gadget or an instruction gadget of a neighbouring⁵ box gadget. In a first step, a connector gadget is placed between two neighbouring box gadgets as shown in Figure 12 for the horizontal case. Then, for each instruction I_i of M we proceed as follows: If $I_i = (i, r, j)$ is an instruction that adds one to the first register, we extend the outgoing wire r_i straight to the right, pass the crossing gadgets of the connector gadget until we meet the wire l_j running towards the left input wire of the instruction gadget j of the neighbouring box. At this position, we remove the crossing gadget and attach wire to wire. Similarly, we proceed for additions to the second register and subtraction instructions.

Let (d_1, d_2, I_i) be the starting configuration of a two-register machine M and c be the central cell of the instruction gadget corresponding to v_i in the box with coordinates (d_1, d_2) . As described in the geometric interpretation above, a

⁵ When connecting vertically neighboured box gadgets, the connector gadget of Figure 12b is rotated by 90° .

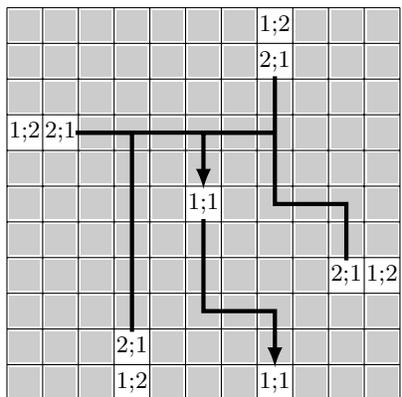


Fig. 10: The layout of an instruction gadget. Black edges indicate cells with weights $x = y = 1$; all remaining grey cells have $x = y = 0$. The choice of weights assures two properties: a fire reaching an *input cell* at the boundary can expand into the gadget; a fire inside the gadget can only reach the *output cell* on the boundary.

sequence of configurations of M corresponds to a unique directed path in the graph G_M and vice versa. Similarly, the vertices of this path in G_M correspond to a unique sequence of burning instruction gadgets when setting c on fire.

Minsky [11] proved that for any Turing machine T , there is a two-register machine program M that computes the same function. His proof implies that: T halts with an empty semi-infinite tape and the head placed right of the square which indicates the end of the tape if and only if M halts with the register contents $r_1 = 3$ and $r_2 = 0$. Due to the construction of our instance of the firefighting model induced by M , this holds if and only if the fire propagation eventually ignites the central cell of the instruction gadget corresponding to v_n of the box with coordinates $(3, 0)$. Consequently, any algorithm deciding the problem of Theorem 4 can be used to decide the following special case of the general halting problem: Given a Turing machine T with a single, semi-infinite tape and an input $w \in \{0, 1\}^*$; does T halt with an empty tape and the head placed right of the tapes end, when started with input w ? The undecidability of this problem implies the undecidability of the decision problem of Theorem 4 and completes the proof.


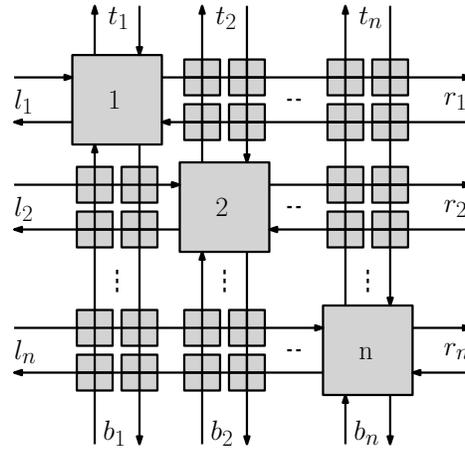


Fig. 11: Layout of the box gadget: Large rectangles along the diagonal indicate instruction gadgets of size 23×23 ; small rectangles indicate crossing gadgets of size (at most) 11×11 ; directed edges model input and output wires.

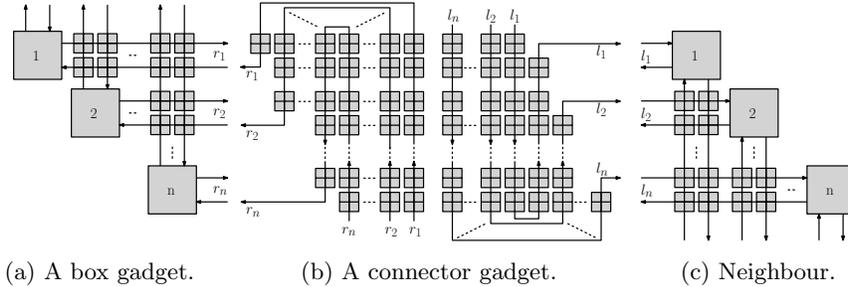

(a) A box gadget. (b) A connector gadget. (c) Neighbour.

Fig. 12: The connector gadget is placed between two neighbouring box gadgets.

A.3 Omitted proof from Subsection 2.2

Lemma 2. *Any shortest local-cost s - t -path with winding number 1 is simple.*

Proof. Assume π_b is a shortest local-cost s - t -path with winding number 1 and at least one intersection. Then we will construct a cheaper path π'_b with no intersections to prove a contradiction.

The path π_b can be represented as a list of $n + 2$ vertices $s, v_1, v_2, \dots, v_i, \dots, v_{n-1}, v_n, t$. It contains intersections as long as there exists a reappearing vertex, so $v_i = v_j$ for some distinct $i \neq j$. Let $v = v_i$ be the first such vertex on the path and $v_j = v$ its next appearance. Then a new path can be constructed by removing everything between v_i and v_{j+1} . Repeating this until no vertex appears twice in the path results in a path free of intersections.

However, while removed edges can no longer contribute to the cost of the path, removing them can change the type and hence the local cost of the edges

from v up to the first unaffected r -edge after (v, v_{j+1}) . Therefore we must look at the specific situation at v more closely to analyse the change in cost.

The situation at the intersection can take one of the following four cases illustrated in Figure 13:

1. π_b turns right at v_i and left at v_j .
2. π_b turns left at v_i and left at v_j .
3. π_b turns right at v_i and right at v_j .
4. π_b turns left at v_i and right at v_j .

Notice that these are all cases because the path cannot include v_{i-1} a second time as we assumed v_i to be the first reappearing vertex.

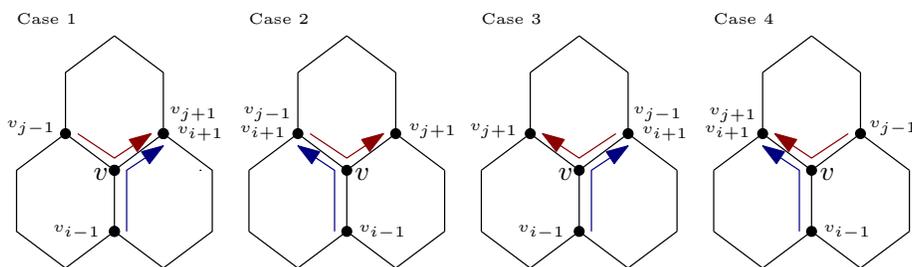


Fig. 13: π_b follows the blue edges upon its first visit of v and the red edges on its second visit. Cases are equivalent for rotation.

Recall the local-cost function: edges of type r and l_1 cost between 0 and y ; edges of type l_2, l_3 , and l_4 always cost y . Also for edges along the same cell, type r edges are at most as costly as l_1 edges and both are at most as costly as edges of type l_2, l_3 , and l_4 . Hence, edges can only become more expensive if they were of type r or l_1 on π_b and the new cost can be at most y .

In cases 1 and 2, (v, v_{j+}) is an edge of type l_1 (or l_2, l_3 or l_4) on π_b and all further edges until the next r edge are of type l_2, l_3 , or l_4 . On π'_b , (v, v_{j+}) is of type r , so the local-cost of π'_b can only be less or equal to that of π_b in these cases.

In case 3 and 4, (v, v_{j+1}) is an edge of type r on π_b and (v_{j+1}, v_{j+2}) could be of type l_1 , so they could increase in cost by y each. All further edges until the next r edge are of type l_2, l_3 , or l_4 and hence do not matter. So π'_b might have local-cost higher than π_b by $2y$, if the removed part of the path v_i, v_{i+1}, \dots, v_j had cost less than $2y$. But then, the removed part can contain at most 2 edges of type l_k with $k > 1$. But this is not enough to reach the edge (v_{j-1}, v) from (v, v_{i+1}) without taking more right turns than left turns. So in both these cases, the removal of that piece of the path either does not increase the cost of π'_b or the winding number of π'_b is at least 6 higher than that of π_b .

But at the end of the procedure we definitely arrive at a simple path, and hence at a path π'_b with winding number 1. Hence at some later intersection we

will remove a part of the path, such that the winding number of π'_b decreases by 6. Considering that removing a part changes the type of at most one of the edges still in π'_b to r in any of the cases given above, the removed part contains at least 5 more edges of type l_1, l_2, l_3 , or l_4 than of type r . That means, it must include at least 5 edges of type l_2, l_3 or l_4 , which means the cost of π'_b is at least $5y$ lower than that of π_b which counters the cost of this removal. In fact similar arguments can be made about the removed parts of the path in case 1 and 2, so that in total, the cost of π'_b is strictly less than π_b . \square

A.4 Selective fortification algorithm

The algorithm computes a solution for the selective fortification problem by computing shortest local cost separating paths from any vertex s at the bottom boundary of a rectangular grid to any vertex t at the top boundary. $\text{LOCAL-COST}((v_1, v_2), e)$ therein always denotes the local cost c of an edge (v_1, v_2) of type e .

Let e be an edge along a cell c of resistance x_e . Remember that we also assume, that y is identical for all cells. We say e is of type r if it comes after a right turn or is the very first edge of the path. This will mean that it goes along a different left-hand cell than the previous edge on the path. We say e is of type l_k if it comes after the k^{th} consecutive left turn. This will make it the $k + 1^{\text{th}}$ consecutive edge along the same left-hand cell. Then, the local cost c of e depends on x_e and its type:

$$c(e, \text{type}) = \begin{cases} \max(0, y + 1 - x_e), & \text{if type} = r \\ \min(y, 2y + 1 - x_e), & \text{if type} = l_1 \\ y, & \text{if type} = l_2, l_3, l_4 \end{cases}$$

The algorithm makes use of a priority queue \mathcal{Q} storing tuples (v, p, e, w) storing the shortest known local cost path to the vertex v via a predecessor p , where the last edge (p, v) is of edge type e and the path has twist w . It functions similar to Dijkstra's shortest path algorithm, but it needs the additional information p and e in the tuple to correctly calculate the cost of the next edge via the function $\text{LOCAL-COST}()$. In addition, it separates paths by the twist w in the tuples in the \mathcal{Q} to filter out an intersection free path in the end. As this introduces potentially infinite tuples, we use the winding number limit based on the size of \mathcal{R} to block tuples with too high or low twist from ever entering \mathcal{Q} .

The correctness of the algorithm follows from the correctness of Dijkstra's shortest path algorithm in combination with arguments from [Subsection 2.2](#). While this algorithm only calculates the cost a solution for the selective fortification problem, it can easily be adjusted to output the whole solution path.

Procedure SELECTIVE FORTIFICATION PATH(\mathcal{R})

Input : The dual graph of a rectangular grid \mathcal{R} in our basic hexagonal model, and the upper twist limit w_{max} based on its width and height.

Output : The cost of an optimal solution for the selective fortification problem on \mathcal{R}

foreach cell s on the bottom boundary of \mathcal{R} and the vertex v_s directly above it **do**
| UPDATE(LOCAL-COST($(s, v_s), r$), $v_s, s, r, 1$)

while \mathcal{Q} is not empty **do**
| $(c, v, p, e, w) \leftarrow$ EXTRACT-MIN()
| **if** v is a cell t on the top boundary of \mathcal{R} **then**
| | **if** $w = 1$ **then**
| | | **return** c
| **else**
| | $v_r \leftarrow$ vertex reached when taking a right turn after the edge (p, v)
| | **if** $w < w_{max}$ **then**
| | | UPDATE($c +$ LOCAL-COST($(v, v_r), r$), $v_r, v, r, w + 1$)
| | $v_l \leftarrow$ vertex reached when taking a left turn after the edge (p, v)
| | **if** $w > -w_{max}$ **then**
| | | **switch** e **do**
| | | | **case** r **do**
| | | | | UPDATE($c +$ LOCAL-COST($(v, v_l), l_1$), $v_l, v, l_1, w - 1$)
| | | | **case** l_1 **do**
| | | | | UPDATE($c +$ LOCAL-COST($(v, v_l), l_2$), $v_l, v, l_2, w - 1$)
| | | | **case** l_2 **do**
| | | | | UPDATE($c +$ LOCAL-COST($(v, v_l), l_3$), $v_l, v, l_3, w - 1$)
| | | | **case** l_3 **do**
| | | | | UPDATE($c +$ LOCAL-COST($(v, v_l), l_4$), $v_l, v, l_4, w - 1$)
| | | | **case** l_4 **do**
| | | | | UPDATE($c +$ LOCAL-COST($(v, v_l), l_5$), $v_l, v, l_5, w - 1$)
