

Words Avoiding Reversed Factors, Revisited

Lukas Fleischer and Jeffrey Shallit

School of Computer Science

University of Waterloo

Waterloo, ON N2L 3G1

Canada

shallit@uwaterloo.ca

March 3, 2022

Abstract

In 2005, Rampersad and the second author proved a number of theorems about infinite words $\mathbf{x}$ with the property that if w is any sufficiently long finite factor of $\mathbf{x}$, then its reversal w^R is *not* a factor of $\mathbf{x}$. In this note we revisit these results, reproving them in more generality, using machine computations only. Two different techniques are presented.

1 Introduction

In this paper we are concerned with certain avoidance properties of finite and infinite words.

Recall that a word x is said to be a *factor* of a word w if there exist words y, z such that $w = yxz$. For example, the word **act** is a factor of the word **factor**. Another term for *factor* is *subword*, although this latter term sometimes refers to a different concept entirely.

For $n \geq 1$ define the property $P_\ell(w)$ of a word w as follows:

$$\forall \text{ factors } x \text{ of } w (|x| \geq \ell) \implies (x^R \text{ is not a factor of } w).$$

If $P_\ell(w)$ holds, then we say w *avoids reversed factors of length $\geq \ell$* . In particular, if $P_\ell(w)$ holds, then w has no palindromes of length $\geq \ell$. Clearly $P_1(w)$ holds only for $w = \varepsilon$, the empty word, so in what follows we always assume $\ell \geq 2$.

Define $L_\ell(\Sigma_k) = \{w \in \Sigma_k^* : P_\ell(w) \text{ holds}\}$, the set of all words over the finite alphabet Σ_k avoiding reversed factors of length $\geq \ell$. In 2005, Rampersad and the second author [9] proved a number of theorems about $L_\ell(\Sigma_k)$ and related infinite words. These results were proved mostly by case-based arguments. In this paper, we revisit these results, using a new method, based on finite automata. Our method is able to prove most of the results in the previous paper, and more, using a unified approach.

A companion paper is [5], which explores the same theme with regard to palindromes.

2 The language of words avoiding reversed factors is regular

We define $\Sigma_k = \{0, 1, \dots, k-1\}$.

The crucial observation is contained in this section. We show that for every $n \geq 2$ and every $k \geq 1$, the language $L_\ell(\Sigma_k)$ is regular.

Theorem 1.

$$\overline{L_\ell(\Sigma_k)} = \bigcup_{x \in \Sigma_k^\ell} (\Sigma_k^* x \Sigma_k^* \cap \Sigma_k^* x^R \Sigma_k^*). \quad (1)$$

Proof. Suppose $w \notin L_\ell(\Sigma_k)$. Then w contains z and z^R as factors for some z with $|z| \geq \ell$. Writing $z = xy$ with $|x| = \ell$, we see that w also contains x and x^R as factors, and hence $w \in \Sigma_k^* x \Sigma_k^* \cap \Sigma_k^* x^R \Sigma_k^*$.

On the other hand, suppose $w \in \bigcup_{x \in \Sigma_k^\ell} (\Sigma_k^* x \Sigma_k^* \cap \Sigma_k^* x^R \Sigma_k^*)$. Then there exists some x of length ℓ such that $w \in \Sigma_k^* x \Sigma_k^* \cap \Sigma_k^* x^R \Sigma_k^*$. Hence w contains both x and x^R as length- ℓ factors, and so $w \notin L_\ell(\Sigma_k)$. $\square$

Corollary 2. *The language $L_\ell(\Sigma_k)$ is regular.*

Proof. Theorem 1 shows that $\overline{L_\ell(\Sigma_k)}$ is regular, as it is the union of regular languages. So $L_\ell(\Sigma_k)$ is regular. $\square$

Corollary 2 provides an algorithmic way to characterize all finite words avoiding reversed factors: namely, just compute the minimal DFA A for $L_\ell(\Sigma_k)$.

It also provides a way to characterize the (one-sided) infinite words avoiding reversed factors: since $L_\ell(\Sigma_k)$ is clearly factor-closed (that is, every factor of a word of $L_\ell(\Sigma_k)$ is also a word of $L_\ell(\Sigma_k)$), it follows that A has only one non-accepting state, which is necessarily a dead state. Without loss of generality, then, we can delete this dead state, obtaining an automaton A' where every path is labeled with a word of $L_\ell(\Sigma_k)$ and all words are so represented. Hence all *infinite* words avoiding reversed factors (if any exist) are given precisely by the infinite paths through A' . We can characterize these using the results in Section 4.

3 Periodicity

Let Σ^ω denote the set of all one-sided infinite words over the alphabet Σ . For a finite nonempty word x , let x^ω denote the infinite word $xxx \dots$. We say that an element $\mathbf{w}$ of Σ^ω is *ultimately periodic* if there exist finite words y, x with $x \neq \varepsilon$ such that $\mathbf{w} = yx^\omega$. Otherwise we say $\mathbf{w}$ is *aperiodic*.

In the expression of an ultimately periodic word in the form yx^ω , we call $|y|$ the *preperiod* and $|x|$ the *period*.

Theorem 3. *Let w_0, w_1 be two noncommuting finite words (that is, $w_0w_1 \neq w_1w_0$). Define a morphism $\gamma(i) = w_i$ for $i \in \{0, 1\}$. Then $\mathbf{a} \in \{0, 1\}^\omega$ is ultimately periodic iff $\gamma(\mathbf{a})$ is ultimately periodic.*

Proof. Suppose $\mathbf{a} \in \{0, 1\}^\omega$ is ultimately periodic, say $\mathbf{a} = yz^\omega$. Then $\gamma(\mathbf{a}) = \gamma(y)\gamma(z)^\omega$, which shows that $\gamma(\mathbf{a})$ is ultimately periodic with preperiod $|\gamma(y)|$ and period $|\gamma(z)|$.

For the other direction, let $\mathbf{a} = a_0a_1a_2\cdots$ and suppose $\gamma(\mathbf{a}) = \mathbf{b} = b_0b_1b_2\cdots$ is ultimately periodic, with preperiod r and period p . Thus $b_i = b_{i+p}$ for all $i \geq r$.

Now think of $\mathbf{b}$ as a concatenation of blocks, each of which is either w_0 or w_1 . Define $d(i) := |\gamma(a_0a_1\cdots a_{i-1})|$, and note that the starting position in $\mathbf{b}$ of the i 'th block, for $i \geq 0$, is at index $d(i)$. Let s be the least integer such that $d(s) \geq r$.

By the infinite pigeonhole principle, there must be two integers $j, k \geq s$, with $j < k$, such that

$$d(j) \equiv d(k) \pmod{p}. \quad (2)$$

The j 'th block begins at $b_{d(j)}$, and the k 'th block begins at $b_{d(k)}$. The congruence (2), together with the fact that $\mathbf{b}$ has period p , and the inequality $d(j), d(k) \geq r$, show that the two infinite words $\gamma(a_ja_{j+1}a_{j+2}\cdots) = b_{d(j)}b_{d(j)+1}b_{d(j)+2}\cdots$ and $\gamma(a_ka_{k+1}a_{k+2}\cdots) = b_{d(k)}b_{d(k)+1}b_{d(k)+2}\cdots$ are identical.

There are now two cases: either the infinite words $a_ja_{j+1}a_{j+2}\cdots$ and $a_ka_{k+1}a_{k+2}\cdots$ differ, or they are identical.

In the former case, let $i \geq 0$ be the least index such that $a_{j+i} \neq a_{k+i}$. Then $a_{j+\ell} = a_{k+\ell}$ for $0 \leq \ell < i$, and so it follows that $d(j+i) \equiv d(k+i) \pmod{p}$. Thus $b_{d(j+i)}b_{d(j+i)+1}b_{d(j+i)+2}\cdots = b_{d(k+i)}b_{d(k+i)+1}b_{d(k+i)+2}\cdots$, and so we have two infinite words,

$$\mathbf{y} = a_{j+i}a_{j+i+1}\cdots \quad \text{and} \quad \mathbf{z} = a_{k+i}a_{k+i+1}\cdots,$$

one beginning with 0 and the other beginning with 1, such that $\gamma(\mathbf{y}) = \gamma(\mathbf{z})$. By [11, Thm. 2.3.5], it follows that w_0 and w_1 commute, a contradiction.

So $a_{j+i} = a_{k+i}$ for all $i \geq 0$, and hence $\mathbf{a}$ is ultimately periodic with period $k - j$. $\square$

4 Adherences

The *adherence* $\text{Adh}(L)$ of a language is defined as follows:

$$\text{Adh}(L) = \{\mathbf{x} \in \Sigma^\omega : \text{every prefix of } \mathbf{x} \text{ is a prefix of some word of } L\}.$$

For example, see [8].

Theorem 4. *Let L be a regular language.*

- (a) *If L is finite then $\text{Adh}(L)$ is empty.*
- (b) *If L is infinite, but has polynomial growth (that is, there exists a fixed integer k such that the number of length- n words in L is $O(n^k)$), then $\text{Adh}(L)$ is nonempty, but is countable and contains only ultimately periodic words.*

- (c) If L does not have polynomial growth (informally, L has exponential growth), then $\text{Adh}(L)$ is uncountable and contains uncountably many aperiodic words.

Proof.

- (a) Trivial.
- (b) By combining [7, Prop. 3] with [1, Lemma 2.2], we see that $\text{Adh}(L)$ is countable iff L has polynomial growth. Furthermore, the proof of [7, Prop. 3] (specifically, the displayed line following Eq. (6) on p. 20 of that paper) actually shows that $\text{Adh}(L)$ consists only of ultimately periodic words.
- (c) By combining [7, Prop. 3] with [1, Lemma 2.3], we see that $\text{Adh}(L)$ is uncountable iff L has exponential growth. Since there are only a countable number of ultimately periodic words, it follows that $\text{Adh}(L)$ contains uncountably many aperiodic words.

□

5 Applications

Let us now turn to reproving the principal theorems from [9]. For many of these theorems, we can employ the following strategy: use **Grail**, a software package for manipulating automata [10], to construct a DFA M corresponding to the regular expression in Eq. (1), and from this obtain a DFA M' for $L_\ell(\Sigma_k)$. The infinite words avoiding reversed factors of length $\geq n$ are then given by all infinite paths through the digraph of the transition diagram of M' . Using Theorem 4, we can characterize the infinite words. Using depth-first search, the finiteness of $L(M')$ can be determined trivially. The distinction between polynomial and exponential growth can be determined efficiently using the methods detailed in [6]: call a state q *birecurrent* if there are at least two distinct noncommuting words, x_0 and x_1 , taking state q to q . By Theorem 3, if there is a birecurrent state, we can find an explicit example of an aperiodic infinite word labeled by an infinite path through the automaton by replacing the 0's (resp., the 1's) in any aperiodic binary word with x_0 (resp., x_1). For example, we can take $\mathbf{w} = \mathbf{t} = 01101001\dots$, the Thue-Morse word [13, 2].

On the other hand, if $L(M')$ has polynomial growth, then there are no birecurrent states. In this case, only periodic infinite words with the given avoidance properties exist.

In practice, creating the DFA from the regular expression in Eq. (1) is not completely straightforward, however, as exponential blowup is observed in some formulations. By experimenting, we found that the following technique works: using de Morgan's law, we rewrite Eq. (1) as

$$L_\ell(\Sigma) = \bigcap_{x \in \Sigma_k^n} \left(\overline{\Sigma_k^* x \Sigma_k^*} \cup \overline{\Sigma_k^* x^R \Sigma_k^*} \right),$$

and construct minimal DFA's for each individual term of the intersection. Clearly it suffices to perform the intersection only for those x for which x is lexicographically equal to or

smaller than x^R . We then iteratively intersect the resulting DFA's term-by-term. Although intermediate results can be quite large (thousands of states), the final DFA so produced is relatively small.

We used a short program written in Dyalog APL to create a Linux shell script with the individual **Grail** commands. We used **Grail**, version 3.3.4 [3]. Running this script creates a text file describing a DFA for $L_\ell(\Sigma_k)$. We identify the unique nonaccepting state in the result, and delete lines referencing this state from the text file. We then used another Dyalog APL program to convert this text file to a file in GraphViz format that can be used to display the automaton.

Since we explicitly construct the DFA for $L_\ell(\Sigma_k)$, another benefit to our approach is as follows. Using standard techniques (e.g., [11, §3.8]), we can enumerate the number of words of length n in the language. We briefly sketch how this can be done.

Once the automaton $A = (Q, \Sigma, \delta, q_0, F)$ for $L_\ell(\Sigma_k)$ is known, we can create a useful matrix $r \times r$ matrix M from it as follows (where $Q = \{q_0, \dots, q_{r-1}\}$ and $r = |Q|$):

$$M[i, j] = |\{a \in \Sigma_k : \delta(q_i, a) = q_j\}|.$$

This matrix M has the property that $M^n[i, j]$ is the number of words taking A from state q_i to state q_j . The minimal polynomial of M then gives a recurrence for the number of length- n words that A accepts. For the details, see [5]. Thus our method allows an automated way to obtain the number of length- n words in $L_\ell(\Sigma_k)$ and its asymptotic growth rate.

We now reprove the theorems from [9].

5.1 Alphabet size 3

Theorem 5. *There exists an infinite word $\mathbf{w}$ over Σ_3 such that if x is a factor of $\mathbf{w}$ and $|x| \geq 2$, then x^R is not a factor of $\mathbf{w}$. Furthermore, $\mathbf{w}$ is unique up to permutation of the alphabet symbols.*

Proof. We use the following Linux shell script to create the automaton:

```
# making automaton for K = 3; N = 2
echo "00"
echo "(0+1+2)*00(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > d0
./fmstats d0
echo "01"
echo "(0+1+2)*01(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > a1
echo "(0+1+2)*10(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > b1
./fmunion a1 b1 | ./fmdeterm | ./fmmin > c1
./fmcross d0 c1 | ./fmdeterm | ./fmmin > d1
./fmstats d1
echo "02"
echo "(0+1+2)*02(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > a2
echo "(0+1+2)*20(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > b2
./fmunion a2 b2 | ./fmdeterm | ./fmmin > c2
./fmcross d1 c2 | ./fmdeterm | ./fmmin > d2
./fmstats d2
```

```

echo "11"
echo "(0+1+2)*11(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > c3
./fmcross d2 c3 | ./fmdeterm | ./fmmin > d3
./fmstats d3
echo "12"
echo "(0+1+2)*12(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > a4
echo "(0+1+2)*21(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > b4
./fmunion a4 b4 | ./fmdeterm | ./fmmin > c4
./fmcross d3 c4 | ./fmdeterm | ./fmmin > d4
./fmstats d4
echo "22"
echo "(0+1+2)*22(0+1+2)*" | ./retofm | ./fmdeterm | ./fmmin | ./fmcment > c5
./fmcross d4 c5 | ./fmdeterm | ./fmmin > d5
./fmstats d5
cp d5 aut32.txt

```

which, after deleting lines corresponding to the dead state numbered 4, gives the following Grail output:

```

(START) |- 0
0 0 1
0 1 2
0 2 3
1 1 5
1 2 6
2 0 7
2 2 8
3 0 9
3 1 10
5 2 8
6 1 10
7 2 6
8 0 9
9 1 5
10 0 7
0 -| (FINAL)
1 -| (FINAL)
2 -| (FINAL)
3 -| (FINAL)
5 -| (FINAL)
6 -| (FINAL)
7 -| (FINAL)
8 -| (FINAL)
9 -| (FINAL)
10 -| (FINAL)

```

which is depicted below.

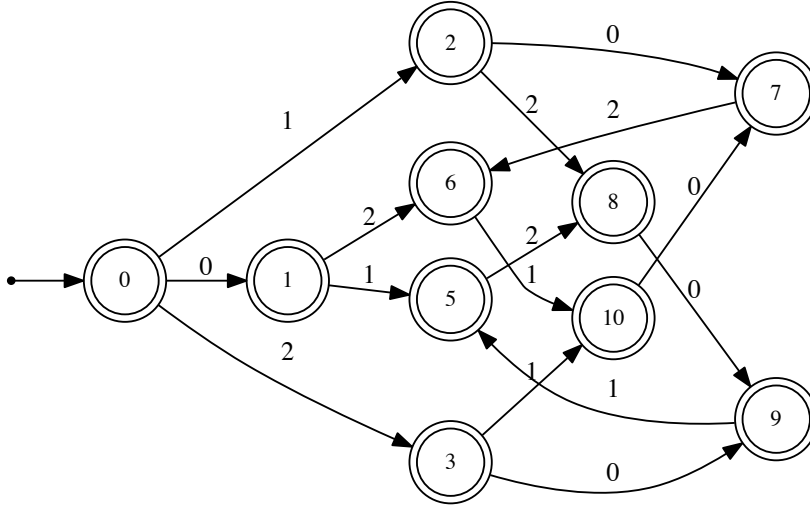


Figure 1: Automaton for $L_2(\Sigma_3)$. Dead state, numbered 4, omitted.

As the reader can now easily verify, the set of finite words accepted are the prefixes of

$$(012)^* + (021)^* + (102)^* + (120)^* + (201)^* + (210)^*.$$

The corresponding set of infinite words is then

$$(012)^\omega + (021)^\omega + (102)^\omega + (120)^\omega + (201)^\omega + (210)^\omega.$$

□

In subsequent theorems, we omit providing the shell scripts and outputs from **Grail**, but the reader can obtain them from the second author's web page

<https://cs.uwaterloo.ca/~shallit/papers.html> .

Theorem 6. *There exists an aperiodic infinite word $\mathbf{w}$ over Σ_3 such that if x is a factor of $\mathbf{w}$ and $|x| \geq 3$, then x^R is not a factor of $\mathbf{w}$.*

Proof. As above, we create the DFA for $L_3(\Sigma_3)$. Although the intermediate automata have as many as 1033 states, the final automaton has only 20 states (including the dead state). It is depicted below.

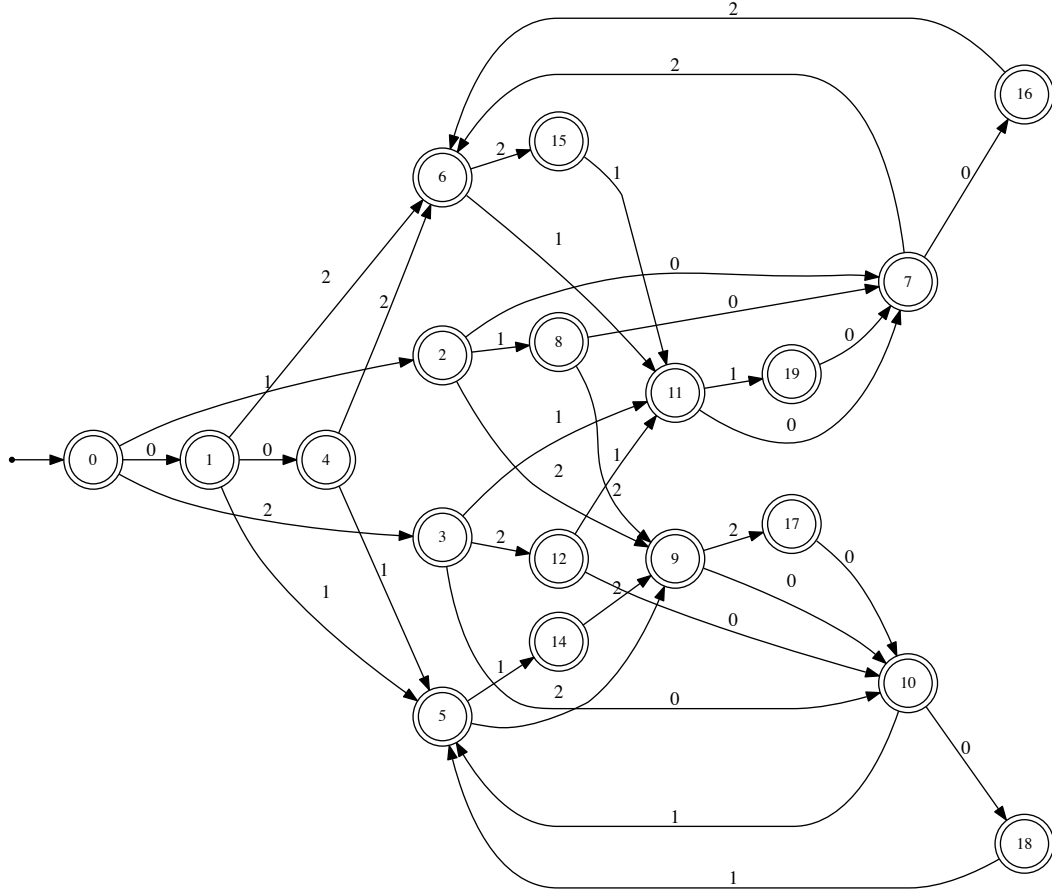


Figure 2: Automaton for $L_3(\Sigma_3)$. Dead state numbered 13, omitted.

Then, for example, state 9 is a birecurrent state, with the corresponding cycles labeled by $x_0 = 0012$ and $x_1 = 0112$. It follows that every word in $\{0012, 0112\}^\omega$ avoids reversed factors of length $\ell \geq 3$, and uncountably many of these are aperiodic. $\square$

Let the Fibonacci numbers be defined, as usual, by the recurrence $F_n = F_{n-1} + F_{n-2}$, together with the initial conditions $F_0 = 0$ and $F_1 = 1$.

Theorem 7. *The number $r_{33}(n)$ of length- n words in $L_3(\Sigma_3)$ is $6F_{n+1}$ for $n \geq 3$.*

Proof. We create the 20×20 matrix M corresponding to the transitions of $L_3(\Sigma_3)$. Its minimal polynomial is $p(X) = X^3(X - 3)(X^2 - X - 1)(X^4 + X^3 + 2X^2 + 2X + 1)$. It now follows that $r_{33}(n)$ can be expressed as a linear combination of n 'th powers of the zeros of $p(X)$. We can determine the coefficients of this linear combination by solving a linear

system, using the computed values of the first 10 terms of $r_{33}(n)$. From this, the result easily follows. $\square$

5.2 Alphabet size 2

Theorem 8. *Let $n \leq 4$ and let w be a word over Σ_2 such that if x is a factor of w and $|x| \geq n$, then x^R is not a factor of w . Then $|w| \leq 8$.*

Proof. As above, we create the DFA for $L_4(\Sigma_2)$. It is depicted below, and we easily see that the longest words accepted are of length 8.

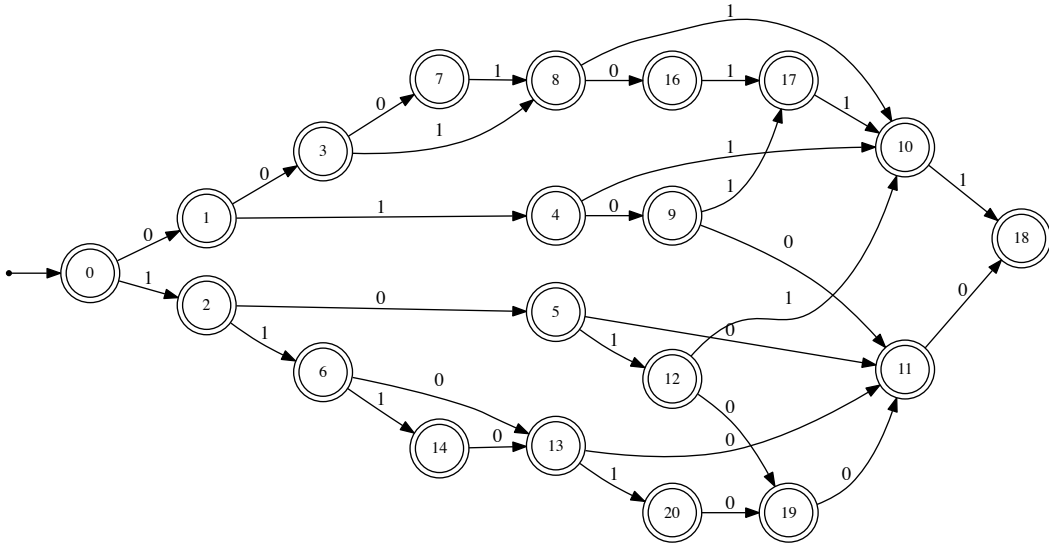


Figure 3: Automaton for $L_4(\Sigma_2)$. Dead state, numbered 15, omitted.

$\square$

Theorem 9. *There exists an infinite word $\mathbf{w}$ over Σ_2 such that if x is a factor of $\mathbf{w}$ and $|x| \geq 5$, then x^R is not a factor of $\mathbf{w}$.*

Proof. As above, we create the DFA for $L_5(\Sigma_2)$. Although the intermediate automata produced have as many as 598 states, the final DFA has only 59 states (including the dead state).

Proof. As in the proof of Theorem 7, we can build the 59×59 matrix corresponding to the automaton, and determine its minimal polynomial $p(X) = X^6(X^6 - 1)(X - 2)$. As before we can express $r_{25}(m)$ as a linear combination of the m 'th powers of the zeros of p . The result now easily follows. $\square$

Theorem 12. *There exists an aperiodic infinite word $\mathbf{w}$ over Σ_2 such that if x is a factor of $\mathbf{w}$ and $|x| \geq 6$, then x^R is not a factor of $\mathbf{w}$.*

Here our previous approach does not succeed in a reasonable length of time, because the intermediate automata grow too large (at least hundreds of thousands of states). We describe an alternative approach that produces the desired DFA for $L_6(\Sigma_2)$.

We can construct a DFA for $L_\ell(\Sigma_k)$ directly as follows: it suffices to record, in the state, the subset of length- n factors seen so far, and the last $n - 1$ symbols seen (or shorter prefix, if $n - 1$ symbols have not yet been seen). Upon reading a new symbol, the DFA updates the subset of factors and the last $n - 1$ symbols seen. So the total number of states is $2^{k^n} \cdot (1 + k + k^2 + \dots + k^{n-1})$. The final states correspond to those subsets not containing both a word and its reversal.

For our particular case of $k = 2$, $n = 6$, this gives a DFA with $63 \cdot 2^{64}$ states, which is evidently too large to manipulate effectively. However, many of these states will be unreachable from the start state. Instead, we can construct the reachable states in a breadth-first manner, using a queue. We wrote a Dyalog APL program to construct the automaton; it has 63705 states (not including the dead state). We then minimized this automaton using **Grail**, and we obtained an automaton A with 7761 states (not including the dead state). This automaton is much too big to display here, but can be obtained from the website of the second author.

State 980 is a birecurrent state, with the corresponding cycles labeled by 0001011 and 1001011. Now we can complete the proof of Theorem 12.

Proof. As before, we can produce an explicit example of an aperiodic infinite word satisfying the given conditions by applying the morphism $0 \rightarrow 0001011$, $1 \rightarrow 1001011$ to any aperiodic binary word, such as the Thue-Morse word. $\square$

As suggested by the size of the minimal automaton A , it turns out that the structure of the language $L_6(\Sigma_2)$ is very complicated. A natural problem is to give a recurrence enumerating the number $r_{26}(n)$ of length- n words in $L_6(\Sigma_2)$. Even this is not so easy; it turns out that $r_{26}(n)$ satisfies a linear recurrence of order 195.

We describe how this can be proved. The first step is to compute the minimal polynomial of the matrix M corresponding to A . We were not able to compute this with **Maple** 2017 (X86 64 LINUX), so we turned to the software **LinBox** [4]. It computed the minimal polynomial

as the following polynomial of degree 239:

$$\begin{aligned} & X^{18}(X-2)(X-1)(X+1)(X^2+1)(X^4+1)(X^2-X+1)(X^2+X+1)(X^4-X^2+1) \times \\ & (X^6+X^3+1)(X^8-X^2-1)(X^8+X^2-1)(X^9-X^2-1)(X^{10}-X^2-1)(X^{12}-X^2-1) \times \\ & (X^{12}-X^3-1)(X^{12}-X^4-1)(X^{12}-X^5-1)(X^{12}-X^6-1)(X^4-X^3+X^2-X+1) \times \\ & (X^4-X^3+X^2-X+1)(X^4+X^3+X^2+X+1)(X^7-X^6+X^4-X^3-1) \times \\ & (X^{10}-X^3-X^2-X-1)(X^{10}-X^8+X^6-X^4-1)(X^{16}-X^9-X^7-X^4+1) \times \\ & (X^{16}-X^{10}-X^6-X^4+1)(X^{10}-X^4-2X^3-2X^2-2X-1)(X^{10}-X^8+X^6-2X^4+X^2-1) \times \\ & (X^6+X^5+X^4+X^3+X^2+X+1)(X^{10}-X^8+X^6-X^4-X^3+X^2-1). \end{aligned}$$

From this one can compute a linear recurrence of order 239 for the sequence $r_{26}(n)$. However, using the techniques from [5], we can find the optimal linear recurrence, which arises from the following degree-195 divisor of the minimal polynomial:

$$\begin{aligned} & (X-1)(X^2+1)(X^2-X+1)(X^2+X+1)(X^4-X^2+1)(X^8-X^2-1)(X^8+X^2-1) \times \\ & (X^9-X^2-1)(X^{10}-X^2-1)(X^{12}-X^2-1)(X^{12}-X^3-1)(X^{12}-X^4-1)(X^{12}-X^5-1) \times \\ & (X^{12}-X^6-1)(X^7-X^6+X^4-X^3-1)(X^{10}-X^3-X^2-X-1)(X^{10}-X^8+X^6-X^4-1) \times \\ & (X^{16}-X^9-X^7-X^4+1)(X^{16}-X^{10}-X^6-X^4+1)(X^{10}-X^4-2X^3-2X^2-2X-1) \times \\ & (X^{10}-X^8+X^6-2X^4+X^2-1)(X^{10}-X^8+X^6-X^4-X^3+X^2-1). \end{aligned}$$

The largest real zero of this polynomial is $\alpha \doteq 1.305429354041958520199761719029$, where α is the positive real zero of $X^{10}-X^4-2X^3-2X^2-2X-1$. It follows that $r_{26}(n) \sim c\alpha^n$, where $c \doteq 15.0313407$.

Remark 13. The sequence $r_{26}(n)$ is sequence [A330012](#) in the *On-Line Encyclopedia of Integer Sequences* (OEIS) [12].

5.3 Alphabet size 4

Inexplicably, the paper [9] did not handle the case of alphabet size 4 (or more precisely, it only considered the case of squarefree words). We consider the alphabet size 4 case now.

Theorem 14. *There are uncountably many infinite words over Σ_4 avoiding reversed factors for length $\ell \geq 2$.*

Proof. We construct the automaton as in Theorem 12. The resulting automaton has 449 states and is minimal. State 360 is birecurrent, with paths $x_0 = 0123$ and $x_1 = 0120123$. $\square$

Corollary 15. *Let $r_{42}(n)$ denote the number of length- n words over Σ_4 avoiding reversed factors of length $\ell \geq 2$. Then*

$$\begin{aligned} & (r_{42}(0), r_{42}(1), \dots, r_{42}(16)) = \\ & (1, 4, 12, 24, 48, 96, 168, 264, 456, 720, 1056, 1656, 2520, 3600, 5352, 7944, 11256) \end{aligned}$$

and

$$r_{42}(n) = r_{42}(n-1) + 5r_{42}(n-3) - 3r_{42}(n-4) - 2r_{42}(n-5) - 8r_{42}(n-6) + r_{42}(n-7) + 6r_{42}(n-8) + 5r_{42}(n-9) + 2r_{42}(n-10) - 4r_{42}(n-11) - 2r_{42}(n-12)$$

for $n \geq 17$. Asymptotically we have $r_{42}(n) = C \cdot \alpha^n$, where $\alpha \doteq 1.395336944$ is the largest real zero of $X^4 - 2X - 1$ and $C \doteq 71.2145756$.

Proof. We computed the minimal polynomial of the associated matrix as above, using **Maple**. It is

$$X^5(X-1)(X-4)(X+1)(X^2+1)(X^3-2)(X^4-2X-1)(X^2+X+1)(X^4-X-1).$$

Using a technique discussed in [5], we can find the annihilator for the sequence, which is

$$(X-1)(X^3-2)(X^4-2X-1)(X^4-X-1).$$

Expanding the coefficients of this polynomial gives us the recurrence. The largest real root is that of $X^4 - 2X - 1$. $\square$

Remark 16. The sequence $r_{42}(n)$ is sequence [A330011](#) in the OEIS.

6 Code

All of the shell scripts, **Maple** code, **LinBox** code, and automata discussed in the paper are available at the website of the second author,

<https://cs.uwaterloo.ca/~shallit/papers.html> .

References

- [1] J. Bell, K. Hare, and J. Shallit. When is an automatic set an additive basis? *Proc. Amer. Math. Soc. Ser. B* **5** (2018), 50–63.
- [2] J. Berstel. *Axel Thue's Papers on Repetitions in Words: a Translation*. Number 20 in Publications du Laboratoire de Combinatoire et d'Informatique Mathématique. Université du Québec à Montréal, February 1995.
- [3] C. Câmpeanu et al. **Grail** software package. Available from <http://www.csit.upei.ca/theory/>, 2019.
- [4] J.-G. Dumas, C. Pernet, et al. Project **LinBox**. Software available at <https://linalg.org/index.html>, 2019.
- [5] L. Fleischer and J. Shallit. Words with few palindromes, revisited. Preprint, 2019.

- [6] P. Gawrychowski, D. Krieger, N. Rampersad, and J. Shallit. Finding the growth rate of a regular or context-free language in polynomial time. *Internat. J. Found. Comp. Sci.* **21** (2010), 597–618.
- [7] P. Lecomte and M. Rigo. On the representation of real numbers using regular languages. *Theory Comput. Systems* **35** (2002), 13–38.
- [8] M. Nivat. Sur les ensembles de mots infinis engendrés par une grammaire algébrique. *RAIRO Inform. Théor. App.* **12** (1978), 259–278.
- [9] N. Rampersad and J. Shallit. Words avoiding reversed subwords. *J. Combin. Math. Combin. Comput.* **54** (2005), 157–164.
- [10] D. Raymond and D. Wood. *Grail*: A C++ library for automata and expressions. *J. Symbolic Comput.* **17** (1994), 341–350.
- [11] J. Shallit. *A Second Course in Formal Languages and Automata Theory*. Cambridge University Press, 2009.
- [12] N. J. A. Sloane et al. The On-Line Encyclopedia of Integer Sequences. Electronic resource available at <https://oeis.org>, 2019.
- [13] A. Thue. Über die gegenseitige Lage gleicher Teile gewisser Zeichenreihen. *Norske vid. Selsk. Skr. Mat. Nat. Kl.* **1** (1912), 1–67. Reprinted in *Selected Mathematical Papers of Axel Thue*, T. Nagell, editor, Universitetsforlaget, Oslo, 1977, pp. 413–478.