

Faster Algorithms for Next Breakpoint and Max Value for Parametric Global Minimum Cuts

HASSENE AISSI¹, S. THOMAS MCCORMICK², AND MAURICE QUEYRANNE²

¹ Paris Dauphine University. aissi@lamsade.dauphine.fr

² Sauder School of Business at the University of British Columbia.
{tom.mccormick,maurice.queyranne}@sauder.ubc.ca

Abstract. The parametric global minimum cut problem concerns a graph $G = (V, E)$ where the cost of each edge is an affine function of a parameter $\mu \in \mathbb{R}^d$ for some fixed dimension d . We consider the problems of finding the next breakpoint in a given direction, and finding a parameter value with maximum minimum cut value. We develop strongly polynomial algorithms for these problems that are faster than a naive application of Megiddo’s parametric search technique. Our results indicate that the next breakpoint problem is easier than the max value problem.

Keywords: Parametric optimization, Global minimum cut.

1 Introduction

Connectivity is a central subject in graph theory and has many practical applications in, e.g., communication and electrical networks. We consider the parametric global minimum cut problem in graphs. A *cut* X in an undirected graph $G = (V, E)$ is a non-trivial vertex subset, i.e., $\emptyset \neq X \subset V$. It cuts the set $\delta(X) = \{e \in E : e \cap X \neq \emptyset \neq e \setminus X\}$ of edges.

In the parametric global minimum cut problem, we are given an undirected graph $G = (V, E)$ where the cost $c_\mu(e)$ of each edge $e \in E$ is an affine function of a d -dimensional parameter $\mu \in \mathbb{R}^d$, i.e., $c_\mu(e) = c^0(e) + \sum_{i=1}^d \mu_i c^i(e)$, where $c^0, \dots, c^d : E \rightarrow \mathbb{Z}$ are $d + 1$ cost functions defined on the set of edges. By not imposing a sign condition on these functions, we may handle, as in [30, Section 3.5], situations where some characteristics, measured by functions c^i , improve with μ while other deteriorate. We assume that the dimension d of the parameter space is a fixed constant. The *cost* of cut C for the edge costs c_μ is $c_\mu(C) \equiv c_\mu(\delta(C)) = \sum_{e \in \delta(C)} c_\mu(e)$. Define $M_0 = \{\mu \in \mathbb{R}^d \mid c_\mu(e) \geq 0 \text{ for all } e \in E\}$ a closed and convex subset of the parameter space where the parametric costs of all the edges are non-negative. Throughout the paper we consider only μ belonging to a nonempty simplex $M \subset M_0$, as negative edge costs usually lead to NP-hard minimization problems (see [18]). As usual we denote $|E|$ by m and $|V|$ by n .

For any $\mu \in M$, let C_μ^* denote a cut with a minimum cost $Z(\mu) \equiv c_\mu(C_\mu^*)$ for edge costs c_μ . Function $Z := Z(\mu)$ is a piecewise linear concave function [28]. Its graph is composed by a number of facets (linear pieces) and breakpoints at

which d facets meet. In order to avoid dealing with a trivial problem, Z is assumed to have at least one breakpoint. The maximum number of facets (linear pieces) of the graph of Z is called the *combinatorial facet complexity* of Z . Mulmuley [23, Theorem 3.10] considers the case $d = 1$ and gives a super-polynomial bound on the combinatorial facet complexity of the global minimum cut problem. In [3, Theorem 4], the authors extended this result to a constant dimension d and give a strongly polynomial bound $O(m^d n^2 \log^{d-1} n)$. By combining this result with several existing computational geometry algorithms, the authors give an $O(m^{d \lfloor \frac{d-1}{2} \rfloor} n^{2 \lfloor \frac{d-1}{2} \rfloor} \log^{(d-1) \lfloor \frac{d-1}{2} \rfloor + O(1)} n)$ time algorithm for constructing function Z for general d , and a $O(mn^4 \log n + n^5 \log^2 n)$ algorithm when $d = 1$. In the particular case where cost functions c^0, \dots, c^d are nonnegative, Karger [15] gives a significantly tighter bound $O(n^{d+2})$ on the combinatorial facet complexity and shows that function Z can be computed using a randomized algorithm in $O(n^{2d+2} \log n)$ time. These results are summarized in rows 5 and 6 of Table 1.

In this paper, we consider the following parametric problems:

- $P_{\text{NB}}(M)$ Given a polyhedron $M \subset \mathbb{R}^d$, a value $\mu^0 \in M \subset \mathbb{R}^d$, and a direction $\nu \in \mathbb{Z}^d$. Find the next breakpoint $\mu^{\text{NB}} \in M$ of Z after μ^0 in direction ν , if any.
- $P_{\text{max}}(M)$ Given a polyhedron $M \subset \mathbb{R}^d$, find a value $\mu^* \in M$ such that $Z(\mu^*) = \max_{\mu \in M} Z(\mu)$.

In contrast to $P_{\text{max}}(M)$, $P_{\text{NB}}(M)$ is a one-dimensional parametric optimization problem as it considers the restriction of function Z to some direction $\nu \in \mathbb{Z}^d$. This problem corresponds to the *ray shooting problem* which is a standard topic in sensitivity analysis [11, Section 30.3] to identify ranges of optimality and related quantities. Given $\lambda \geq 0$, the cost $c_{\mu^0 + \lambda\nu}$ of each edge $e \in E$ in the direction ν is defined by $c_{\mu^0 + \lambda\nu}(e) = c^0(e) + \sum_{i=1}^d (\mu_i^0 + \lambda\nu_i) c^i(e)$. Let $\bar{c}^0(e) = c^0(e) + \sum_{i=1}^d \mu_i^0 c^i(e)$ and $\bar{c}^1(e) = \sum_{i=1}^d \nu_i c^i(e)$. The edge costs can be rewritten as $c_{\mu^0 + \lambda\nu}(e) = \bar{c}^0(e) + \lambda \bar{c}^1(e)$. For any cut $\emptyset \neq C \subset V$, its cost for the edge costs $c_{\mu^0 + \lambda\nu}$ is a function $c_{\mu^0 + \lambda\nu}(C) = \bar{c}^0(C) + \lambda \bar{c}^1(C)$ of variable λ . For any $\lambda \geq 0$ let $Z'(\lambda) = Z'(\mu^0 + \lambda\nu, \nu)$ denote the right derivative of $Z(\mu^0 + \lambda\nu)$ in direction ν at λ . If the next breakpoint μ^{NB} exists, define λ^{NB} by $\mu^{\text{NB}} = \mu^0 + \lambda^{\text{NB}}\nu$, and let $C_{\mu^{\text{NB}}}^*$ denote an optimal cut for edge costs $c_{\mu^{\text{NB}}}(e)$ defining the slope $Z'(\lambda^{\text{NB}})$.

$P_{\text{max}}(M)$ arises in the context of network reinforcement problem. Consider the following 2-player game of reinforcing a graph against an attacker. Given a graph $G = (V, E)$ where each edge $e \in E$ has a capacity $c^0(e)$, the Graph player wants to reinforce the capacities of the edges in E by buying $d + 1$ resources subject to a budget B . The Graph player can spend $\mu_i \geq 0$ on each resource i to increase the capacities of all edges to $c_\mu(e) = c^0(e) + \sum_{i=1}^{d+1} \mu_i c^i(e)$, where all functions c^i are assumed to be non-negative. The Attacker wants to remove some edges of E in order to cut the graph into two pieces at a minimum cost. Therefore, these edges correspond to an optimal cut $\delta(C_\mu^*)$ and their removal cost is $Z(\mu)$. The Graph player wants to make it as expensive as possible for the Attacker to

cut the graph, and so he wants to solve P_{\max} . It is optimal for the Graph player to spend all the budget, and thus to spend $\mu_{d+1} = B - \sum_{i=1}^d \mu_i$ on resource $d+1$. Therefore, the cost of removing edge e as a function of the amounts spent on the first d resources is $c_\mu(e) = c^0(e) + \sum_{i=1}^d \mu_i c^i(e) + (B - \sum_{i=1}^d \mu_i) c^{d+1}(e) = (c^0(e) + B c^{d+1}(e)) + \sum_{i=1}^d \mu_i (c^i(e) - c^{d+1}(e))$. Note that $c^i(e) - c^{d+1}(e)$ may be negative. This application illustrates how negative parametric edge costs may arise even when all original data are non-negative.

Clearly problems $P_{\max}(M)$ and $P_{\text{NB}}(M)$ can be solved by constructing function Z . However, the goal of this paper is to give much faster strongly polynomial algorithms for these problems without explicitly constructing the whole function Z .

1.1 Related works

The results mentioned in this section are summarized in the first four rows of Table 1. We concentrate on *strongly* polynomial bounds here as is the case in most of the literature, but see Section 1.3 for one case where there is a potentially faster weakly polynomial bound.

Problem	Deterministic	Randomized
Non-param Global MC	[24,31] $O(mn + n^2 \log n)$	[14] $\tilde{O}(m)$ ([16] $\tilde{O}(n^2)$)
All α -approx for $\alpha < \frac{4}{3}$	[25] $O(n^4)$	[16] $\tilde{O}(n^2)$
Megiddo P_{NB} ($\sim d=1$)	[31] $O(n^5 \log n)$	[32,16] $O(n^2 \log^5 n)$
Megiddo P_{\max} (\sim gen'l d)	[31] $O(n^{2d+3} \log^d n)$	[32,16] $O(n^2 \log^{4d+1} n)$
All of $Z(\mu)$ for $d=1$	[3] $O(mn^4 \log n + n^5 \log^2 n)$	[15] $O(n^4 \log n)$
All of $Z(\mu)$ for gen'l d	[3] [big]	[15] $O(n^{2d+2} \log n)$
This paper P_{NB} ($\sim d=1$)	[24,31] $O(mn + n^2 \log n)$	[13] $O(n^2 \log^3 n)$
This paper P_{\max} (\sim gen'l d)	$O(n^4 \log^{d-1} n)$???

Table 1. New results in this paper are in red. Compare these to the non-parametric lower bounds in green, and the various upper bounds in blue.

The standard (non-parametric) global minimum cut minimum cut is a special case of the parametric global minimum cut, i.e., for some fixed value $\mu \in M$. Nagamochi and Ibaraki [24] and Stoer and Wagner [31] give a deterministic algorithm for this problem that runs in $O(mn + n^2 \log n)$ time. Karger and Stein [16] give a faster randomized algorithm that runs in $\tilde{O}(n^2)$ time. Karger [14] improves the running time and give an $\tilde{O}(m)$ time algorithm.

Given $\alpha > 1$, a cut is called α -approximate if its cost is at most at factor of α larger than the optimal value. A remarkable property of the global minimum cut problem is that there exists a strongly polynomial number of near-optimal cuts. Karger [14] showed that the number of α -approximate cuts is $O(n^{\lfloor 2\alpha \rfloor})$. Nagamochi et al. [26] give a deterministic $O(m^2 n + mn^{2\alpha})$ time algorithm for enumerating them. For the particular case $1 < \alpha < \frac{4}{3}$, they improved this

running time to $O(m^2n + mn^2 \log n)$. Nagamochi and Ibaraki [25, Corollary 4.14] further reduced the running time to $O(n^4)$. The fastest randomized algorithm to enumerate all the near-optimal cuts, which is an $\tilde{O}(n^{\lfloor 2\alpha \rfloor})$ time algorithm by Karger and Stein [16], is faster than the best deterministic algorithm.

Megiddo’s parametric searching method [19,20] is a powerful technique to solve parametric optimization problems. Megiddo’s approach was originally designed to handle one-dimensional parametric problems. Cohen and Megiddo [7] extend it to fixed dimension $d > 1$, see also [2]. The crucial requirement is that the underlying non-parametric problem must have an *affine* algorithm, that is all numbers manipulated are affine functions of parameter μ . This condition is not restrictive, as many combinatorial optimization algorithms have this property; e.g., minimum spanning tree [10], matroid and polymatroid optimization [32], maximum flow [8]. The technique can be summarized as follows in the special case $d = 1$. Megiddo’s approach simulates the execution of an affine algorithm \mathcal{A} on an unknown target value $\bar{\mu}$ ($= \mu^{\text{NB}}$ or μ^*) by considering it as a symbolic constant. During the course of execution of \mathcal{A} , if we need to determine the sign of some function f at $\bar{\mu}$, we compute the root r of f . The key point is that by testing if $\bar{\mu} = r$, $\bar{\mu} < r$, or $\bar{\mu} > r$, we can determine the sign of $f(\bar{\mu})$. This operation is called a *parametric test* and requires calling algorithm \mathcal{A} with parameter value fixed at r .

Tokuyama [32] considers the analogue of problem $P_{\max}(M)$ for several geometric and graph problems, called the *minimax (or maximin) parametric optimization*, and give efficient algorithms for them based on Megiddo’s approach. He observes that the randomized algorithm of Karger [13] is affine. In order to improve the running time, Tokuyama implemented Megiddo’s technique using the parallel algorithm of Karger and Stein [16] which solves the minimum cut problem in $\tilde{O}(\log^3 n)$ randomized parallel time using $O(\frac{n^2}{\log^2 n})$ processors. The resulting randomized algorithm for $P_{\max}(M)$ has a $O(n^2 \log^{4d+1} n)$ running time. The result was stated only for $P_{\max}(M)$ but it is easy to see that the same running time can be obtained for $P_{\text{NB}}(M)$. In Appendix 5.2, we show that Stoer and Wagner’s algorithm [31] is affine and can be combined with Megiddo’s approach in order to solve $P_{\text{NB}}(M)$ and $P_{\max}(M)$. This gives deterministic algorithms that run in $O(n^{2d+3} \log^d n)$ and $O(n^5 \log n)$ time for $P_{\max}(M)$ and $P_{\text{NB}}(M)$ respectively (Proposition 1).

1.2 Our results

Our new results are summarized in rows 7 and 8 of Table 1.


The algorithms based on Megiddo’s approach typically introduce a slowdown with respect to the non-parametric algorithm. For $d = 1$, these algorithms perform similar parametric tests and solve problems $P_{\text{NB}}(M)$ and $P_{\max}(M)$ with the same running time. This gives the impression that these problems have the same complexity in this special case. The main contribution of the paper is to extend the techniques of Nagamochi and Ibaraki [24] and Stoer and Wagner [31] and Karger [13] to handle parametric edge costs. We give faster deterministic

and randomized algorithms for problems $P_{\text{NB}}(M)$ and $P_{\text{max}}(M)$ which are not based on Megiddo's approach. We show that problem $P_{\text{NB}}(M)$ can be solved with the same running time as the non-parametric global minimum cut (Theorems 1 and 2). We give for problem $P_{\text{max}}(M)$ a much faster deterministic algorithm exploiting the key property that all near-optimal cuts can be enumerated in strongly polynomial time (Theorem 3). The algorithm builds upon a scaling technique given in [3]. The differences in how we tackle problems $P_{\text{NB}}(M)$ and $P_{\text{max}}(M)$ illustrate that $P_{\text{NB}}(M)$ might be significantly easier than $P_{\text{max}}(M)$.


Notice that our new algorithms for P_{NB} in row 7 of Table 1 are *optimal*, in the sense that their running times match the best-known running times of the non-parametric versions of the problem (up to log factors). That is, the times quoted in row 7 of Table 1 are (nearly) the same as those in row 1 (with the exception that we do not match the Karger's speedup from $\tilde{O}(n^2)$ to $\tilde{O}(m)$ for the non-parametric randomized case).

1.3 Relating P_{NB} and P_{max}

Recall that P_{NB} wants us to compute λ^{NB} as this picture:

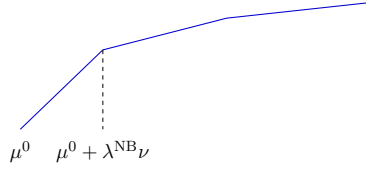

Intuitively, if we “rotate” until the local slope at μ^0 is just short of horizontal, then finding λ^{NB} becomes equivalent to computing μ^* in this 1-dimensional problem:



Unfortunately, there appears not to be any way to actually “rotate” the slopes of $\mu^0 + \lambda\nu$ that would formalize this intuition. We can instead consider an *oracle* model for P_{NB} , and for P_{max} for $d = 1$, where the algorithms interact with the graph only through calls to an oracle with input μ that reports the local slope at μ . We can then ask how many calls to the P_{max} oracle are necessary in order to solve P_{NB} .

In order to solve P_{NB} using P_{max} 's oracle, we could proceed as follows. Compute the right slope $m^0 = Z'(0)$ of $\mu^0 + \lambda\nu$ at $\lambda = 0$ by one call to P_{NB} 's oracle. Note that m^0 is an integer. Define $\delta = m^0 - \frac{1}{2}$. This means that $m^0 - \delta = \frac{1}{2}$, and (since $Z'(\lambda^{\text{NB}}) \leq Z'(0) - 1$) that $Z'(\lambda^{\text{NB}}) - \delta$ at the (as-yet) unknown λ^{NB} is negative. This implies that λ^{NB} solves P_{max} w.r.t. the slopes adjusted by subtracting δ . Hence we can solve P_{NB} by using P_{max} 's oracle algorithm with its slopes adjusted downwards by δ . Thus in this oracle sense P_{NB} cannot be any harder than P_{max} for $d = 1$, though it could be easier.

The Discrete Newton algorithm is one type of oracle algorithm for such problems. In particular, Radzik [30, Theorem 3.9] shows how to use Discrete Newton to solve P_{\max} for $d = 1$ (and so also P_{NB}) in $O(m^2 \log n)$ oracle calls. Radzik also shows a weakly polynomial bound. Let $C^0 = \max_e c^0(e)$, $C^1 = \max_e c^1(e)$, and $C = \max(C^0, C^1)$. Then [30, Theorem 3.4, Section 3.3] says that Discrete Newton solves P_{\max} for $d = 1$ (and so also P_{NB}) in $O\left(\frac{\log(nC^0C^1)}{1 + \log \log(nC^0C^1) - \log \log(nC^1)}\right) \leq O(\log(nC))$ oracle calls.

We could use Discrete Newton in place of Megiddo to solve P_{NB} by using the method described above. Each iteration costs $O(mn + n^2 \log n)$ time. This would give an $O(m^3 n \log n + m^2 n^2 \log^2 n)$ algorithm. This is slower than the $O(n^4)$ we will get from Megiddo. However, if $\log C$ is smaller than $O(n)$, then the weakly polynomial bound of $O(\log(nC)(mn + n^2 \log n))$ is faster than the $O(n^4)$ that we will get from Megiddo.

2 Problem $P_{\text{NB}}(M)$

We discuss in Sections 2.1 and 2.1 efficient deterministic and randomized algorithms for solving problem $P_{\text{NB}}(M)$ respectively. These algorithms are based on edge contractions. Before giving the algorithms, a preliminary step is to compute an upper bound $\bar{\lambda} > 0$ such that the next breakpoint μ^{NB} satisfies $\mu^{\text{NB}} = \mu^0 + \lambda^{\text{NB}} \nu$ for some $\lambda^{\text{NB}} \in [0, \bar{\lambda}]$. If the next breakpoint exists, then $\bar{c}^1(C_{\mu^0}^*) \neq \bar{c}^1(C_{\mu^{\text{NB}}}^*)$ or equivalently $|\bar{c}(C_{\mu^0}^*) - \bar{c}(C_{\mu^{\text{NB}}}^*)| \geq 1$ as costs c^i and the direction vector ν are in \mathbb{Z}^d . In this case, functions $c_{\mu^0 + \lambda \nu}(C_{\mu^0}^*)$ and $c_{\mu^0 + \lambda \nu}(C_{\mu^{\text{NB}}}^*)$ intersect at

$$0 \leq \lambda^{\text{NB}} = \frac{\bar{c}^0(C_{\mu^{\text{NB}}}^*) - \bar{c}^0(C_{\mu^0}^*)}{\bar{c}^1(C_{\mu^0}^*) - \bar{c}^1(C_{\mu^{\text{NB}}}^*)} = \frac{|\bar{c}^0(C_{\mu^{\text{NB}}}^*) - \bar{c}^0(C_{\mu^0}^*)|}{|\bar{c}^1(C_{\mu^0}^*) - \bar{c}^1(C_{\mu^{\text{NB}}}^*)|} \leq |\bar{c}^0(C_{\mu^{\text{NB}}}^*) - \bar{c}^0(C_{\mu^0}^*)| \leq \sum_{e \in E} |\bar{c}^0(e)|.$$

Therefore, the desired upper bound is $\bar{\lambda} := \sum_{e \in E} |\bar{c}^0(e)|$.

Our algorithms require also computing the slope $Z'(\mu^0, \nu) \in \mathbb{R}$ such that for some (unknown) $\delta > 0$, $Z(\mu^0 + \lambda \nu) = Z(\mu^0) + Z'(\mu^0, \nu) \lambda$ for all $\lambda \in [0, \delta]$. A deterministic algorithm to compute this quantity is to call the Stoer and Wagner's algorithm [31] in order to compute $Z(\mu^0 + \epsilon \nu)$ for some very small $\epsilon > 0$. Since this algorithm is affine (see Appendix 5.2), one can consider ϵ as an implicit parameter with a very small value. By calling instead the affine algorithm of Karger and Stein [16] in order to solve $Z(\mu^0 + \epsilon \nu)$, one can obtain a randomized algorithm for computing $Z'(\mu^0, \nu)$.

2.1 A deterministic contraction algorithm

We describe in this section a deterministic algorithm for $P_{\text{NB}}(M)$ based on the concept of *pendant pair*. We call an ordered pair (u, v) of vertices in G a pendant pair for edge costs $c_\mu(e)$ for some $\mu \in M$ if $\min\{c_\mu(X) : \emptyset \subset X \subset V \text{ separating } u \text{ and } v\} = c_\mu(\delta(v))$.

The algorithm proceeds in $n - 1$ phases and computes iteratively the next breakpoint μ^{NB} , if any, or claims that it does not exist. In the former case, the algorithm refines, at each iteration r , an upper bound $\bar{\lambda}^{\text{NB}}$ of λ^{NB} by choosing some $\lambda^r \in [0, \bar{\lambda}]$ and merging a pendant pair (u^r, v^r) in G^r for edge costs $c_{\mu^0 + \lambda^r \nu}(e)$. The process continues until the residual graph contains only one node. All the details are summarized in Algorithm 1.

Algorithm 1 Deterministic Parametric Edge Contraction

Require: a graph $G = (V, E)$, costs c^0, \dots, c^d , a direction ν , an upper bound $\bar{\lambda}$, the optimal value $Z(\mu^0)$ and a slope $Z'(\mu^0, \nu)$

Ensure: next breakpoint μ^{NB} if any

- 1: let $E^0 \leftarrow E$, $V^0 \leftarrow V$, $G^0 \leftarrow G$, $r \leftarrow 0$, $\bar{\lambda}^{\text{NB}} \leftarrow \bar{\lambda}$
- 2: **while** $|V_r| > 1$ **do**
- 3: define functions $L(\lambda) := Z(\mu^0) + \lambda Z'(\mu^0, \nu)$, $Z^r(\mu) := \min_{v \in V^r} c_\mu(\delta(v))$, compute, if any, $\hat{\lambda}^r := \min\{\lambda > 0 : Z^r(\mu^0 + \lambda \nu) \leq L(\lambda)\}$, and let $\lambda^r := \begin{cases} \min\{\bar{\lambda}, \hat{\lambda}^r\} & \text{if } \hat{\lambda}^r \text{ exists} \\ \bar{\lambda} & \text{otherwise} \end{cases}$
- 4: **if** $\lambda^r < \bar{\lambda}^{\text{NB}}$ **then**
- 5: set $\bar{\lambda}^{\text{NB}} \leftarrow \lambda^r$
- 6: **end if**
- 7: compute a pendant pair (u^r, v^r) in G^r for edge costs $c_{\mu^0 + \lambda^r \nu}(e)$ using the algorithm given in [31]
- 8: merge nodes u^r and v^r and remove self-loops
- 9: set $r \leftarrow r + 1$ and let $G_r = (V_r, E_r)$ denote the resulting graph
- 10: **end while**
- 11: **if** $L(\bar{\lambda}^{\text{NB}}) > \min_C \{c_{\mu^0 + \bar{\lambda}^{\text{NB}} \nu}(C) : \emptyset \neq C \subset V_r\}$ **then**
- 12: return $\mu^{\text{NB}} = \mu^0 + \bar{\lambda}^{\text{NB}} \nu$
- 13: **else**
- 14: the next breakpoint does not exist
- 15: **end if**

Since cuts $\delta(v)$ for all $v \in V^r$ are also cuts in G , it follows that $Z(\mu) \leq Z^r(\mu)$ for any $\mu \in M$. In particular, $L(\lambda) = Z(\mu^0 + \lambda \nu) \leq Z^r(\mu^0 + \lambda \nu)$ for any $\lambda \in [0, \lambda^{\text{NB}}]$. By the definition of λ^r , this implies that

$$\lambda^{\text{NB}} \leq \lambda^r \text{ and } L(\lambda^r) \leq Z^r(\mu^0 + \lambda^r \nu). \quad (1)$$

Lemma 1. *If the next breakpoint μ^{NB} exists, then in any iteration r Algorithm 1 either*

- i) finds $\lambda^r = \lambda^{\text{NB}}$ and returns at the end the next breakpoint, or*
- ii) merges nodes u^r and v^r that are not separated by any optimal cut $C_{\mu^{\text{NB}}}^*$ in G for edge costs $c_{\mu^{\text{NB}}}(e)$.*

Proof. *i)* In this case, $\bar{\lambda}^{\text{NB}}$ is set to λ^{NB} at iteration r and by (1) the value of $\bar{\lambda}^{\text{NB}}$ will not decrease in the subsequent iterations. Therefore, the next breakpoint is returned at the end of Algorithm 1.

- ii) For any iteration r and any $\mu \in M$, define function $Z_{u^r v^r}(\mu) := \min_C \{c_\mu(C) : \emptyset \neq C \subset V_r \text{ and separates } u^r \text{ and } v^r\}$. By the choice of the pair (u^r, v^r) and (1), we have

$$Z_{u^r v^r}(\mu^0 + \lambda^r \nu) \geq Z^r(\mu^0 + \lambda^r \nu) \geq L(\lambda^r) > c_{\mu^0 + \lambda^r \nu}(C_{\mu^{\text{NB}}}^*),$$

where the last inequality follows since the next breakpoint exists and function Z is concave. This shows the claimed result. \square

Lemma 2. *Algorithm 1 is correct.*

Proof. Suppose first that the next breakpoint exists. By Lemma 1 i), Algorithm 1 is clearly correct if $\lambda^r = \lambda^{\text{NB}}$ for some r . Otherwise, fix an optimal cut $C_{\mu^{\text{NB}}}^*$ for edge costs $c_{\mu^{\text{NB}}}(e)$ defining the slope $Z'(\mu^{\text{NB}}, \nu)$ at μ^{NB} . By Lemma 1 ii), all the pairs merged during the course of Algorithm 1 are not separated by $C_{\mu^{\text{NB}}}^*$, and thus $C_{\mu^{\text{NB}}}^*$ is associated to a cut in the final graph which is formed by a single node. This leads to a contradiction.

Suppose now that the next breakpoint does not exist. In this case, $L(\bar{\lambda}^{\text{NB}}) = \min_C \{c_{\mu^0 + \bar{\lambda}^{\text{NB}} \nu}(C) : \emptyset \neq C \subset V_r\}$ and thus, Algorithm 1 gives a correct answer. This shows the claimed result. \square

Computing the lower envelope of $O(n)$ linear functions and getting function Z^r takes $O(n \log n)$ time [4]. Therefore, the running time of an iteration r of Algorithm 1 is dominated by the time of computing a pendant pair in $O(m + n \log n)$ time [31]. The added running time of the $n - 1$ iterations of the while loop takes $O(mn + n^2 \log n)$. Note that this corresponds to the same running time of computing a non-parametric minimum cut [31]. Since the test performed in Step 11 requires the computation of a minimum cut, it follows that the overall running time of Algorithm 1 is $O(mn + n^2 \log n)$. The following result summarizes the running time of our contraction algorithm.

Theorem 1. *Problem P_{NB} can be solved in $O(mn + n^2 \log n)$ time.*

2.2 A randomized contraction algorithm

The algorithm performs a number of random edge contractions and iteratively solves the next breakpoint problem. At each iteration r , the algorithm chooses some $\tilde{\mu}^r \in M$ and randomly selects an edge $e \in E^r$ with probability $\frac{c_{\tilde{\mu}^r}(e)}{c_{\tilde{\mu}^r}(E_r)}$ to be contracted. The point $\tilde{\mu}^r$ is defined as the intersection of functions $L(\lambda) := Z(\mu^0) + \lambda Z'(\mu^0, \nu)$ and $UB^r(\lambda) := \frac{1}{|V_r|} c_{\mu^0 + \lambda \nu}(E_r)$ and may vary from one iteration to the next. The choice of the appropriate value of $\tilde{\mu}^r$ is crucial to ensure the high success probability of solving the problem, and is the main contribution of this algorithm. The random edges contraction sequence continues until obtaining a graph G' with two nodes. If the next breakpoint μ^{NB} exists, then the algorithm returns it after computing an optimal cut $C_{\mu^{\text{NB}}}^*$ for edge costs $c_{\mu^{\text{NB}}}(e)$

Algorithm 2 Randomized Parametric Random Edge Contraction

Require: a graph $G = (V, E)$, costs c^0, \dots, c^d , a direction ν , an upper bound $\bar{\lambda}$, the optimal value $Z(\mu^0)$ and a slope $Z'(\mu^0, \nu)$

Ensure: next breakpoint μ^{NB} if any

- 1: let $E^0 \leftarrow E$, $V^0 \leftarrow V$, $G^0 \leftarrow G$, $r \leftarrow 0$
- 2: **while** $|V_r| > \rho$ **do**
- 3: compute the intersection point λ^r of functions $L(\lambda) := Z(\mu^0) + \lambda Z'(\mu^0, \nu)$ and $UB^r(\lambda) := \frac{1}{|V^r|} \sum_{v \in V^r} c_{\mu^0 + \lambda \nu}(\delta(\{v\}))$
- 4: **if** $\lambda^r \in [0, \bar{\lambda}]$ **then**
- 5: set $\tilde{\mu}^r = \mu^0 + \lambda^r \nu$
- 6: **else**
- 7: set $\tilde{\mu}^r = \mu^0 + \bar{\lambda} \nu$
- 8: **end if**
- 9: choose an arbitrary edge $e \in E_r$ with probability $\frac{c_{\tilde{\mu}^r}(e)}{c_{\tilde{\mu}^r}(E_r)}$
- 10: $r \leftarrow r + 1$
- 11: contract e by merging all its vertices and removing self-loops
- 12: let $G_r = (V_r, E_r)$ denote the resulting graph
- 13: **end while**
- 14: choose uniformly at random a cut C in the final graph G^r and define $\mu^0 + \bar{\lambda}^{\text{NB}} \nu$ as the intersection value of functions $L(\lambda)$ and $c_{\mu^0 + \lambda \nu}(C)$
- 15: **if** $\bar{\lambda}^{\text{NB}} > 0$ **then**
- 16: return $\mu^{\text{NB}} = \mu^0 + \bar{\lambda}^{\text{NB}} \nu$
- 17: **else**
- 18: the next breakpoint does not exist
- 19: **end if**

defining the slope $Z'(\mu^{\text{NB}}, \nu)$ at μ^{NB} . Otherwise, the algorithm claims that it does not exist. All the details are summarized in Algorithm 2.

We say that an edge e in G_r *survives* at the current contraction if it is not chosen to be contracted. An edge $e \in G$ survives at the end of iteration r if it survives all the r edge contractions. A cut C *survives* at the end of iteration r if every edge $e \in \delta(C)$ has survived. We show that a fixed optimal cut $C_{\mu^{\text{NB}}}^*$ is returned by Algorithm 2 with probability at least $\binom{n}{2}^{-1}$.

Assume first that the next breakpoint $\mu^{\text{NB}} = \mu^0 + \lambda^{\text{NB}} \nu$ exists and $\lambda^{\text{NB}} \in [0, \bar{\lambda}]$. Fix an optimal cut $C_{\mu^{\text{NB}}}^*$ for edge costs $c_{\mu^{\text{NB}}}(e)$ defining the slope $Z'(\mu^{\text{NB}}, \nu)$ at μ^{NB} and suppose that it has survived until iteration r . Since cuts in the minor graph G^r are also cuts in G , it follows that

$$Z(\mu^0 + \lambda \nu) \leq \min_C \{c_{\mu^0 + \lambda \nu}(C) : \emptyset \neq C \subset V_r\} \text{ for all } \lambda \in [0, \lambda^{\text{NB}}]. \quad (2)$$

Since the minimum cut value in graph G^r is less than the values of all the cuts formed by singleton nodes $v \in V^r$, it follows that

$$\min_C \{c_{\mu^0+\lambda\nu}(C) : \emptyset \neq C \subset V_r\} \leq \frac{1}{|V_r|} \sum_{v \in V_r} c_{\mu^0+\lambda\nu}(\delta(\{v\})) = UB(\lambda) \text{ for any } \lambda \in [0, \bar{\lambda}]. \quad (3)$$

By (2)-(3), we have

$$Z(\mu^0 + \lambda\nu) = Z(\mu^0) + \lambda Z'(\mu^0, \nu) = L(\lambda) \leq UB(\lambda) \text{ for all } \lambda \in [0, \lambda^{\text{NB}}]. \quad (4)$$

This shows that the intersection value $\lambda^r \notin (0, \lambda^{\text{NB}})$. Depending on the value of λ^r , several cases need to be considered. If $\lambda^r \in [0, \bar{\lambda}]$, then $\lambda^r \geq \lambda^{\text{NB}}$. By the concavity of function Z , we have

$$c_{\mu^0+\lambda^r\nu}(C_{\mu^{\text{NB}}}^*) \leq Z(\mu^0) + \lambda^r Z'(\mu^0, \nu) = L(\lambda^r) = UB^r(\lambda^r). \quad (5)$$

Suppose that $\lambda^r > \bar{\lambda}$. The case where $\lambda^r < 0$ can be handled similarly. By (4), $L(\lambda) < UB^r(\lambda)$ for any $\lambda \in [0, \bar{\lambda}]$. Again, by the concavity of function Z , we have

$$c_{\mu^0+\bar{\lambda}\nu}(C_{\mu^{\text{NB}}}^*) \leq Z(\mu^0) + \bar{\lambda} Z'(\mu^0, \nu) = L(\bar{\lambda}) < UB^r(\bar{\lambda}). \quad (6)$$

The probability of randomly picking an edge in $\delta(C_{\mu^{\text{NB}}}^*)$ is

$$\begin{aligned} Pr(e \in \delta(C_{\mu^{\text{NB}}}^*)) &= \frac{c_{\bar{\mu}^r}(C_{\mu^{\text{NB}}}^*)}{c_{\bar{\mu}^r}(E_r)} = \begin{cases} \frac{c_{\mu^0+\lambda^r\nu}(C_{\mu^{\text{NB}}}^*)}{c_{\mu^0+\lambda^r\nu}(E_r)} & \text{if } \lambda^r \in [0, \bar{\lambda}] \\ \frac{c_{\mu^0+\bar{\lambda}\nu}(C_{\mu^{\text{NB}}}^*)}{c_{\mu^0+\bar{\lambda}\nu}(E_r)} & \text{otherwise,} \end{cases} \\ &\leq \frac{UB^r(\hat{\mu}^r)}{c_{\bar{\mu}^r}(E_r)} \text{ by (5-6)} \\ &\leq \frac{2}{|V_r|} = \frac{2}{n-r+1}. \end{aligned} \quad (7)$$

Lemma 3. *Suppose that the next breakpoint exists. Any fixed optimal cut $C_{\mu^{\text{NB}}}^*$ for edge costs $c_{\mu^{\text{NB}}}(e)$ defining the slope $Z'(\mu^{\text{NB}}, \nu)$ at μ^{NB} is returned by Algorithm 2 with probability at least $\binom{n}{2}^{-1}$.*

Proof. Using (7), the probability that cut $\delta(C_{\mu^{\text{NB}}}^*)$ survives all the edge contractions is at least

$$(1 - \frac{2}{n})(1 - \frac{2}{n-1}) \cdots (1 - \frac{2}{3}) = \binom{n}{2}^{-1}.$$

□

Note that this error probability is identical to the one for the original (non-parametric) contraction algorithm [13,16].

If the next breakpoint does not exist, then there exists no cut C such that the intersection value $\bar{\lambda}^{\text{NB}}$ of functions $L(\lambda)$ and $c_{\mu^0 + \lambda\nu}(C)$ is nonnegative. In this case, Algorithm 2 gives a correct answer (with probability 1) after performing the test in Step 15. Therefore, the success probability of Algorithm 2 is given as follows.

Corollary 1. $P_{\text{NB}}(M)$ is solved by Algorithm 2 with probability at least $\binom{n}{2}^{-1}$.

The random edge selection of Algorithm 2 may be performed in $O(n)$ time by extending a technique given Karger and Stein [16]. With non-parametric costs, this technique is based on updating at each iteration r of the algorithm a cost adjacency matrix $\Gamma = (\gamma(u, v))_{u, v \in V_r}$ and a degree cost vector $D = (d(v))_{v \in V_r}$ associated to graph G_r . The entries $\gamma(u, v)$ and $d(v)$ represent the cost of edge (u, v) and the total cost of all the edges incident to node v , respectively. The update operations consists in replacing a row (a column) with the sum of two rows (columns) and removing a row and a column. Since the edges cost $c_{\bar{\mu}^r}$ used to construct the probability distribution in Algorithm 2 may vary from one iteration to the other, the previous update operations are not possible and computing these matrices in $O(n^2)$ at each iteration is expensive. Instead, we may use two cost adjacency matrix and degree cost vectors for costs \bar{c}^0 and \bar{c}^1 . These matrices can be updated in $O(n)$ time as in [16, Section 3]. By embedding Algorithm 2 in the recursive scheme of Karger and Stein [16], it follows that an optimal cut for our problem can be computed in $O(n^2 \log^3 n)$ time as for non-parametric costs.

Theorem 2. Problem P_{NB} can be solved with high probability in $O(n^2 \log^3 n)$ time.

3 Problem P_{max}

We give in this section an efficient algorithm for solving problem P_{max} and show the following result.

Theorem 3. Problem P_{max} can be solved in $O(\log^{d-1}(n)n^4)$ time.

Before detailing the algorithm, let us first introduce some notation. An *arrangement* $A(\mathcal{H})$, formed by a set \mathcal{H} of hyperplanes in \mathbb{R}^d , corresponds to a partition of \mathbb{R}^d into $O(|\mathcal{H}|^d)$ convex regions called *cells*. See [22] for more details. Given a polytope P in \mathbb{R}^d , let $A(\mathcal{H}) \cap P$ denote the restriction of the arrangement $A(\mathcal{H})$ into P . The following simplified version of standard problem in geometry called, *point location in arrangements* (PLA), is used as a subroutine in our algorithm. This problem is solved by a multidimensional parametric search algorithm [7, 32]. See Appendix 5.2 for more details.

$P_{\text{reg}}(\mathcal{H}, P, \bar{\mu})$ Given a polytope P , a set \mathcal{H} of hyperplanes in \mathbb{R}^d , and a target value $\bar{\mu}$, locate a simplex $R \subseteq A(\mathcal{H}) \cap P$ containing $\bar{\mu}$.

Fix a constant $1 < \varepsilon < \sqrt{\frac{4}{3}}$ and let $\beta = \frac{\varepsilon^2 - 1}{m} > 0$. Compute $p = 1 + \lceil \log \frac{m^2}{\varepsilon^2 - 1} / \log \varepsilon^2 \rceil$ so that $\beta \varepsilon^{2(p-1)} > m$, and observe that $p = O(\log n)$. For a given edge $\bar{e} \in E$, define the $p + 2$ affine functions $g_i : \mathbb{R}^d \rightarrow \mathbb{R}$ by $g_0(\bar{e}, \mu) = 0$,

$$g_i(\bar{e}, \mu) = \beta \varepsilon^{2(i-1)} c_\mu(\bar{e}) \quad \text{for } i = 1, \dots, p,$$

and $g_{p+1}(\bar{e}, \mu) = +\infty$.

Algorithm 3 Deterministic algorithm for P_{\max}

Require: a graph $G = (V, E)$, costs c^0, \dots, c^d , and $1 < \varepsilon < \sqrt{\frac{4}{3}}$

Ensure: the optimal value μ^*

- 1: let $A(\mathcal{H}_1)$ denote the arrangement formed by the set \mathcal{H}_1 of hyperplanes $H_{e,e'} = \{\mu \in \mathbb{R}^d : c_\mu(e) = c_\mu(e')\}$ for any pair of edges $e, e' \in E$
 - 2: solve $P_{\text{reg}}(\mathcal{H}_1, M, \mu^*)$ and compute a simplex $R_1 \subseteq A(\mathcal{H}_1) \cap M$ containing μ^*
 - 3: choose arbitrarily μ^1 in the interior of R_1 , compute a maximum spanning tree T of G for edge costs $c_{\mu^1}(e)$, and let \bar{e} be an edge in T such that $c_{\mu^1}(\bar{e}) = \arg \min_{e \in T} c_{\mu^1}(e)$
 - 4: let $\pi(e)$ denote the rank of edge $e \in E$ according to the increasing edges costs order in R_1 (ties are broken arbitrary)
 - 5: **if** $\min_{\mu \in R_1} c_\mu(\bar{e}) = 0$ **then**
 - 6: let \tilde{e} be an edge such that $\pi(\tilde{e}) \in \arg \min_{e \in E} \{\pi(e) : c_e(\mu) > 0 \text{ for all } \mu \in R_1\}$
 and $R'_1 = \{\mu \in R_1 : g_p(\bar{e}, \mu) \geq c_\mu(\tilde{e})\}$
 - 7: set $R_1 \leftarrow R'_1$
 - 8: **end if**
 - 9: let $A(\mathcal{H}_2)$ denote the arrangement formed by the set \mathcal{H}_2 of hyperplanes $H_i(e) = \{\mu \in \mathbb{R}^d : c_\mu(e) = g_i(\bar{e}, \mu)\}$ for any edges $e \in E$ and for $i = 1, \dots, p$
 - 10: solve $P_{\text{reg}}(\mathcal{H}_2, R_1, \mu^*)$ and compute a simplex $R_2 \subseteq A(\mathcal{H}_2) \cap R_1$ containing μ^*
 - 11: choose arbitrarily $\mu^2 \in R_2$ and compute the set \mathcal{C} of all the ε -approximate cuts for edge costs $c_{\mu^2}(e)$
 - 12: let $A(\mathcal{H}_3)$ denote the arrangement formed by the set \mathcal{H}_3 of hyperplanes $H_{C,C'} = \{\mu \in \mathbb{R}^d : c_\mu(C) = c_\mu(C')\}$ for any pair of cuts $C, C' \in \mathcal{C}$
 - 13: solve $P_{\text{reg}}(\mathcal{H}_3, R_2, \mu^*)$ and return μ^*
-

One of the difficulties of parametric optimization is that edges are only partially ordered by costs. In order to overcome it, Algorithm 3 restricts the parametric search to a simplex R_1 containing μ^* where the parametric functions $c_\mu(e)$ are totally ordered. Let $\pi(e)$ denote the rank of edge $e \in E$ according to the increasing edges costs order in R_1 . The algorithm needs to divide R_1 into smaller regions using as in Mulmuley [23] the relationship between cuts and spanning trees. However, the proof of Mulmuley's result is complicated and results in a large number of regions. Consider an arbitrary μ^1 in the interior of R_1 and compute a maximum spanning tree T for costs $c_{\mu^1}(e)$. Let \bar{e} denote an edge in T such that $c_{\mu^1}(\bar{e}) = \arg \min_{e \in T} c_{\mu^1}(e)$. Since functions $c_\mu(e)$ may intersect only at the boundaries of R_1 , for any edge $e \in T \setminus \{\bar{e}\}$ exactly one of the following cases occurs: *i*) $c_{\mu^1}(e) = c_{\mu^1}(\bar{e})$, and therefore $c_\mu(e) = c_\mu(\bar{e})$ for all $\mu \in R_1$, or

ii) $c_{\mu^1}(e) > c_{\mu^1}(\bar{e})$, and therefore $c_\mu(e) \geq c_\mu(\bar{e})$ for all $\mu \in R_1$. In either cases, edge \bar{e} satisfies

$$c_\mu(\bar{e}) = \min_{e \in T} c_\mu(e) \text{ for all } \mu \in R_1. \quad (8)$$

Since every cut in G intersects T in at least one edge, by (8) we have the following lower bound on the minimum cut value.

$$c_\mu(\bar{e}) \leq Z(\mu) \text{ for all } \mu \in R_1. \quad (9)$$

Let \bar{C} denote the cut formed by deleting \bar{e} from T . By the cut optimality condition, we obtain the following upper bound on the minimum cut value.

$$\begin{aligned} Z(\mu) &\leq c_\mu(\bar{C}) \\ &= \sum_{e \in \delta(\bar{C})} c_\mu(e) \\ &\leq mc_\mu(\bar{e}) \\ &< g_p(\bar{e}, \mu), \end{aligned} \quad (10)$$

where the last inequality follows from the definition of function $g_p(\bar{e}, \mu)$. Let $A(\mathcal{H}_2)$ denote the arrangement formed by the set \mathcal{H}_2 of hyperplanes $H_i(e) = \{\mu \in \mathbb{R}^d : c_\mu(e) = g_i(\bar{e}, \mu)\}$ for any edges $e \in E$ and for $i = 1, \dots, p$. Suppose first that $c_\mu(\bar{e}) > 0$ for all $\mu \in R_1$, then by (9) we have $Z(\mu) > 0$ for all $\mu \in R_1$. In this case, we may apply the technique given in [3, Theorem 4] to compute all optimal cuts for edge costs $c_{\mu^*}(e)$. Consider a simplex $R_2 \subseteq A(\mathcal{H}_2) \cap R_1$ containing μ^* and any optimal cut $C_{\mu^*}^*$ for edge costs $c_{\mu^*}(e)$. Since functions $g_p(\bar{e}, \mu)$ and $c_\mu(e)$, for all $e \in E$, may intersect only at the boundaries of R_2 , it follows by (10) that $c_\mu(e) \leq g_p(\bar{e}, \mu)$ for all $e \in \delta(C_{\mu^*}^*)$ and all $\mu \in R_2$. By construction of the arrangement $A(\mathcal{H}_2) \cap R_1$, for every edge e in $\delta(C_{\mu^*}^*)$ there exists some $q \in \{0, \dots, p\}$ such that

$$g_q(\bar{e}, \mu) \leq c_\mu(e) \leq g_{q+1}(\bar{e}, \mu) \text{ for all } \mu \in R_2. \quad (11)$$

The following result shows that not all functions $c_\mu(e)$ of the edges in $\delta(C_\mu^*)$ are below function $g_1(\bar{e}, \mu)$ for all $\mu \in R_2$.

Lemma 4. *For any $\bar{\mu} \in R_2$ and any optimal cut $C_{\bar{\mu}}^*$ for edge costs $c_{\bar{\mu}}(e)$, there exists at least an edge $e \in \delta(C_{\bar{\mu}}^*)$ satisfying $c_\mu(e) \geq g_1(\bar{e}, \mu)$ for all $\mu \in R_2$.*

Proof. By contradiction, if the statement of the lemma does not hold, then

$$Z(\bar{\mu}) \leq mg_1(\bar{e}, \bar{\mu}) = (\varepsilon^2 - 1)c_{\bar{\mu}}(\bar{e}) < c_{\bar{\mu}}(\bar{e}),$$

where the last inequality follows from $\varepsilon^2 < 2$. This contradicts (9) and thus, at least an edge $e \in \delta(C_{\bar{\mu}}^*)$ satisfies $c_{\bar{\mu}}(e) \geq g_1(\bar{e}, \bar{\mu})$. Since functions $g_1(\bar{e}, \mu)$ and $c_\mu(e)$ may intersect only at the boundaries of R_2 , we have $c_\mu(e) \geq g_1(\bar{e}, \mu)$ for all $\mu \in R_2$. \square

By (11) and Lemma 4, one can use the same arguments as in [3, Theorem 4] and get the following result.

Lemma 5. *If $Z(\mu) > 0$ for all $\mu \in R_1$, then any specific optimal cut $C_{\mu^*}^*$ for edge costs $c_{\mu^*}(e)$ is an ε -approximate cut for edge costs $c_\mu(e)$ for every $\mu \in R_2$.*

The optimal value μ^* is defined by the intersection of parametric functions $c_\mu(C)$ of at least d optimal cuts C for edge costs $c_{\mu^*}(e)$. If the condition of Lemma 5 holds, the enumeration of these solutions can be done by picking some μ^2 in a simplex $R_2 \subseteq A(\mathcal{H}_2) \cap R_1$ containing μ^* and computing the set \mathcal{C} of all the ε -approximate cuts for edge costs $c_{\mu^2}(e)$. Note that this set is formed by $O(n^2)$ cuts [26]. Naturally, μ^* can be obtained by computing the lower envelope of the parametric functions $c_\mu(C)$ for all the cuts $C \in \mathcal{C}$. However, this will take an excessive $O(n^{2d}\alpha(n))$ running time [9], where $\alpha(n)$ is the inverse of Ackermann's function. Instead, observe that μ^* is a vertex of at least d cells of the arrangement $A(\mathcal{H}_3) \cap R_2$ formed by the set \mathcal{H}_3 of hyperplanes $H_{C,C'} = \{\mu \in \mathbb{R}^d : c_\mu(C) = c_\mu(C')\}$ for any pair of cuts $C, C' \in \mathcal{C}$. Therefore, μ^* is a vertex of any simplex containing it and included in a facet of $A(\mathcal{H}_3)$. By solving PLA problem in $A(\mathcal{H}_3) \cap R_2$, μ^* can be computed more efficiently.

In order to complete the algorithm, we need to handle the case where $\min_{\mu \in R_1} c_\mu(\bar{e}) = 0$. It is sufficient to consider in this case a restriction $R'_1 \subset R_1$ containing μ^* such that $\min_{\mu \in R'_1} c_\mu(\bar{e}) > 0$. The following results show how to construct such a restriction.

Lemma 6. *There exists at least an edge $\hat{e} \in E$ such that $c_\mu(e) > 0$ for all $\mu \in R_1$.*

Proof. Let \hat{e} denote the edge maximizing the rank $\pi(e)$ among all the edges $e \in E$. Suppose that $\min_{\mu \in R_1} c_\mu(\hat{e}) = 0$ and let $\mu^0 \in R_1$ such that $c_{\mu^0}(\hat{e}) = 0$. The total order of edges costs in R_1 implies that $c_{\mu^0}(e) = 0$ for all $e \in E$ and thus, we have $c_{\mu^0}(C) = 0$ for any cut C in G . Consider any $\mu^1 \neq \mu^0$ in R_1 . By the concavity of Z , we have

$$Z(\zeta\mu^0 + (1-\zeta)\mu^1) \geq \zeta Z(\mu^0) + (1-\zeta)Z(\mu^1) = (1-\zeta)Z(\mu^1) \text{ for all } \zeta \in [0, 1]. \quad (12)$$

For all optimal cuts $C_{\mu^1}^*$ for edge costs $c_{\mu^1}(e)$, we have

$$c_{\zeta\mu^0 + (1-\zeta)\mu^1}(C_{\mu^1}^*) = \zeta c_{\mu^0}(C_{\mu^1}^*) + (1-\zeta)c_{\mu^1}(C_{\mu^1}^*) = (1-\zeta)Z(\mu^1).$$

Therefore, by (12) all optimal cuts $C_{\mu^1}^*$ are also optimal for edge costs $c_{\zeta\mu^0 + (1-\zeta)\mu^1}(e)$ for any $\zeta \in [0, 1]$. Consider now the restriction of Z to the segment $[\mu^0, \mu^1]$. By definition, if μ^1 is a breakpoint of function Z , then there exists at least an optimal cut $C_{\mu^1}^*$ which is not optimal for edge costs $c_{\zeta\mu^0 + (1-\zeta)\mu^1}(e)$ for any $\zeta \in [0, 1)$. Therefore, μ^1 is not a breakpoint of Z . Since μ^1 was chosen arbitrary, it follows that function Z has no breakpoints in R_1 . This leads to a contradiction since μ^* is a breakpoint of Z in R_1 . \square

Let \tilde{e} be an edge such that $\pi(\tilde{e}) \in \arg \min_{e \in E} \{\pi(e) : c_\mu(e) > 0 \text{ for all } \mu \in R_1\}$ and $R'_1 = \{\mu \in R_1 : g_p(\tilde{e}, \mu) \geq c_\mu(\tilde{e})\}$. By Lemma 6, edge \tilde{e} exists and we have $g_p(\tilde{e}, \mu) = \beta^2 \varepsilon^{p-1} c_\mu(\tilde{e}) > 0$ for all $\mu \in R'_1$. This shows that $c_\mu(\tilde{e}) > 0$ for all $\mu \in R'_1$ and thus, the condition of Lemma 5 holds in R'_1 . It remains now to show that $\mu^* \notin R_1 \setminus R'_1$.

Lemma 7. *Function Z has no breakpoint in $R_1 \setminus R'_1$.*

Proof. Any edge $e \in E$ such that $\pi(e) \geq \pi(\tilde{e})$ satisfies $c_\mu(e) \geq g_p(\tilde{e}, \mu)$ for any $\mu \in R_1 \setminus R'_1$. Therefore, by (10) no such edge is in an optimal cut for edge costs $c_\mu(e)$ for any $\mu \in R_1 \setminus R'_1$. Let \check{e} be an edge such that $\check{e} = \arg \max_{e \in E} \{\pi(e) : \pi(e) < \pi(\tilde{e})\}$. By the choice of \tilde{e} , there exist $\mu^0 \in R_1 \setminus R'_1$ such that $c_{\mu^0}(\check{e}) = 0$. The total order of edges costs in R_1 implies that $c_{\mu^0}(e) = 0$ for all edges $e \in E$ such that $\pi(e) \leq \pi(\check{e})$. Therefore, we have $c_{\mu^0}(C) = 0$ for any cut C in G . Using the same argument as in the proof of Lemma 6, one can show that function Z has no breakpoint in $R_1 \setminus R'_1$. \square

Let $T(d)$ denote the running time of Algorithm 3 for solving P_{\max} with d parameters and $T(0) = O(n^2 \log n + nm)$ denote the running time of computing a minimum (non-parametric) global cut using the algorithm given in [31]. The input of a call to problem PLA requires $O(n^4)$ hyperplanes. Therefore, by Lemma 8 given in the appendix, the $\Theta(1)$ calls to problem PLA can be solved recursively in $O(\log(n)T(d-1) + n^4)$ time. The enumeration of all the $O(n^2)$ approximate cuts can be done in $O(n^4)$ time [25, Corollary 4.14]. Therefore, the running time of Algorithm 3 is given by the following recursive formula.

$$\begin{aligned} T(d) &= O(\log(n)T(d-1) + n^4) = O(\log^d(n)T(0) + \log^{d-1}(n)n^4) \\ &= O(\log^{d-1}(n)n^4). \end{aligned}$$

4 Conclusion

As shown in Table 1, our improved algorithms are significantly faster than what one could otherwise get from just using Megiddo. As mentioned in Section 1.2, our results for P_{NB} are close to being the best possible, as they are only log factors slower than the best known non-parametric algorithms. One exception is that we don't quite match Karger's [14] speedup to near-linear time for the randomized case, and we leave this as an open problem.

Our deterministic algorithm for P_{\max} is also close to best possible, though in a weaker sense. It uses the ability to compute all α -optimal cuts in $O(n^4)$ time, and otherwise is only log factors slower than $O(n^4)$. The conspicuous open problem here is to find a faster randomized algorithm for P_{\max} when $d > 1$.

We also developed evidence that P_{NB} is in fact easier than P_{\max} for $d = 1$. Section 1.3 showed that P_{NB} is oracle-reducible to P_{\max} for $d = 1$, and we were able to find a deterministic algorithm for P_{NB} that is much faster than our best algorithm for P_{\max} when $d = 1$.

Finally, we note that Stoer and Wagner’s [31] algorithm was generalized to *symmetric submodular function minimization* (SSFM) by Queyranne [29]. Thus we could solve the equivalent versions of P_{NB} and P_{max} for parametric SSFM by substituting Queyranne’s algorithm for Stoer and Wagner’s algorithm in Megiddo’s framework. This leads to the question of whether one could find faster algorithms for P_{NB} and P_{max} for parametric SSFM by generalizing our results.

References

1. P. K. Agarwal, M. Sharir, and S. Toledo. An efficient multi-dimensional searching technique and its applications. *Tech. Rep. CS-1993-20, Dept. of Computer Science, Duke University, 1993*.
2. P. K. Agarwal, and M. Sharir. Efficient algorithms for geometric optimization. *ACM Computing Surveys (CSUR)*, 30(4): 412–458, 1998.
3. H. Aissi, A.R. Mahjoub, S.T. McCormick, and M. Queyranne. Strongly Polynomial Bounds for Multiobjective and Parametric Global Minimum Cuts in Graphs and Hypergraphs. *Mathematical Programming*, 154 (1-2): 3–28, 2015.
4. J. D. Boissonnat and M. Yvinec, *Algorithmic geometry*. Cambridge university press, 1998.
5. B. Chazelle and J. Friedman. A deterministic view of random sampling and its use in geometry. *Combinatorica*, 10(3):229–249, 1990.
6. K.L. Clarkson. New applications of random sampling in computational geometry. *Discrete and Computational Geometry*, 2:195–222, 1987.
7. E. Cohen and N. Megiddo. Maximizing concave functions in fixed dimensions. *Chapter in Complexity in Numerical Optimization, P.M Pardalos, Editor*, 74–87, 1993.
8. E. Cohen and N. Megiddo. Algorithms and complexity analysis for some flow problems. *Algorithmica*, 11(3): 320–340, 1994.
9. H. Edelsbrunner, Herbert, L.J. Guibas, and M. Sharir. The upper envelope of piecewise linear functions: algorithms and applications. *Discrete & Computational Geometry*, 4(1):311–336, 1989.
10. D. Fernández-Baca. Multi-parameter Minimum Spanning Trees. *In Proceedings of LATIN*, LNCS 1776, 217–226, 2000.
11. D. Fernández-Baca and B. Venkatchalam. Sensitivity analysis in combinatorial optimization. Chapter 30 in: T. Gonzalez (Ed.), *Handbook of Approximation Algorithms and Metaheuristics*, Chapman and Hall/CRC Press, 2007.
12. M. Henzinger and D.P. Williamson. On the number of small cuts in a graph. *Information Processing Letters*, 59(1): 41–44, 1996.
13. D. R. Karger. Global min-cuts in RNC, and other ramifications of a simple min-cut algorithm. *In Proceedings of the Fourth Annual ACM-SIAM Symposium on Discrete Algorithms*, 21–30, 1993.
14. D. R. Karger. Minimum cuts in near-linear time. *Journal of the ACM*, 47(1):46–76, 2000.
15. D. R. Karger. Enumerating parametric global minimum cuts by random interleaving. *In Proceedings of the Forty-Eight Annual ACM Symposium on Theory of Computing*, 542–555, 2016.
16. D. R. Karger and C. Stein. A new approach to the minimum cut problem. *Journal of the ACM*, 43(4):601–640, 1996.

17. J. Matoušek and O. Schwarzkopf. Linear optimization queries, *In Proceedings of the Eighth ACM Symposium on Computational Geometry*, 16–25, 1992.
18. S.T. McCormick, G. Rinaldi, and M.R. Rao (2003). Easy and Difficult Objective Functions for Max Cut. *Math. Prog. B*, **94**, 459–466.
19. N. Megiddo. Combinatorial optimization with rational objective functions. *Mathematics of Operation Research*, 4(4):414–424, 1979.
20. N. Megiddo. Applying parallel computation algorithms in the design of serial algorithms. *Journal of the ACM* 30, 852–865, 1983.
21. N. Megiddo. Linear programming in linear time when the dimension is fixed. *Journal of the ACM*, 31:114–127, 1984.
22. K. Mulmuley. *Computational geometry: An introduction through randomized algorithms*. Prentice-Hall, 1994.
23. K. Mulmuley. Lower bounds in a parallel model without bit operations, *SIAM Journal on Computing*, 28(4): 1460–1509, 1999.
24. H. Nagamochi and T. Ibaraki. Computing edge-connectivity in multigraphs and capacitated graphs. *SIAM Journal on Discrete Mathematics*, 5(1):54–66, 1992.
25. H. Nagamochi and T. Ibaraki. *Algorithmic aspects of graph connectivity*. Cambridge University Press, 2008.
26. H. Nagamochi, K. Nishimura, and T. Ibaraki. Computing all small cuts in undirected networks. *SIAM Journal of Discrete Mathematics*, 10:469–481, 1997.
27. H. Nagamochi, S. Nakamura, and T. Ishii. Constructing a cactus for minimum cuts of a graph in $O(mn + n^2 \log n)$ time and $O(m)$ space. *Inst. Electron. Inform. Comm. Eng. Trans. Inform. Systems*, 179–185, 2003.
28. G. L. Nemhauser and L. A. Wolsey. *Integer and combinatorial optimization*. John Wiley & Sons, 1999.
29. M. Queyranne. Minimizing symmetric submodular functions. *Mathematical Programming*, 82(1-2):3–12, 1998.
30. Radzik, T. (1993). “Parametric Flows, Weighted Means of Cuts, and Fractional Combinatorial Optimization” in *Complexity in Numerical Optimization*, World Scientific, ed. by P. Pardalos, 351–386.
31. M. Stoer and F. Wagner. A simple min-cut algorithm. *Journal of the ACM*, 44(4):585–591, 1997.
32. T. Tokuyama. Minimax parametric optimization problems and multi-dimensional parametric searching. *In Proceedings of the Thirty-Third Annual ACM Symposium on Theory of Computing*, 75–83, 2001.

5 Appendix

5.1 Geometric tools

A classical problem in computational geometry called *point location in arrangements* (PLA) is useful to our algorithm. PLA has been widely used in various contexts such as linear programming [1,17] or parametric optimization [7,32]. For more details, see [22, Chapter 5].

Given a simplex P , an arrangement $A(\mathcal{H})$ formed by a set \mathcal{H} of hyperplanes in \mathbb{R}^d , let $A(\mathcal{H}) \cap P$ denote the restriction of the arrangement $A(\mathcal{H})$ to P . The goal of PLA is to construct a data structure in order to quickly locate a cell of $A(\mathcal{H}) \cap P$ containing an unknown target value $\bar{\mu}$. Solving PLA requires the

explicit construction of the arrangement $A(\mathcal{H})$ which can be done in an excessive $O(|\mathcal{H}|^d)$ running time [22, Theorem 6.1.2]. For our purposes, it is sufficient to solve the following simpler form of PLA.

$P_{\text{reg}}(\mathcal{H}, P, \bar{\mu})$ Given a simplex P , a set \mathcal{H} of hyperplanes in \mathbb{R}^d , and a target value $\bar{\mu}$, locate a simplex $R \subseteq A(\mathcal{H}) \cap P$ containing a target and unknown value $\bar{\mu}$.

Cohen and Megiddo [7] consider the problem $\text{Max}(f)$ of maximizing a concave function $f : \mathbb{R}^d \rightarrow \mathbb{R}$ with fixed dimension d and give, under some conditions, a polynomial time algorithm. This algorithm also uses problem $P_{\text{reg}}(\mathcal{H}, P, \bar{\mu})$ as a subroutine, where in this context the target value $\bar{\mu}$ is the optimal value of $\text{Max}(f)$. Let $T(d)$ denote the time required to solve $\text{Max}(f)$ with d parameters and $T(0)$ denote the running time of evaluating f at any value in \mathbb{R}^d . The authors solve $P_{\text{reg}}(\mathcal{H}, P, \bar{\mu})$ recursively using multidimensional parametric search technique. See also [6, 5, 32].

Lemma 8. *Given a simplex P , a set \mathcal{H} of hyperplanes in \mathbb{R}^d , and a target and unknown value $\bar{\mu}$, $P_{\text{reg}}(\mathcal{H}, P, \bar{\mu})$ can be solved in $O(\log(|\mathcal{H}|)T(d-1) + |\mathcal{H}|)$ time.*

5.2 Parametrized Stoer and Wagner's algorithm

In this appendix we discuss an application of the standard technique of Megiddo's parametric searching method [19, 20] to global minimum cut in the context of Stoer and Wagner's algorithm (SW) [31]. Let us first recap the SW algorithm. For a fixed value $\bar{\mu}$ of the parameter μ , the SW algorithm computes a *Maximum Adjacency* (MA) ordering (v_1, \dots, v_n) of the nodes. The algorithm starts with an arbitrary node v_1 and for each $i \in \{2, \dots, n\}$ adds node $v_i \in V \setminus \{v_1, \dots, v_{i-1}\}$ with maximum connection cost $f^{iv}(\bar{\mu}) := \sum_{j < i} \sum_{e \in E: e=(v_j, v)} c_{\bar{\mu}}(e)$ of all edges between $v \in V \setminus \{v_1, \dots, v_{i-1}\}$ and the set $\{v_1, \dots, v_{i-1}\}$. The key property is that cut $C^{(1)} = \{v_n\}$ is a minimum cost cut separating v_{n-1} and v_n . The SW algorithm stores this cut as a candidate for a global min cut and merges nodes v_{n-1} and v_n . The pair (v_{n-1}, v_n) is called a *pendant pair*. If a global min cut separates v_{n-1} and v_n then $C^{(1)}$ is an optimal global cut; otherwise v_{n-1} and v_n must be on the same side of any global minimum cut and thus this merging does not destroy any global minimum cut. This process continues generating a sequence $C^{(1)}, \dots, C^{(n-2)}$ of candidate cuts (singletons in the contracted graphs) until $i = n - 1$. At this step, the graph contains only two vertices which give the final stored candidate $C^{(n-1)}$. The best cut in the set $\mathcal{S} = \{C^{(1)}, \dots, C^{(n-1)}\}$ is a global minimum cut.

Definition 1 ([7, 20, 21]). *An algorithm \mathcal{A} that computes function Z for any $\mu \in M$ is called affine if the operations that depend on μ used at each step are limited to additions, multiplications by constants, comparisons, and copies.*

Consider a target value $\bar{\mu} \in M$ which may correspond to the optimal value of problem P_{NB} or P_{max} . We now show that the SW algorithm is affine. Indeed,

when μ is not fixed, the parametrized version of SW uses two types of comparisons. First, choosing the next node v_i to add to an incomplete MA ordering (v_1, \dots, v_{i-1}) requires computing the maximum of affine functions $f^{iv}(\bar{\mu})$ for all $v \in V \setminus \{v_1, \dots, v_{i-1}\}$ for the target value $\bar{\mu}$. For this it suffices to compare affine functions $f^{iu}(\mu)$ and $f^{iv}(\mu)$ for all nodes u and v in $V \setminus \{v_1, \dots, v_{i-1}\}$. The second type of comparison is to compute the minimum among of the costs $c_{\bar{\mu}}(C^{(i)})$ of candidate cuts for $i = 1, \dots, n-1$, which again amounts to comparisons between affine functions of μ .

In the following, we bound the running time of the parametrized MA ordering. Recall that in contrast to problem P_{\max} , problem P_{NB} is a one-dimensional parametric optimization problem ($d = 1$). Let $T(d)$ denote the time needed to solve the parametric optimization P_{\max} or P_{NB} with d parameters and $T(0) = O(n^2 \log n + nm)$ denote the running time of computing a minimum (non-parametric) global cut using SW algorithm. For each iteration i of SW algorithm, define $A(\mathcal{H}^i)$ the arrangement formed by the set \mathcal{H}^i of hyperplanes $H_{u,v}^i = \{\mu \in \mathbb{R}^d : f^{iu}(\mu) = f^{iv}(\mu)\}$ for any pair of nodes $u, v \in V \setminus \{v_1, \dots, v_{i-1}\}$ and define $R^0 = M$. Referring to the notation in Section 3 and using Lemma 8, problem $P_{\text{reg}}(\mathcal{H}^i, R^{i-1}, \bar{\mu})$ can be solved in $O(\log(n)T(d-1) + n^2)$ time in order to compute a simplex $R^i \subseteq A(\mathcal{H}^i) \cap R^{i-1}$ containing the unknown target $\bar{\mu}$. By construction, functions $f^{iu}(\mu)$ are totally ordered in R^i . The next node $v_i \in V \setminus \{v_1, \dots, v_{i-1}\}$ to be added to the incomplete MA ordering maximizes the connection cost $f^{iv}(\mu)$ for all $\mu \in R^i$ among the nodes $v \in V \setminus \{v_1, \dots, v_{i-1}\}$. Therefore, node v_i can be computed in $O(n)$ time. This shows that total running time of adding a node to an incomplete MA ordering is $O(\log(n)T(d-1) + n^2)$. After adding $O(n)$ vertices, the MA ordering can be computed in $O(n \log(n)T(d-1) + n^3)$ time. The overall running time for computing the $O(n)$ MA orderings is $O(n^2 \log(n)T(d-1) + n^4)$.

In the last step of the SW algorithm, we have a set $\mathcal{S} = \{C^{(1)}, \dots, C^{(n-1)}\}$ of candidate cuts. We now determine the target value $\bar{\mu}$ as follows. By construction, at least one cut $C^{(i)} \in \mathcal{S}$ corresponds to the target value $\bar{\mu}$, i.e., is minimum for edge costs $c_{\bar{\mu}}(e)$. By the correctness of the algorithm, at least a solution in \mathcal{S} is optimal for edge costs $c_{\mu}(e)$ for any $\mu \in R^{n-1}$. This yields a simple approach for solving P_{NB} . Compute the minimum intersection point $\bar{\lambda}$ of function $Z(\mu^0) + \lambda Z'(\mu^0, \nu)$ and the $O(n)$ functions $c_{\mu^0 + \lambda v}(C^{(i)})$ for all $C^{(i)} \in \mathcal{S}$ such that $\bar{\lambda} > 0$. If such a point exists, then the next breakpoint $\mu^{\text{NB}} = \mu^0 + \bar{\lambda}v$. Otherwise, the next breakpoint does not exist.

For problem P_{\max} , observe that μ^* is a vertex of the arrangement $A(\mathcal{H}^*)$ formed by the set \mathcal{H}^* of hyperplanes $H^{ij} = \{\mu \in \mathbb{R}^d : c_{\mu}(C^{(i)}) = c_{\mu}(C^{(j)})\}$ for any pair of cuts $C^{(i)}, C^{(j)} \in \mathcal{S}$. Therefore, μ^* is a vertex of any simplex containing it and included in a facet of $A(\mathcal{H}^*)$. By Lemma 8, a simplex $R^* \subseteq A(\mathcal{H}^*) \cap R^{n-1}$ with a vertex μ^* can be computed in $O(\log(n)T(d-1) + n^2)$ time.

The following proposition summarizes the running time for solving problems P_{\max} and P_{NB} by this approach.

Proposition 1. *Megiddo's parametric searching method combined with the SW algorithm solves problem P_{NB} in $O(n^5 \log(n))$ time and P_{\max} in $O(n^{2d+3} \log^d(n))$ time.*

Proof. For problem P_{NB} , the overall running time is $T(1) = O(n^2 \log(n)T(0) + n^4) = O(n^5 \log(n))$ as claimed since $m = O(n^2)$. For problem P_{max} , the running time is given by the following recursive formula:

$$\begin{aligned}
 T(d) &= O(n^2 \log(n)T(d-1) + n^4) \\
 &= O((n^2 \log(n))^d T(0) + n^4 \sum_{i=0}^{d-1} (n^2 \log n)^i) \\
 &= O(n^{2d+3} \log^d(n)).
 \end{aligned}$$