

Plasmono-Atomic Interactions on a Fiber Tip

Eng Aik Chan^{1*}, Giorgio Adamo^{1*}, Syed Abdullah Aljunid¹, Martial Ducloy^{1,3}, Nikolay Zheludev^{1,2}, and David Wilkowski^{1,4,5}

¹Centre for Disruptive Photonic Technologies, TPI & SPMS, Nanyang Technological University, 637371, Singapore, Singapore.

²Optoelectronics Research Centre and Centre for Photonic Metamaterials, University of Southampton, Southampton SO17 1BJ, UK

³Laboratoire de Physique des Lasers, UMR 7538 du CNRS, Université Paris13-Sorbonne-Paris-Cité, F-93430 Villetaneuse, France.

⁴MajuLab, International Joint Research Unit UMI 3654, CNRS, Université Côte d'Azur, Sorbonne Université, National University of Singapore, Nanyang Technological University, Singapore, Singapore.

⁵Centre for Quantum Technologies, National University of Singapore, 117543 Singapore, Singapore.

Author e-mail address: echan003@e.ntu.edu.sg

Abstract: We show that optical fiber sensor bearing plasmonic metamaterial at its tip can be used to detect modifications of the Doppler-free hyperfine atomic spectra induced by coupling between atomic and plasmonic excitations. We observed the inversion of the phase modulation reflectivity spectra of Cesium vapor in presence of the metamaterial. This work paves the way for new compact hybrid atomic systems with a cleaved tip as substrate platform to host various two-dimensional materials.

Atomic vapors are commonly used for frequency standards, metrology, quantum technologies and for high-precision tests in fundamental physics (Julsgaard, Kozhekin, & Polzik, 2001; Phillips, Fleischhauer, Mair, Walsworth, & Lukin, 2001; Safronova et al., 2018; Vanier, 2005). However, optical experiments with atomic vapors are generally undertaken with bulky cells and free-space optical setups. Incorporation of atomic media with fiber technology would considerably miniaturize the platform. Important steps towards that direction have been done using hollow core fibers (Ghosh et al., 2006), fiber integrated-capillary devices (Gutekunst et al., 2017), waveguides (Liron Stern, Desiatov, Mazurski, & Levy, 2017; Yang et al., 2007), nanofibers (Hendrickson, Lai, Pittman, & Franson, 2010; Spillane et al., 2008), filled up with atomic or molecular gases for compact spectroscopic applications. In this letter, we propose an alternative solution using a cleaved tip of a multimode optical fiber immersed into an atomic vapor. A decisive advantage of our setup would be to offer a simple substrate platform (the cleaved tip) to host various materials such as 2D materials stack, hyperbolic and topological metamaterials. Those materials can be used to engineer the properties of the atom-light interactions. Here, we illustrate this point using a metallic nano-structured metasurface with tunable surface plasmon resonances, which leads to Fano-like couplings, and modifications of the Casimir-Polder potential.

The spectroscopic measurement is performed using selective reflection technique at the cleaved tip of the fiber (Akulshin et al., 1982; Woerdman & Schuurmans, 1975). By construction, the excitation laser field is at normal incidence, leading to a Doppler-free and surface-sensitive -within a probing layer of $1/k$ distance-spectroscopic signal (Ducloy & Fichet, 1991), where k is the wavenumber of the optical beam. It gives the opportunity to access the natural spectral line, in a single laser beam experiment by measuring the reflection through the optical fiber tip immersed in an atomic vapor. As the variation of the interface reflectance, induced by the presence of vapor, is small, we used a sensitive phase modulation spectroscopy technique to recover

* E.A. Chan and G. Adamo provided equal contribution to this work.

the sharp atomic line signature from the broad reflectance spectrum of the glass interface. We implemented this technique by phase modulating a narrowband laser and demodulate the reflection signal at the frequency of modulation. By scanning the main frequency of the laser source across the atomic resonance one then recovers the spectrum of atomic vapor at the vicinity of the interface.

The optical set-up is presented in Fig.1(a). The laser radiation is produced by a diffraction-grating tunable semiconductor diode laser (Toptica DL pro) operating on the 852 nm $6^2S_{1/2} - 6^2P_{3/2}$ D2 line of Cesium [see Fig. 1(b)]. The beam is phase-modulated at a frequency of 9 MHz by an electro-optic modulator before being launched into an optical fiber. We used a multimode silica fiber (Thorlabs FG200UEA) with core diameter of 200 μm . The large core of the optical fiber was required to sustain a significant level of light power at the fiber tip, without entering into nonlinear regimes of interactions with the atomic vapor (saturation intensity 2.2 mW/cm^2). The optical fiber tip was immersed in an ultrahigh vacuum chamber where a Cesium vapor was maintained at a temperature of 50 $^\circ\text{C}$, which corresponds to an atomic density of $5 \times 10^{11} \text{ cm}^{-3}$. The reflected light from the fiber tip was detected by a silicon avalanche photodetector (Hamamatsu C10508) and demodulated using a sensitive lock-in amplifier (Zurich instruments HF2LI). A part of the laser radiation was diverted to a hole-burning set-up with a room-temperature Cesium cell for frequency calibration.

To account for the modifications due to the nanostructure on the atomic spectra, we compared the Cesium vapor reflection spectrum at a bare fiber tip with the Cesium spectrum at the interface with a plasmonic metasurface. The later has a surface resonance overlapping with D2 line of Cesium. To prepare the optical fiber tip bearing a metasurface, we deposited a 50 nm layer of silver on a cleaved fiber end and sides. Finally, we structured the silver layer at the fiber tip with a light polarization-independent two-dimensional array of rings. The rings are 155 nm inner diameter with a 30 nm width, while the squared arrangement period is 370 nm in both axes see Fig. 1(c). The metasurface has a 50 THz wide plasmonic resonance centered at a wavelength of 830 nm, thus slightly blue shifted with respect to the 852 nm Cesium D2 line. The metasurface reflectance spectrum is shown in Fig. 2(a).

Fig. 2 (b) and (c) shows a comparison of the demodulated reflective spectra recorded at the bare fiber tip and at the fiber tip equipped with the plasmonic metasurface. The larger noise level, observed for the metasurface fiber, is due to the lower light transmission of the metasurface, with respect to the bare fiber case. One important feature of these spectra is the inversion of the dispersion-like shape upon transition from bare fiber to metasurface fiber. Such effect has been previously observed using a free-space optical setup probing on atomic gases hybridized with highly confined plasmons (Aljunid et al., 2016; L. Stern, Grajower, & Levy, 2014). In those references, it was shown that the modifications in line shape, as observed in Fig. 2 (b) and (c), are associated with Fano-like coupling between the narrow atomic resonance and the plasmonic resonance with a linewidth that is several orders of magnitude broader.

Beside Fano-like coupling, the shape of Doppler-free reflective spectra are also modified by the Casimir-Polder potential exerted by a surface on the atoms (Ducloy & Fichet, 1991). Using a classical picture, the Casimir-Polder interaction can be understood as the coupling of the atomic dipole moment with its own image reflected by the surface (Jackson, 2007). When an atom is located above a perfect reflective surface, the latter induces an anti-correlated dipole image leading to an attractive potential, which is the Casimir-Polder potential when propagation effects are taken into consideration (Casimir & Polder, 1948). If the perfect surface is replaced by a dispersive surface exhibiting a surface mode that is in near-resonance with the atomic transition, the induced image of the mean dipole moment is both enhanced and de-phased, resulting in either an enhanced attractive or a repulsive Casimir-Polder potential of the excited state (Failache, Saltiel, Fichet, Bloch, & Ducloy, 1999; Fichet, Schuller, Bloch, & Ducloy, 1995). We note that the Casimir-Polder potential of the ground state is due to fluctuations of the dipole moment which are almost insensitive to the surface mode resonance (Chan et al., 2018). The plasmonic metasurface equipped on our fiber tip provides a resonant surface mode that modify the Casimir-Polder potential. We carried out a mean-field approximation of the metasurface and find that the metasurface is characterized by a complex refractive index of $0.67 + 2.53i$. To evaluate the modification of the Casimir-Polder potential on the fiber tip, we performed a fit of the demodulated reflectance spectra recorded at the bare fiber tip and the fiber tip coated with plasmonic metasurface, following the theoretical treatment in (Chan et al., 2018). The fitting parameters are the atomic linewidth Γ , the differential Van der Waals (Casimir-Polder in the non-retarded regime) coefficient ΔC_3 between the atomic excited and ground states, and an overall amplitude V_0 . The fits are shown as black dashed lines in Fig 2(b) & (c). The Van der Waals coefficient ΔC_3 obtained from the fit are $3(2) \text{ kHz } \mu\text{m}^3$ for the bare fiber and $6(6) + i5(7) \text{ kHz } \mu\text{m}^3$ for the metasurface-coated fiber. Similar enhancement of the Van der Waals coefficients on Cesium vapor coupled with blue-detuned plasmonic metasurfaces on a dielectric window and reduction of the Casimir-Polder interaction on Cesium vapor coupled with red-detuned plasmonic metasurfaces was reported in (Chan et al., 2018).

The spectra measured on both bare fiber and fiber with metasurface have a similar fitted atomic linewidth Γ of $2\pi \times 45(5) \text{ MHz}$, which is larger than the atomic bare linewidth of $2\pi \times 5.2 \text{ MHz}$. The Casimir-Polder counts for $\sim \text{Im}\{\Delta C_3\}k^3 = 2\text{MHz}$, which cannot explain the linewidth broadening. We related the linewidth broadening to a transit time broadening of the flying atoms in the optical intensity profile at the fiber tip. Because of the multimode nature of the optical fiber, the optical intensity spatial distribution at the fiber tip looks disordered like a speckle pattern [Fig. 2(d)]. We evaluated the characteristic size of the speckle-like grain by computing the autocorrelation function of the intensity profile and find a characteristic $1/e$ width of $\Delta\mu = 4.4 \mu\text{m}$. For atoms with thermal velocity of $\bar{v} = 140 \text{ m/s}$ (temperature of $50 \text{ }^\circ\text{C}$), the corresponding transit time broadening is $\Delta\mu/\bar{v} = 2\pi \times 32 \text{ MHz}$, which accounts as the dominant broadening contribution to the $2\pi \times 45 \text{ MHz}$ linewidth. Other sources of broadening such as atom-atom collision have been reported in similar studies (Aljunid et al., 2016; Chan et al., 2018; Chevrollier et al., 1992) and might also play a role, but minor, in our experiment.

In conclusion, we demonstrate the modification of the reflection signal from an atomic vapor and Casimir-Polder potential tuning by coating a metasurface on a fiber tip. This paves the way for fiber-integrated surface engineering of hybrid atoms-metasurface devices. As the light polarization is not maintained in the fiber, we use a two-dimensional array of rings, which exhibit light polarization-independent plasmonic resonances. Polarization dependence in the atom-plasmon coupling can be restored, for example, if the atomic vapor becomes optically active by applying a magnetic field. In this case, extra tuning of the atom-plasmon Fano resonance can be implemented (Liron Stern, Grajower, Mazurski, & Levy, 2018). The field intensity distribution at the output of the fiber tip has a disordered structure similar to a speckle pattern. The transport of matter wave in such disordered optical potentials has recently attracted a lot of attention both for non-interacting system leading to Anderson localization (Kuhn, Sigwarth, Miniatura, Delande, & Müller, 2007; Semeghini et al., 2015; Volchkov et al., 2018), and for interacting atoms exploring thermalization in presence of many-body interactions, for a recent review see (Abanin, Altman, Bloch, & Serbyn, 2019). Similar studies on the multimode fiber speckle patterns could be done, at which it would be interesting to add a surface plasmon field to gain larger amplitude and shorter length scale of the electromagnetic field. In addition, a new single emitter source with a narrow spectrum generated by cold atoms at the nearfield of a fiber nanotip has been proposed (Suarez et al., 2018). The performance of the single emitter source depends on the collective damping and Purcell effect at the vicinity of the fiber nanotip. In this case, it would be desirable to tailor the fiber nanotip nearfields with plasmonic metamaterials to enhance the collective damping and Purcell effect.

- Abanin, D. A., Altman, E., Bloch, I., & Serbyn, M. (2019). Colloquium: Many-body localization, thermalization, and entanglement. *Reviews of Modern Physics*, *91*(2), 021001. doi:10.1103/RevModPhys.91.021001
- Akulshin, A., Velichanskii, V., Zibrov, A., Nikitin, V., Sautenkov, V., Yurkin, E., & Senkov, N. (1982). Collisional broadening of Intra-Doppler resonances of selective reflection on the D2 line of cesium. *JETP Letters*, *36*, 303-307.
- Aljunid, S. A., Chan, E. A., Adamo, G., Ducloy, M., Wilkowski, D., & Zheludev, N. I. (2016). Atomic Response in the Near-Field of Nanostructured Plasmonic Metamaterial. *Nano Lett*, *16*(5), 3137-3141. doi:10.1021/acs.nanolett.6b00446
- Casimir, H. B. G., & Polder, D. (1948). The Influence of Retardation on the London-van der Waals Forces. *Physical Review*, *73*(4), 360-372. doi:10.1103/PhysRev.73.360
- Chan, E. A., Aljunid, S. A., Adamo, G., Lalot, A., Ducloy, M., & Wilkowski, D. (2018). Tailoring optical metamaterials to tune the atom-surface Casimir-Polder interaction. *Sci Adv*, *4*(2), eaao4223. doi:10.1126/sciadv.aao4223
- Chevrollier, M., Fichet, M., Oria, M., Rahmat, G., Bloch, D., & Ducloy, M. (1992). High resolution selective reflection spectroscopy as a probe of long-range surface interaction : measurement of the surface van der Waals attraction exerted on excited Cs atoms. *J. Phys. II France*, *2*(4), 631-657.
- Ducloy, M., & Fichet, M. (1991). General theory of frequency modulated selective reflection. Influence of atom surface interactions. *J. Phys. II France*, *1*(12), 1429-1446.
- Failache, H., Saltiel, S., Fichet, M., Bloch, D., & Ducloy, M. (1999). Resonant van der Waals Repulsion between Excited Cs Atoms and Sapphire Surface. *Physical Review Letters*, *83*(26), 5467-5470. doi:10.1103/PhysRevLett.83.5467
- Fichet, M., Schuller, F., Bloch, D., & Ducloy, M. (1995). van der Waals interactions between excited-state atoms and dispersive dielectric surfaces. *Physical Review A*, *51*(2), 1553-1564. doi:10.1103/PhysRevA.51.1553
- Ghosh, S., Bhagwat, A. R., Renshaw, C. K., Goh, S., Gaeta, A. L., & Kirby, B. J. (2006, 2006/07/23). *Low-Light-Level Optical Interactions with Rubidium Vapor in a Photonic Band-Gap Fiber*. Paper presented at the Slow and Fast Light, Washington, D.C.
- Gutekunst, J., Weller, D., Kübler, H., Negel, J.-P., Ahmed, M. A., Graf, T., & Löw, R. (2017). Fiber-integrated spectroscopy device for hot alkali vapor. *Applied Optics*, *56*(21), 5898-5902. doi:10.1364/AO.56.005898

- Hendrickson, S. M., Lai, M. M., Pittman, T. B., & Franson, J. D. (2010). Observation of Two-Photon Absorption at Low Power Levels Using Tapered Optical Fibers in Rubidium Vapor. *Physical Review Letters*, *105*(17), 173602. doi:10.1103/PhysRevLett.105.173602
- Jackson, J. D. (2007). *Classical Electrodynamics* (Third Edition ed.): Wiley India Pvt. Limited.
- Julsgaard, B., Kozhekin, A., & Polzik, E. S. (2001). Experimental long-lived entanglement of two macroscopic objects. *Nature*, *413*, 400. doi:10.1038/35096524
- Kuhn, R. C., Sigwarth, O., Miniatura, C., Delande, D., & Müller, C. A. (2007). Coherent matter wave transport in speckle potentials. *New Journal of Physics*, *9*(6), 161.
- Phillips, D. F., Fleischhauer, A., Mair, A., Walsworth, R. L., & Lukin, M. D. (2001). Storage of Light in Atomic Vapor. *Physical Review Letters*, *86*(5), 783-786. doi:10.1103/PhysRevLett.86.783
- Safronova, M. S., Budker, D., DeMille, D., Kimball, D. F. J., Derevianko, A., & Clark, C. W. (2018). Search for new physics with atoms and molecules. *Reviews of Modern Physics*, *90*(2), 025008. doi:10.1103/RevModPhys.90.025008
- Semeghini, G., Landini, M., Castilho, P., Roy, S., Spagnolli, G., Trenkwalder, A., . . . Modugno, G. (2015). Measurement of the mobility edge for 3D Anderson localization. *Nature Physics*, *11*, 554. doi:10.1038/nphys3339
- Spillane, S. M., Pati, G. S., Salit, K., Hall, M., Kumar, P., Beausoleil, R. G., & Shahriar, M. S. (2008). Observation of Nonlinear Optical Interactions of Ultralow Levels of Light in a Tapered Optical Nanofiber Embedded in a Hot Rubidium Vapor. *Physical Review Letters*, *100*(23), 233602. doi:10.1103/PhysRevLett.100.233602
- Stern, L., Desiatov, B., Mazurski, N., & Levy, U. (2017). Strong coupling and high-contrast all-optical modulation in atomic cladding waveguides. *Nature Communications*, *8*(1), 14461. doi:10.1038/ncomms14461
- Stern, L., Grajower, M., & Levy, U. (2014). Fano resonances and all-optical switching in a resonantly coupled plasmonic-atomic system. *Nat Commun*, *5*, 4865. doi:10.1038/ncomms5865
- Stern, L., Grajower, M., Mazurski, N., & Levy, U. (2018). Magnetically Controlled Atomic-Plasmonic Fano Resonances. *Nano Letters*, *18*(1), 202-207. doi:10.1021/acs.nanolett.7b03912
- Suarez, E., Auwärter, D., Arruda, T. J., Bachelard, R., Courteille, P. W., Zimmermann, C., & Slama, S. (2018). Photon-antibunching in the fluorescence of statistical ensembles of emitters at an optical nanofiber-tip. *eprint arXiv:1809.07621*, arXiv:1809.07621.
- Vanier, J. (2005). Atomic clocks based on coherent population trapping: a review. *Applied Physics B*, *81*(4), 421-442. doi:10.1007/s00340-005-1905-3
- Volchkov, V. V., Pasek, M., Denechaud, V., Mukhtar, M., Aspect, A., Delande, D., & Josse, V. (2018). Measurement of Spectral Functions of Ultracold Atoms in Disordered Potentials. *Physical Review Letters*, *120*(6), 060404. doi:10.1103/PhysRevLett.120.060404
- Woerdman, J. P., & Schuurmans, M. F. H. (1975). Spectral narrowing of selective reflection from sodium vapour. *Optics Communications*, *14*(2), 248-251. doi:[https://doi.org/10.1016/0030-4018\(75\)90226-6](https://doi.org/10.1016/0030-4018(75)90226-6)
- Yang, W., Conkey, D. B., Wu, B., Yin, D., Hawkins, A. R., & Schmidt, H. (2007). Atomic spectroscopy on a chip. *Nature Photonics*, *1*(6), 331-335. doi:10.1038/nphoton.2007.74

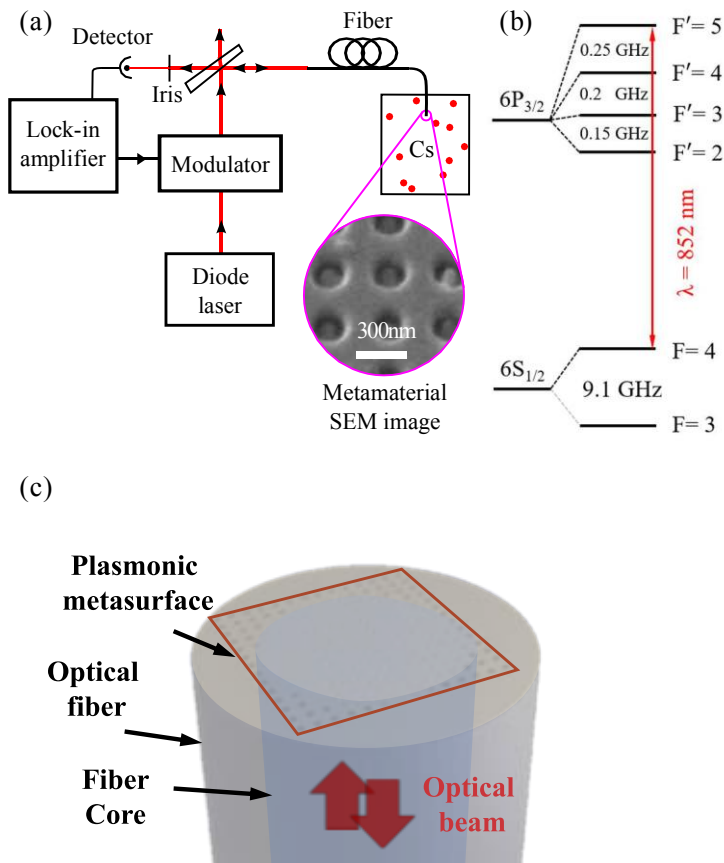


Figure 1. **Experimental set-up to study Plasmono-Atomic interactions at the fiber tip.** (a) Experimental set-up. Phase modulation spectroscopy measurements are conducted on the $F = 4 - F' = 5$ hyperfine structure of the $6^2S_{1/2} - 6^2P_{3/2}$ D2 in Cesium, see energy diagram in (b). (c) Artistic impression of the optical fiber with plasmonic metasurface (brown box) at the fiber tip immersed into cesium atomic vapor. The light blue area represents the core of the fiber. The red arrows represent the optical excitation and reflection.

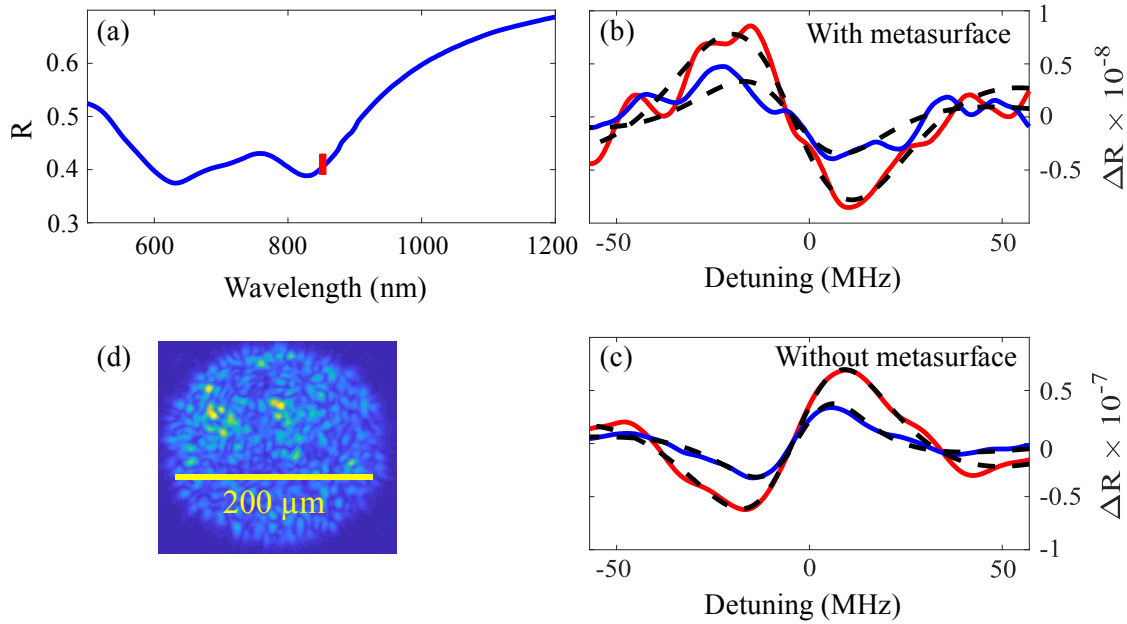


Figure 2. The effect of metasurface on the reflection spectra of Cesium vapor at the fiber tip. (a) Reflectance spectrum of the plasmonic metasurface structure at the fiber tip. Plasmonic metasurface line shape is shown in the broad frequency scan (blue). Cesium D2 atomic resonance line is indicated as red bars. The in-phase and in-quadrature (90° out-of-phase) of the demodulated reflectance spectrum correspond to the red and blue curves, respectively, for fiber with metasurface (b) and bare fiber (c). The origin of the detuning corresponds to the strongest $F = 4 - F' = 5$ hyperfine transition of the D2 line. The dashed black curves are the theoretical fits including the Casimir-Polder interaction model. (d) The picture shows a micrograph of a typical intensity distribution at the tip of the fiber.