

SYSTEMATIC MISESTIMATION OF MACHINE LEARNING PERFORMANCE IN NEUROIMAGING STUDIES OF DEPRESSION

A PREPRINT

Claas Flint ^{*1,2}, Micah Cearns^{*3,5}, Nils Opel¹, Ronny Redlich¹, David M. A. Mehler¹, Daniel Emden¹, Nils R. Winter¹, Ramona Leenings¹, Simon B. Eickhoff^{4,8}, Tilo Kircher⁶, Axel Krug⁶, Igor Nenadic⁶, Volker Arolt¹, Scott Clark³, Bernhard T. Baune^{3,5,7}, Xiaoyi Jiang², Udo Dannlowski ^{†‡1}, and Tim Hahn ^{†1}

¹Department of Psychiatry, University of Münster, Germany

²Faculty of Mathematics and Computer Science, University of Münster, Germany

³Discipline of Psychiatry, School of Medicine, University of Adelaide, Australia

⁴Institute of Neuroscience and Medicine (INM-7) Research Center Jülich

⁵Department of Psychiatry, Melbourne Medical School, The University of Melbourne, Parkville, Australia

⁶Department of Psychiatry and Psychotherapy, University of Marburg, Germany

⁷The Florey Institute of Neuroscience and Mental Health, The University of Melbourne, Parkville, Australia

⁸Institute of Systems Neuroscience, Medical Faculty, Heinrich Heine University Düsseldorf, Düsseldorf, Germany

[†]Corresponding author: Udo Dannlowski, Phone: +49-251-83-56610, Email: dannlow@uni-muenster.de

January 31, 2022

ABSTRACT

We currently observe a disconcerting phenomenon in machine learning studies in psychiatry: While we would expect larger samples to yield better results due to the availability of more data, larger machine learning studies consistently show much weaker performance than the numerous small-scale studies. Here, we systematically investigated this effect focusing on one of the most heavily studied questions in the field, namely the classification of patients suffering from major depressive disorder (MDD) and healthy control (HC) based on neuroimaging data. Drawing upon structural magnetic resonance imaging (MRI) data from a balanced sample of $N = 1,868$ MDD patients and HC from our recent international Predictive Analytics Competition (PAC), we first trained and tested a classification model on the full dataset which yielded an accuracy of 61 %. Next, we mimicked the process by which researchers would draw samples of various sizes ($N = 4$ to $N = 150$) from the population and showed a strong risk of misestimation. Specifically, for small sample sizes ($N = 20$), we observe accuracies of up to 95 %. For medium sample sizes ($N = 100$) accuracies up to 75 % were found. Importantly, further investigation showed that sufficiently large test sets effectively protect against performance misestimation whereas larger datasets per se do not. While these results question the validity of a substantial part of the current literature, we outline the relatively low-cost remedy of larger test sets, which is readily available in most cases.

Keywords machine learning · neuroimaging · major depression · overestimation · small sample size · clinical translation

^{*}indicates that the authors contributed equally to the work and should be regarded as first authors.

[†]indicates that the authors contributed equally to the work and should be regarded as senior authors.

1 Introduction

In psychiatry, we are witnessing an explosion of interest in machine learning (ML) and artificial intelligence for prediction and biomarker discovery, paralleling similar developments in personalized medicine [1, 2, 3, 4]. In contrast to the majority of investigations employing classic group-level statistical inference, ML approaches aim to build models which allow for individual (i.e. single subject) predictions, thus enabling direct assessment of individual differences and clinical utility [5]. While this constitutes a major advancement for clinical translation, recent results of large-scale investigations have given rise to a fundamental concern in the field: Specifically, ML studies including larger samples did not yield stronger performance, but consistently showed weaker results than studies drawing on small samples, calling into question the validity and generalizability of a large number of highly published proof-of-concept studies.

The magnitude of this issue was impressively illustrated by the results of the Predictive Analytics Competition (PAC) 2018 (Supplementary appendix /refcha:pac-2018) in which participants developed ML models to classify healthy control (HC) and patients diagnosed with major depressive disorder (MDD) based on structural magnetic resonance imaging (MRI) data from $N = 2,240$ participants. Despite the best efforts of ~ 170 machine learners in 49 teams from around the world, performance ranged between 60 % and 65 % accuracy in a large, independent test set. This is in strong contrast to the numerous smaller studies showing accuracies of 80 % or more [6, 7, 8].

Further empirical studies focusing on other disorders support this observed effect of performance deterioration with increasing sample size: In a large-scale investigation, Neuhaus & Popescu [9] aggregated original studies across disorder categories, including schizophrenia (total observation $N = 5,563$), MDD ($N = 2,042$), and attention deficit hyperactivity disorder (ADHD) ($N = 8,084$), finding an inverse relationship between sample size and balanced accuracy (schizophrenia, $r = -0.34$; MDD, $r = -0.32$; and ADHD, $r = -0.43$). Similar results were observed in a recent review of 200 neuroimaging classification studies of brain disorders, finding a general trend towards lower reported accuracy scores in larger samples [10]. Given that model performance would be expected to increase with more data, these results hint at a fundamental issue hampering current predictive biomarker studies in psychiatry.

From a methodological point of view, it has been known since the early 90's that training samples should be large when there is a high number of features (i.e. measured variables) and a complex classification rule being fit to a dataset [11]. Recent works have further reiterated this point [12]. Moreover, these effects may have been further amplified by certain cross-validation schemes. For example, Kambeitz et al. [13] observed higher accuracy estimates in studies using hold-out cross-validation strategies compared to 10-fold and leave-one-out cross-validation (LOOCV), whilst Varoquaux et al. observed that LOOCV leads to unstable and biased estimates, concluding that repeated random splits should be preferred [14].

Although these findings have sparked in-depth conceptual considerations [15], empirical investigations of this problem have been limited to specific cross-validation schemes and small test set sizes [16]. Here, we aim to systematically investigate the effects of both train and test set sample sizes on ML model performance in neuroimaging based MDD classification. In addition, as it is possible that effects of systematic misestimation have arisen due to suboptimal pipeline configurations (i.e., the disproportionate use of LOOCV and linear support-vector machines (SVMs) on samples containing more predictors than observations), we also test a further 48 different pipeline configurations to quantify the influence of these additional factors. To demonstrate that this effect was not dependent on the data or any pipeline configurations used in our analyses, we repeat the process using a *dummy classifier*. To quantify the magnitude of these effects in each configuration, we drew samples of various sizes from the PAC dataset - mimicking the process by which researchers would draw samples from the population of ML studies reported in the literature. The resulting probability distributions are investigated.

2 Materials and methods

To investigate the effects of both train and test set sample sizes on ML model performance in neuroimaging based MDD classification, we repeatedly drew samples of different sizes from the PAC dataset to imitate the procedure reported in the literature. Subsequently, the resulting probability distributions are investigated.

2.1 Data description

The PAC dataset comprised anonymized, pre-processed MRI data of $N = 2,240$ individuals obtained from two large, independent, ongoing studies - the Münster Neuroimaging Cohort [17, 18] ($N = 724$ MDD; $N = 285$ HC) and the FOR2107-study [19] ($N = 582$ MDD, $N = 649$ HC). Case/control status was diagnosed with the SCID-IV [20] interview employed by trained clinical raters in both studies. In both cohorts, exclusion criteria were any neurological or severe medical condition, MRI contraindications, substance-related disorders, Benzodiazepine treatment and head

injuries. For healthy controls, any current or previous psychiatric disorder or use of any psychotropic substances. The Münster Neuroimaging Cohort was scanned at one single MRI-scanner with the same sequence, while the FOR2107-study was scanned at two independent sites [21], yielding 3 different scanner types/sequences. The structural T1-weighted MRI scans were pre-processed with the CAT12 toolbox (http://www.neuro.uni-jena.de/cat_r1184) using default parameters to obtain modulated, normalized grey matter segments (resolution $1.5 \times 1.5 \times 1.5 \text{ mm}^3$) which were used for the present analysis. Furthermore, age, gender, scanner type, and total intracranial volume (TIV) were provided.

The FOR2107 cohort project was approved by the Ethics Committees of the Medical Faculties, University of Marburg and University of Münster.

2.2 Machine learning pipeline

To ensure the unbiased approximation of the model’s performance in previously unseen patients (i.e., model generalization), we trained and tested all models in a pipeline to prevent information leaking between patients used for training and validation. To avoid a confounding effect due to an imbalance in the sample, we used random under-sampling in a first step to obtain a balanced sample of 934 MDD cases and 934 HC (see Supplementary appendix A for summary statistics). To reduce the computational effort, all images have been scaled down to a voxel size of $3 \times 3 \times 3 \text{ mm}^3$. Following, every image was converted to a vector, where every voxel served as a feature. After background elimination (features with no variance), 58,255 features remained. For standardization, the features were scaled to have zero mean and unit variance. Finally, a linear SVM with default parameters (Scikit-learn [22], v0.20) was trained and model performance was calculated and analysed in the subsequent analyses. The effect of varying scanner-distributions across samples was found to be negligible (see Supplementary appendix D).

2.3 Overall sample size effects

To first examine the effects of overall-set size, we randomly sampled the PAC dataset in steps of 1 from $N = 4$ to $N = 150$. For each N value we created 1,000 balanced samples. This yielded 147,000 random samples with equal numbers of MDD patients and HC. Applying the SVM pipeline described above to each of these samples independently allowed us to obtain a distribution of accuracy scores for each N value, respectively. On each sample one SVM was trained with default parameters using LOOCV. Thus, we trained a total of 11,315,000 SVMs. Since the computational effort increases quadratically with increasing sample size, and in addition, the most recent neuroimaging ML studies using LOOCV rarely exceed $N = 150$, we decided to stop at this value. Following, we evaluated the distribution of accuracy scores estimated for each sample size ($N = 4$ to 150).

2.4 Training set size effects

Second, to examine the effects of training set size, we varied the size of each training set and then tested performance on a fixed hold-out set. Specifically, we randomly sampled the PAC dataset in steps of 1 from $N = 4$ to 150 as was done in the previous analysis. For each N value, we created 1,000 balanced samples and used each of them to train different models. To then test the effects of training set size on test set performance, we tested each trained model on a balanced test set of $N = 300$. From the resulting distributions, we quantified the probability of overestimating accuracy as a function of training set size.

2.5 Test set size effects

To assess the effects of test set size on classification accuracy, we randomly sampled a balanced group of 300 subjects from our full sample of 934 MDD cases and 934 HCs. From this sample, we randomly sub-sampled test sets of $N = 4$ to 150 in steps of 1. For each value of N , we took 1,000 samples, resulting in the creation of 147,000 random test samples. From the remaining 784 MDD cases and 784 HCs, we took out another 20 % sample (MDD = 157 and HC = 157). The prediction of this sample provides a reliable basis for an overall performance estimation and allows for a comparison with the results obtained from smaller samples. We then trained a single SVM on the remaining sample (MDD = 627, HC = 627). The trained SVM was then tested on each test set sample ($N = 4$ to 150). From the resulting test set accuracy distributions, we derived the probability of obtaining accuracy scores between 50 % and 90 % accuracy by chance. See Figure 1 for an overview of all analyses.

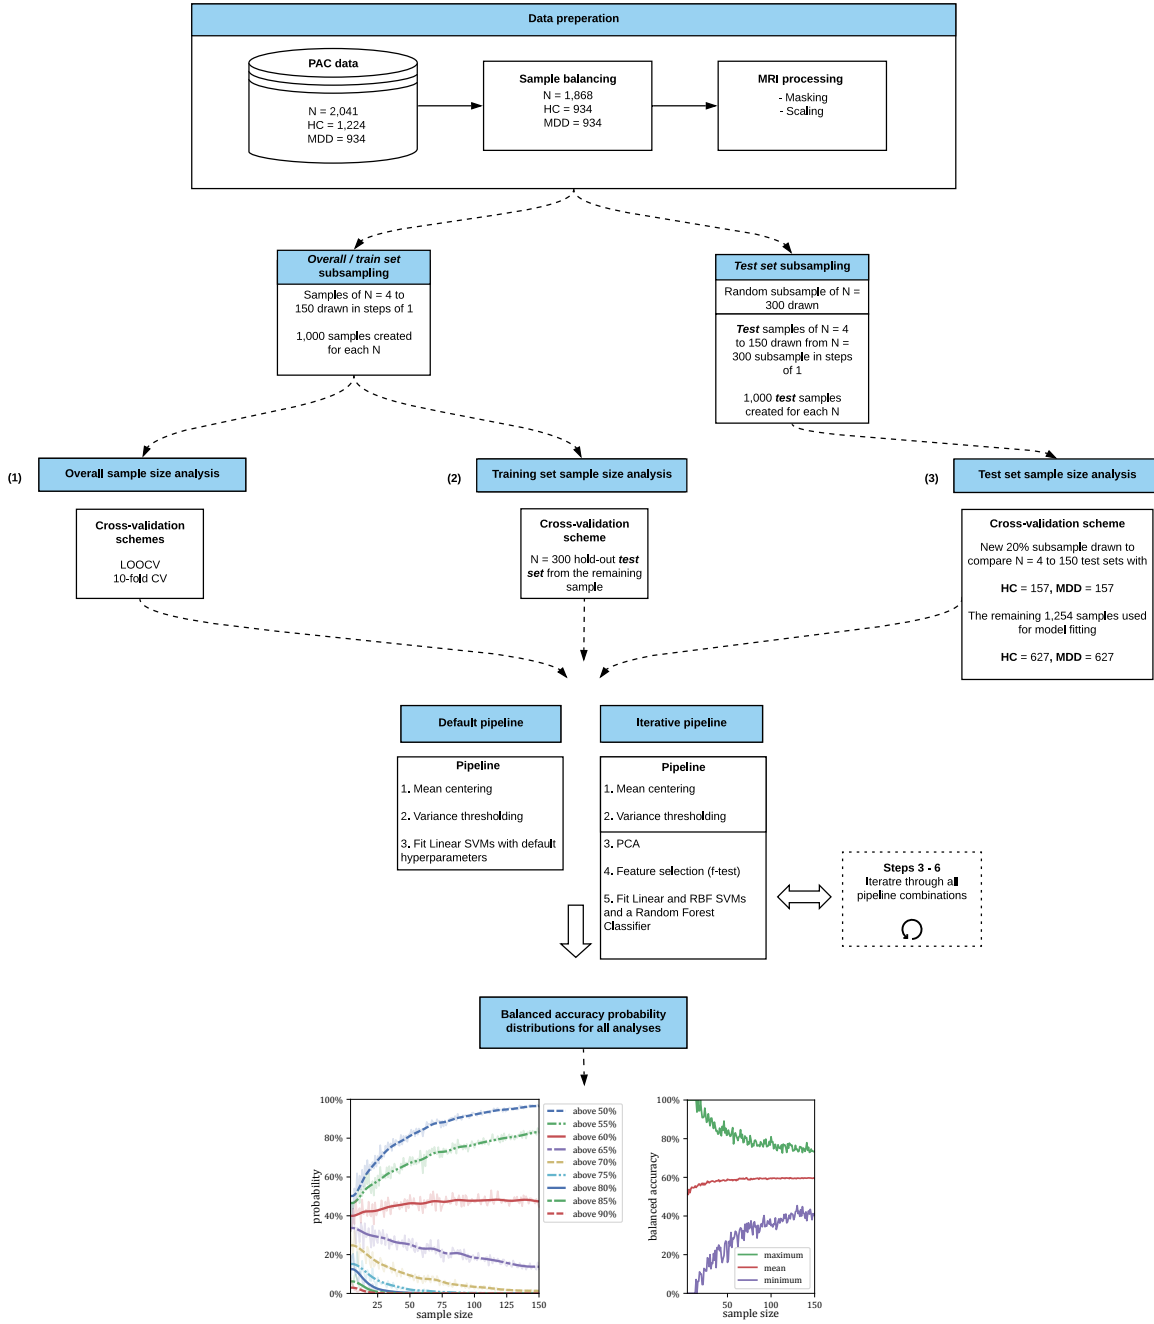


Figure 1: Workflow to investigate the correlations between sample size and misestimation. First the effect of misestimation is investigated over the whole classification process ((1) Overall sample size analysis). Following the process of training and testing is evaluated separately ((2) Training set sample size analysis, (3) Test set sample size analysis)

2.6 Generalizability of statistical effect

2.6.1 Alternative pipeline configurations

As we have attempted to hold other components of the modelling process constant so any observed effects of systematic misestimation can be attributed to sample size alone, it is also possible that our results may be dependent on the basic configuration of our ML pipeline (e.g., the use of a linear SVM, default hyperparameters, and LOOCV). Therefore, we trained a further 48 pipeline configurations, including the use of both linear and radial basis function SVMs and a Random Forest classifier, all of which have demonstrated their efficacy in neuroimaging classification studies [13]. Within these configurations, we conducted dimensionality reduction using principal-component analysis (PCA) as well as f-test based feature selection. This allowed us to assess whether our findings were being confounded by the large number of predictors used in the main analysis. For further information see Supplement Appendix x F and for all results see supplementary results F.1, supplementary figures F.3 - F.50 and supplementary tables F.11 - F.58.

2.6.2 Dummy classifier

In order to show that the observed effects were not specific to the PAC dataset or any of the alternative pipeline configurations in these analyses, we repeated the procedures described above with a dummy classifier. Our dummy classifier assumed a prior probability for MDD vs HC classification based on the percentage proportion of each class in the training data (prevalence). As the dataset was balanced with random under-sampling, the prior and subsequent ground truth of the model was equal to exactly 50 %. This approach allowed us to compare our distribution of dummy performance estimates derived from our subsample analysis to this ground truth value. Importantly, this approach allows for the quantification of accuracy misestimation as a function of sample size completely independent of any unique characteristics that may be specific to the PAC dataset or our pipeline configurations. Therefore, we can then be sure that any subsequent changes in classifier performance are attributable to sample size alone.

3 Results

3.1 Overall sample size effects


In the overall sample size analysis using LOOCV, we were able to show that the risk of overestimating the classifier performance increases with decreasing overall sample size (Figure 2a, Supplements Table C.4a). Specifically, accuracies of 70 % or higher are observed with a probability of 13 % on sample sizes of $N = 20$ whereas this probability is reduced to 2 % for sample sizes of $N = 100$. In addition, sample size has a profound impact on the variability of accuracy estimates: For samples of size $N = 20$, accuracies ranged from 10 % to 95 % (standard deviation = 15 %) while for samples of $N = 100$, accuracies ranged between 35 % and 81 % (standard deviation = 6 %) (Figure 2b, Supplements Table C.4b). Note that this effect is symmetrical and also applies to the underestimation of performance (Figure 2b). Additionally, the results of the dummy classifier (Figure 2c, d, Supplements Table C.5) show that the observed overestimation effect is a general effect of sample size as previously pointed out by Varoquaux [16]. As the regularization of the SVM is sensitive to the total number of outliers, which may increase in parallel with sample size, we conducted an additional analysis with adjusted C parameters, with the observed effect remaining constant across these analyses (see Supplements Figure E.1 and E.2).

3.2 Training set size effects


When examining the effects of training set size ($N = 4$ to 150) using a large test set for evaluation ($N = 300$), we did not observe any systematic misestimation (Figure 3a, Supplements Table C.6a). In fact, models trained on virtually any training set size from $N = 4$ to 150 were sufficient to obtain maximum model performance. However, increasing training sample size decreased the probability of obtaining very low performance estimate. For training sets of size $N = 20$, accuracies ranged from 32 % to 69 % (standard deviation = 7.1 %) while for training sets of $N = 100$, accuracies ranged between 51 % and 70 % (standard deviation = 3.0 %) (Figure 3b, Supplements Table C.6b). In accordance with the overall sample size analysis, the results of the dummy classifier (Figure 3c, d, Supplements Table C.7) showed that this observed effect was general in nature.

3.3 Test set size effects


For our analysis varying test set size, we found a similar pattern of systematic misestimation as that in our first overall sample size analysis using LOOCV. With a sample size of $N = 20$, we obtain results of 70 % accuracy or higher with a probability of 30 %, whilst the mean accuracy on the full dataset ($N = 268$) was only 61 %. This probability

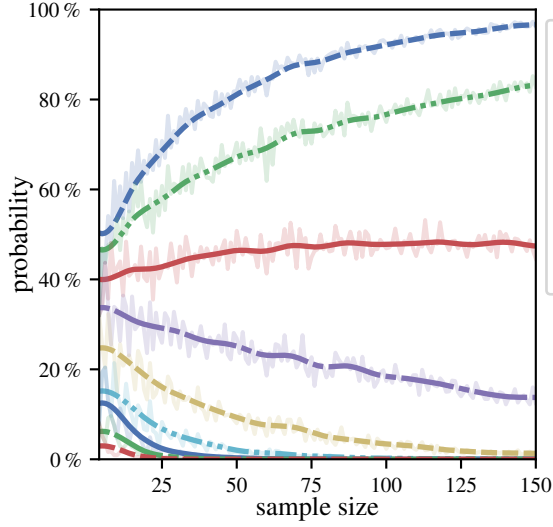


(a) Probabilities for linear SVMs to yield an accuracy exceeding a certain threshold as a function of sample size employing LOOCV.

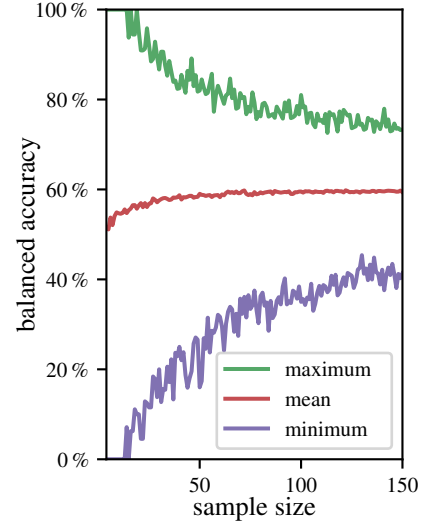

(b) Minimum, maximum and mean results for the linear SVMs as a function of sample size employing LOOCV.

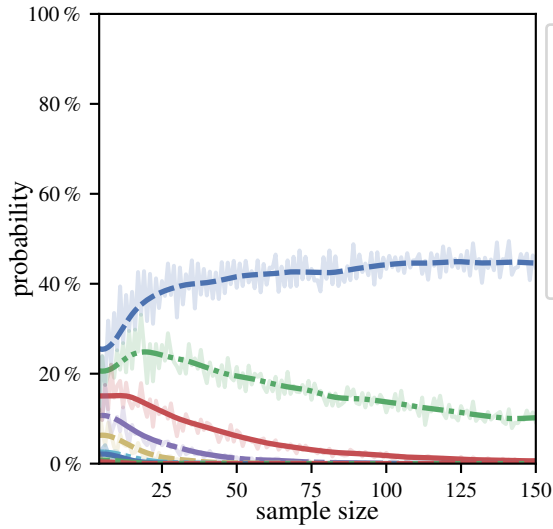


(c) Probabilities for dummy classifiers's to get an accuracy above a certain chance level related to the size of the used sample.

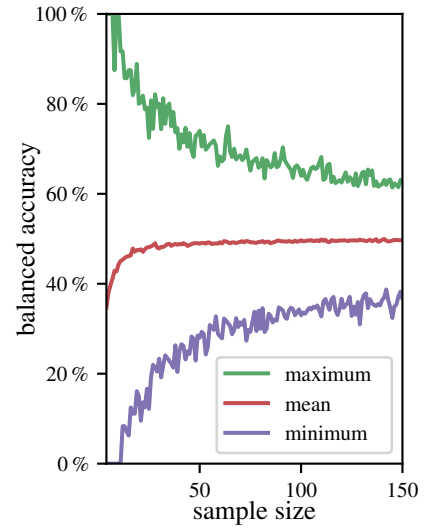


(d) Minimum, maximum and mean results for the dummy classifiers related to the size of the used sample size for training and testing.


Figure 2: Effects of varying overall sample sizes employing LOOCV.

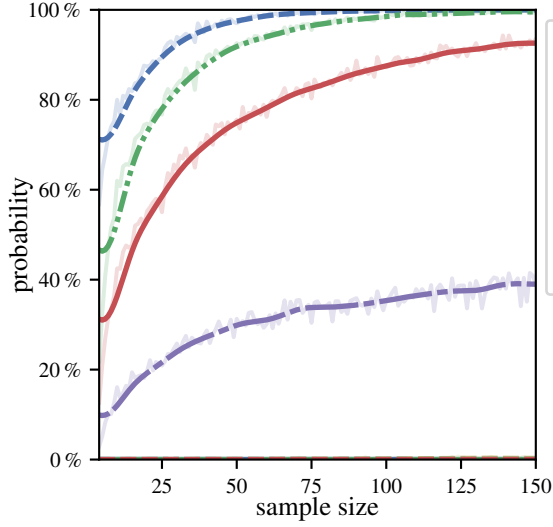


(a) Probabilities for linear SVMs to yield an accuracy exceeding a certain threshold as a function of training sample size.

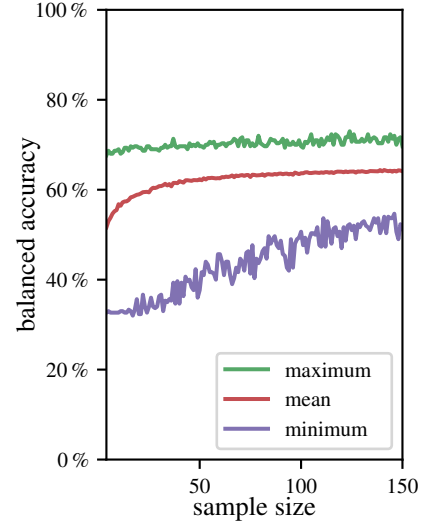

(b) Minimum, maximum and mean results for the linear SVMs as a function of training sample size.

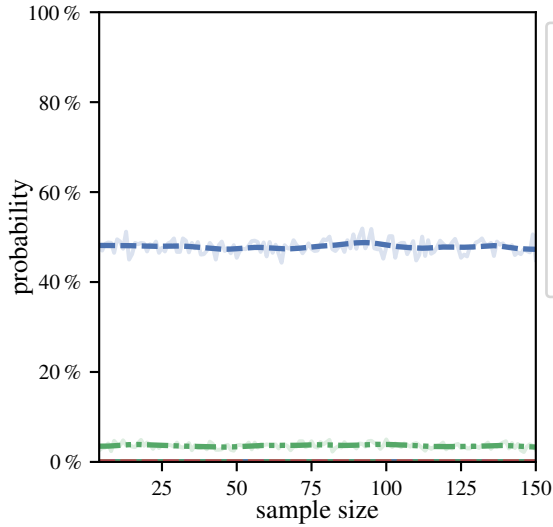

(c) Probabilities for the dummy classifier to get an accuracy above a certain chance level related to the size of the training set size.

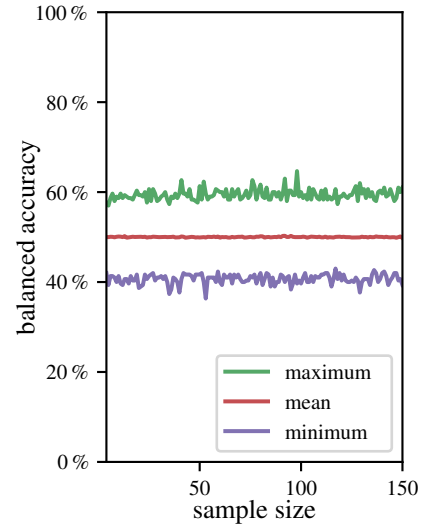

(d) Minimum, maximum and mean results for the dummy classifier related to the size of the used sample size for training.

Figure 3: Results as a function of training set sizes with a fixed test set size of $N = 300$.

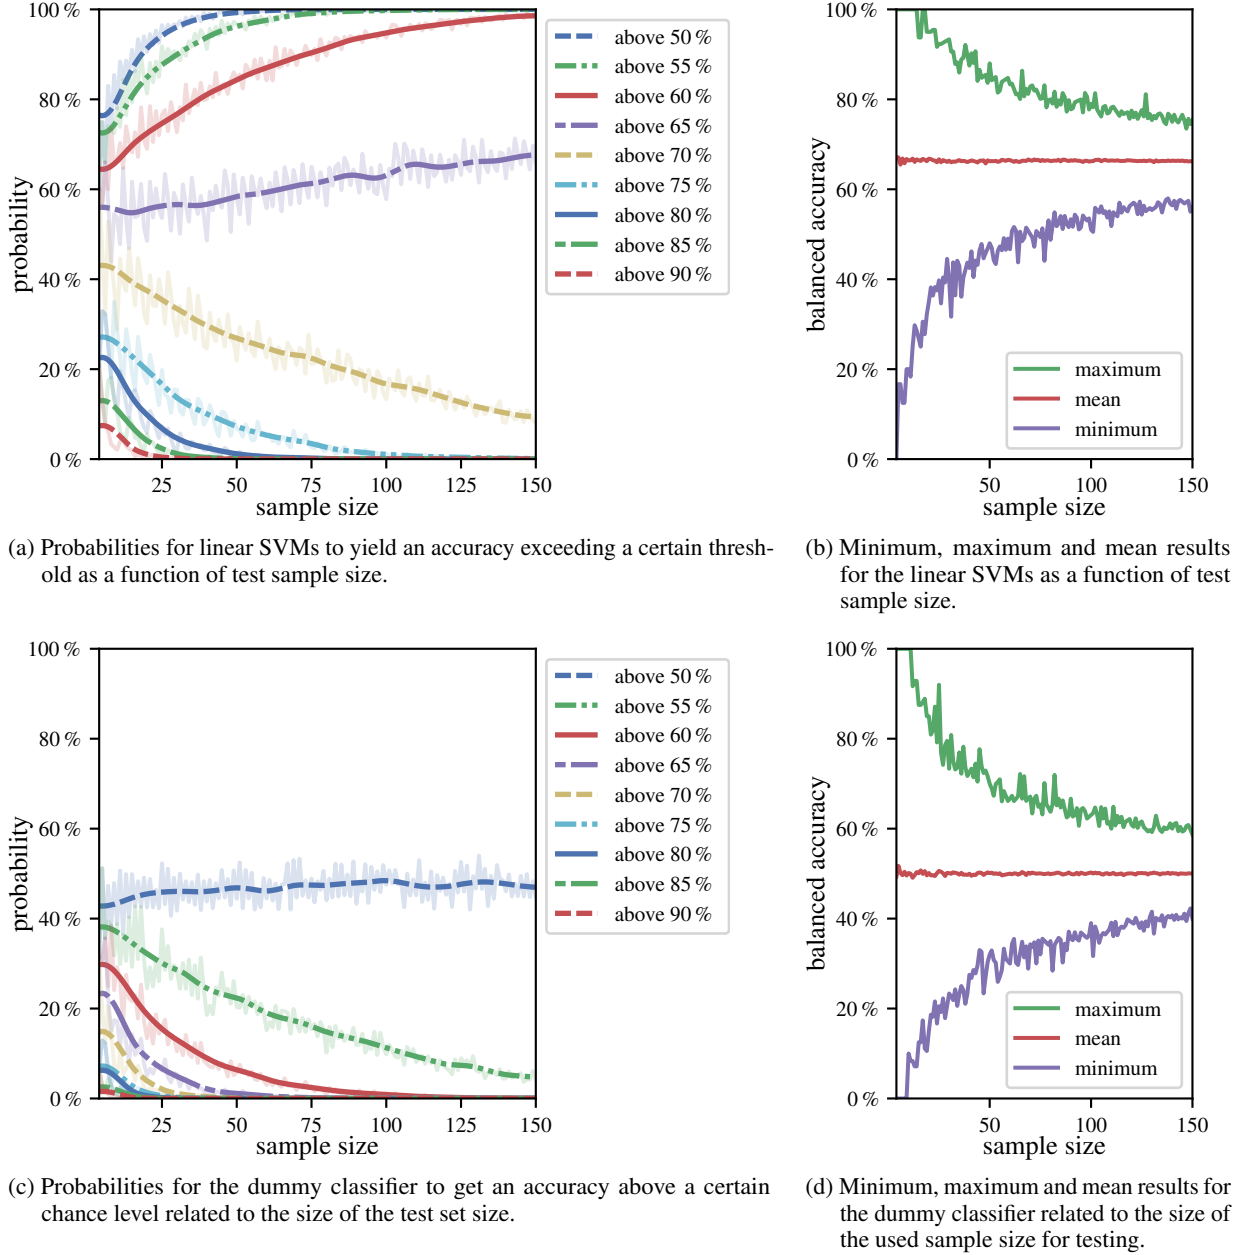


Figure 4: Results as a function of variable test set sizes with and a fixed classifier.

dropped to 13% when the test sample size was $N = 100$. For test sets of size $N = 20$, accuracies ranged from 35% to 95% (standard deviation = 10%) whilst for test sets of size $N = 100$, accuracies ranged from 51% and 79% (standard deviation = 4%) (Figure 4b, Supplements Table C.9b). Running the analysis again using our dummy classifier, we were able to show that the general pattern of systematic overestimation was independent of the specific dataset used (Figure 4c, d, Supplements Table C.9). To show the independent and generalizable character of the observed effect, we repeated the analysis on the 48 unique pipeline configurations discussed above (see Supplementary appendix F). Specifically, the results are comparable to the original used configuration, i.e. an SVM with a linear kernel and no preprocessing. Finally, our analysis of scanner sites revealed no effects on model performance (see Supplementary appendix E).

4 Discussion

Sparked by the observation that machine learning studies drawing on larger neuroimaging samples consistently showed weaker results than studies drawing on smaller ones, we drew samples of various sizes from the PAC dataset, thereby mimicking the process by which researchers would draw samples from the population of ML studies reported in the literature. When applying a linear SVM with LOOCV, as is the most common approach in the neuroimaging literature [10], we observed a higher risk of misestimations, which may lead to artificially high performance estimates in smaller samples. Importantly, our analyses revealed that this is primarily due to a small test set, not training set size. Generally, this shows that a small test sample size may explain many of the highly optimistic results published in recent years. When considering the well-established effect of publication bias, even if underestimated results are equally as likely, they will have a significantly lower chance of being published.

Our results are the first to disentangle the effects of training and test set size effects which are typically inseparable in common cross-validation frameworks such as LOOCV. This delineation of effects enabled two important insights for biomarker discovery and outcome prediction. First, researchers need to validate their models on large, independent test sets. Our results indicate that in the PAC dataset, a test set size of $N = 100$ was already sufficient to lower the probability of obtaining artificially good performance (i.e., 70 % or higher) to 13 %. With a median N of less than 100 in many published studies [10], this may seem challenging. However, online infrastructure for independent machine learning model evaluation is available (e.g., www.photon-ai.com/repo). If researchers open-source their models, anyone - independent of technical knowledge or machine learning expertise - can evaluate them. This way, large independent test datasets can be obtained in a short time without the need for data sharing. This is not restricted to neuroimaging data, but any machine learning model. In addition, efforts from consortia will also help to mitigate this problem and should be considered by machine learning practitioners.

Second, the size of the training set alone cannot serve as an indicator of later model performance. Larger training sets are more likely to generalize to new data and broaden model scope (i.e., about which groups within a population a given model can make reasonable predictions), however, in the current analysis, the linear rule learned by an SVM on high-dimensional neuroimaging data could be approximated with only a handful of samples. From a training set size of 30 onward, we no longer observed any increase in model performance. This somewhat counterintuitive effect arises whenever a simple rule is approximated. For higher complexity models (i.e., models capable of learning more complex rules), we, of course, expect performance increases as training sample size increases. However, considering the results of the PAC (Supplementary appendix B), high complexity models such as Deep Learning approaches did not yield higher performance when trained with $\sim 1,000$ samples. Thus, we conclude that simple models are competitive for sample sizes of up to $N = 1,000$ for this particular classification problem. Whether more complex rules can be discovered beyond this point or whether other fundamental issues hamper biomarker discovery in psychiatry (cf. e.g. biotype identification [19] and normative modelling approaches [23]) remains an open question.

An intuitive criticism of our main analyses would be that it has merely replicated methods similar to those of previous low-quality works (for example, studies using only linear SVMs with default parameters, tested in LOOCV schemes, on samples with many more predictors than observations). Whilst this pipeline configuration was used in the current analysis to a) hold constant properties, that if varied, may have been indistinguishably responsible for changes in accuracy misestimation, and b) replicate the most commonly used ML pipeline configuration in our field, it was important to conduct complementary analyses to rule out these confounds. Therefore, we tested a further 48 ML pipeline configurations (see Supplementary appendix F) using both linear (a linear SVM) and non-linear (a radial basis function (RBF) SVM and a Random Forest) classifiers. In addition, we conducted PCA based dimensionality reduction as well as f-test based feature selection within these classifiers to delineate whether our findings were confounded by the large size of the predictor space relative to our number of observations. Importantly, all pipeline configurations demonstrated the same pattern of systematic misestimation as that in our main analyses. The second potential criticism of the current work is that these findings may merely be modality-specific, limiting the generalizability of these findings across domains. However, the use of a dummy classifier that completely ignored the input predictor space (the voxels), and instead, classified samples based only on their prevalence in training ($MDD = 50\%$, $HC = 50\%$), showed the same pattern of sample size based systematic misestimation across all pipeline configurations, thus, demonstrating a generalizable statistical effect regardless of the data modality used.

Given the profound effect of the test set size on systematic misestimation, it is important to consider why an effect of overestimation may arise. Previous work by Schnack & Kahn [24] suggests that patient characteristics in smaller samples tend to be more homogeneous. In the case of small N , participants may be more likely to be recruited from the same data collection site and of a similar age (for example, in the case of a university recruited convenience sample). In addition, stringent recruitment criterion may be easily met, resulting in a well-defined phenotype that is not truly representative of the parent population of interest. Whilst this explanation makes sense for samples collected in this manner, it fails to explain why we observed this phenomenon in our random sampling procedure, and more importantly,

with our dummy classifiers that paid no attention to participants, their characteristics, or the inputted predictor variables. This observation suggests a mechanism for systematic misestimation that is not just sample/patient-specific or contingent on sample homogeneity, but instead, inherent in the natural variation that arises in small test samples. Indeed, this effect is known as sampling error, and as demonstrated by Combrisson et al. [25] can lead to an effect whereby we exceed a machine learning model's chance level, purely by chance.

In addition to sample size, other issues such as data leakage [13], are likely contributing to the systematic overestimation seen in the literature. Dedicated cross-platform software to help avoid data leakage is freely available (e.g. PHOTON, www.photon-ai.com or Scikit-learn [22]). Finally, code should be made available on request or provided in an online repository (e.g., GitHub or GitLab) upon submission for review. In addition, a more elaborate evaluation framework including the analysis of model scope assessment as well as incremental utility and risk analysis is needed to move the field beyond proof-of-concept studies. The success of current translational efforts in neuroimaging and psychiatry will crucially depend on the timely adoption of guidelines and rules for medical machine learning models (for an in-depth introduction, see [15]).

In summary, our results indicate that - while many of the most highly published results might strongly overestimate true performance - evaluation on large test sets constitutes a straightforward remedy. Given that simple, low-complexity models such as linear SVMs did not gain from larger training set size, researchers should not discard their models due to low training N but seek evaluation on a large test set for any model showing good performance.

Acknowledgements

FOR2107

This work was funded by the German Research Foundation (DFG, grant FOR2107 DA1151/5-1 and DA1151/5-2 to UD; SFB-TRR58, Projects C09 and Z02 to UD) and the Interdisciplinary Center for Clinical Research (IZKF) of the medical faculty of Münster (grant Dan3/012/17 to UD). TH was supported by the German Research Foundation (DFG grants HA7070/2-2, HA7070/3, HA7070/4).

This work is part of the German multicenter consortium "Neurobiology of Affective Disorders. A translational perspective on brain structure and function", funded by the German Research Foundation (Deutsche Forschungsgemeinschaft DFG; Forschungsgruppe/Research Unit FOR2107).

Principal investigators (PIs) with respective areas of responsibility in the FOR2107 consortium are: Work Package WP1, FOR2107/MACS cohort and brain imaging: Tilo Kircher (speaker FOR2107; DFG grant numbers KI 588/14-1, KI 588/14-2), Udo Dannlowski (co-speaker FOR2107; DA 1151/5-1, DA 1151/5-2), Axel Krug (KR 3822/5-1, KR 3822/7-2), Igor Nenadic (NE 2254/1-2), Carsten Konrad (KO 4291/3-1). WP2, animal phenotyping: Markus Wöhr (WO 1732/4-1, WO 1732/4-2), Rainer Schwarting (SCHW 559/14-1, SCHW 559/14-2). WP3, miRNA: Gerhard Schratt (SCHR 1136/3-1, 1136/3-2). WP4, immunology, mitochondria: Judith Alferink (AL 1145/5-2), Carsten Culmsee (CU 43/9-1, CU 43/9-2), Holger Garn (GA 545/5-1, GA 545/7-2). WP5, genetics: Marcella Rietschel (RI 908/11-1, RI 908/11-2), Markus Nöthen (NO 246/10-1, NO 246/10-2), Stephanie Witt (WI 3439/3-1, WI 3439/3-2). WP6, multi method data analytics: Andreas Jansen (JA 1890/7-1, JA 1890/7-2), Tim Hahn (HA 7070/2-2), Bertram Müller-Myhsok (MU1315/8-2), Astrid Dempfle (DE 1614/3-1, DE 1614/3-2). CP1, biobank: Petra Pfefferle (PF 784/1-1, PF 784/1-2), Harald Renz (RE 737/20-1, 737/20-2). CP2, administration: Tilo Kircher (KI 588/15-1, KI 588/17-1), Udo Dannlowski (DA 1151/6-1), Carsten Konrad (KO 4291/4-1).

Data access and responsibility: All PIs take responsibility for the integrity of the respective study data and their components. All authors and coauthors had full access to all study data.

Acknowledgements and members by Work Package (WP):

WP1: Henrike Bröhl, Katharina Brosch, Bruno Dietsche, Rozbeh Elahi, Jennifer Engelen, Sabine Fischer, Jessica Heinen, Svenja Klingel, Felicitas Meier, Tina Meller, Torsten Sauder, Simon Schmitt, Frederike Stein, Annette Tittmar, Dilara Yüksel (Dept. of Psychiatry, Marburg University). Mechthild Wallnig, Rita Werner (Core-Facility Brainimaging, Marburg University). Carmen Schade-Brittinger, Maik Hahmann (Coordinating Centre for Clinical Trials, Marburg). Michael Putzke (Psychiatric Hospital, Friedberg). Rolf Speier, Lutz Lenhard (Psychiatric Hospital, Haina). Birgit Köhnlein (Psychiatric Practice, Marburg). Peter Wulf, Jürgen Kleebach, Achim Becker (Psychiatric Hospital Hephata, Schwalmstadt-Treysa). Ruth Bär (Care facility Bischoff, Neunkirchen). Matthias Müller, Michael Franz, Siegfried Scharmann, Anja Haag, Kristina Spenner, Ulrich Ohlenschläger (Psychiatric Hospital Vitos, Marburg). Matthias Müller, Michael Franz, Bernd Kundermann (Psychiatric Hospital Vitos, Gießen). Christian Bürger, Fanni Dzvonyar, Verena

Enneking, Stella Fingas, Janik Goltermann, Hannah Lemke, Susanne Meinert, Jonathan Repple, Kordula Vorspohl, Bettina Walden, Dario Zaremba (Dept. of Psychiatry, University of Münster). Harald Kugel, Jochen Bauer, Walter Heindel, Birgit Vahrenkamp (Dept. of Clinical Radiology, University of Münster). Gereon Heuft, Gudrun Schneider (Dept. of Psychosomatics and Psychotherapy, University of Münster). Thomas Reker (LWL-Hospital Münster). Gisela Bartling (IPP Münster). Ulrike Buhlmann (Dept. of Clinical Psychology, University of Münster).

WP2: Marco Bartz, Miriam Becker, Christine Blöcher, Annuska Berz, Moria Braun, Ingmar Conell, Debora dalla Vecchia, Darius Dietrich, Ezgi Esen, Sophia Estel, Jens Hensen, Ruhkshona Kayumova, Theresa Kisko, Rebekka Obermeier, Anika Pützer, Nivethini Sangarapillai, Özge Sungur, Clara Raithel, Tobias Redecker, Vanessa Sandermann, Finnja Schramm, Linda Tempel, Natalie Vermehren, Jakob Vörckel, Stephan Weingarten, Maria Willadsen, Cüneyt Yildiz (Faculty of Psychology, Marburg University).

WP4: Jana Freff, Silke Jörgens, Kathrin Schwarte (Dept. of Psychiatry, University of Münster). Susanne Michels, Goutham Ganjam, Katharina Elsässer (Faculty of Pharmacy, Marburg University). Felix Ruben Picard, Nicole Löwer, Thomas Ruppertsberg (Institute of Laboratory Medicine and Pathobiochemistry, Marburg University).

WP5: Helene Dukal, Christine Hohmeyer, Lennard Stütz, Viola Schwerdt, Fabian Streit, Josef Frank, Lea Sirignano (Dept. of Genetic Epidemiology, Central Institute of Mental Health, Medical Faculty Mannheim, Heidelberg University).

WP6: Anastasia Benedyk, Miriam Bopp, Roman Keßler, Maximilian Lückel, Verena Schuster, Christoph Vogelbacher (Dept. of Psychiatry, Marburg University). Jens Sommer, Olaf Steinträger (Core-Facility Brainimaging, Marburg University). Thomas W.D. Möbius (Institute of Medical Informatics and Statistics, Kiel University).

CP1: Julian Glandorf, Fabian Kormann, Arif Alkan, Fatana Wedi, Lea Henning, Alena Renker, Karina Schneider, Elisabeth Folwarczny, Dana Stenzel, Kai Wenk, Felix Picard, Alexandra Fischer, Sandra Blumenau, Beate Kleb, Doris Finholdt, Elisabeth Kinder, Tamara Wüst, Elvira Przypadlo, Corinna Brehm (Comprehensive Biomaterial Bank Marburg, Marburg University).

The FOR2107 cohort project (WP1) was approved by the Ethics Committees of the Medical Faculties, University of Marburg (AZ: 07/14) and University of Münster (AZ: 2014–422-b-S).

Conflict of Interest

Biomedical financial interests or potential conflicts of interest: Tilo Kircher received unrestricted educational grants from Servier, Janssen, Recordati, Aristo, Otsuka, neuraxpharm.

The other authors (Claas Flint, Micah Cearn, Nils Opel, Ronny Redlich, David M. A. Mehler, Daniel Emden, Nils R. Winter, Ramona Leenings, Simon B. Eickhoff, Axel Krug, Igor Nenadic, Volker Arolt, Scott Clark, Bernhard T. Baune, Xiaoyi Jiang, Udo Dannlowski, Tim Hahn) declare no conflicts of interest.

References

- [1] Alison M. Darcy, Alan K. Louie, and Laura Weiss Roberts. Machine learning and the profession of medicine. *JAMA - Journal of the American Medical Association*, 315(6):551–552, 2016.
- [2] Harris A. Eyre, Ajeet B. Singh, and Charles Reynolds. Tech giants enter mental health. *World Psychiatry*, 15(1):21–22, 2016.
- [3] John D.E. Gabrieli, Satrajit S. Ghosh, and Susan Whitfield-Gabrieli. Prediction as a humanitarian and pragmatic contribution from human cognitive neuroscience. *Neuron*, 85(1):11–26, 2015.
- [4] M I Jordan and T M Mitchell. Machine learning: Trends, perspectives, and prospects. *Science (New York, N.Y.)*, 349(6245):255–60, 2015.
- [5] T. Hahn, A. A. Nierenberg, and S. Whitfield-Gabrieli. Predictive analytics in mental health: Applications, guidelines, challenges and perspectives. *Molecular Psychiatry*, 22(1):37–43, 2017.
- [6] Blair A. Johnston, J. Douglas Steele, Serenella Tolomeo, David Christmas, and Keith Matthews. Structural MRI-based predictions in patients with treatment-refractory depression (TRD). *PLoS ONE*, 10(7):1–16, 2015.
- [7] Benson Mwangi, Klaus P. Ebmeier, Keith Matthews, and J. Douglas Steele. Multi-centre diagnostic classification of individual structural neuroimaging scans from patients with major depressive disorder. *Brain*, 135(5):1508–1521, 2012.

- [8] Meenal J. Patel, Carmen Andreescu, Julie C. Price, Kathryn L. Edelman, Charles F. Reynolds, and Howard J. Aizenstein. Machine learning approaches for integrating clinical and imaging features in late-life depression classification and response prediction. *International Journal of Geriatric Psychiatry*, 30(10):1056–1067, 2015.
- [9] Andres H. Neuhaus and Florin C. Popescu. Sample Size, Model Robustness, and Classification Accuracy in Diagnostic Multivariate Neuroimaging Analyses. *Biological Psychiatry*, 84(11):e81–e82, 2018.
- [10] Mohammad R Arbabshirani, Sergey Plis, Jing Sui, and Vince D Calhoun. Single subject prediction of brain disorders in neuroimaging: Promises and pitfalls. *NeuroImage*, 145:137–165, 2017.
- [11] S. Raudys and A. Jain. Small Sample Size Effects in Statistical Pattern Recognition: Recommendations for Practitioners. *IEEE Transactions on Pattern Analysis & Machine Intelligence*, 13:252–264, 1991.
- [12] Tjeerd van der Ploeg, Peter C Austin, and Ewout W Steyerberg. Modern modelling techniques are data hungry: a simulation study for predicting dichotomous endpoints. *BMC Medical Research Methodology*, 14(1):137, 2014.
- [13] Joseph Kambeitz, Carlos Cabral, Matthew D. Sacchet, Ian H. Gotlib, Roland Zahn, Mauricio H. Serpa, Martin Walter, Peter Falkai, and Nikolaos Koutsouleris. Detecting Neuroimaging Biomarkers for Depression: A Meta-analysis of Multivariate Pattern Recognition Studies. *Biological Psychiatry*, 82(5):330–338, 2017.
- [14] Gaël Varoquaux, Pradeep Reddy Raamana, Denis A. Engemann, Andrés Hoyos-Idrobo, Yannick Schwartz, and Bertrand Thirion. Assessing and tuning brain decoders: Cross-validation, caveats, and guidelines. *NeuroImage*, 145(August 2015):166–179, 2017.
- [15] Tim Hahn, Ulrich Ebner-Priemer, and Andreas Meyer-Lindenberg. Transparent Artificial Intelligence – A Conceptual Framework for Evaluating AI-based Clinical Decision Support Systems. *OSF Preprints*, 2019.
- [16] Gaël Varoquaux. Cross-validation failure: Small sample sizes lead to large error bars. *NeuroImage*, 180:68–77, oct 2018.
- [17] Udo Dannlowski, Harald Kugel, Dominik Grotegerd, Ronny Redlich, Janina Suchy, Nils Opel, Thomas Suslow, Carsten Konrad, Patricia Ohrmann, Jochen Bauer, Tilo Kircher, Axel Krug, Andreas Jansen, Bernhard T. Baune, Walter Heindel, Katharina Domschke, Andreas J. Forstner, Markus M. Nöthen, Jens Treutlein, Volker Arolt, Christa Hohoff, Marcella Rietschel, and Stephanie H. Witt. NCAN Cross-Disorder Risk Variant Is Associated with Limbic Gray Matter Deficits in Healthy Subjects and Major Depression. *Neuropsychopharmacology*, 40(11):2510–2516, 2015.
- [18] U. Dannlowski, H. J. Grabe, K. Wittfeld, J. Klaus, C. Konrad, D. Grotegerd, R. Redlich, T. Suslow, N. Opel, P. Ohrmann, J. Bauer, P. Zwanzger, I. Laeger, C. Hohoff, V. Arolt, W. Heindel, M. Deppe, K. Domschke, K. Hegenscheid, H. Völzke, D. Stacey, H. Meyer Zu Schwabedissen, H. Kugel, and B. T. Baune. Multimodal imaging of a tescalin (TESC)-regulating polymorphism (rs7294919)-specific effects on hippocampal gray matter structure. *Molecular Psychiatry*, 20(3):398–404, 2015.
- [19] Tilo Kircher, Markus Wöhr, Igor Nenadic, Rainer Schwarting, Gerhard Schratt, Judith Alferink, Carsten Culmsee, Holger Garn, Tim Hahn, Bertram Müller-Myhsok, Astrid Dempfle, Maik Hahmann, Andreas Jansen, Petra Pfefferle, Harald Renz, Marcella Rietschel, Stephanie H. Witt, Markus Nöthen, Axel Krug, and Udo Dannlowski. Neurobiology of the major psychoses: a translational perspective on brain structure and function—the FOR2107 consortium. *European Archives of Psychiatry and Clinical Neuroscience*, 0(0):1–14, 2018.
- [20] H.-U. Wittchen, U. Wunderlich, S. Gruschwitz, and M. Zaudig. *SKID I. Strukturiertes Klinisches Interview für DSM-IV. Achse I: Psychische Störungen. Interviewheft und Beurteilungsheft. Eine deutschsprachige, erweiterte Bearb. d. amerikanischen Originalversion des SKID I.* Hogrefe, Göttingen, 1997.
- [21] Christoph Vogelbacher, Thomas W.D. Möbius, Jens Sommer, Verena Schuster, Udo Dannlowski, Tilo Kircher, Astrid Dempfle, Andreas Jansen, and Miriam H.A. Bopp. The Marburg-Münster Affective Disorders Cohort Study (MACS): A quality assurance protocol for MR neuroimaging data. *NeuroImage*, 172(December 2017):450–460, 2018.
- [22] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [23] Andre F. Marquand, Iead Rezek, Jan Buitelaar, and Christian F. Beckmann. Understanding Heterogeneity in Clinical Cohorts Using Normative Models: Beyond Case-Control Studies. *Biological Psychiatry*, 80(7):552–561, 2016.
- [24] Hugo G. Schnack and René S. Kahn. Detecting neuroimaging biomarkers for psychiatric disorders: Sample size matters. *Frontiers in Psychiatry*, 7(MAR):1–12, 2016.

- [25] Etienne Combrisson and Karim Jerbi. Exceeding chance level by chance: The caveat of theoretical chance levels in brain signal classification and statistical assessment of decoding accuracy. *Journal of Neuroscience Methods*, 250:126–136, 2015.

SUPPLEMENTAL MATERIALS

Systematic Misestimation of Machine Learning Performance in Neuroimaging Studies of Depression

A Summary statistics for the final study sample

		MDD	HC
	n	934	934
Sex	female	556	548
	male	378	368
Scanner	1	285	512
	2	395	236
	3	254	186

(a) Summary of sample size (n), sex and scanner site.

		Mean	SD	Min	Max
MDD	Age ($n = 934$)	37.76	12.94	16	65
	TIV ($n = 933$)	1,575.94	152.97	1,115.00	2,189.00
HC	Age ($n = 934$)	34.15	12.42	17	65
	TIV ($n = 933$)	1,575.61	156.38	1,146.23	2,706.76

(b) Summage of Age (in years) and TIV (total intracranial volume).

Table A.1: Summary statistics for the final study sample.

Abbreviations: HC - healthy control
MDD - major depressive disorder

B Predictive Analytics Competition 2018

The medical machine learning lab from Prof. Dr. Tim Hahn invited teams from all over the world to develop a model classifying patients suffering from MDD and HC individuals based on structural Magnetic Resonance Imaging (sMRI) data. This competition was called *Predictive Analytics Competition 2018* (PAC 2018).

Data

The data for this competition - comprising structured MRI datasets with and without MDD from $N = 2,240$ subjects - was provided by the *Institute of Translational Psychiatry*, Münster. The images were preprocessed in advanced with the SPM toolbox CAT-12 (Matlab 9.0 / SMP12 rev. 6685 / CAT12 v.1184) and quality checked. The participants got, additional to the diagnosis, the age, gender, TIV and the scanner-site to consider them as covariates.

The data was split into a training and test set in advance (Table B.2). The test set was held back and only used in the final step to designate the winner.

Timeline

Registration opened:	1 st	February	2018
Training data available:	1 st	March	2018
Test data available:	27 th	April	2018
Test prediction upload opened:	4 th	May	2018
Test prediction upload closed:	31 st	May	2018

	Training	Test
MDD	1,033	273
HC	759	175
Total	1,792	448

Table B.2: Split between training and test data for the PAC 2018.

Abbreviations: HC - healthy control
MDD - major depressive disorder

The “PAC Award Winner 2018” was announced in a ceremony held at annually meeting of the *Organization for Human Brain Mapping* (OHBM) in Singapore at the 21st June 2018.

Results

In total 49 teams registered with at least 170 participants. The winner was determined by the highest balanced accuracy score on the held-back test set. The team with the highest score was “paranoidandroid” (TableB.3) and won the PAC 2018 Award.

	Team	BA	TPR	TNR
1 st	paranoidandroid	0.65	0.53	0.77
2 nd	utastoot	0.64	0.51	0.77
3 rd	berlin_brain_decoders	0.64	0.58	0.69
4 th	depression	0.63	0.59	0.67
5 th	neuronauts_p	0.63	0.61	0.64

Table B.3: Test results on the held-back test set by the top five teams at the PAC 2018.

Abbreviations: BA - balanced accuracy
TPR - true positive rate (sensitivity)
TNR - true negative rate (specificity)

C Additional tabular presentations

This section contains the tabular presentation of the graphical visualized data in the paper.

		\geq accuracy (%)								
overall sample size	n	50	55	60	65	70	75	80	85	90
	10	0.54	0.54	0.43	0.33	0.15	0.15	0.05	0.05	0.01
	20	0.64	0.52	0.40	0.24	0.13	0.06	0.01	0.01	0.00
	30	0.70	0.61	0.39	0.29	0.11	0.06	0.01	0.00	0.00
	40	0.78	0.63	0.47	0.23	0.09	0.02	0.00	0.00	0.00
	50	0.82	0.70	0.51	0.27	0.08	0.02	0.00	0.00	0.00
	60	0.81	0.62	0.41	0.19	0.05	0.01	0.00	0.00	0.00
	70	0.88	0.72	0.42	0.20	0.07	0.01	0.00	0.00	0.00
	80	0.90	0.73	0.48	0.18	0.04	0.00	0.00	0.00	0.00
	90	0.89	0.76	0.45	0.20	0.03	0.00	0.00	0.00	0.00
	100	0.93	0.75	0.47	0.17	0.02	0.00	0.00	0.00	0.00
	125	0.94	0.81	0.48	0.14	0.01	0.00	0.00	0.00	0.00
150	0.96	0.83	0.45	0.12	0.01	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the overall sample size.

	n	mean	median	min	max	std
overall sample size	10	0.55	0.60	0.00	1.00	0.20
	20	0.56	0.60	0.10	0.95	0.15
	30	0.58	0.58	0.20	0.87	0.12
	40	0.59	0.60	0.25	0.82	0.10
	50	0.59	0.60	0.16	0.82	0.09
	60	0.58	0.58	0.32	0.82	0.08
	70	0.59	0.60	0.36	0.81	0.07
	80	0.59	0.60	0.36	0.76	0.07
	90	0.59	0.60	0.34	0.77	0.07
	100	0.60	0.60	0.35	0.81	0.06
	125	0.59	0.60	0.41	0.74	0.05
	150	0.59	0.59	0.41	0.73	0.05

(b) Summary of the accuracy value distributions for certain overall sample size.

Table C.4: Effects of varying overall sample sizes for training and testing a linear SVM employing LOOCV.

		\geq accuracy (%)								
overall sample size	n	50	55	60	65	70	75	80	85	90
	10	0.25	0.25	0.17	0.10	0.03	0.03	0.01	0.01	0.00
	20	0.32	0.18	0.10	0.04	0.02	0.01	0.00	0.00	0.00
	30	0.33	0.22	0.06	0.03	0.01	0.00	0.00	0.00	0.00
	40	0.37	0.18	0.09	0.02	0.00	0.00	0.00	0.00	0.00
	50	0.39	0.21	0.07	0.01	0.00	0.00	0.00	0.00	0.00
	60	0.40	0.16	0.04	0.01	0.00	0.00	0.00	0.00	0.00
	70	0.40	0.16	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.41	0.13	0.03	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.41	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.43	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.46	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00
150	0.44	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the overall sample size.

	n	mean	median	min	max	std
overall sample size	10	0.44	0.40	0.00	1.00	0.17
	20	0.47	0.45	0.15	0.80	0.11
	30	0.48	0.47	0.23	0.80	0.09
	40	0.49	0.50	0.25	0.70	0.08
	50	0.49	0.48	0.28	0.74	0.07
	60	0.49	0.50	0.28	0.68	0.06
	70	0.49	0.50	0.31	0.69	0.06
	80	0.49	0.50	0.30	0.66	0.06
	90	0.49	0.49	0.34	0.68	0.05
	100	0.50	0.50	0.33	0.64	0.05
	125	0.50	0.50	0.33	0.63	0.05
	150	0.50	0.49	0.37	0.63	0.04

(b) Summary of the accuracy value distributions for certain overall sample size.

Table C.5: Effects of varying overall sample sizes for training and testing a Dummy Classifier employing LOOCV.

train sample size	\geq accuracy (%)									
	n	50	55	60	65	70	75	80	85	90
	10	0.80	0.62	0.42	0.16	0.00	0.00	0.00	0.00	0.00
	20	0.87	0.75	0.55	0.20	0.00	0.00	0.00	0.00	0.00
	30	0.94	0.83	0.65	0.26	0.00	0.00	0.00	0.00	0.00
	40	0.97	0.90	0.72	0.29	0.00	0.00	0.00	0.00	0.00
	50	0.97	0.93	0.76	0.31	0.00	0.00	0.00	0.00	0.00
	60	0.99	0.95	0.76	0.30	0.00	0.00	0.00	0.00	0.00
	70	0.99	0.96	0.83	0.35	0.00	0.00	0.00	0.00	0.00
	80	0.99	0.97	0.83	0.34	0.00	0.00	0.00	0.00	0.00
	90	1.00	0.98	0.89	0.36	0.00	0.00	0.00	0.00	0.00
	100	1.00	0.98	0.87	0.35	0.00	0.00	0.00	0.00	0.00
125	1.00	0.99	0.91	0.39	0.00	0.00	0.00	0.00	0.00	
150	1.00	0.99	0.94	0.39	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the train sample size.

	n	mean	median	min	max	std
train sample size	10	0.57	0.58	0.33	0.69	0.08
	20	0.59	0.61	0.32	0.69	0.07
	30	0.61	0.62	0.36	0.69	0.06
	40	0.62	0.63	0.35	0.70	0.05
	50	0.62	0.63	0.38	0.70	0.05
	60	0.63	0.64	0.46	0.70	0.04
	70	0.63	0.64	0.45	0.71	0.04
	80	0.63	0.64	0.45	0.70	0.03
	90	0.64	0.64	0.49	0.71	0.03
	100	0.64	0.64	0.51	0.70	0.03
	125	0.64	0.64	0.51	0.71	0.03
	150	0.64	0.65	0.51	0.70	0.03

(b) Summary of the accuracy value distributions for certain train sample size.

Table C.6: Results of a fixed validation set of $n = 300$ and varying train sample sizes on a linear SVM using default parameter. ($C = 1$)

		\geq accuracy (%)								
train sample size	n	50	55	60	65	70	75	80	85	90
	10	0.49	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	20	0.47	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.47	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.47	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.45	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.46	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.48	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.49	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.47	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.48	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.45	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.45	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the train sample size.

	n	mean	median	min	max	std
train sample size	10	0.50	0.50	0.41	0.59	0.03
	20	0.50	0.50	0.39	0.59	0.03
	30	0.50	0.50	0.41	0.58	0.03
	40	0.50	0.50	0.38	0.60	0.03
	50	0.50	0.50	0.42	0.61	0.03
	60	0.50	0.50	0.40	0.60	0.03
	70	0.50	0.50	0.41	0.58	0.03
	80	0.50	0.50	0.42	0.62	0.03
	90	0.50	0.50	0.42	0.58	0.03
	100	0.50	0.50	0.40	0.60	0.03
	125	0.50	0.50	0.40	0.59	0.03
	150	0.50	0.50	0.39	0.61	0.03

(b) Summary of the accuracy value distributions for certain train sample size.

Table C.7: Results of a fixed validation set of $n = 300$ and varying train sample sizes on a Dummy Classifier.

		\geq accuracy (%)								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.78	0.78	0.66	0.54	0.29	0.29	0.10	0.10	0.02
	20	0.91	0.81	0.69	0.48	0.30	0.17	0.06	0.06	0.00
	30	0.96	0.90	0.73	0.57	0.27	0.15	0.02	0.01	0.00
	40	0.98	0.91	0.80	0.49	0.25	0.09	0.02	0.01	0.00
	50	0.99	0.97	0.85	0.58	0.22	0.07	0.00	0.00	0.00
	60	1.00	0.97	0.84	0.56	0.23	0.05	0.00	0.00	0.00
	70	1.00	0.99	0.88	0.61	0.21	0.04	0.00	0.00	0.00
	80	1.00	0.99	0.90	0.56	0.17	0.02	0.00	0.00	0.00
	90	1.00	1.00	0.94	0.63	0.17	0.02	0.00	0.00	0.00
	100	1.00	0.99	0.94	0.58	0.13	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.97	0.63	0.13	0.00	0.00	0.00	0.00
150	1.00	1.00	0.98	0.66	0.08	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.66	0.70	0.20	1.00	0.15
	20	0.67	0.65	0.35	0.95	0.11
	30	0.66	0.67	0.40	0.93	0.08
	40	0.66	0.65	0.42	0.88	0.07
	50	0.66	0.66	0.48	0.88	0.06
	60	0.66	0.67	0.47	0.83	0.06
	70	0.66	0.67	0.50	0.83	0.05
	80	0.66	0.66	0.49	0.80	0.05
	90	0.66	0.67	0.53	0.78	0.04
	100	0.66	0.66	0.51	0.79	0.04
	125	0.66	0.66	0.54	0.78	0.03
	150	0.66	0.66	0.56	0.75	0.03

(b) Summary of the accuracy value distributions for certain test sample size.

Table C.8: Effects of varying test sample sizes on a fixed pretrained linear SVM.

		\geq accuracy (%)								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.39	0.39	0.29	0.17	0.05	0.05	0.01	0.01	0.00
	20	0.42	0.24	0.13	0.05	0.02	0.01	0.00	0.00	0.00
	30	0.42	0.28	0.10	0.05	0.01	0.00	0.00	0.00	0.00
	40	0.44	0.19	0.08	0.01	0.00	0.00	0.00	0.00	0.00
	50	0.44	0.20	0.06	0.01	0.00	0.00	0.00	0.00	0.00
	60	0.45	0.15	0.03	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.45	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.44	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.43	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.47	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.53	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.45	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.50	0.50	0.10	1.00	0.16
	20	0.50	0.50	0.15	0.85	0.11
	30	0.50	0.50	0.23	0.73	0.09
	40	0.50	0.50	0.28	0.72	0.07
	50	0.50	0.50	0.32	0.70	0.06
	60	0.50	0.50	0.30	0.67	0.06
	70	0.50	0.50	0.34	0.67	0.05
	80	0.50	0.50	0.35	0.64	0.05
	90	0.50	0.50	0.36	0.67	0.04
	100	0.50	0.50	0.39	0.63	0.04
	125	0.50	0.50	0.39	0.62	0.04
	150	0.50	0.50	0.40	0.59	0.03

(b) Summary of the accuracy value distributions for certain test sample size.

Table C.9: Effects of varying test sample sizes on a fixed pretrained Dummy Classifier.

D Influence of the scanner distribution

Scanner site distributions were not well balanced in the PAC sample. This imbalance was even stronger in our randomly drawn sub-samples. To determine the influence of the different scanner-sites on model accuracy, we took the same methodical approach that we used for the “train sample size effect analysis” and determined the scanner distribution for each set. Following, we calculated Spearman’s rho between the scanner-distribution and the accuracy of the hold-out test set ($n = 300$). The scanner-distribution for each set was approximated using Gini’s index. Here, we show that the scanner distribution has a statistically significant influence on test set accuracy but explains only 0.79 % of the variance.

E Adjustment of SVM regularization based on sample size

The regularization of a linear SVM depends on the absolute number of outliers in a sample. To exclude the possibility that the use of default hyperparameters (a constant value of $C = 1$) caused the effect that we observed, we have adjusted the SVM regularization (our C hyperparameter) based on the size of each analyses sub-sample. In this adjustment, a constant value k is divided by the sample size. To approximate the default parameter $C = 1$ on average, we have set $k = 75$. For example, C would be $C = 100/75 = 1.33$ for a sample size of $n = 100$. In this case, the adjusted regularization did not deliver results as good as what we observed with $C = 1$ (see Figure E.1, E.2). Therefore, we conclude that the default value of $C = 1$ across changing N values did not increase the probability of misestimating accuracy as sample size decreased.

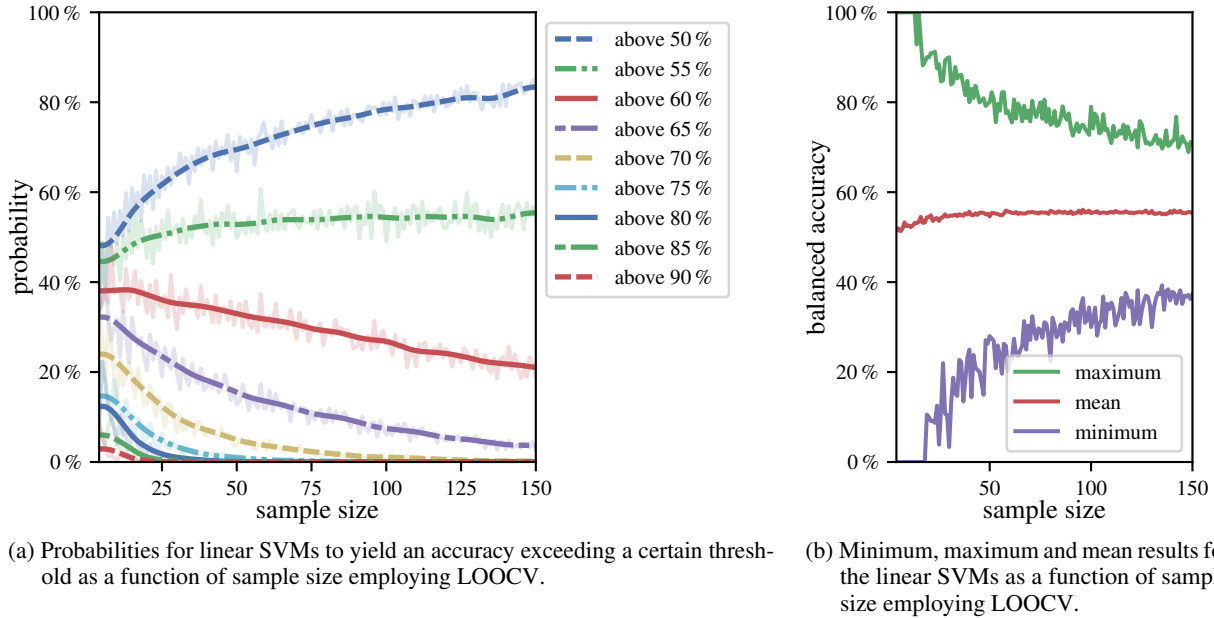


Figure E.1: Effects of varying overall sample sizes employing LOOCV with an adjusted C parameter with $C = \frac{75}{\text{sample size}}$.

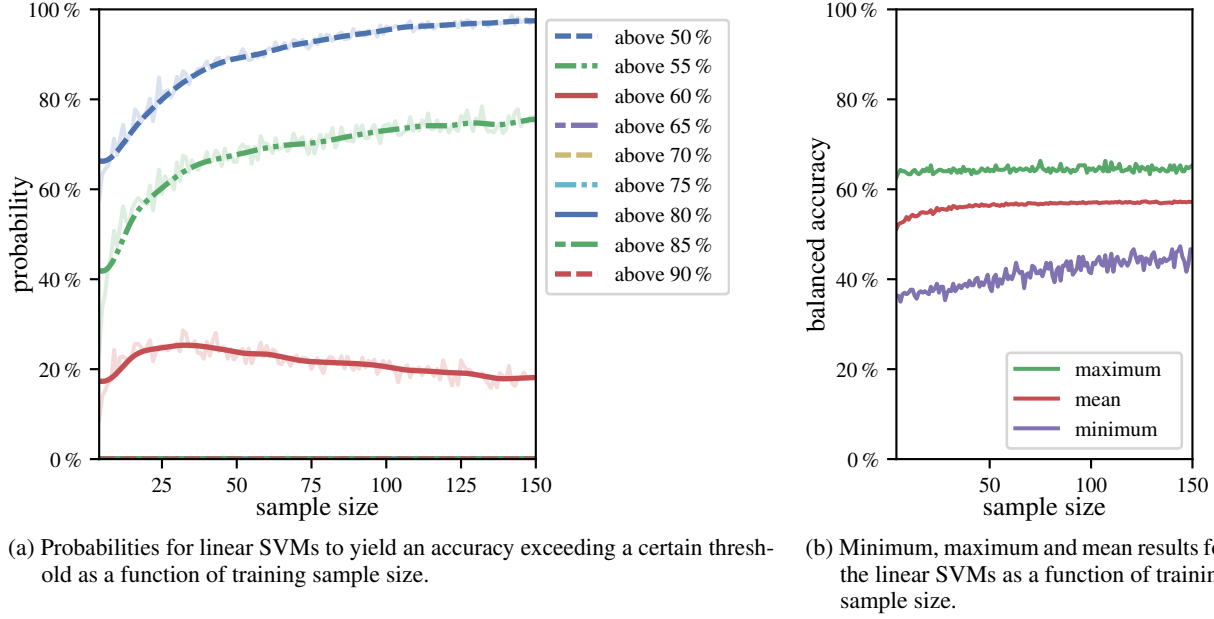


Figure E.2: Results as a function of training set sizes with a fixed test set size of $N = 300$ and an adjusted C parameter with $C = \frac{75}{\text{sample size}}$.

F Alternative Machine Configurations

To exclude the possibility that the observed effects can only be traced back to our specific configuration, we have tested other usual configurations. The configurations consist of a preprocessing and a classification. In the preprocessing step, we used a method for reduction of feature space and a method for features selection. The reduction of the feature space was achieved with a PCA, where only a certain number the first components were used. Afterwards, for feature selection, an ANOVA was calculated and a specific number of feature beginning with the highest F-value were taken. The actual configuration used for preprocessing is listed in Table F.10. For the classification, we chose three specific machines:

1. An SVM with a linear kernel and default parameter. ($C = 1.0$)
2. An SVM with an RBF kernel and default parameter ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)
3. A Random Forrest and default parameter ($n_{\text{estimators}} = 100$)

In combination with the preprocessing, this results in 48 configurations. Since the found effect is limited to the test set size, we have only repeated our analyses for the test set for each of these configurations.

		PCA $n_{\text{components}}$				
		no	all	500	50	10
ANOVA k_{best}	no	×	×	×	×	×
	10	×	×	×	×	
	100	×	×	×		
	1,000	×	×			
	10,000	×				
	50,000	×				

Table F.10: The \times marks the used combinations of configurations for the preprocessing. The *no*-label means that this preprocessing step were left out.

F.1 Results

The results are comparable to the originally used configuration, an SVM with a linear kernel and no preprocessing (see Figure F.3 to F.50 and Table F.11 to F.58). The results thus underline a generally valid character of the findings. An outlier in the results can be found for a specific configuration, a PCA with 10 components and the SVM with an RBF kernel (see Figure F.22 and Table F.30). This result can be explained due to overfitting, the machine constantly returns one constant class as a prediction.

F.1.1 Graphical results representation


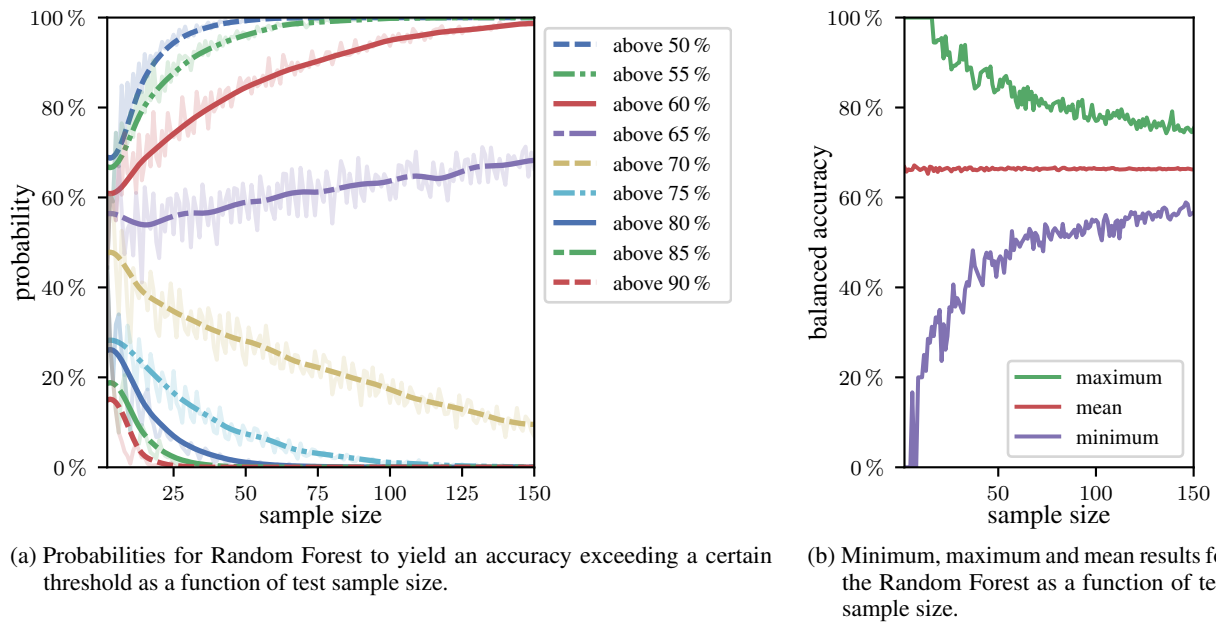



Figure F.3: Results as a function of variable test set sizes with a fixed classifier. A **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

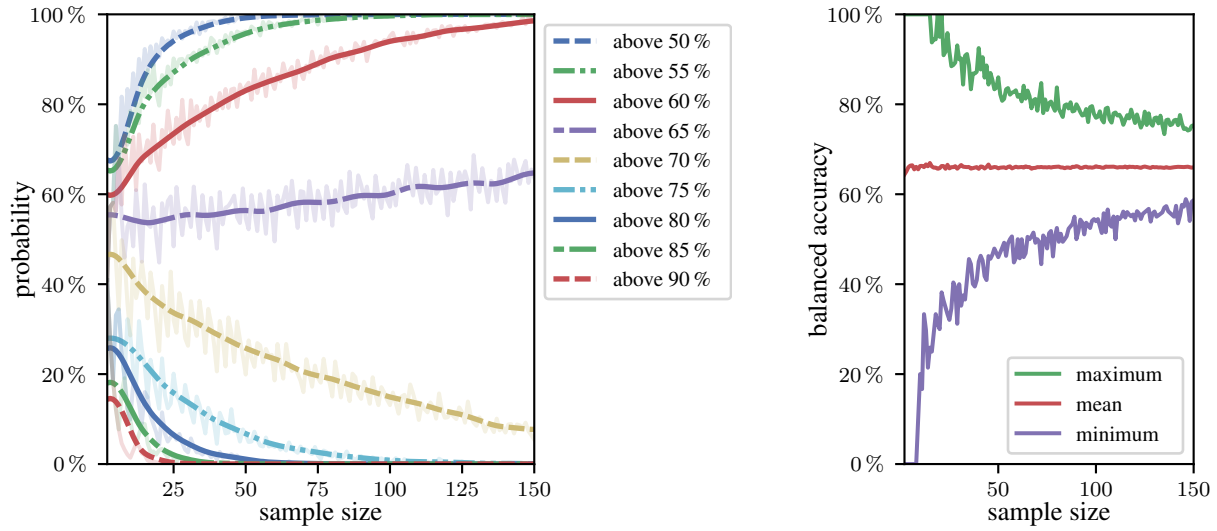

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.4: Results as a function of variable test set sizes with a fixed classifier. An SVM with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

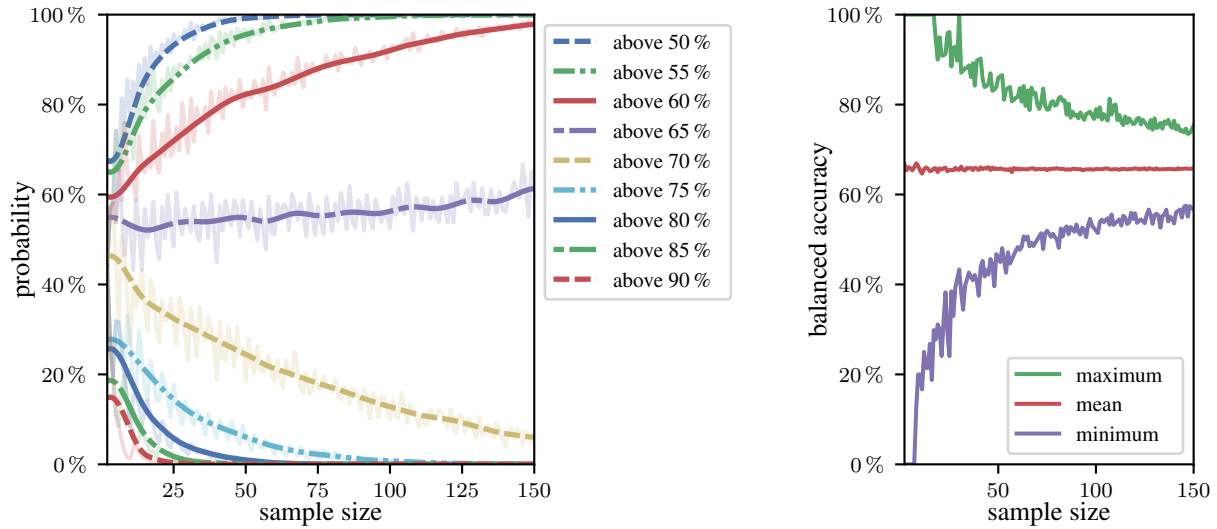

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.5: Results as a function of variable test set sizes with a fixed classifier. A **linear SVM** was trained with default parameters. ($C = 1.0$)

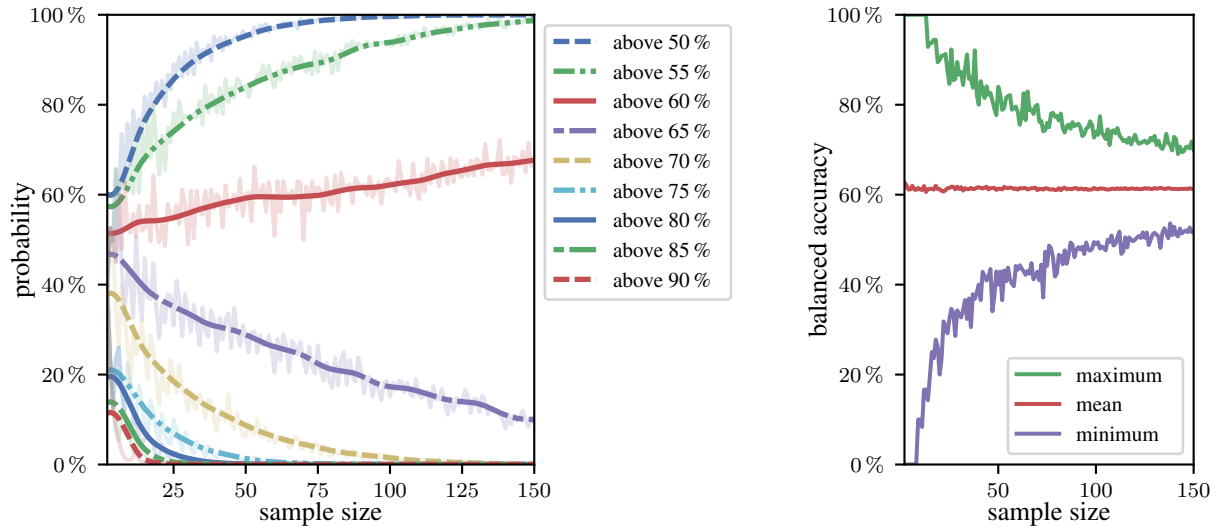

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.6: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

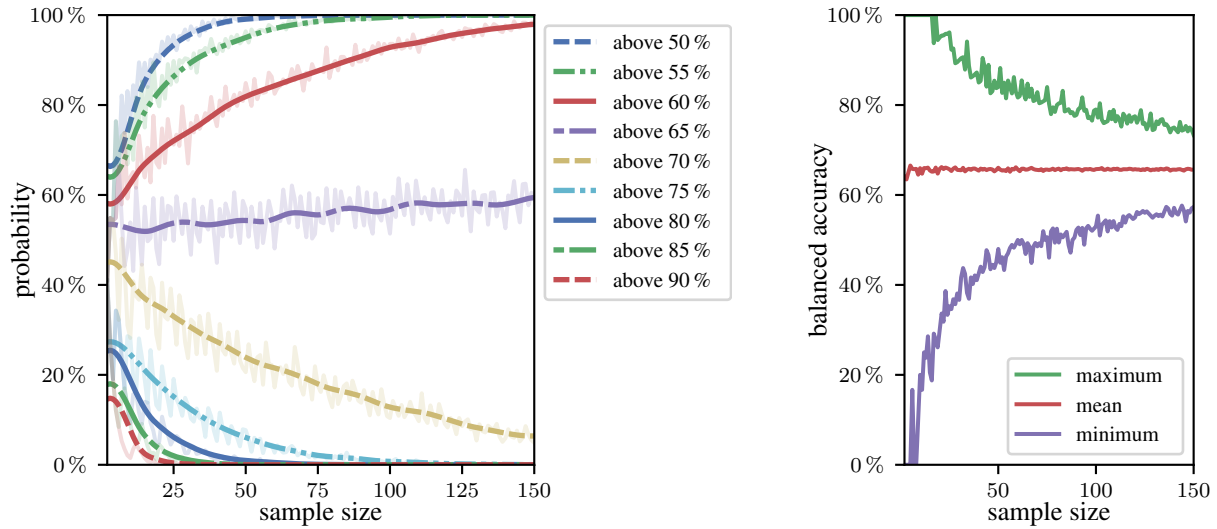

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.7: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

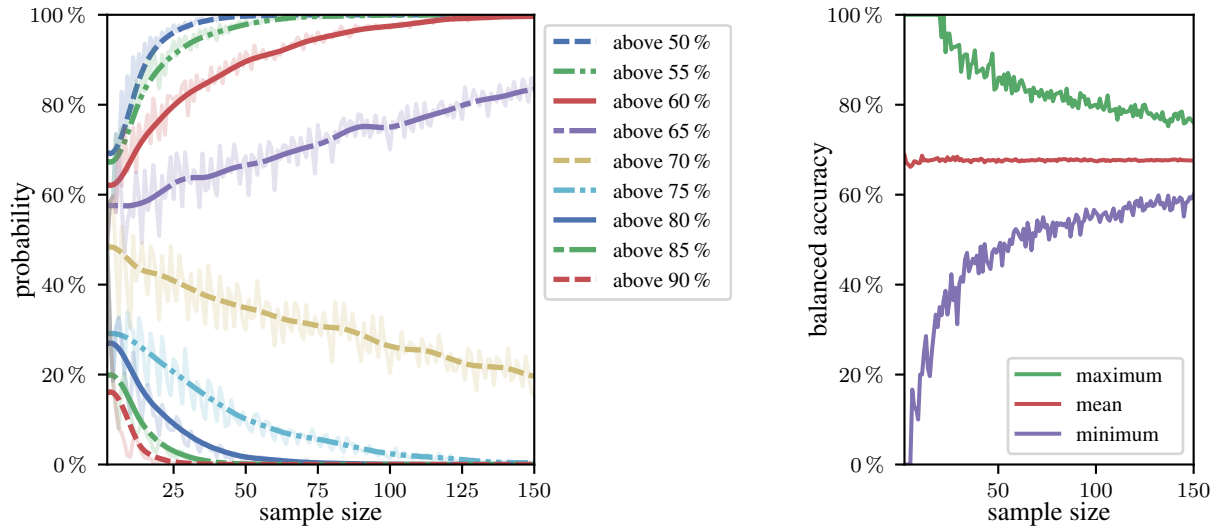

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.8: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

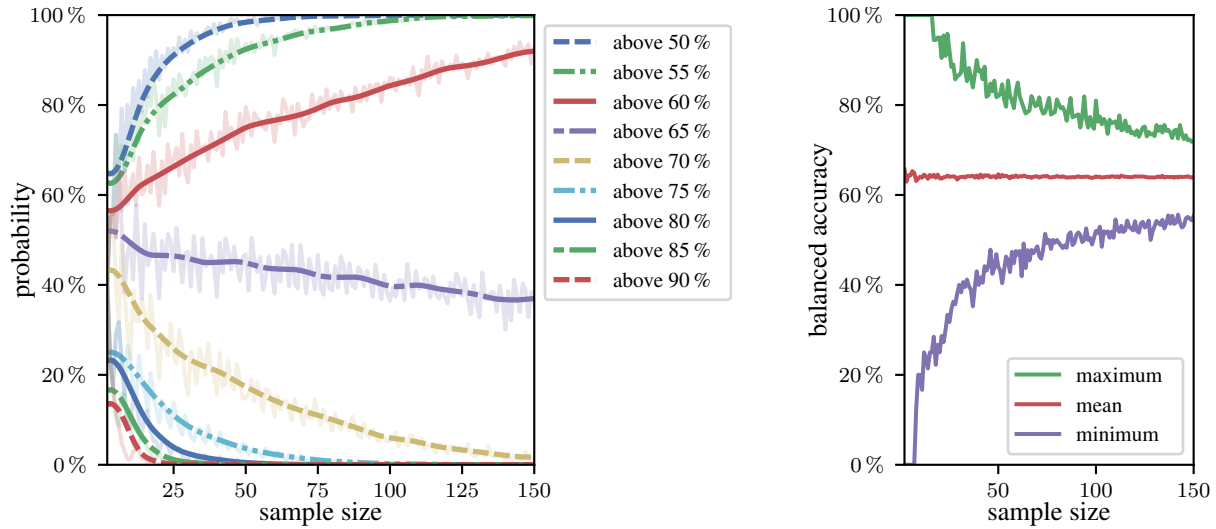

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.9: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

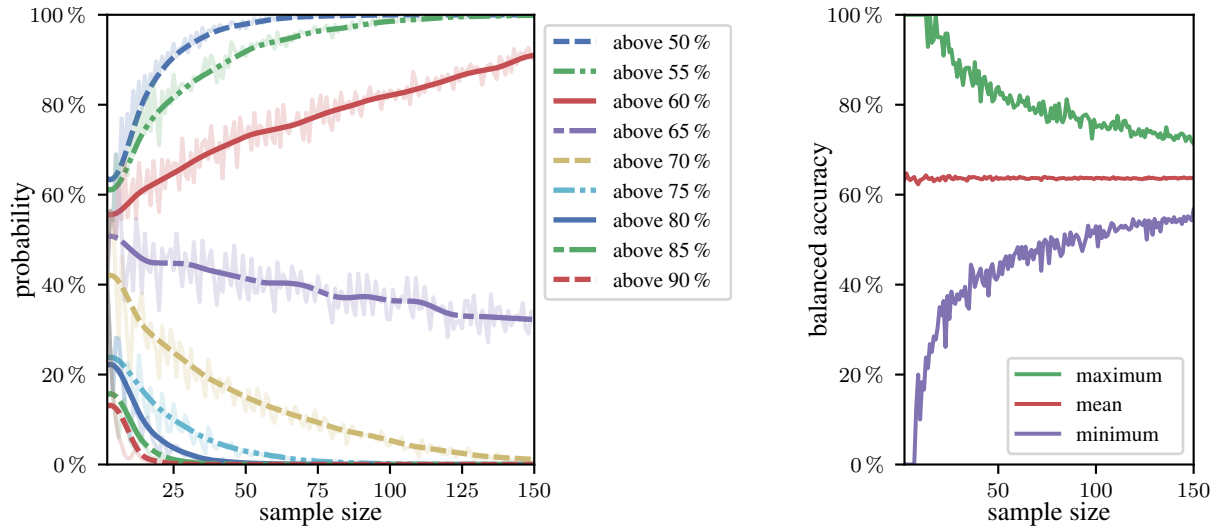

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.10: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

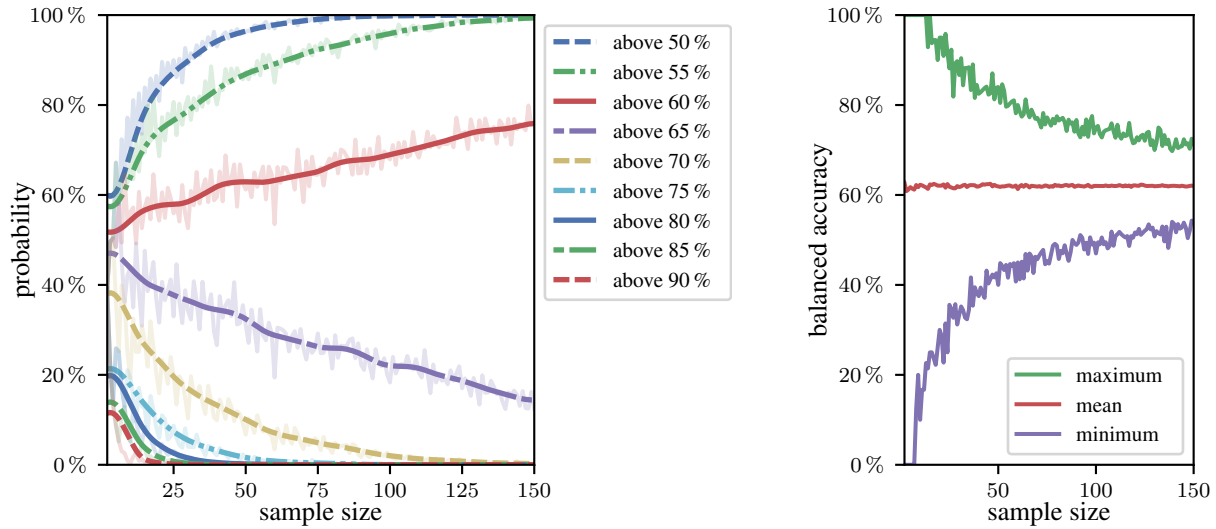

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.11: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

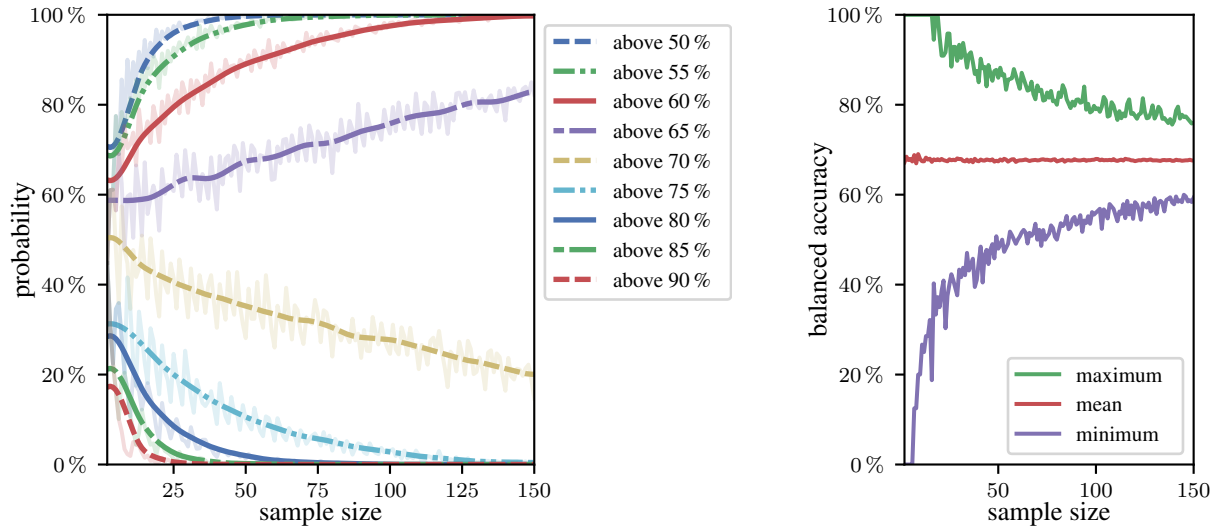

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.12: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

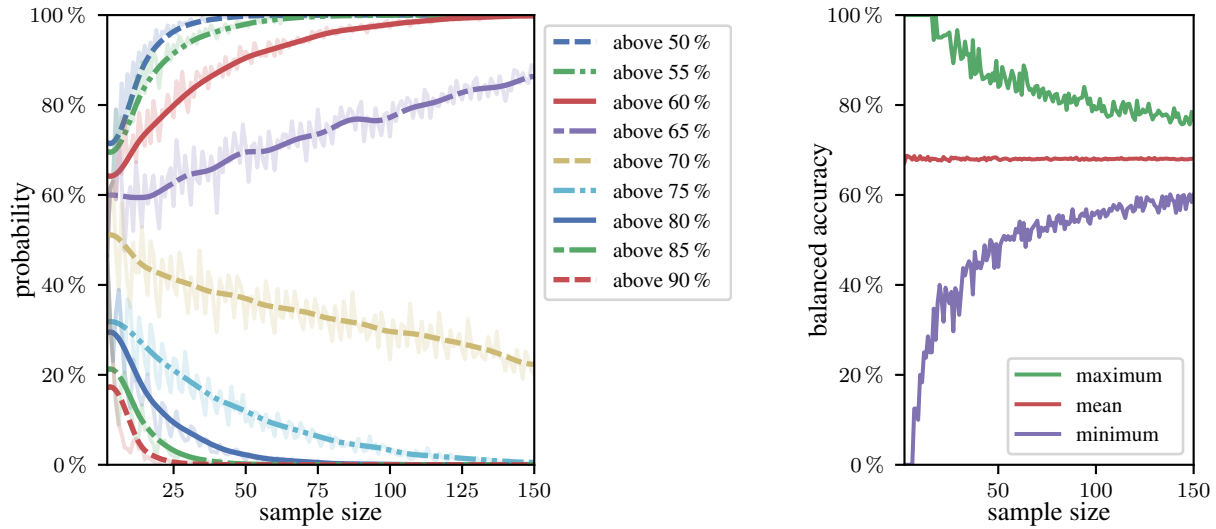

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.13: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

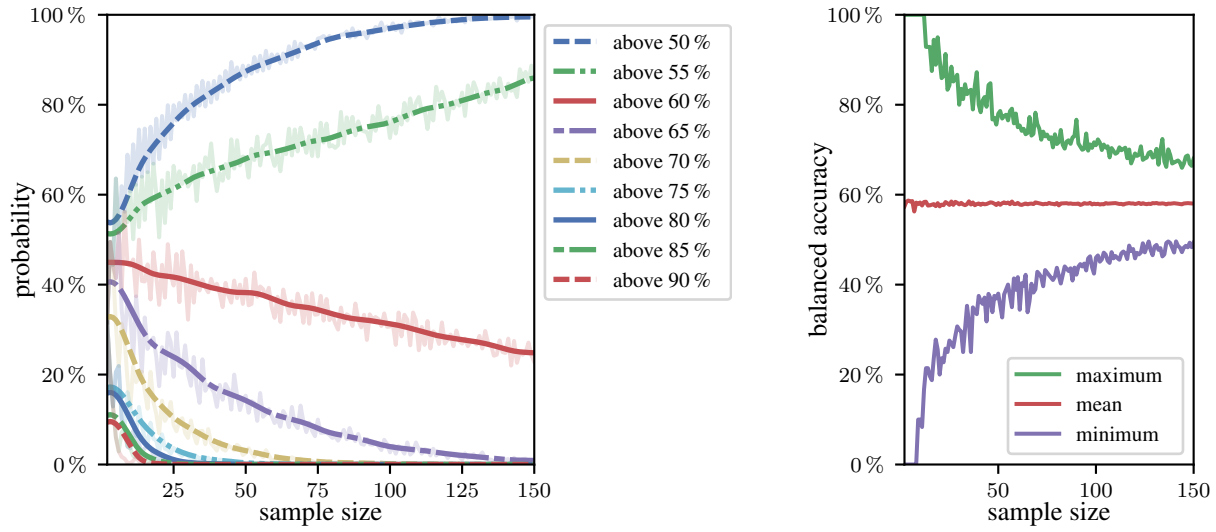

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.14: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

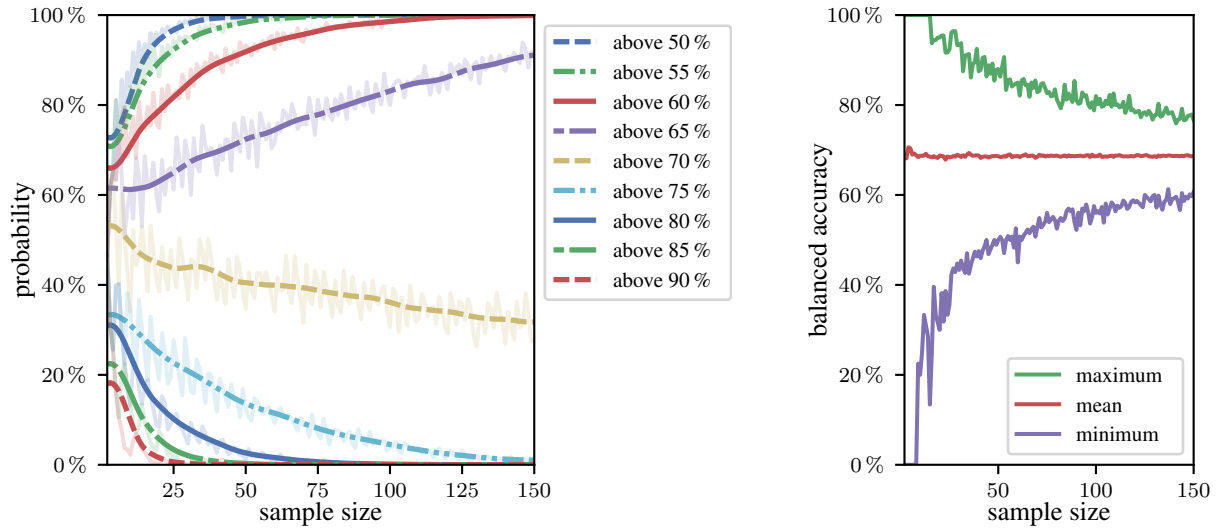

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.15: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

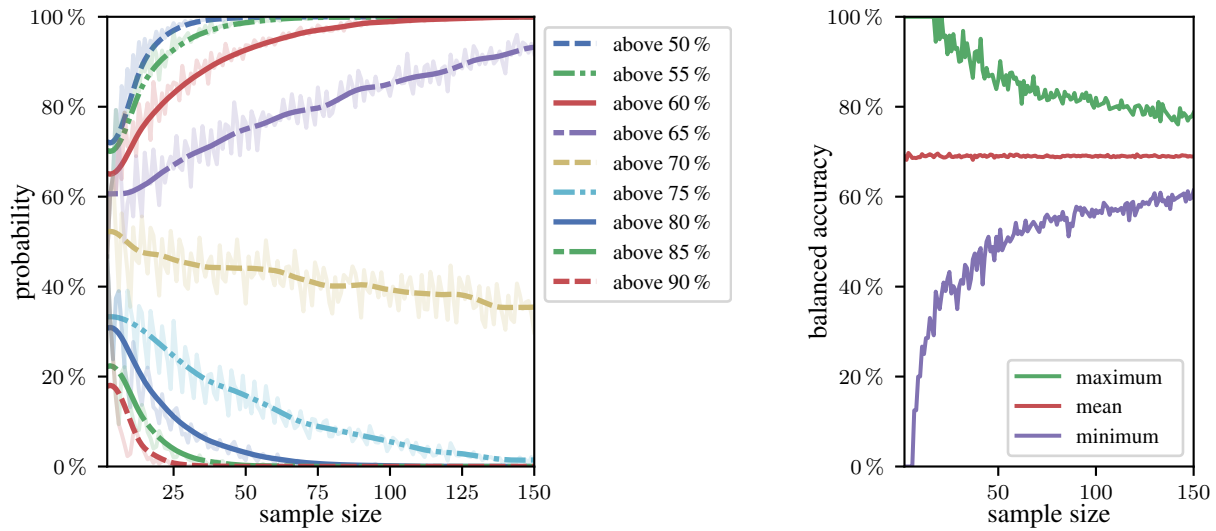

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.16: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

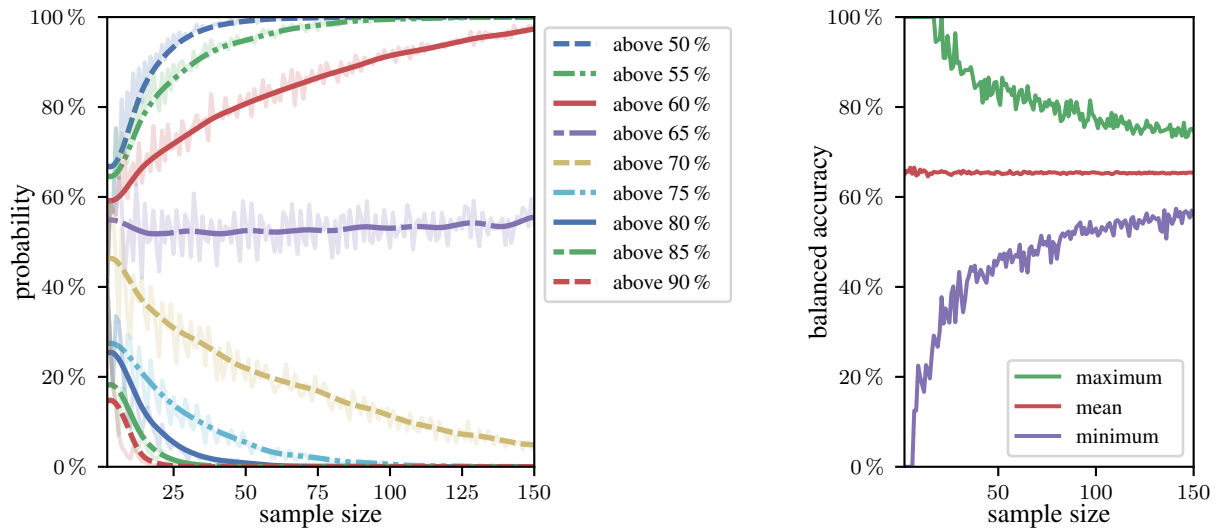

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.17: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

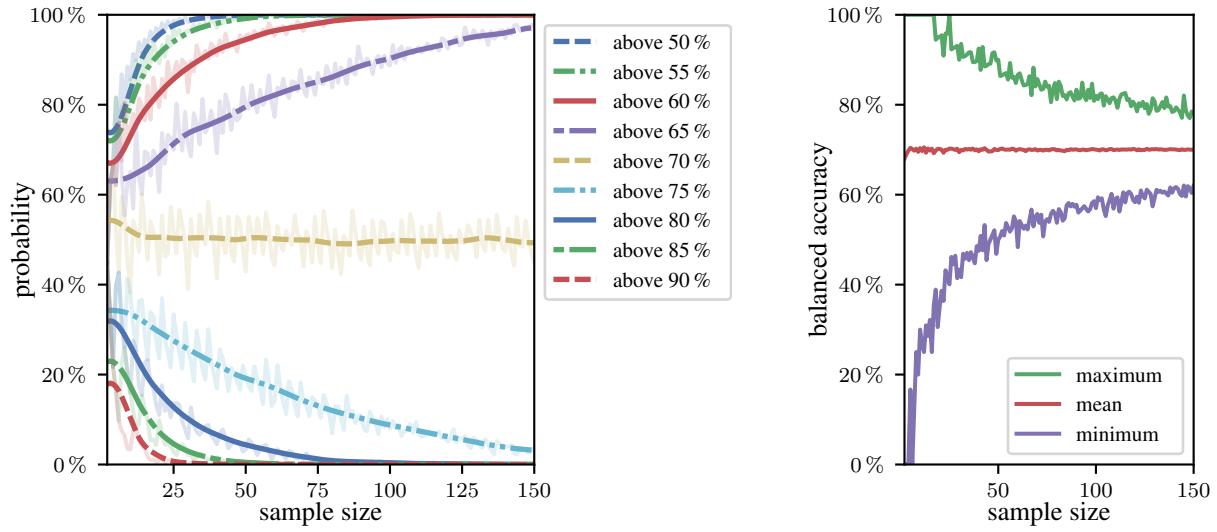

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.18: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

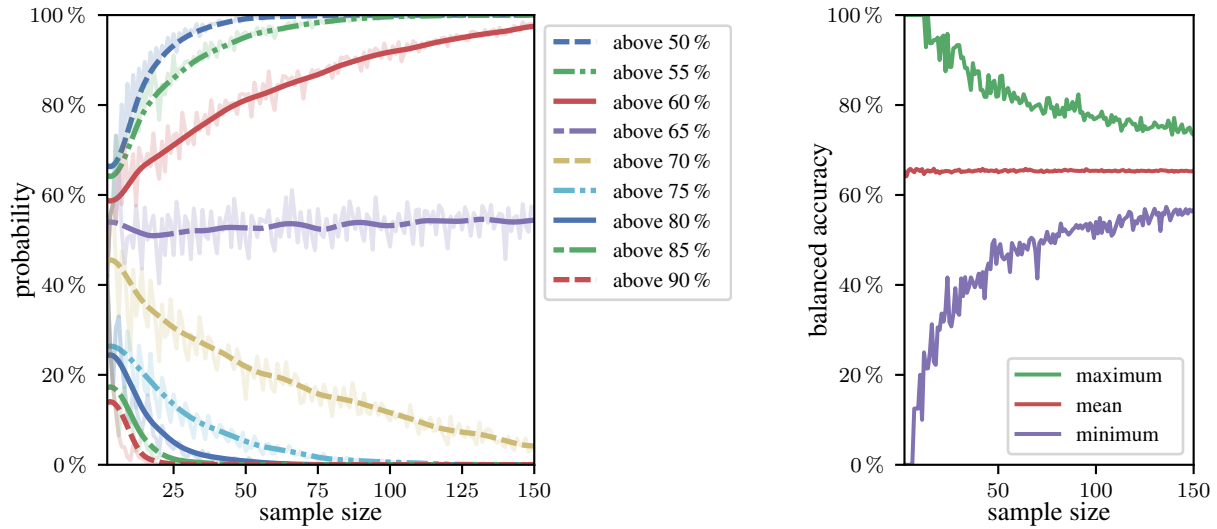

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.19: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

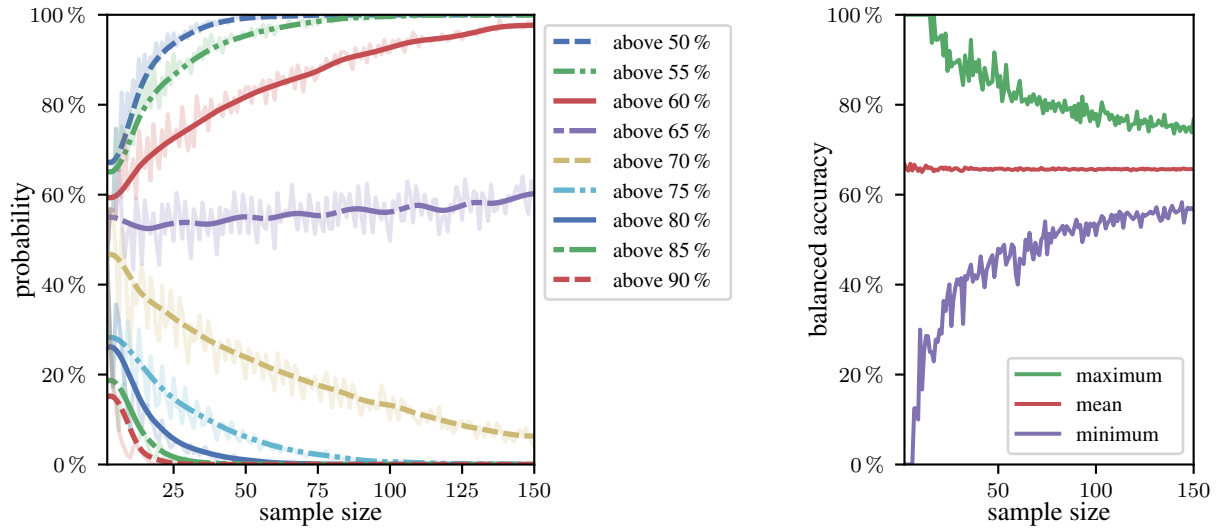

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.20: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

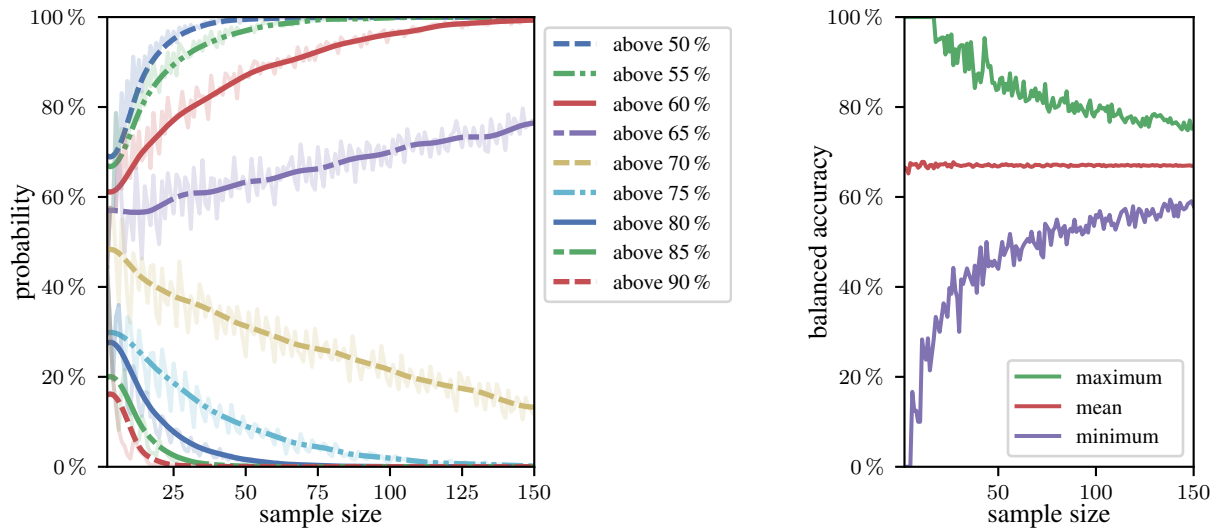

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.21: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

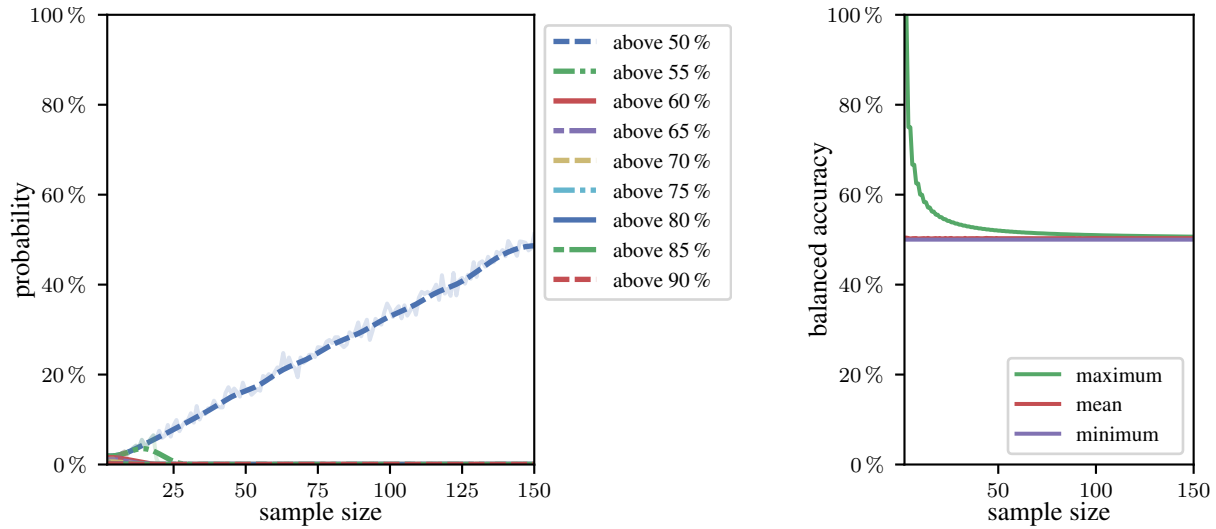

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.22: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

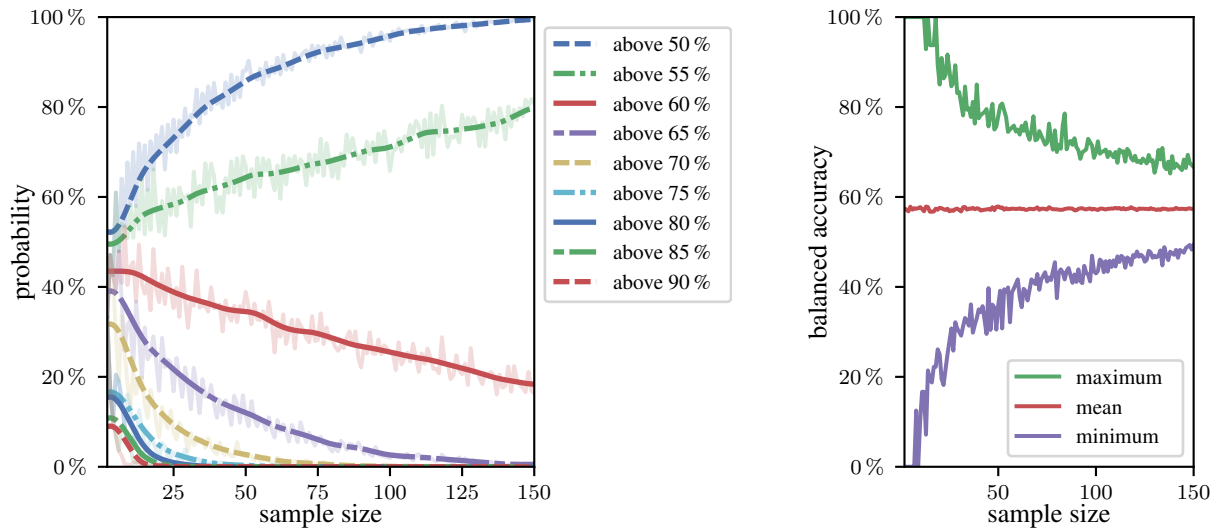

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.23: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

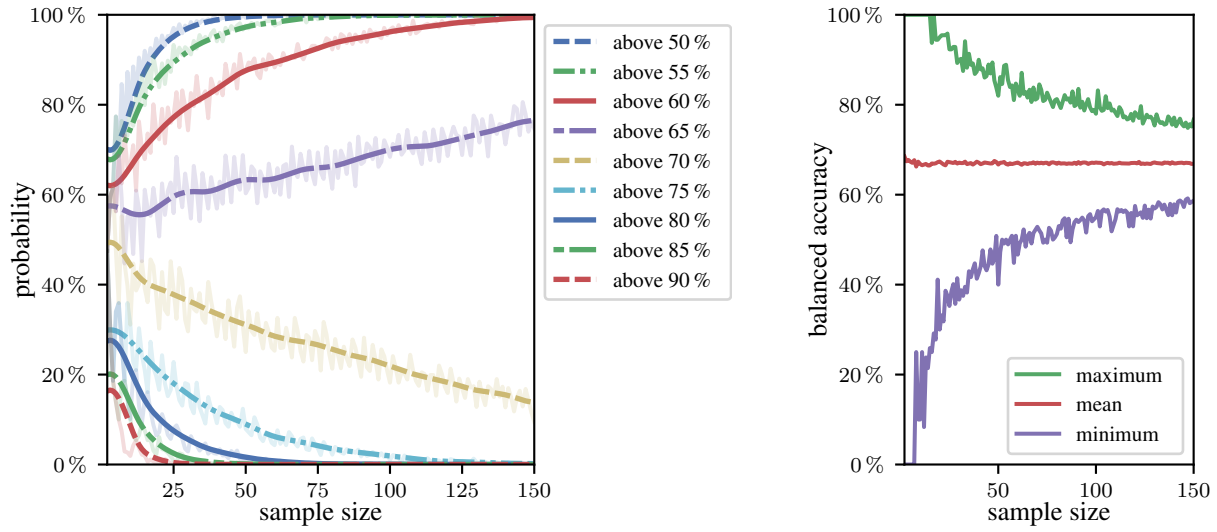

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.24: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

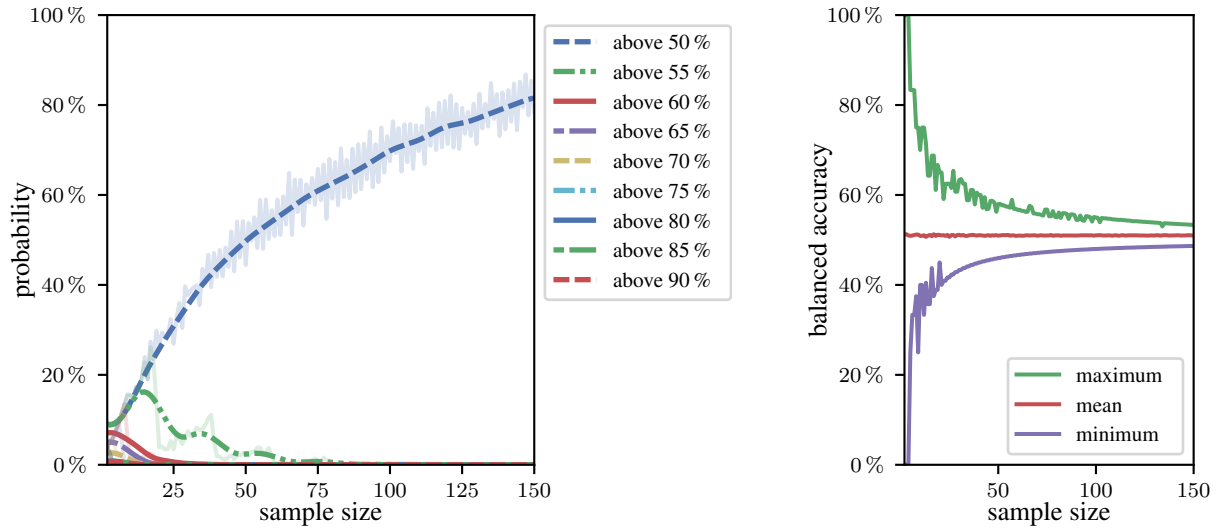

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.25: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

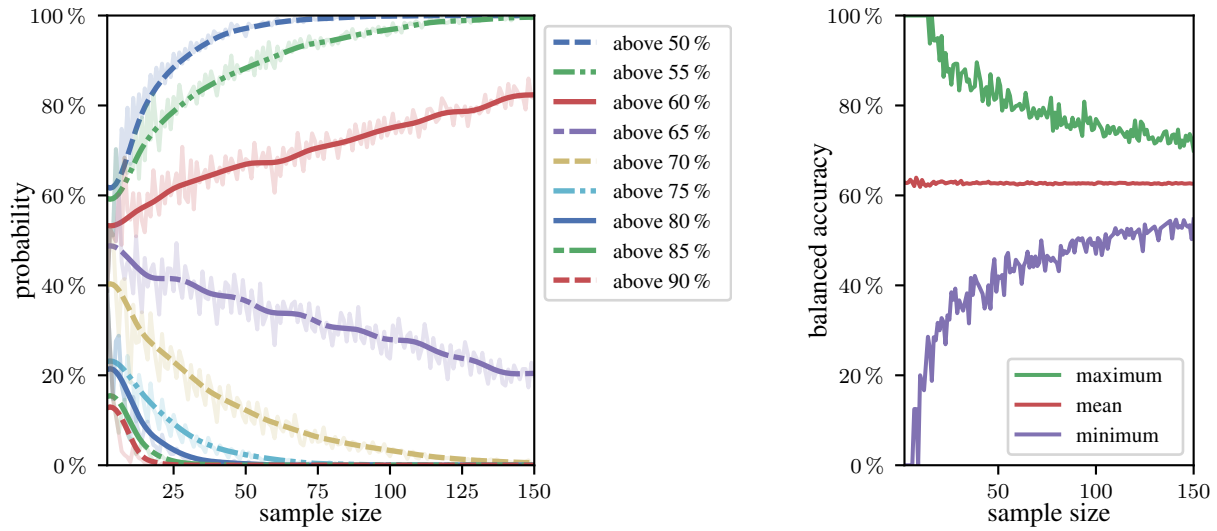

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.26: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

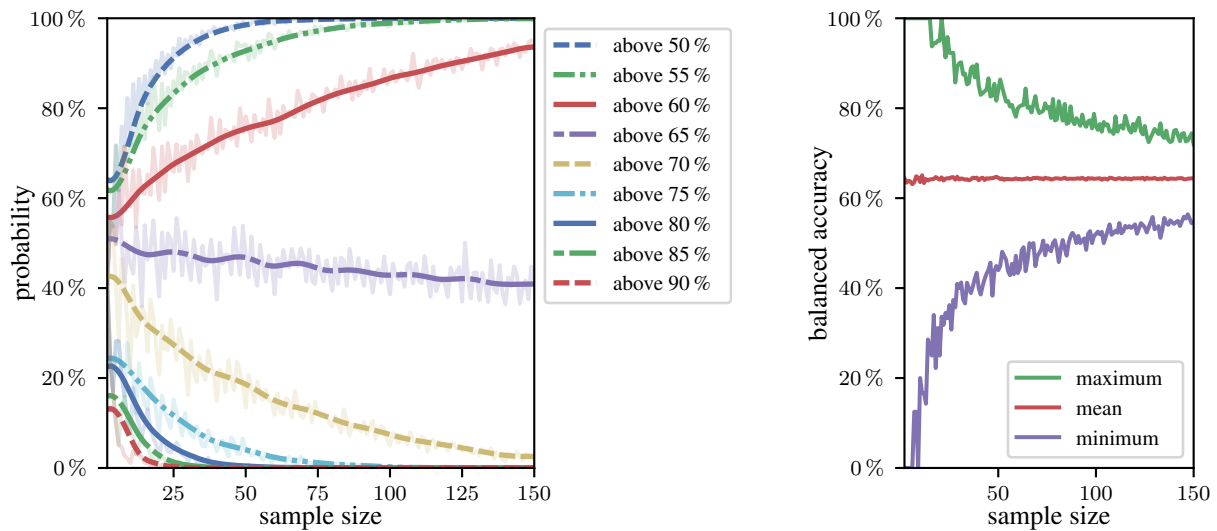

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.27: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

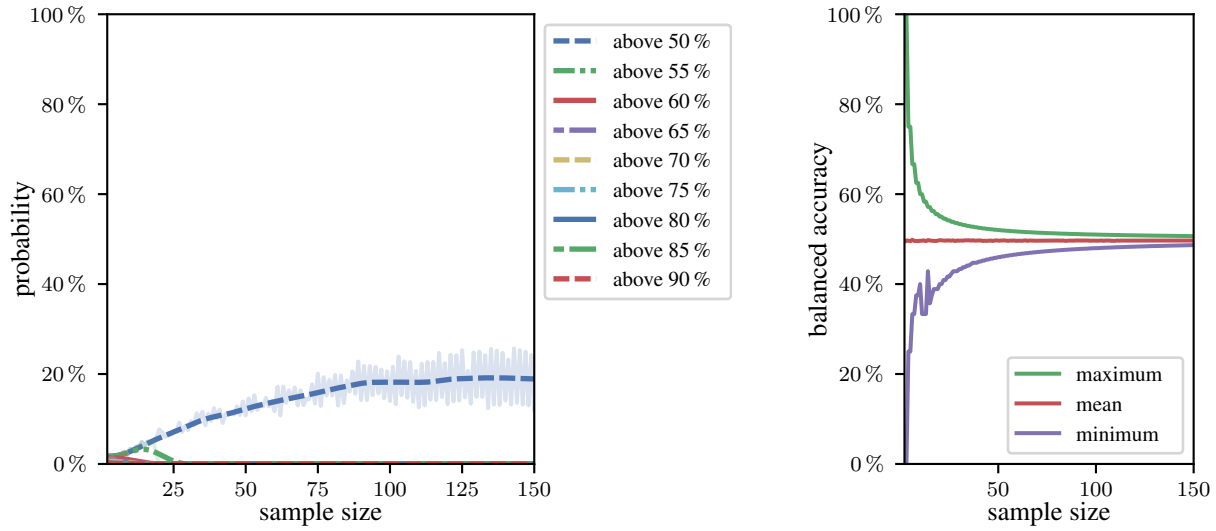

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.28: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

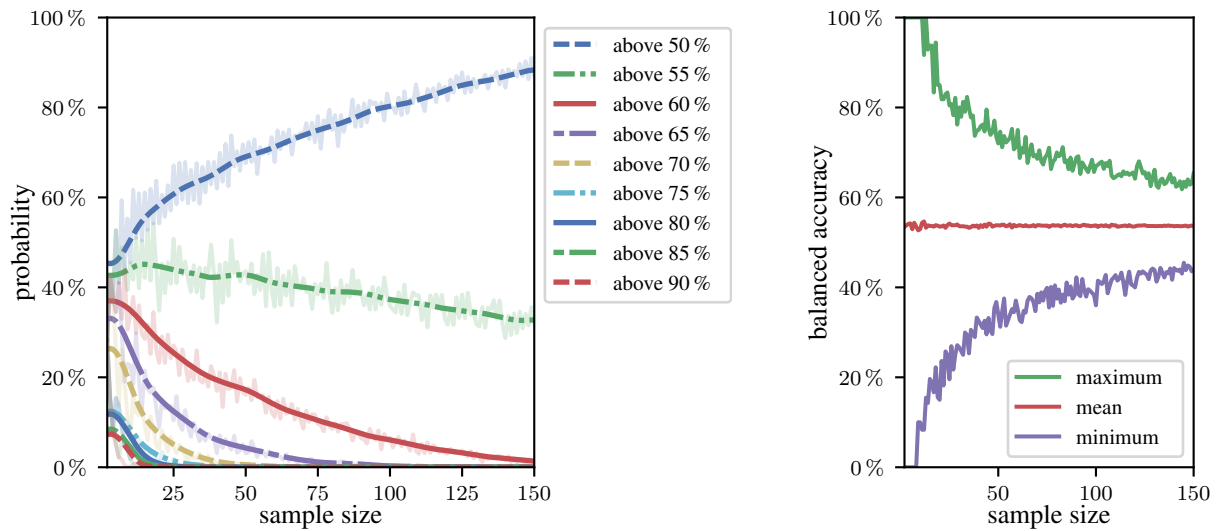

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.29: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

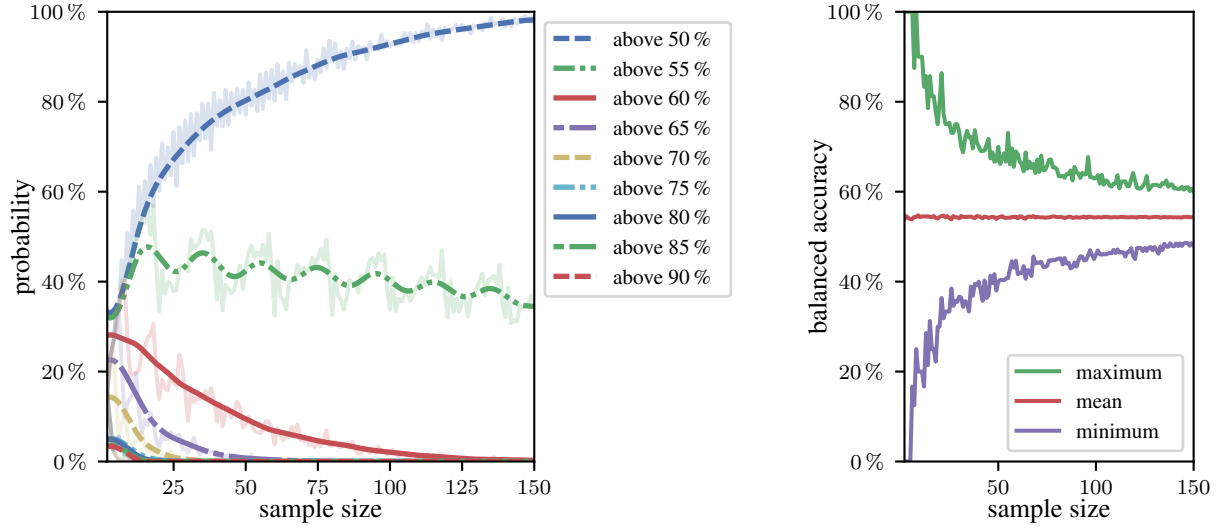

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.30: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

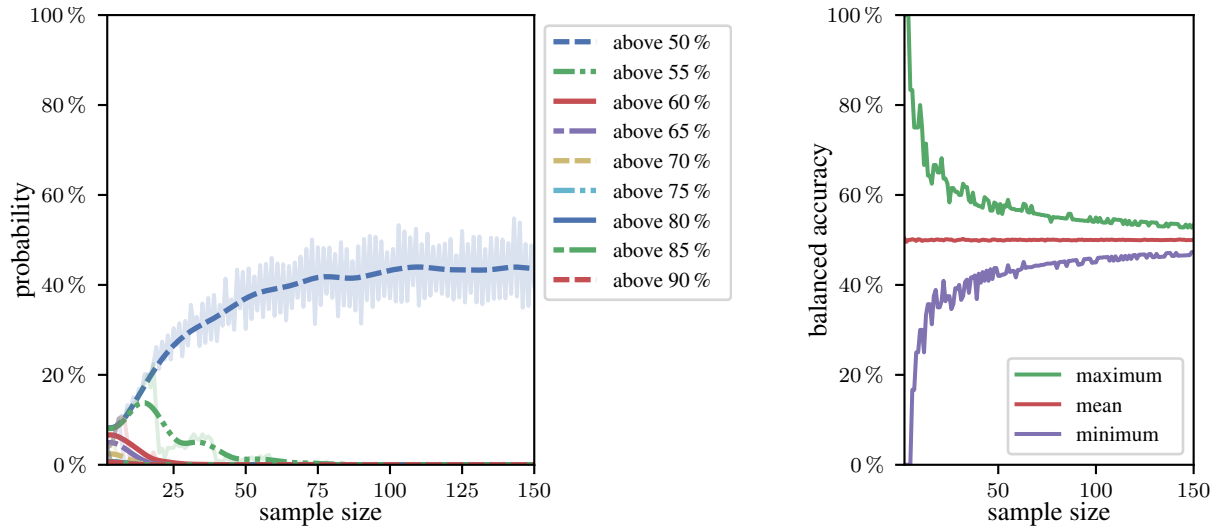

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.31: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

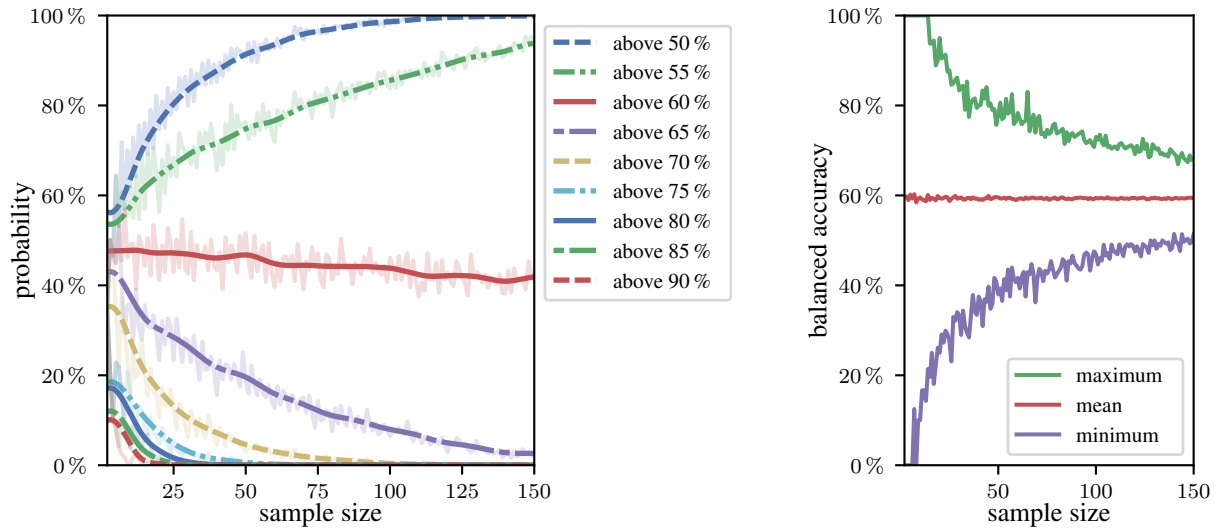

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.32: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

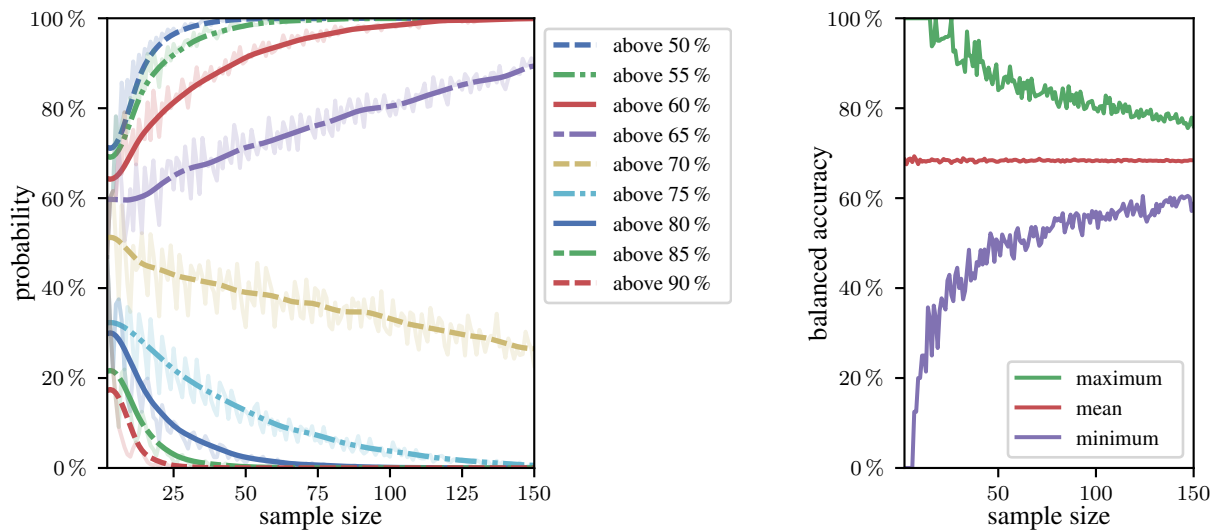

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.33: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

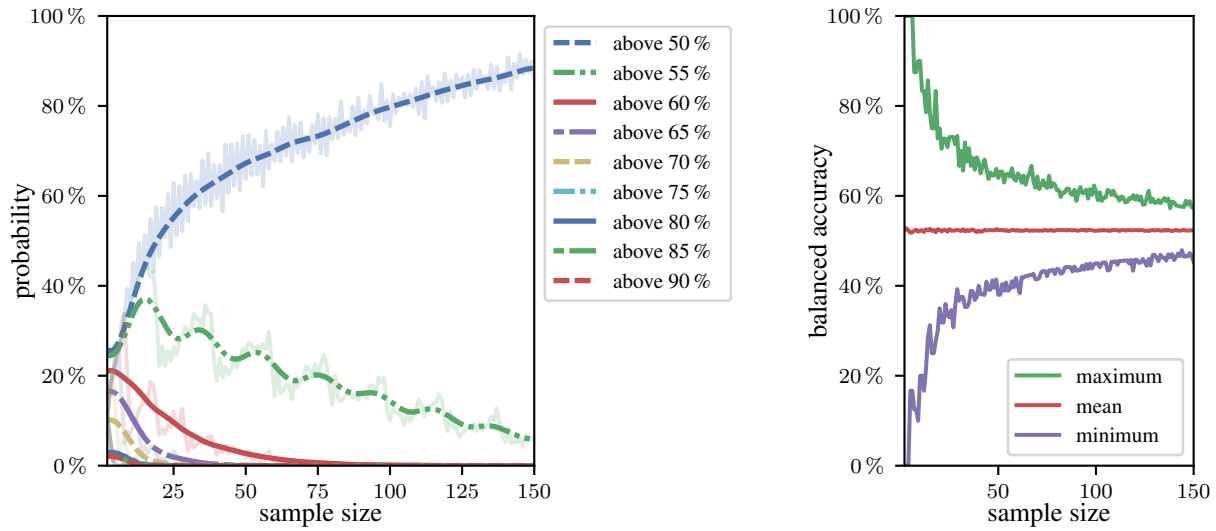

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.34: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

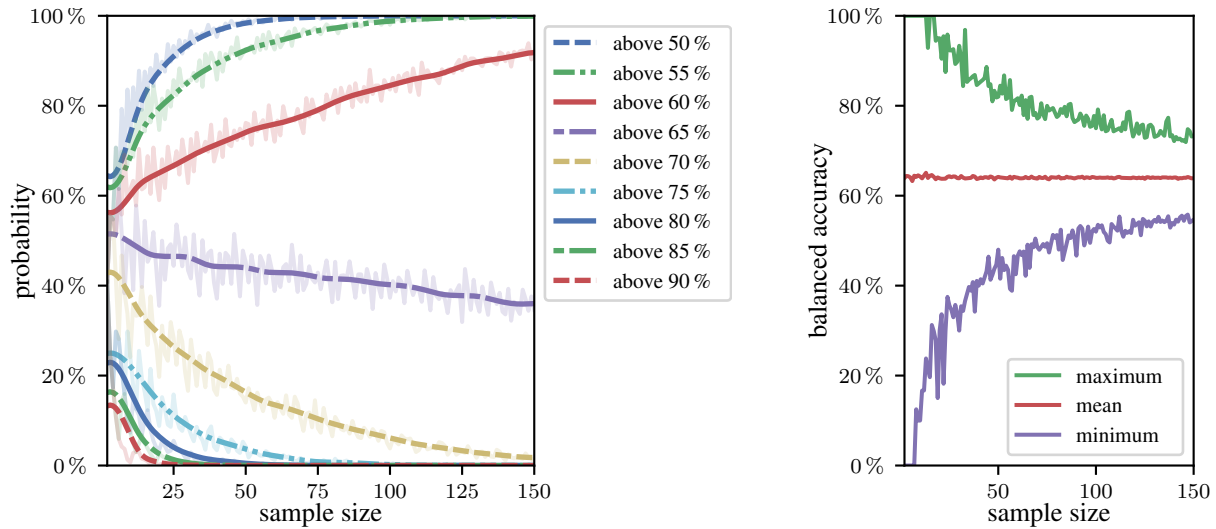

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.35: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

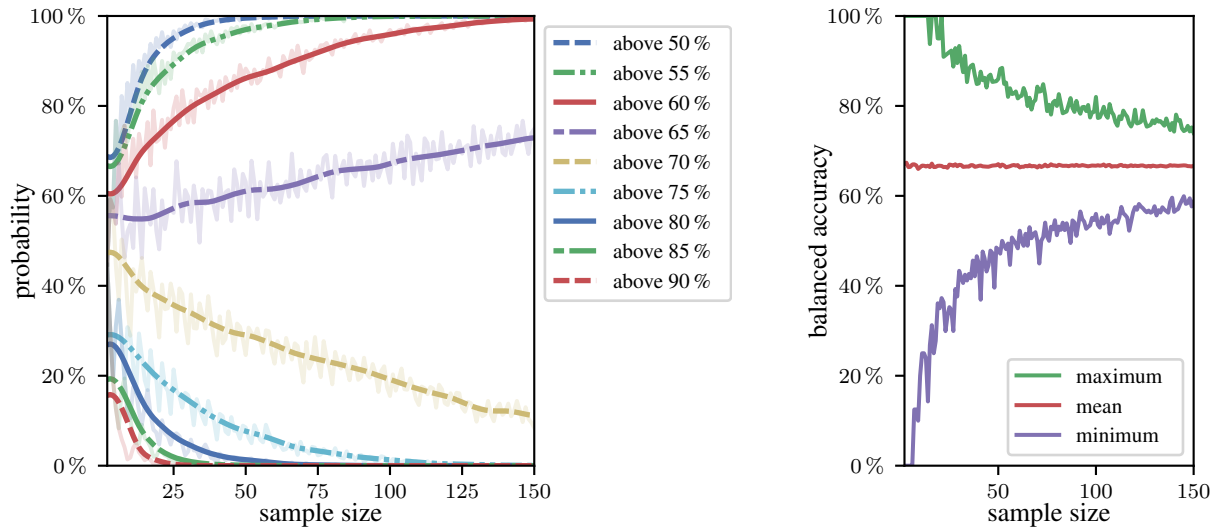

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.36: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

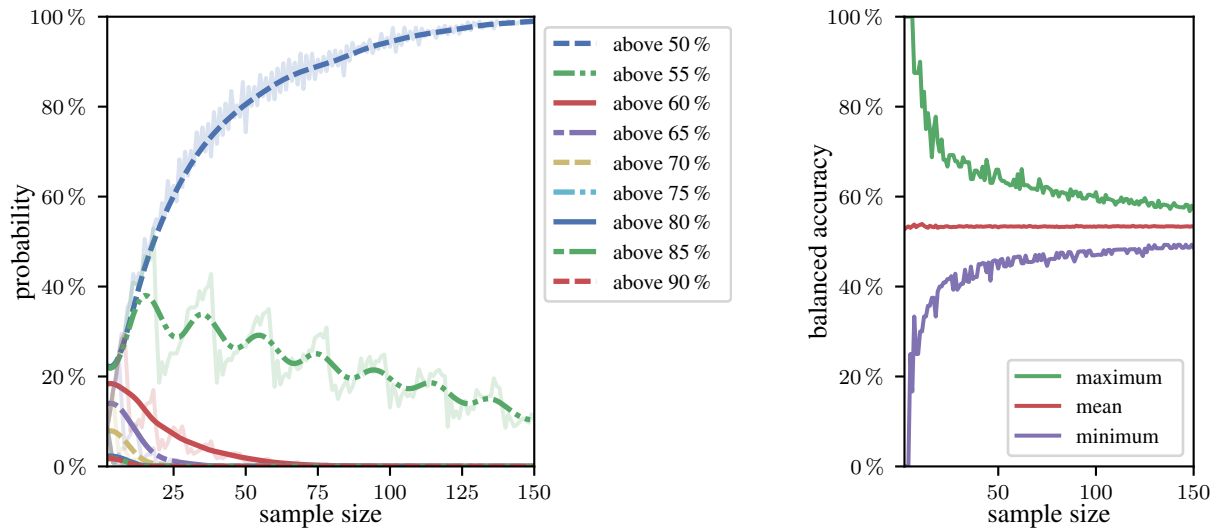

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.37: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

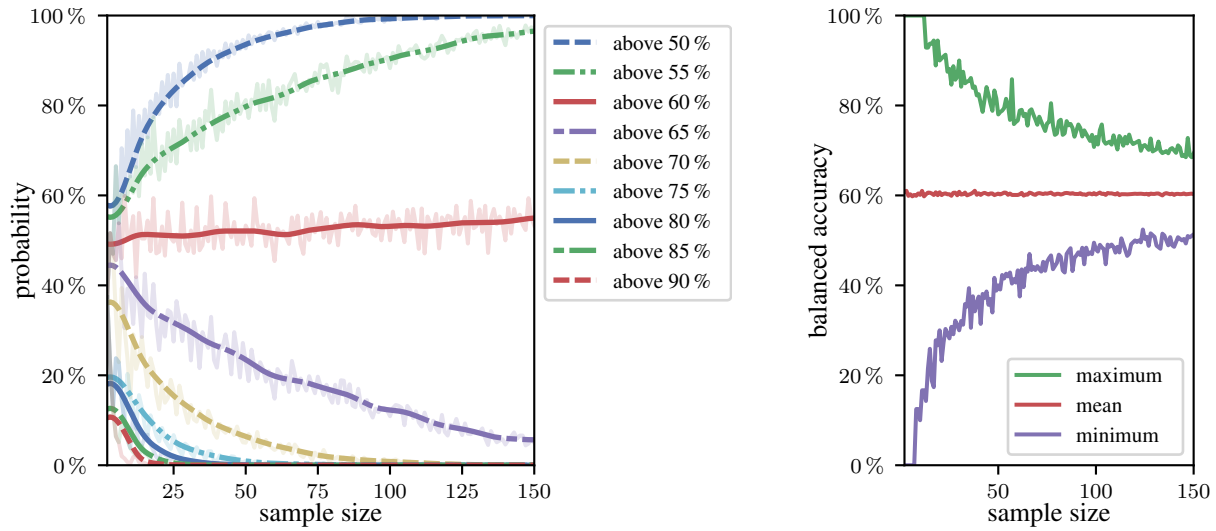

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.38: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

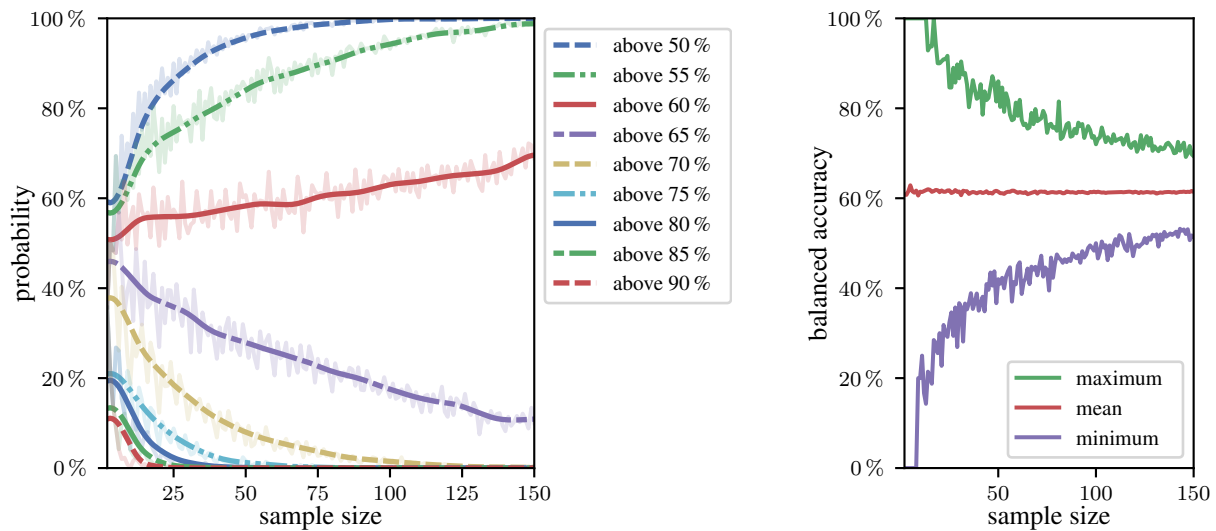

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.39: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

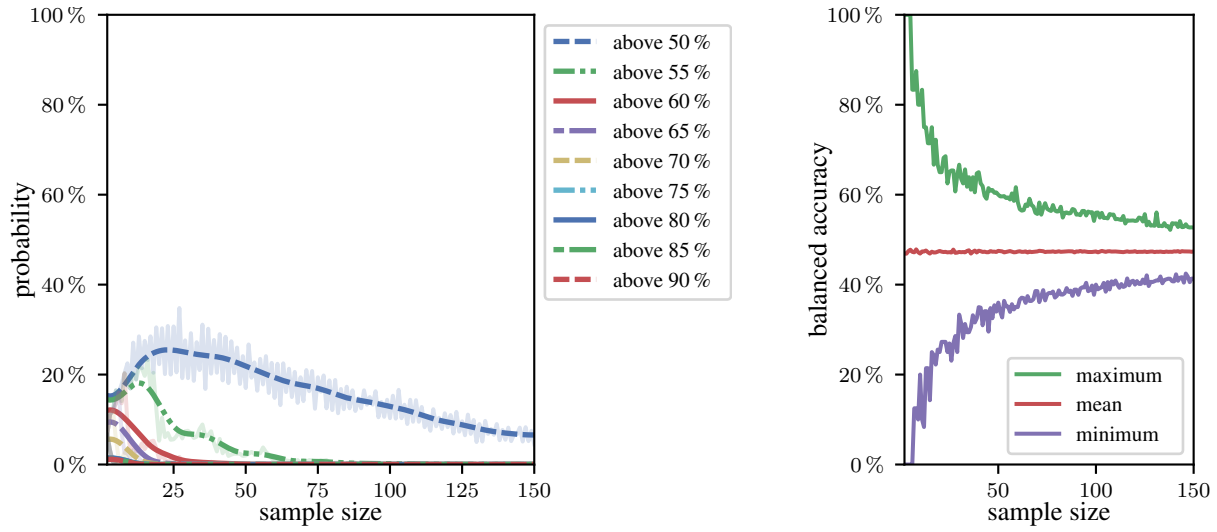

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.40: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

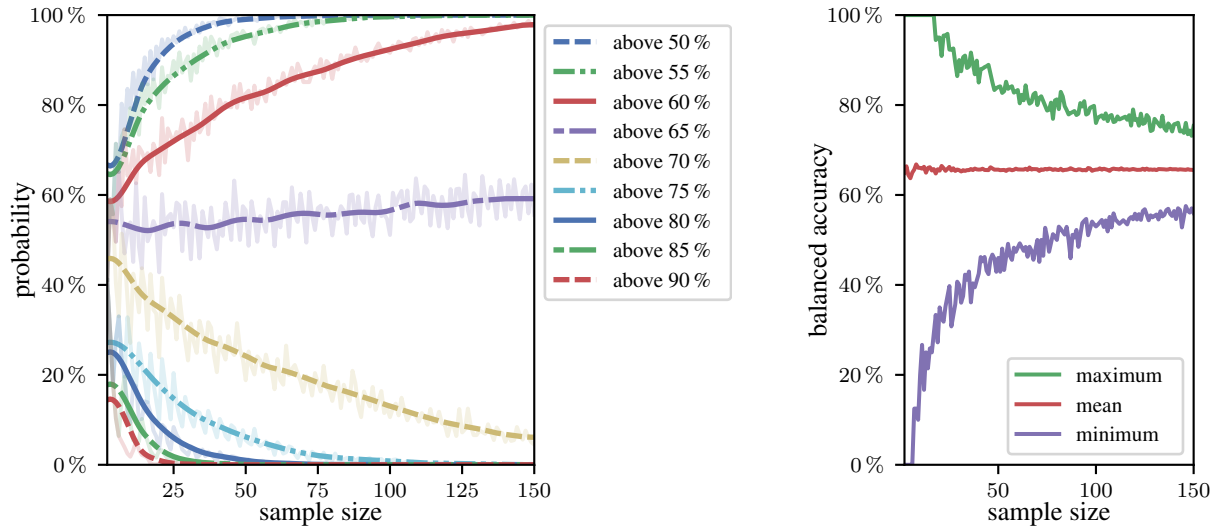

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.41: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

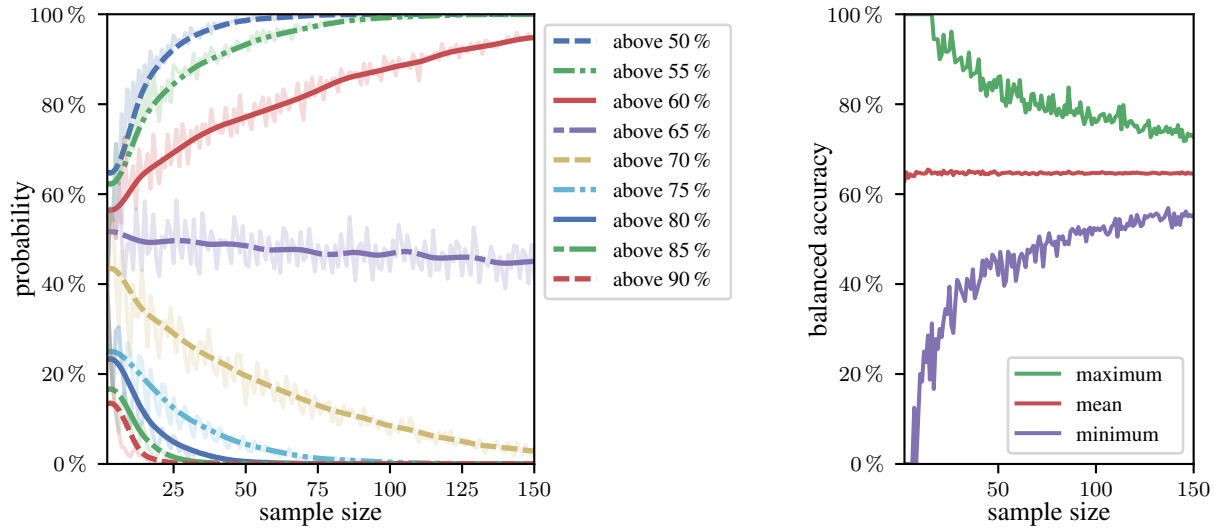

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.42: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

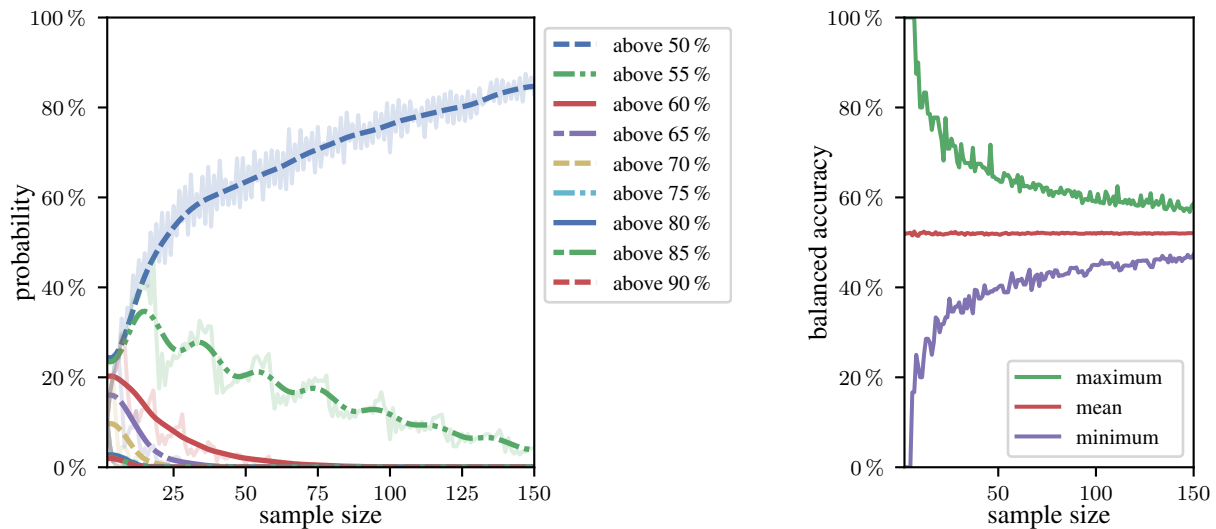

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.43: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

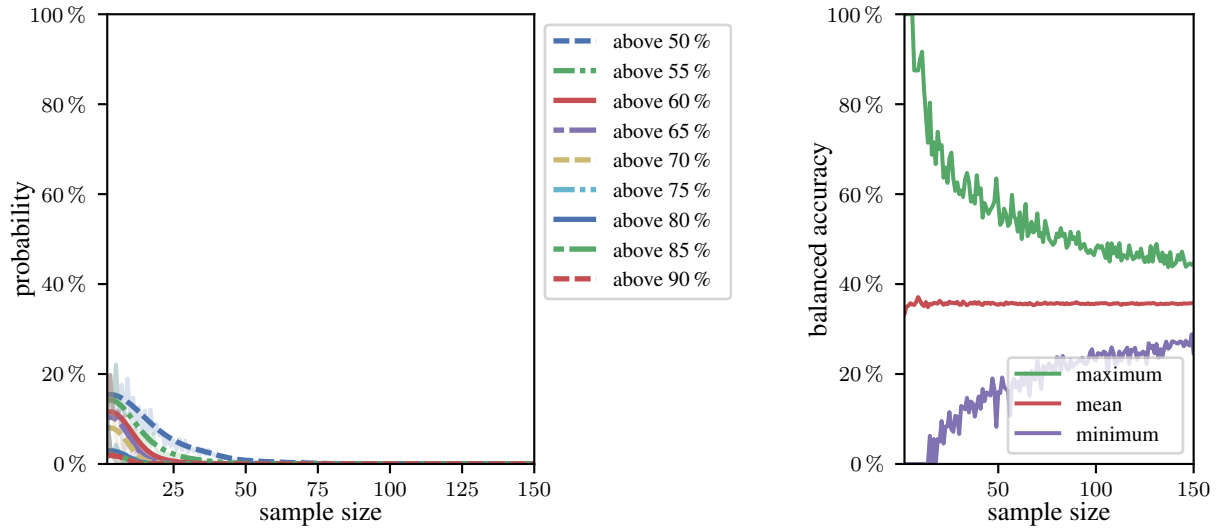

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.44: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

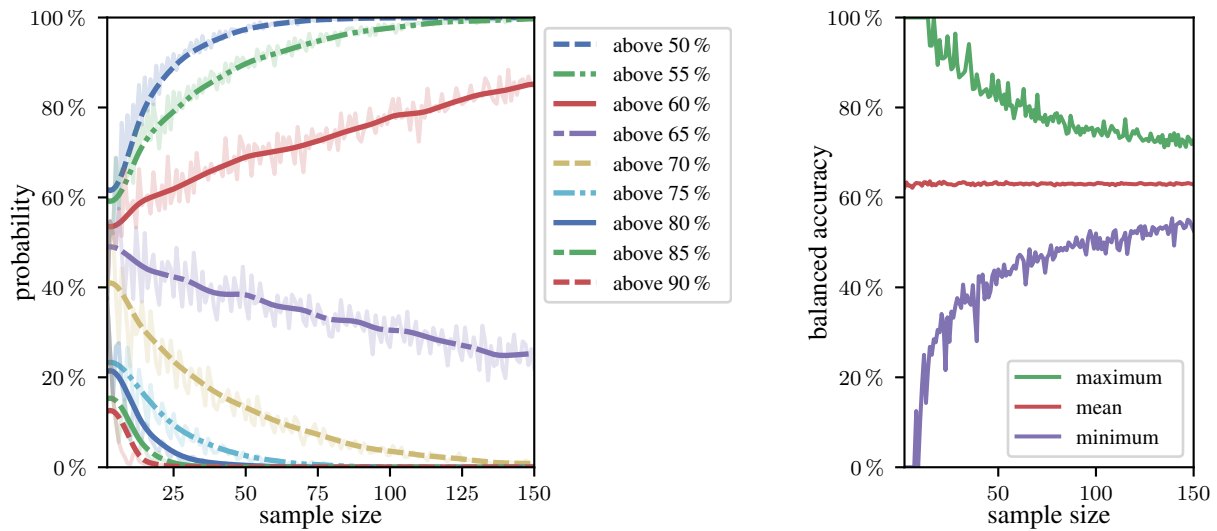

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.


Figure F.45: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

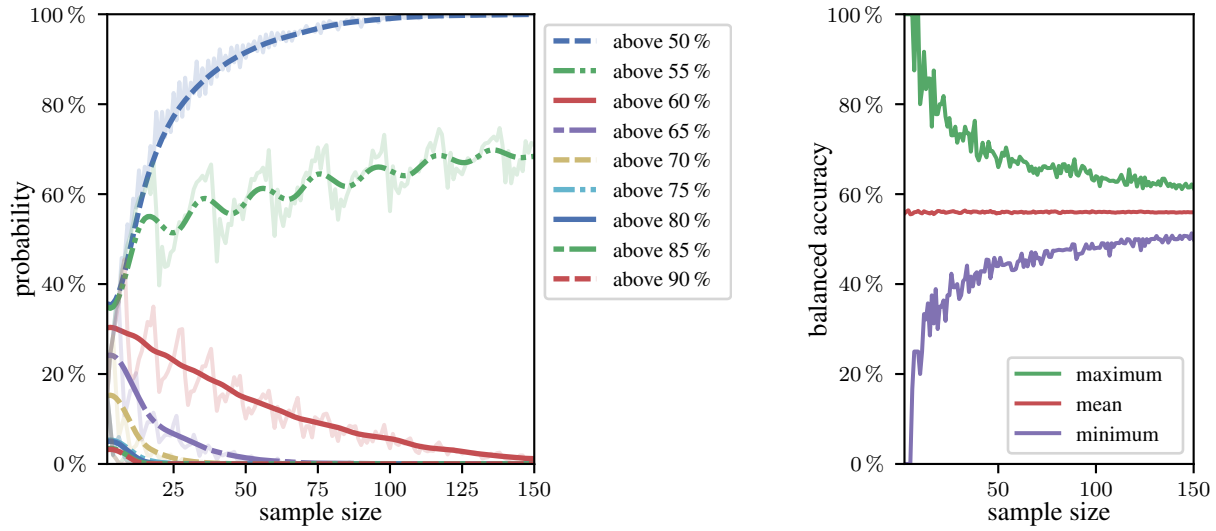

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.


Figure F.46: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

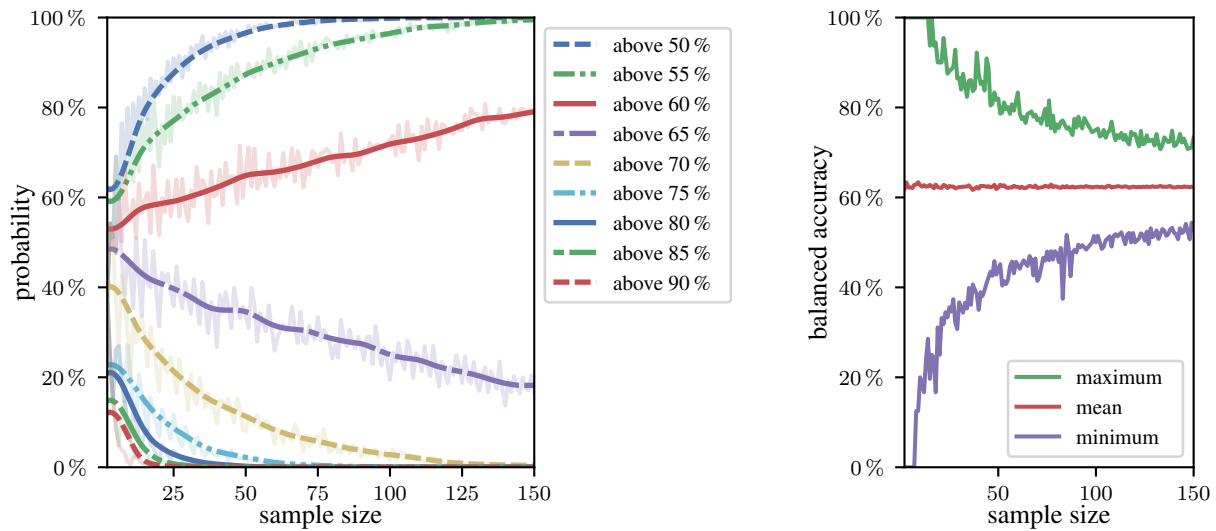

(a) Probabilities for linear SVM to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the linear SVM as a function of test sample size.


Figure F.47: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

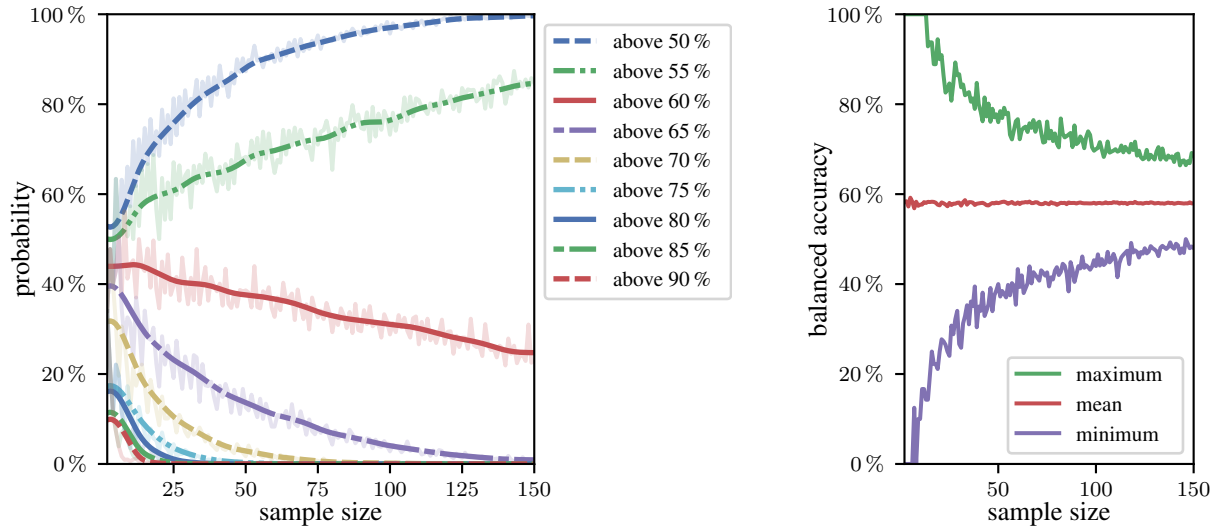

(a) Probabilities for Random Forest to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the Random Forest as a function of test sample size.

Figure F.48: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

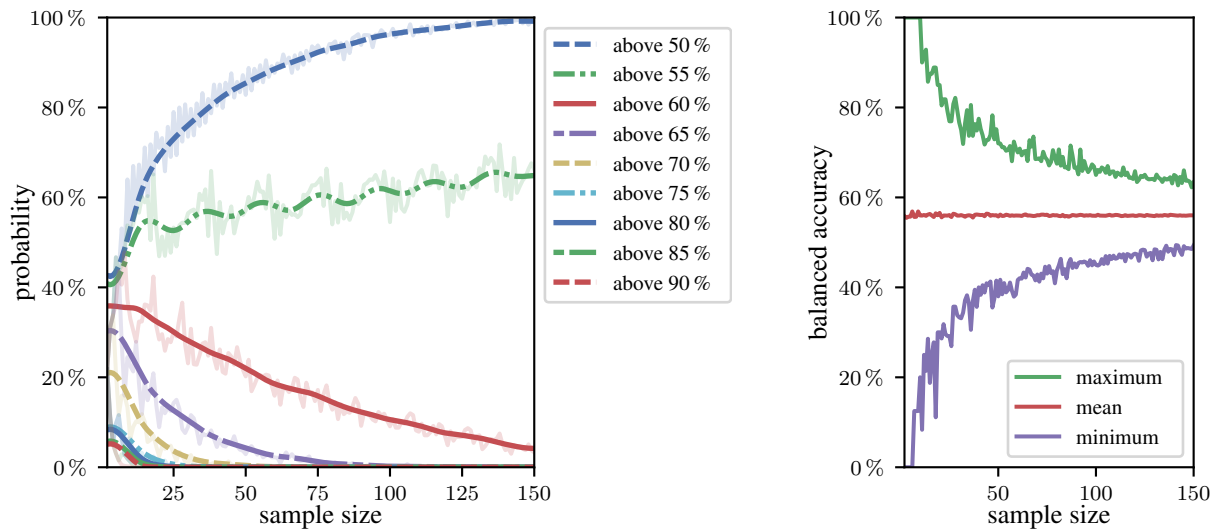

(a) Probabilities for SVM with an RBF kernel to yield an accuracy exceeding a certain threshold as a function of test sample size.

(b) Minimum, maximum and mean results for the SVM with an RBF kernel as a function of test sample size.

Figure F.49: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

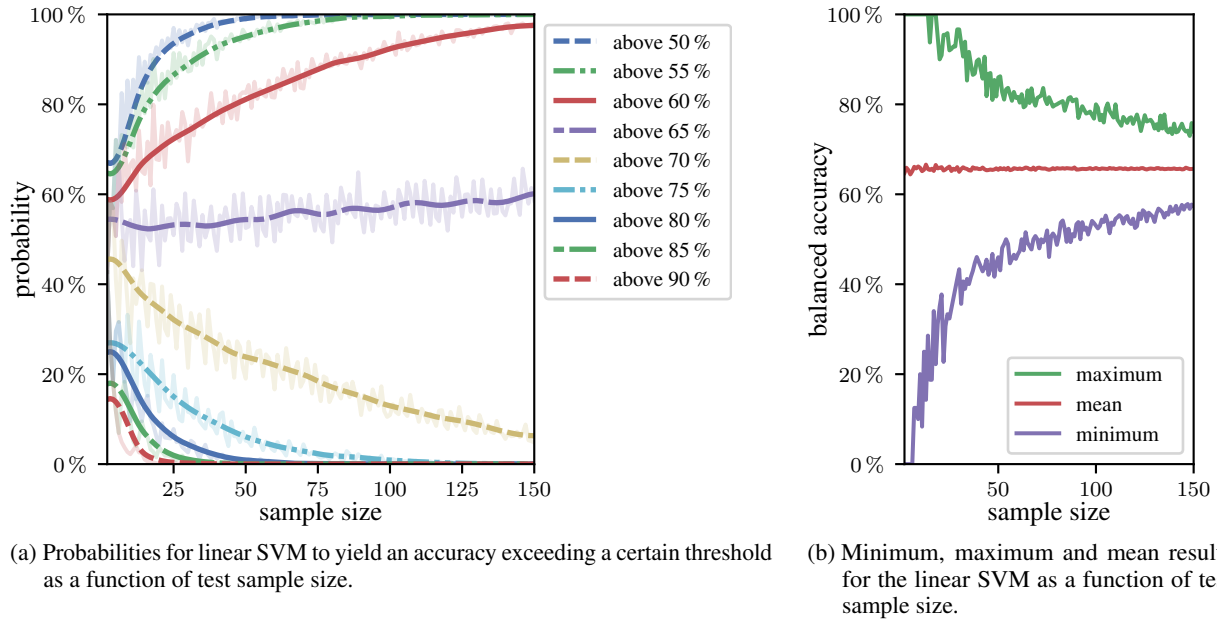


Figure F.50: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

F.1.2 Tabular results representation

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.79	0.79	0.65	0.54	0.28	0.28	0.08	0.08	0.01
	20	0.92	0.81	0.67	0.47	0.29	0.15	0.07	0.06	0.00
	30	0.96	0.91	0.74	0.58	0.29	0.15	0.03	0.01	0.00
	40	0.98	0.93	0.80	0.50	0.24	0.07	0.01	0.00	0.00
	50	0.99	0.96	0.86	0.59	0.23	0.08	0.00	0.00	0.00
	60	1.00	0.98	0.87	0.55	0.23	0.03	0.00	0.00	0.00
	70	1.00	0.99	0.89	0.61	0.21	0.03	0.00	0.00	0.00
	80	1.00	0.99	0.90	0.54	0.16	0.02	0.00	0.00	0.00
	90	1.00	1.00	0.93	0.61	0.14	0.02	0.00	0.00	0.00
	100	1.00	1.00	0.94	0.59	0.14	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.96	0.64	0.12	0.01	0.00	0.00	0.00
150	1.00	1.00	0.99	0.66	0.07	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.66	0.70	0.20	1.00	0.14
	20	0.67	0.65	0.35	0.95	0.10
	30	0.67	0.67	0.37	0.90	0.08
	40	0.66	0.65	0.42	0.85	0.07
	50	0.66	0.66	0.46	0.84	0.06
	60	0.67	0.67	0.50	0.80	0.05
	70	0.67	0.67	0.51	0.81	0.05
	80	0.66	0.66	0.53	0.81	0.05
	90	0.66	0.67	0.51	0.78	0.04
	100	0.66	0.66	0.55	0.77	0.04
	125	0.66	0.66	0.54	0.76	0.03
	150	0.66	0.66	0.57	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.11: Results as a function of variable test set sizes with a fixed classifier. A **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.79	0.79	0.65	0.55	0.29	0.29	0.10	0.10	0.01
	20	0.91	0.80	0.65	0.45	0.25	0.12	0.04	0.03	0.00
	30	0.96	0.91	0.71	0.56	0.26	0.14	0.03	0.01	0.00
	40	0.98	0.91	0.79	0.48	0.21	0.04	0.01	0.00	0.00
	50	0.99	0.96	0.84	0.55	0.20	0.07	0.00	0.00	0.00
	60	0.99	0.97	0.83	0.49	0.19	0.04	0.00	0.00	0.00
	70	1.00	0.99	0.86	0.60	0.16	0.03	0.00	0.00	0.00
	80	1.00	0.99	0.91	0.53	0.15	0.02	0.00	0.00	0.00
90	1.00	0.99	0.92	0.62	0.14	0.02	0.00	0.00	0.00	
100	1.00	1.00	0.95	0.57	0.13	0.00	0.00	0.00	0.00	
125	1.00	1.00	0.96	0.63	0.12	0.01	0.00	0.00	0.00	
150	1.00	1.00	0.98	0.64	0.05	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.66	0.70	0.20	1.00	0.15
	20	0.66	0.65	0.30	0.95	0.10
	30	0.66	0.67	0.40	0.90	0.08
	40	0.66	0.65	0.45	0.93	0.07
	50	0.66	0.66	0.46	0.86	0.06
	60	0.66	0.65	0.50	0.82	0.05
	70	0.66	0.66	0.50	0.79	0.05
	80	0.66	0.66	0.53	0.84	0.04
	90	0.66	0.67	0.50	0.80	0.04
	100	0.66	0.66	0.54	0.77	0.04
	125	0.66	0.66	0.56	0.78	0.03
	150	0.66	0.66	0.59	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.12: Results as a function of variable test set sizes with a fixed classifier. An **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.77	0.77	0.63	0.53	0.27	0.27	0.08	0.08	0.01
	20	0.90	0.78	0.65	0.46	0.27	0.14	0.05	0.04	0.00
	30	0.95	0.89	0.69	0.54	0.23	0.12	0.02	0.01	0.00
	40	0.98	0.90	0.78	0.45	0.19	0.06	0.01	0.00	0.00
	50	1.00	0.97	0.83	0.55	0.18	0.06	0.01	0.00	0.00
	60	1.00	0.96	0.82	0.51	0.18	0.02	0.00	0.00	0.00
	70	1.00	0.98	0.84	0.55	0.16	0.03	0.00	0.00	0.00
	80	1.00	0.99	0.89	0.52	0.16	0.01	0.00	0.00	0.00
	90	1.00	1.00	0.89	0.57	0.12	0.01	0.00	0.00	0.00
	100	1.00	1.00	0.93	0.52	0.10	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.96	0.58	0.10	0.00	0.00	0.00	0.00
150	1.00	1.00	0.98	0.61	0.04	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.65	0.70	0.20	1.00	0.15
	20	0.66	0.65	0.30	0.95	0.11
	30	0.66	0.67	0.43	1.00	0.08
	40	0.65	0.65	0.38	0.90	0.07
	50	0.66	0.66	0.46	0.86	0.06
	60	0.66	0.67	0.48	0.82	0.05
	70	0.66	0.66	0.50	0.80	0.05
	80	0.66	0.66	0.50	0.80	0.05
	90	0.66	0.66	0.53	0.78	0.04
	100	0.66	0.66	0.52	0.79	0.04
	125	0.66	0.66	0.54	0.76	0.03
	150	0.66	0.66	0.57	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.13: Results as a function of variable test set sizes with a fixed classifier. A **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.67	0.67	0.52	0.41	0.18	0.18	0.06	0.06	0.01
	20	0.81	0.64	0.49	0.28	0.13	0.05	0.01	0.01	0.00
	30	0.87	0.77	0.49	0.34	0.12	0.05	0.01	0.00	0.00
	40	0.93	0.78	0.60	0.25	0.07	0.02	0.00	0.00	0.00
	50	0.95	0.84	0.60	0.28	0.06	0.01	0.00	0.00	0.00
	60	0.97	0.84	0.51	0.20	0.05	0.00	0.00	0.00	0.00
	70	0.98	0.88	0.50	0.23	0.04	0.00	0.00	0.00	0.00
	80	0.99	0.87	0.58	0.17	0.02	0.00	0.00	0.00	0.00
	90	0.99	0.93	0.62	0.21	0.02	0.00	0.00	0.00	0.00
	100	0.99	0.93	0.63	0.15	0.01	0.00	0.00	0.00	0.00
	125	1.00	0.98	0.64	0.14	0.01	0.00	0.00	0.00	0.00
150	1.00	0.98	0.68	0.09	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.61	0.60	0.10	1.00	0.15
	20	0.61	0.60	0.20	0.90	0.10
	30	0.61	0.60	0.33	0.87	0.09
	40	0.62	0.62	0.40	0.80	0.07
	50	0.61	0.62	0.40	0.84	0.06
	60	0.61	0.62	0.43	0.78	0.06
	70	0.61	0.60	0.43	0.80	0.05
	80	0.61	0.61	0.42	0.77	0.05
	90	0.61	0.61	0.48	0.76	0.04
	100	0.61	0.61	0.49	0.74	0.04
	125	0.61	0.62	0.50	0.72	0.03
	150	0.61	0.61	0.52	0.70	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.14: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.77	0.77	0.64	0.54	0.28	0.28	0.09	0.09	0.01
	20	0.90	0.80	0.66	0.45	0.26	0.12	0.05	0.04	0.00
	30	0.94	0.90	0.67	0.53	0.24	0.13	0.03	0.01	0.00
	40	0.98	0.91	0.75	0.45	0.21	0.05	0.01	0.00	0.00
	50	0.99	0.96	0.85	0.57	0.21	0.08	0.01	0.00	0.00
	60	1.00	0.97	0.82	0.48	0.17	0.03	0.00	0.00	0.00
	70	1.00	0.98	0.83	0.55	0.16	0.03	0.00	0.00	0.00
	80	1.00	0.98	0.89	0.52	0.13	0.01	0.00	0.00	0.00
90	1.00	0.99	0.90	0.57	0.14	0.01	0.00	0.00	0.00	
100	1.00	1.00	0.94	0.51	0.10	0.01	0.00	0.00	0.00	
125	1.00	1.00	0.95	0.55	0.09	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.98	0.59	0.05	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.66	0.70	0.20	1.00	0.15
	20	0.66	0.65	0.30	0.95	0.10
	30	0.66	0.67	0.37	0.90	0.08
	40	0.65	0.65	0.42	0.85	0.07
	50	0.66	0.66	0.48	0.84	0.06
	60	0.66	0.65	0.50	0.82	0.05
	70	0.66	0.66	0.49	0.83	0.05
	80	0.66	0.66	0.53	0.80	0.05
	90	0.66	0.66	0.52	0.78	0.04
	100	0.66	0.66	0.53	0.79	0.04
	125	0.66	0.66	0.56	0.76	0.03
	150	0.66	0.65	0.57	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.15: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.80	0.80	0.69	0.57	0.30	0.30	0.11	0.11	0.02
	20	0.93	0.84	0.72	0.51	0.32	0.15	0.07	0.05	0.01
	30	0.97	0.94	0.78	0.63	0.32	0.18	0.04	0.01	0.00
	40	0.99	0.94	0.86	0.60	0.30	0.10	0.02	0.00	0.00
	50	1.00	0.99	0.92	0.69	0.30	0.10	0.01	0.00	0.00
	60	1.00	0.99	0.90	0.61	0.27	0.05	0.01	0.00	0.00
	70	1.00	1.00	0.92	0.70	0.28	0.07	0.00	0.00	0.00
	80	1.00	0.99	0.95	0.67	0.23	0.03	0.00	0.00	0.00
	90	1.00	1.00	0.97	0.78	0.23	0.03	0.00	0.00	0.00
	100	1.00	1.00	0.97	0.70	0.20	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.99	0.77	0.23	0.01	0.00	0.00	0.00
	150	1.00	1.00	1.00	0.83	0.15	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.67	0.70	0.20	1.00	0.15
	20	0.67	0.70	0.35	1.00	0.10
	30	0.68	0.67	0.40	0.93	0.08
	40	0.68	0.68	0.42	0.88	0.07
	50	0.68	0.68	0.48	0.86	0.06
	60	0.68	0.67	0.52	0.83	0.05
	70	0.68	0.67	0.54	0.83	0.05
	80	0.67	0.68	0.54	0.82	0.05
	90	0.68	0.68	0.56	0.80	0.04
	100	0.67	0.67	0.56	0.80	0.04
	125	0.68	0.67	0.57	0.80	0.03
	150	0.68	0.67	0.60	0.76	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.16: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.73	0.73	0.62	0.49	0.24	0.24	0.09	0.09	0.01
	20	0.86	0.73	0.58	0.37	0.19	0.09	0.03	0.03	0.00
	30	0.92	0.85	0.63	0.47	0.15	0.08	0.01	0.00	0.00
	40	0.96	0.84	0.70	0.37	0.15	0.04	0.01	0.00	0.00
	50	0.98	0.94	0.80	0.47	0.15	0.04	0.00	0.00	0.00
	60	0.99	0.91	0.72	0.38	0.11	0.02	0.00	0.00	0.00
	70	1.00	0.96	0.75	0.43	0.09	0.01	0.00	0.00	0.00
	80	1.00	0.97	0.81	0.39	0.08	0.01	0.00	0.00	0.00
	90	1.00	0.98	0.81	0.43	0.06	0.00	0.00	0.00	0.00
	100	1.00	0.99	0.86	0.36	0.05	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.89	0.38	0.03	0.00	0.00	0.00	0.00
150	1.00	1.00	0.93	0.36	0.01	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.64	0.60	0.20	1.00	0.15
	20	0.64	0.65	0.25	0.95	0.10
	30	0.64	0.63	0.40	0.87	0.08
	40	0.64	0.65	0.40	0.88	0.07
	50	0.65	0.64	0.44	0.82	0.06
	60	0.64	0.63	0.47	0.85	0.06
	70	0.64	0.64	0.49	0.80	0.05
	80	0.64	0.65	0.50	0.81	0.05
	90	0.64	0.64	0.51	0.78	0.04
	100	0.64	0.64	0.52	0.81	0.04
	125	0.64	0.64	0.53	0.75	0.03
	150	0.64	0.64	0.55	0.72	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.17: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.73	0.73	0.60	0.47	0.20	0.20	0.05	0.05	0.01
	20	0.86	0.71	0.56	0.34	0.19	0.07	0.02	0.01	0.00
	30	0.92	0.85	0.63	0.44	0.17	0.09	0.02	0.01	0.00
	40	0.96	0.85	0.67	0.35	0.15	0.04	0.01	0.00	0.00
	50	0.97	0.91	0.73	0.40	0.12	0.03	0.00	0.00	0.00
	60	0.99	0.92	0.71	0.34	0.09	0.01	0.00	0.00	0.00
	70	1.00	0.96	0.72	0.39	0.09	0.01	0.00	0.00	0.00
	80	1.00	0.95	0.74	0.32	0.06	0.00	0.00	0.00	0.00
	90	1.00	0.99	0.78	0.37	0.06	0.00	0.00	0.00	0.00
	100	1.00	0.99	0.83	0.32	0.04	0.00	0.00	0.00	0.00
125	1.00	1.00	0.88	0.30	0.03	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.90	0.33	0.01	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.63	0.60	0.10	1.00	0.14
	20	0.63	0.65	0.35	0.95	0.10
	30	0.64	0.63	0.37	0.90	0.09
	40	0.64	0.62	0.42	0.88	0.07
	50	0.63	0.64	0.42	0.84	0.06
	60	0.64	0.63	0.48	0.80	0.05
	70	0.64	0.64	0.47	0.79	0.05
	80	0.63	0.64	0.50	0.76	0.05
	90	0.64	0.63	0.51	0.77	0.04
	100	0.64	0.64	0.53	0.75	0.04
	125	0.64	0.64	0.54	0.73	0.03
	150	0.64	0.64	0.57	0.71	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.18: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.69	0.69	0.56	0.44	0.19	0.19	0.05	0.05	0.00
	20	0.81	0.69	0.54	0.32	0.16	0.06	0.02	0.02	0.00
	30	0.89	0.82	0.53	0.34	0.10	0.04	0.00	0.00	0.00
	40	0.93	0.80	0.59	0.27	0.10	0.02	0.00	0.00	0.00
	50	0.96	0.87	0.61	0.31	0.07	0.01	0.00	0.00	0.00
	60	0.97	0.85	0.54	0.19	0.03	0.00	0.00	0.00	0.00
	70	0.99	0.92	0.58	0.26	0.04	0.00	0.00	0.00	0.00
	80	0.99	0.92	0.67	0.21	0.03	0.00	0.00	0.00	0.00
90	1.00	0.95	0.65	0.22	0.02	0.00	0.00	0.00	0.00	
100	1.00	0.96	0.68	0.18	0.02	0.00	0.00	0.00	0.00	
125	1.00	0.99	0.74	0.17	0.01	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.76	0.12	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.62	0.60	0.10	1.00	0.15
	20	0.62	0.60	0.30	0.95	0.10
	30	0.62	0.63	0.33	0.87	0.08
	40	0.62	0.62	0.38	0.82	0.07
	50	0.62	0.62	0.40	0.84	0.06
	60	0.61	0.62	0.45	0.80	0.05
	70	0.62	0.61	0.46	0.77	0.05
	80	0.62	0.62	0.49	0.77	0.05
	90	0.62	0.62	0.49	0.77	0.04
	100	0.62	0.62	0.47	0.75	0.04
	125	0.62	0.62	0.52	0.72	0.03
	150	0.62	0.62	0.54	0.71	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.19: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.81	0.81	0.71	0.60	0.35	0.35	0.11	0.11	0.02
	20	0.94	0.84	0.72	0.52	0.33	0.16	0.06	0.05	0.01
	30	0.97	0.95	0.78	0.65	0.33	0.20	0.04	0.01	0.00
	40	0.99	0.95	0.86	0.57	0.30	0.09	0.02	0.00	0.00
	50	0.99	0.98	0.89	0.67	0.28	0.10	0.01	0.00	0.00
	60	1.00	0.99	0.88	0.64	0.26	0.05	0.01	0.00	0.00
	70	1.00	0.99	0.92	0.71	0.27	0.06	0.01	0.00	0.00
	80	1.00	0.99	0.95	0.65	0.24	0.03	0.00	0.00	0.00
	90	1.00	1.00	0.97	0.74	0.24	0.04	0.00	0.00	0.00
	100	1.00	1.00	0.98	0.74	0.25	0.03	0.00	0.00	0.00
	125	1.00	1.00	0.99	0.81	0.24	0.01	0.00	0.00	0.00
150	1.00	1.00	1.00	0.82	0.15	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.68	0.70	0.20	1.00	0.15
	20	0.68	0.70	0.35	0.95	0.10
	30	0.68	0.67	0.43	0.93	0.08
	40	0.67	0.68	0.45	0.85	0.07
	50	0.67	0.68	0.48	0.86	0.06
	60	0.68	0.68	0.50	0.85	0.05
	70	0.68	0.67	0.50	0.84	0.05
	80	0.67	0.68	0.50	0.80	0.05
	90	0.68	0.68	0.53	0.81	0.04
	100	0.68	0.68	0.56	0.79	0.04
	125	0.68	0.68	0.58	0.78	0.03
	150	0.68	0.68	0.59	0.76	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.20: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.82	0.82	0.69	0.62	0.35	0.35	0.13	0.13	0.03
	20	0.93	0.84	0.72	0.53	0.33	0.17	0.06	0.06	0.00
	30	0.98	0.95	0.78	0.64	0.34	0.20	0.06	0.01	0.00
	40	0.99	0.95	0.87	0.56	0.29	0.12	0.03	0.01	0.00
	50	1.00	0.98	0.92	0.71	0.30	0.10	0.01	0.00	0.00
	60	1.00	0.98	0.91	0.66	0.29	0.06	0.01	0.00	0.00
	70	1.00	1.00	0.94	0.73	0.30	0.08	0.01	0.00	0.00
	80	1.00	1.00	0.97	0.71	0.28	0.04	0.00	0.00	0.00
90	1.00	1.00	0.98	0.81	0.30	0.04	0.00	0.00	0.00	
100	1.00	1.00	0.97	0.73	0.23	0.03	0.00	0.00	0.00	
125	1.00	1.00	0.99	0.81	0.26	0.02	0.00	0.00	0.00	
150	1.00	1.00	1.00	0.88	0.20	0.01	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.69	0.70	0.20	1.00	0.15
	20	0.68	0.70	0.40	0.95	0.10
	30	0.68	0.67	0.33	0.93	0.08
	40	0.68	0.68	0.45	0.93	0.07
	50	0.68	0.68	0.44	0.84	0.06
	60	0.68	0.68	0.52	0.83	0.05
	70	0.68	0.69	0.54	0.84	0.05
	80	0.68	0.68	0.55	0.82	0.04
	90	0.68	0.68	0.54	0.80	0.04
	100	0.68	0.68	0.56	0.79	0.04
	125	0.68	0.68	0.58	0.78	0.03
	150	0.68	0.68	0.60	0.77	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.21: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.61	0.61	0.44	0.33	0.13	0.13	0.04	0.04	0.00
	20	0.68	0.51	0.35	0.17	0.07	0.03	0.01	0.01	0.00
	30	0.77	0.62	0.32	0.20	0.06	0.02	0.00	0.00	0.00
	40	0.81	0.61	0.40	0.13	0.03	0.00	0.00	0.00	0.00
	50	0.86	0.68	0.41	0.15	0.03	0.00	0.00	0.00	0.00
	60	0.90	0.66	0.33	0.09	0.01	0.00	0.00	0.00	0.00
	70	0.93	0.72	0.32	0.10	0.01	0.00	0.00	0.00	0.00
	80	0.95	0.71	0.33	0.06	0.00	0.00	0.00	0.00	0.00
90	0.96	0.74	0.30	0.05	0.00	0.00	0.00	0.00	0.00	
100	0.97	0.73	0.31	0.03	0.00	0.00	0.00	0.00	0.00	
125	0.99	0.83	0.27	0.01	0.00	0.00	0.00	0.00	0.00	
150	1.00	0.86	0.23	0.01	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.58	0.60	0.10	1.00	0.15
	20	0.57	0.60	0.20	0.90	0.11
	30	0.58	0.57	0.30	0.80	0.08
	40	0.58	0.57	0.38	0.80	0.07
	50	0.58	0.58	0.38	0.78	0.07
	60	0.58	0.58	0.42	0.75	0.06
	70	0.58	0.59	0.43	0.76	0.05
	80	0.58	0.57	0.44	0.71	0.05
	90	0.58	0.58	0.42	0.77	0.04
	100	0.58	0.58	0.46	0.71	0.04
	125	0.58	0.58	0.47	0.68	0.03
	150	0.58	0.58	0.49	0.68	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.22: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.84	0.84	0.73	0.61	0.34	0.34	0.13	0.13	0.02
	20	0.94	0.86	0.75	0.56	0.39	0.19	0.08	0.07	0.01
	30	0.98	0.95	0.81	0.69	0.37	0.22	0.05	0.02	0.00
	40	1.00	0.97	0.91	0.65	0.37	0.12	0.03	0.00	0.00
	50	1.00	0.99	0.93	0.74	0.35	0.12	0.01	0.00	0.00
	60	1.00	0.99	0.92	0.72	0.34	0.09	0.01	0.00	0.00
	70	1.00	1.00	0.94	0.76	0.32	0.09	0.01	0.00	0.00
	80	1.00	1.00	0.97	0.77	0.33	0.07	0.00	0.00	0.00
90	1.00	1.00	0.98	0.81	0.32	0.06	0.00	0.00	0.00	
100	1.00	1.00	0.99	0.80	0.31	0.04	0.00	0.00	0.00	
125	1.00	1.00	1.00	0.87	0.36	0.03	0.00	0.00	0.00	
150	1.00	1.00	1.00	0.92	0.27	0.01	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.69	0.70	0.20	1.00	0.15
	20	0.69	0.70	0.30	0.95	0.10
	30	0.69	0.70	0.43	0.93	0.08
	40	0.69	0.68	0.47	0.88	0.07
	50	0.69	0.68	0.50	0.88	0.06
	60	0.69	0.68	0.45	0.85	0.05
	70	0.68	0.69	0.53	0.83	0.05
	80	0.69	0.69	0.53	0.81	0.04
	90	0.69	0.69	0.52	0.81	0.04
	100	0.69	0.69	0.56	0.82	0.04
	125	0.69	0.69	0.60	0.78	0.03
	150	0.69	0.69	0.61	0.77	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.23: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.82	0.82	0.71	0.61	0.35	0.35	0.13	0.13	0.03
	20	0.94	0.86	0.77	0.58	0.38	0.21	0.10	0.08	0.01
	30	0.98	0.96	0.83	0.71	0.40	0.24	0.05	0.02	0.00
	40	1.00	0.97	0.90	0.67	0.39	0.15	0.04	0.01	0.00
	50	1.00	0.99	0.94	0.77	0.36	0.13	0.01	0.00	0.00
	60	1.00	0.99	0.94	0.76	0.40	0.10	0.01	0.00	0.00
	70	1.00	1.00	0.96	0.79	0.34	0.09	0.01	0.00	0.00
	80	1.00	1.00	0.97	0.79	0.34	0.07	0.00	0.00	0.00
90	1.00	1.00	0.98	0.86	0.33	0.07	0.00	0.00	0.00	
100	1.00	1.00	0.99	0.82	0.36	0.04	0.00	0.00	0.00	
125	1.00	1.00	1.00	0.89	0.40	0.03	0.00	0.00	0.00	
150	1.00	1.00	1.00	0.92	0.30	0.01	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.69	0.70	0.20	1.00	0.15
	20	0.69	0.70	0.35	0.95	0.10
	30	0.69	0.70	0.40	0.90	0.08
	40	0.69	0.70	0.47	0.90	0.07
	50	0.69	0.70	0.48	0.86	0.06
	60	0.69	0.70	0.52	0.85	0.05
	70	0.69	0.69	0.53	0.84	0.05
	80	0.69	0.69	0.54	0.84	0.05
	90	0.69	0.69	0.58	0.81	0.04
	100	0.69	0.69	0.57	0.82	0.04
	125	0.69	0.70	0.58	0.78	0.03
	150	0.69	0.69	0.61	0.79	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.24: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.77	0.77	0.66	0.55	0.29	0.29	0.09	0.09	0.02
	20	0.89	0.79	0.66	0.43	0.24	0.12	0.04	0.02	0.00
	30	0.95	0.89	0.70	0.54	0.24	0.13	0.02	0.01	0.00
	40	0.98	0.92	0.78	0.45	0.19	0.05	0.01	0.00	0.00
	50	0.99	0.95	0.81	0.54	0.19	0.06	0.00	0.00	0.00
	60	0.99	0.95	0.81	0.48	0.17	0.02	0.00	0.00	0.00
	70	1.00	0.98	0.82	0.51	0.16	0.03	0.00	0.00	0.00
	80	1.00	0.98	0.88	0.47	0.13	0.01	0.00	0.00	0.00
	90	1.00	0.99	0.88	0.56	0.12	0.01	0.00	0.00	0.00
	100	1.00	1.00	0.92	0.49	0.09	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.95	0.53	0.08	0.00	0.00	0.00	0.00
150	1.00	1.00	0.98	0.54	0.04	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.66	0.70	0.20	1.00	0.15
	20	0.66	0.65	0.30	0.95	0.10
	30	0.66	0.67	0.43	0.90	0.08
	40	0.65	0.65	0.42	0.85	0.07
	50	0.66	0.66	0.46	0.82	0.06
	60	0.65	0.65	0.47	0.82	0.05
	70	0.65	0.66	0.47	0.81	0.05
	80	0.65	0.65	0.46	0.81	0.05
	90	0.66	0.66	0.53	0.81	0.04
	100	0.65	0.65	0.53	0.77	0.04
	125	0.65	0.66	0.55	0.75	0.03
	150	0.65	0.65	0.56	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.25: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.86	0.86	0.75	0.65	0.38	0.38	0.16	0.16	0.03
	20	0.96	0.89	0.80	0.61	0.42	0.24	0.11	0.10	0.01
	30	0.98	0.96	0.83	0.71	0.39	0.26	0.06	0.02	0.00
	40	0.99	0.97	0.91	0.69	0.41	0.17	0.04	0.02	0.00
	50	1.00	0.99	0.95	0.80	0.43	0.20	0.03	0.01	0.00
	60	1.00	0.99	0.95	0.77	0.44	0.14	0.02	0.00	0.00
	70	1.00	1.00	0.96	0.83	0.44	0.14	0.01	0.00	0.00
	80	1.00	1.00	0.99	0.84	0.44	0.07	0.00	0.00	0.00
90	1.00	1.00	0.99	0.90	0.46	0.11	0.01	0.00	0.00	
100	1.00	1.00	0.99	0.89	0.45	0.08	0.00	0.00	0.00	
125	1.00	1.00	1.00	0.94	0.49	0.06	0.00	0.00	0.00	
150	1.00	1.00	1.00	0.97	0.45	0.04	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.70	0.70	0.30	1.00	0.14
	20	0.70	0.70	0.35	0.95	0.10
	30	0.69	0.70	0.43	0.90	0.08
	40	0.70	0.70	0.47	0.93	0.07
	50	0.70	0.70	0.50	0.90	0.06
	60	0.70	0.70	0.48	0.87	0.05
	70	0.70	0.70	0.56	0.86	0.05
	80	0.70	0.70	0.54	0.81	0.04
	90	0.70	0.70	0.58	0.83	0.04
	100	0.70	0.70	0.57	0.82	0.04
	125	0.70	0.70	0.59	0.79	0.03
	150	0.70	0.70	0.62	0.78	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.26: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.77	0.77	0.64	0.51	0.26	0.26	0.09	0.09	0.01
	20	0.89	0.77	0.64	0.40	0.23	0.10	0.03	0.02	0.00
	30	0.96	0.90	0.71	0.54	0.23	0.12	0.02	0.01	0.00
	40	0.98	0.91	0.76	0.47	0.21	0.06	0.01	0.00	0.00
	50	0.99	0.96	0.82	0.50	0.15	0.03	0.00	0.00	0.00
	60	1.00	0.95	0.79	0.48	0.16	0.03	0.00	0.00	0.00
	70	1.00	0.98	0.81	0.52	0.14	0.02	0.00	0.00	0.00
	80	1.00	0.98	0.86	0.48	0.11	0.01	0.00	0.00	0.00
90	1.00	0.99	0.88	0.52	0.12	0.01	0.00	0.00	0.00	
100	1.00	1.00	0.90	0.48	0.10	0.01	0.00	0.00	0.00	
125	1.00	1.00	0.95	0.52	0.07	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.97	0.56	0.04	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.65	0.70	0.20	1.00	0.15
	20	0.65	0.65	0.30	0.90	0.10
	30	0.66	0.67	0.33	0.93	0.08
	40	0.66	0.65	0.42	0.88	0.07
	50	0.65	0.64	0.48	0.82	0.06
	60	0.65	0.65	0.47	0.82	0.06
	70	0.65	0.66	0.41	0.80	0.05
	80	0.65	0.65	0.51	0.80	0.05
	90	0.65	0.66	0.53	0.80	0.04
	100	0.65	0.65	0.54	0.77	0.04
	125	0.65	0.66	0.57	0.75	0.03
	150	0.65	0.65	0.57	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.27: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.79	0.79	0.64	0.53	0.26	0.26	0.08	0.08	0.01
	20	0.90	0.79	0.66	0.44	0.28	0.14	0.05	0.05	0.00
	30	0.95	0.90	0.70	0.52	0.23	0.12	0.03	0.01	0.00
	40	0.98	0.92	0.79	0.47	0.20	0.06	0.01	0.00	0.00
	50	0.99	0.95	0.84	0.56	0.19	0.06	0.00	0.00	0.00
	60	0.99	0.96	0.81	0.48	0.16	0.03	0.00	0.00	0.00
	70	1.00	0.99	0.83	0.55	0.15	0.02	0.00	0.00	0.00
	80	1.00	0.98	0.89	0.52	0.13	0.01	0.00	0.00	0.00
90	1.00	1.00	0.90	0.56	0.11	0.01	0.00	0.00	0.00	
100	1.00	0.99	0.92	0.50	0.10	0.00	0.00	0.00	0.00	
125	1.00	1.00	0.95	0.54	0.10	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.99	0.61	0.04	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.66	0.70	0.30	1.00	0.14
	20	0.66	0.65	0.30	0.95	0.11
	30	0.65	0.67	0.40	0.90	0.08
	40	0.66	0.65	0.42	0.90	0.07
	50	0.66	0.66	0.48	0.84	0.06
	60	0.65	0.65	0.40	0.83	0.06
	70	0.66	0.66	0.47	0.80	0.05
	80	0.66	0.66	0.51	0.80	0.05
	90	0.66	0.66	0.54	0.77	0.04
	100	0.65	0.65	0.51	0.78	0.04
	125	0.66	0.66	0.55	0.77	0.03
	150	0.66	0.66	0.57	0.77	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.28: Results as a function of variable test set sizes with a fixed classifier. For **feature selection** an ANOVA was computed inside the the pipeline and the top **50,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.78	0.78	0.64	0.56	0.32	0.32	0.12	0.12	0.02
	20	0.93	0.83	0.70	0.49	0.32	0.16	0.07	0.06	0.00
	30	0.96	0.91	0.75	0.63	0.30	0.16	0.03	0.01	0.00
	40	0.99	0.93	0.83	0.55	0.29	0.09	0.02	0.00	0.00
	50	0.99	0.97	0.87	0.63	0.24	0.09	0.01	0.00	0.00
	60	1.00	0.98	0.87	0.58	0.23	0.05	0.00	0.00	0.00
	70	1.00	0.99	0.90	0.67	0.23	0.05	0.00	0.00	0.00
	80	1.00	1.00	0.94	0.64	0.24	0.02	0.00	0.00	0.00
	90	1.00	0.99	0.93	0.70	0.19	0.03	0.00	0.00	0.00
	100	1.00	1.00	0.96	0.67	0.18	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.98	0.71	0.20	0.01	0.00	0.00	0.00
	150	1.00	1.00	0.99	0.77	0.12	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.67	0.70	0.10	1.00	0.15
	20	0.67	0.65	0.30	0.95	0.10
	30	0.67	0.67	0.30	0.93	0.08
	40	0.67	0.68	0.45	0.88	0.07
	50	0.67	0.67	0.44	0.84	0.06
	60	0.67	0.67	0.48	0.83	0.05
	70	0.67	0.67	0.49	0.81	0.05
	80	0.67	0.68	0.55	0.80	0.04
	90	0.67	0.67	0.52	0.81	0.04
	100	0.67	0.67	0.56	0.79	0.04
	125	0.67	0.67	0.54	0.76	0.03
	150	0.67	0.67	0.58	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.29: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	20	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	150	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.50	0.50	0.50	0.60	0.02
	20	0.50	0.50	0.50	0.55	0.01
	30	0.50	0.50	0.50	0.53	0.01
	40	0.50	0.50	0.50	0.53	0.01
	50	0.50	0.50	0.50	0.52	0.01
	60	0.50	0.50	0.50	0.52	0.01
	70	0.50	0.50	0.50	0.51	0.01
	80	0.50	0.50	0.50	0.51	0.01
	90	0.50	0.50	0.50	0.51	0.01
	100	0.50	0.50	0.50	0.51	0.00
	125	0.50	0.50	0.50	0.51	0.00
	150	0.50	0.51	0.50	0.51	0.00

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.30: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.58	0.58	0.45	0.32	0.13	0.13	0.04	0.04	0.00
	20	0.70	0.52	0.37	0.17	0.07	0.02	0.00	0.00	0.00
	30	0.74	0.60	0.31	0.18	0.04	0.02	0.00	0.00	0.00
	40	0.81	0.57	0.36	0.11	0.03	0.00	0.00	0.00	0.00
	50	0.88	0.67	0.39	0.12	0.02	0.00	0.00	0.00	0.00
	60	0.88	0.61	0.25	0.07	0.01	0.00	0.00	0.00	0.00
	70	0.92	0.67	0.30	0.07	0.00	0.00	0.00	0.00	0.00
	80	0.92	0.65	0.28	0.03	0.00	0.00	0.00	0.00	0.00
	90	0.92	0.69	0.22	0.04	0.00	0.00	0.00	0.00	0.00
	100	0.95	0.66	0.25	0.02	0.00	0.00	0.00	0.00	0.00
	125	0.99	0.78	0.21	0.01	0.00	0.00	0.00	0.00	0.00
150	0.99	0.81	0.16	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.58	0.60	0.10	1.00	0.16
	20	0.58	0.60	0.25	0.85	0.10
	30	0.57	0.57	0.30	0.83	0.08
	40	0.57	0.57	0.35	0.78	0.07
	50	0.58	0.58	0.36	0.78	0.06
	60	0.57	0.57	0.42	0.75	0.06
	70	0.58	0.57	0.43	0.73	0.05
	80	0.57	0.57	0.38	0.70	0.05
	90	0.57	0.57	0.41	0.71	0.05
	100	0.57	0.57	0.43	0.70	0.04
	125	0.57	0.58	0.46	0.68	0.03
	150	0.57	0.57	0.49	0.67	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.31: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **10 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.79	0.79	0.67	0.56	0.31	0.31	0.10	0.10	0.02
	20	0.92	0.84	0.72	0.51	0.30	0.17	0.07	0.06	0.01
	30	0.97	0.92	0.74	0.60	0.30	0.18	0.03	0.01	0.00
	40	0.99	0.94	0.82	0.57	0.28	0.09	0.02	0.00	0.00
	50	0.99	0.98	0.88	0.60	0.25	0.08	0.00	0.00	0.00
	60	0.99	0.98	0.88	0.60	0.25	0.04	0.01	0.00	0.00
	70	1.00	1.00	0.90	0.66	0.23	0.06	0.00	0.00	0.00
	80	1.00	0.99	0.92	0.61	0.21	0.02	0.00	0.00	0.00
	90	1.00	1.00	0.94	0.67	0.20	0.02	0.00	0.00	0.00
	100	1.00	1.00	0.97	0.68	0.18	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.98	0.69	0.17	0.01	0.00	0.00	0.00
	150	1.00	1.00	0.99	0.75	0.10	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.67	0.70	0.10	1.00	0.15
	20	0.67	0.70	0.30	0.95	0.11
	30	0.67	0.67	0.37	0.90	0.08
	40	0.67	0.68	0.42	0.90	0.07
	50	0.67	0.66	0.40	0.82	0.06
	60	0.67	0.67	0.47	0.83	0.05
	70	0.67	0.67	0.53	0.81	0.05
	80	0.67	0.68	0.51	0.81	0.05
	90	0.67	0.67	0.54	0.80	0.04
	100	0.67	0.67	0.55	0.78	0.04
	125	0.67	0.67	0.58	0.77	0.03
	150	0.67	0.67	0.59	0.77	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.32: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.15	0.15	0.01	0.01	0.00	0.00	0.00	0.00	0.00
	20	0.27	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.38	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.42	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.44	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.51	0.50	0.40	0.70	0.05
	20	0.51	0.50	0.45	0.65	0.03
	30	0.51	0.50	0.43	0.63	0.03
	40	0.51	0.50	0.45	0.60	0.02
	50	0.51	0.50	0.46	0.58	0.02
	60	0.51	0.52	0.47	0.57	0.02
	70	0.51	0.51	0.47	0.56	0.02
	80	0.51	0.51	0.47	0.55	0.01
	90	0.51	0.51	0.48	0.54	0.01
	100	0.51	0.51	0.48	0.55	0.01
	125	0.51	0.51	0.48	0.54	0.01
	150	0.51	0.51	0.49	0.53	0.01

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.33: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.67	0.67	0.55	0.43	0.18	0.18	0.06	0.06	0.01
	20	0.85	0.70	0.56	0.34	0.19	0.08	0.02	0.02	0.00
	30	0.90	0.82	0.58	0.41	0.15	0.07	0.01	0.00	0.00
	40	0.96	0.82	0.63	0.31	0.10	0.03	0.00	0.00	0.00
	50	0.95	0.88	0.68	0.35	0.10	0.02	0.00	0.00	0.00
	60	0.99	0.88	0.61	0.27	0.06	0.01	0.00	0.00	0.00
	70	0.98	0.93	0.65	0.32	0.04	0.01	0.00	0.00	0.00
	80	0.99	0.94	0.71	0.27	0.04	0.00	0.00	0.00	0.00
	90	1.00	0.96	0.71	0.28	0.04	0.00	0.00	0.00	0.00
	100	1.00	0.96	0.75	0.24	0.02	0.00	0.00	0.00	0.00
	125	1.00	0.99	0.78	0.22	0.01	0.00	0.00	0.00	0.00
150	1.00	1.00	0.82	0.20	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.62	0.60	0.20	1.00	0.15
	20	0.63	0.65	0.30	0.90	0.10
	30	0.63	0.63	0.37	0.83	0.09
	40	0.63	0.62	0.40	0.88	0.07
	50	0.63	0.62	0.42	0.86	0.06
	60	0.62	0.62	0.45	0.80	0.05
	70	0.63	0.63	0.44	0.77	0.05
	80	0.63	0.62	0.45	0.75	0.05
	90	0.63	0.62	0.50	0.76	0.04
	100	0.63	0.63	0.47	0.77	0.04
	125	0.63	0.62	0.54	0.74	0.03
	150	0.63	0.63	0.55	0.70	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.34: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.72	0.72	0.58	0.45	0.22	0.22	0.08	0.08	0.01
	20	0.88	0.75	0.60	0.38	0.21	0.08	0.02	0.02	0.00
	30	0.94	0.88	0.64	0.46	0.16	0.09	0.01	0.00	0.00
	40	0.97	0.87	0.70	0.37	0.15	0.04	0.01	0.00	0.00
	50	0.98	0.94	0.78	0.47	0.13	0.04	0.00	0.00	0.00
	60	0.99	0.93	0.73	0.39	0.12	0.03	0.00	0.00	0.00
	70	0.99	0.97	0.78	0.47	0.11	0.02	0.00	0.00	0.00
	80	1.00	0.98	0.82	0.39	0.09	0.01	0.00	0.00	0.00
	90	1.00	0.99	0.84	0.43	0.08	0.01	0.00	0.00	0.00
	100	1.00	0.98	0.88	0.39	0.05	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.89	0.37	0.04	0.00	0.00	0.00	0.00
150	1.00	1.00	0.94	0.41	0.02	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.64	0.60	0.20	1.00	0.15
	20	0.64	0.65	0.25	0.95	0.10
	30	0.64	0.63	0.40	0.90	0.08
	40	0.64	0.65	0.40	0.85	0.07
	50	0.65	0.64	0.44	0.84	0.06
	60	0.64	0.65	0.43	0.80	0.06
	70	0.65	0.64	0.47	0.80	0.05
	80	0.64	0.65	0.49	0.78	0.05
	90	0.64	0.64	0.50	0.78	0.04
	100	0.64	0.64	0.52	0.76	0.04
	125	0.64	0.64	0.54	0.76	0.03
	150	0.64	0.65	0.55	0.72	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.35: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	20	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	150	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.50	0.50	0.40	0.60	0.03
	20	0.50	0.50	0.40	0.55	0.02
	30	0.50	0.50	0.43	0.53	0.02
	40	0.50	0.50	0.45	0.53	0.01
	50	0.50	0.50	0.46	0.52	0.01
	60	0.50	0.50	0.47	0.52	0.01
	70	0.50	0.50	0.47	0.51	0.01
	80	0.50	0.50	0.47	0.51	0.01
	90	0.50	0.50	0.48	0.51	0.01
	100	0.50	0.50	0.48	0.51	0.01
	125	0.50	0.50	0.48	0.51	0.01
	150	0.50	0.50	0.49	0.51	0.01

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.36: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.46	0.46	0.34	0.23	0.06	0.06	0.02	0.02	0.00
	20	0.54	0.35	0.23	0.09	0.04	0.01	0.00	0.00	0.00
	30	0.59	0.42	0.19	0.09	0.01	0.01	0.00	0.00	0.00
	40	0.62	0.32	0.17	0.03	0.01	0.00	0.00	0.00	0.00
	50	0.68	0.44	0.16	0.03	0.00	0.00	0.00	0.00	0.00
	60	0.68	0.36	0.11	0.02	0.00	0.00	0.00	0.00	0.00
	70	0.74	0.42	0.09	0.01	0.00	0.00	0.00	0.00	0.00
	80	0.75	0.34	0.09	0.01	0.00	0.00	0.00	0.00	0.00
	90	0.76	0.39	0.06	0.01	0.00	0.00	0.00	0.00	0.00
	100	0.80	0.36	0.07	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.88	0.38	0.04	0.00	0.00	0.00	0.00	0.00	0.00
150	0.87	0.32	0.01	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.53	0.50	0.10	1.00	0.16
	20	0.54	0.55	0.15	0.85	0.11
	30	0.54	0.53	0.27	0.80	0.09
	40	0.53	0.53	0.33	0.75	0.07
	50	0.54	0.54	0.34	0.72	0.06
	60	0.54	0.53	0.35	0.75	0.06
	70	0.54	0.54	0.39	0.69	0.05
	80	0.54	0.54	0.38	0.70	0.05
	90	0.54	0.53	0.42	0.69	0.04
	100	0.54	0.54	0.36	0.67	0.04
	125	0.54	0.54	0.43	0.66	0.03
	150	0.54	0.53	0.44	0.65	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.37: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **50 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.44	0.44	0.19	0.14	0.03	0.03	0.01	0.01	0.00
	20	0.60	0.33	0.14	0.03	0.00	0.00	0.00	0.00	0.00
	30	0.67	0.42	0.09	0.02	0.00	0.00	0.00	0.00	0.00
	40	0.75	0.36	0.09	0.01	0.00	0.00	0.00	0.00	0.00
	50	0.77	0.43	0.08	0.01	0.00	0.00	0.00	0.00	0.00
	60	0.80	0.32	0.04	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.84	0.43	0.05	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.89	0.33	0.04	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.91	0.41	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.92	0.34	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.97	0.36	0.01	0.00	0.00	0.00	0.00	0.00	0.00
150	0.97	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.54	0.50	0.20	0.90	0.10
	20	0.54	0.55	0.30	0.80	0.07
	30	0.54	0.53	0.37	0.73	0.05
	40	0.55	0.55	0.40	0.70	0.05
	50	0.54	0.54	0.40	0.70	0.05
	60	0.54	0.53	0.42	0.68	0.04
	70	0.54	0.54	0.44	0.67	0.04
	80	0.54	0.54	0.45	0.65	0.03
	90	0.54	0.54	0.43	0.64	0.03
	100	0.54	0.54	0.46	0.63	0.03
	125	0.54	0.55	0.47	0.62	0.02
	150	0.54	0.54	0.48	0.60	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.38: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.12	0.12	0.01	0.01	0.00	0.00	0.00	0.00	0.00
	20	0.21	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.27	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.30	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	150	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.50	0.50	0.30	0.80	0.05
	20	0.50	0.50	0.35	0.65	0.04
	30	0.50	0.50	0.40	0.60	0.03
	40	0.50	0.50	0.42	0.57	0.03
	50	0.50	0.50	0.42	0.56	0.02
	60	0.50	0.50	0.43	0.57	0.02
	70	0.50	0.50	0.44	0.56	0.02
	80	0.50	0.50	0.44	0.55	0.02
	90	0.50	0.50	0.46	0.54	0.02
	100	0.50	0.50	0.45	0.55	0.01
	125	0.50	0.50	0.47	0.54	0.01
	150	0.50	0.50	0.47	0.53	0.01

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.39: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.62	0.62	0.49	0.36	0.15	0.15	0.04	0.04	0.01
	20	0.75	0.56	0.41	0.23	0.11	0.05	0.01	0.01	0.00
	30	0.80	0.70	0.43	0.28	0.06	0.03	0.00	0.00	0.00
	40	0.85	0.66	0.43	0.16	0.04	0.01	0.00	0.00	0.00
	50	0.91	0.76	0.52	0.19	0.03	0.01	0.00	0.00	0.00
	60	0.93	0.72	0.40	0.13	0.02	0.00	0.00	0.00	0.00
	70	0.95	0.80	0.39	0.15	0.01	0.00	0.00	0.00	0.00
	80	0.97	0.77	0.41	0.07	0.01	0.00	0.00	0.00	0.00
	90	0.98	0.85	0.42	0.09	0.00	0.00	0.00	0.00	0.00
	100	0.98	0.84	0.46	0.07	0.00	0.00	0.00	0.00	0.00
	125	1.00	0.91	0.42	0.05	0.00	0.00	0.00	0.00	0.00
	150	1.00	0.94	0.41	0.02	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.60	0.60	0.10	1.00	0.15
	20	0.59	0.60	0.25	0.95	0.11
	30	0.59	0.60	0.33	0.83	0.09
	40	0.59	0.60	0.38	0.80	0.07
	50	0.60	0.60	0.38	0.78	0.06
	60	0.59	0.58	0.42	0.78	0.06
	70	0.59	0.59	0.41	0.77	0.05
	80	0.59	0.59	0.42	0.74	0.05
	90	0.59	0.60	0.44	0.73	0.04
	100	0.59	0.60	0.47	0.73	0.04
	125	0.59	0.59	0.49	0.70	0.03
	150	0.59	0.59	0.51	0.68	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.40: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.82	0.82	0.71	0.62	0.35	0.35	0.13	0.13	0.03
	20	0.94	0.85	0.74	0.54	0.34	0.17	0.06	0.05	0.00
	30	0.98	0.95	0.80	0.66	0.34	0.21	0.04	0.01	0.00
	40	0.99	0.95	0.88	0.64	0.34	0.12	0.02	0.01	0.00
	50	1.00	0.98	0.91	0.70	0.31	0.13	0.01	0.00	0.00
	60	1.00	1.00	0.93	0.70	0.31	0.07	0.01	0.00	0.00
	70	1.00	0.99	0.94	0.75	0.33	0.08	0.01	0.00	0.00
	80	1.00	1.00	0.97	0.74	0.31	0.05	0.00	0.00	0.00
	90	1.00	1.00	0.98	0.80	0.31	0.04	0.00	0.00	0.00
	100	1.00	1.00	0.98	0.78	0.30	0.03	0.00	0.00	0.00
	125	1.00	1.00	0.99	0.84	0.31	0.02	0.00	0.00	0.00
150	1.00	1.00	1.00	0.90	0.23	0.01	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.69	0.70	0.20	1.00	0.15
	20	0.68	0.70	0.35	0.95	0.10
	30	0.68	0.70	0.40	0.90	0.08
	40	0.68	0.68	0.45	0.95	0.07
	50	0.68	0.68	0.50	0.84	0.06
	60	0.68	0.68	0.53	0.83	0.05
	70	0.68	0.69	0.51	0.83	0.05
	80	0.68	0.69	0.55	0.81	0.04
	90	0.68	0.69	0.57	0.83	0.04
	100	0.68	0.68	0.57	0.80	0.04
	125	0.68	0.68	0.56	0.78	0.03
	150	0.68	0.69	0.59	0.76	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.41: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.36	0.36	0.11	0.07	0.01	0.01	0.00	0.00	0.00
	20	0.47	0.22	0.07	0.01	0.00	0.00	0.00	0.00	0.00
	30	0.54	0.30	0.03	0.01	0.00	0.00	0.00	0.00	0.00
	40	0.59	0.19	0.03	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.64	0.26	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.68	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.69	0.19	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.72	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.75	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.76	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.86	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	150	0.86	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.52	0.50	0.20	0.90	0.09
	20	0.52	0.50	0.35	0.75	0.07
	30	0.52	0.53	0.37	0.67	0.05
	40	0.52	0.53	0.40	0.68	0.05
	50	0.52	0.52	0.38	0.64	0.04
	60	0.52	0.52	0.40	0.65	0.04
	70	0.52	0.53	0.41	0.64	0.03
	80	0.52	0.53	0.44	0.61	0.03
	90	0.52	0.52	0.43	0.59	0.03
	100	0.52	0.52	0.45	0.61	0.02
	125	0.52	0.52	0.45	0.58	0.02
	150	0.52	0.52	0.45	0.57	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.42: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.74	0.74	0.61	0.50	0.24	0.24	0.07	0.07	0.01
	20	0.87	0.75	0.59	0.35	0.20	0.09	0.03	0.03	0.00
	30	0.93	0.86	0.63	0.43	0.17	0.09	0.01	0.01	0.00
	40	0.95	0.86	0.70	0.37	0.16	0.03	0.01	0.00	0.00
	50	0.98	0.93	0.76	0.45	0.14	0.04	0.00	0.00	0.00
	60	0.99	0.93	0.72	0.39	0.11	0.01	0.00	0.00	0.00
	70	1.00	0.97	0.74	0.39	0.08	0.01	0.00	0.00	0.00
	80	1.00	0.98	0.81	0.36	0.07	0.00	0.00	0.00	0.00
	90	1.00	0.98	0.81	0.42	0.06	0.01	0.00	0.00	0.00
	100	1.00	0.98	0.84	0.37	0.04	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.88	0.32	0.03	0.00	0.00	0.00	0.00
150	1.00	1.00	0.92	0.35	0.01	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.64	0.65	0.10	1.00	0.15
	20	0.64	0.65	0.30	0.95	0.10
	30	0.64	0.63	0.30	0.93	0.08
	40	0.64	0.65	0.40	0.85	0.07
	50	0.64	0.64	0.48	0.82	0.06
	60	0.64	0.63	0.47	0.82	0.06
	70	0.64	0.64	0.49	0.77	0.05
	80	0.64	0.64	0.51	0.78	0.04
	90	0.64	0.64	0.47	0.77	0.04
	100	0.64	0.64	0.52	0.75	0.04
	125	0.64	0.64	0.54	0.73	0.03
	150	0.64	0.64	0.55	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.43: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.79	0.79	0.66	0.54	0.29	0.29	0.10	0.10	0.02
	20	0.93	0.83	0.73	0.48	0.28	0.12	0.05	0.04	0.00
	30	0.97	0.94	0.76	0.60	0.27	0.16	0.03	0.01	0.00
	40	0.99	0.94	0.83	0.55	0.24	0.06	0.01	0.00	0.00
	50	1.00	0.98	0.88	0.63	0.25	0.09	0.01	0.00	0.00
	60	1.00	0.97	0.88	0.59	0.23	0.04	0.00	0.00	0.00
	70	1.00	0.99	0.87	0.62	0.18	0.03	0.00	0.00	0.00
	80	1.00	0.99	0.91	0.60	0.18	0.02	0.00	0.00	0.00
90	1.00	1.00	0.95	0.68	0.20	0.02	0.00	0.00	0.00	
100	1.00	1.00	0.97	0.63	0.15	0.01	0.00	0.00	0.00	
125	1.00	1.00	0.99	0.69	0.13	0.00	0.00	0.00	0.00	
150	1.00	1.00	1.00	0.75	0.08	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.66	0.70	0.20	1.00	0.15
	20	0.67	0.65	0.35	0.95	0.10
	30	0.67	0.67	0.43	0.93	0.08
	40	0.67	0.68	0.45	0.85	0.06
	50	0.67	0.66	0.48	0.86	0.06
	60	0.67	0.67	0.48	0.82	0.05
	70	0.66	0.67	0.50	0.84	0.05
	80	0.67	0.66	0.51	0.80	0.05
	90	0.67	0.67	0.51	0.81	0.04
	100	0.67	0.67	0.56	0.82	0.04
	125	0.67	0.66	0.57	0.77	0.03
	150	0.67	0.67	0.59	0.74	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.44: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.37	0.37	0.08	0.07	0.01	0.01	0.00	0.00	0.00
	20	0.53	0.19	0.04	0.01	0.00	0.00	0.00	0.00	0.00
	30	0.65	0.35	0.03	0.01	0.00	0.00	0.00	0.00	0.00
	40	0.72	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.74	0.27	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.82	0.18	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.84	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.89	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.93	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.93	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.98	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.99	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.54	0.50	0.30	0.90	0.07
	20	0.53	0.55	0.40	0.70	0.05
	30	0.53	0.53	0.40	0.67	0.04
	40	0.53	0.53	0.45	0.65	0.03
	50	0.53	0.54	0.44	0.66	0.03
	60	0.53	0.53	0.47	0.65	0.03
	70	0.53	0.53	0.46	0.61	0.03
	80	0.53	0.54	0.47	0.61	0.02
	90	0.54	0.53	0.47	0.61	0.02
	100	0.53	0.53	0.47	0.61	0.02
	125	0.53	0.53	0.48	0.60	0.02
	150	0.53	0.53	0.49	0.57	0.01

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.45: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.64	0.64	0.51	0.39	0.15	0.15	0.04	0.04	0.00
	20	0.78	0.64	0.47	0.26	0.12	0.05	0.01	0.01	0.00
	30	0.86	0.75	0.48	0.32	0.09	0.04	0.01	0.00	0.00
	40	0.89	0.72	0.53	0.22	0.06	0.01	0.00	0.00	0.00
	50	0.93	0.81	0.53	0.23	0.05	0.01	0.00	0.00	0.00
	60	0.94	0.77	0.45	0.15	0.03	0.00	0.00	0.00	0.00
	70	0.97	0.85	0.47	0.18	0.02	0.00	0.00	0.00	0.00
	80	0.98	0.83	0.52	0.14	0.01	0.00	0.00	0.00	0.00
	90	0.98	0.88	0.53	0.13	0.01	0.00	0.00	0.00	0.00
	100	0.99	0.88	0.50	0.11	0.01	0.00	0.00	0.00	0.00
	125	1.00	0.95	0.53	0.07	0.00	0.00	0.00	0.00	0.00
	150	1.00	0.97	0.53	0.05	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.60	0.60	0.10	1.00	0.15
	20	0.61	0.60	0.30	0.90	0.10
	30	0.61	0.60	0.30	0.90	0.09
	40	0.60	0.60	0.38	0.82	0.07
	50	0.60	0.60	0.40	0.78	0.06
	60	0.60	0.60	0.43	0.77	0.06
	70	0.60	0.60	0.44	0.76	0.05
	80	0.60	0.60	0.45	0.74	0.05
	90	0.60	0.60	0.47	0.74	0.04
	100	0.60	0.60	0.48	0.73	0.04
	125	0.60	0.60	0.50	0.71	0.03
	150	0.60	0.60	0.51	0.69	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.46: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **500 components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.67	0.67	0.55	0.42	0.19	0.19	0.04	0.04	0.00
	20	0.83	0.66	0.49	0.27	0.12	0.05	0.01	0.01	0.00
	30	0.88	0.77	0.52	0.35	0.11	0.04	0.01	0.00	0.00
	40	0.92	0.78	0.58	0.24	0.07	0.01	0.00	0.00	0.00
	50	0.95	0.85	0.61	0.28	0.05	0.02	0.00	0.00	0.00
	60	0.96	0.83	0.54	0.21	0.04	0.00	0.00	0.00	0.00
	70	0.97	0.88	0.52	0.22	0.02	0.00	0.00	0.00	0.00
	80	0.98	0.87	0.60	0.17	0.02	0.00	0.00	0.00	0.00
	90	0.99	0.94	0.58	0.17	0.01	0.00	0.00	0.00	0.00
	100	1.00	0.93	0.63	0.16	0.01	0.00	0.00	0.00	0.00
	125	1.00	0.98	0.65	0.13	0.00	0.00	0.00	0.00	0.00
150	1.00	0.99	0.69	0.10	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.61	0.60	0.20	1.00	0.15
	20	0.61	0.60	0.30	0.90	0.10
	30	0.61	0.60	0.37	0.87	0.08
	40	0.61	0.62	0.35	0.82	0.07
	50	0.61	0.62	0.42	0.86	0.06
	60	0.61	0.62	0.45	0.78	0.06
	70	0.61	0.61	0.43	0.77	0.05
	80	0.61	0.61	0.47	0.75	0.05
	90	0.61	0.61	0.47	0.74	0.04
	100	0.61	0.61	0.50	0.72	0.04
	125	0.61	0.62	0.51	0.73	0.03
	150	0.61	0.61	0.51	0.69	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.47: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.17	0.17	0.03	0.01	0.00	0.00	0.00	0.00	0.00
	20	0.22	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.19	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.20	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.47	0.50	0.20	0.80	0.09
	20	0.47	0.50	0.25	0.65	0.07
	30	0.47	0.47	0.33	0.67	0.05
	40	0.48	0.47	0.35	0.65	0.05
	50	0.48	0.48	0.36	0.60	0.04
	60	0.47	0.47	0.35	0.58	0.03
	70	0.47	0.47	0.39	0.56	0.03
	80	0.47	0.47	0.38	0.56	0.03
	90	0.47	0.48	0.39	0.56	0.03
	100	0.47	0.47	0.40	0.56	0.03
	125	0.47	0.48	0.40	0.56	0.02
	150	0.47	0.47	0.41	0.53	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.48: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

test sample size	\geq accuracy									
	n	50	55	60	65	70	75	80	85	90
	10	0.79	0.79	0.66	0.54	0.27	0.27	0.09	0.09	0.02
	20	0.90	0.79	0.64	0.43	0.24	0.10	0.04	0.03	0.00
	30	0.95	0.91	0.68	0.54	0.23	0.12	0.02	0.01	0.00
	40	0.98	0.91	0.78	0.48	0.21	0.06	0.01	0.00	0.00
	50	0.99	0.95	0.82	0.57	0.19	0.06	0.00	0.00	0.00
	60	0.99	0.97	0.82	0.49	0.17	0.02	0.00	0.00	0.00
	70	0.99	0.98	0.85	0.56	0.16	0.03	0.00	0.00	0.00
	80	1.00	0.99	0.86	0.51	0.14	0.01	0.00	0.00	0.00
90	1.00	0.99	0.90	0.55	0.11	0.01	0.00	0.00	0.00	
100	1.00	1.00	0.92	0.51	0.11	0.00	0.00	0.00	0.00	
125	1.00	1.00	0.95	0.55	0.07	0.00	0.00	0.00	0.00	
150	1.00	1.00	0.98	0.56	0.04	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.66	0.70	0.20	1.00	0.15
	20	0.65	0.65	0.35	0.95	0.10
	30	0.66	0.67	0.40	0.90	0.08
	40	0.66	0.65	0.42	0.85	0.07
	50	0.66	0.66	0.46	0.84	0.06
	60	0.66	0.65	0.48	0.83	0.05
	70	0.66	0.66	0.50	0.80	0.05
	80	0.66	0.66	0.50	0.81	0.05
	90	0.66	0.66	0.52	0.78	0.04
	100	0.66	0.66	0.53	0.76	0.04
	125	0.66	0.66	0.57	0.76	0.03
	150	0.66	0.65	0.56	0.75	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.49: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.75	0.75	0.62	0.50	0.24	0.24	0.09	0.09	0.02
	20	0.88	0.76	0.62	0.42	0.24	0.11	0.05	0.04	0.00
	30	0.94	0.87	0.67	0.50	0.20	0.10	0.01	0.00	0.00
	40	0.97	0.89	0.75	0.43	0.20	0.05	0.01	0.00	0.00
	50	0.98	0.94	0.78	0.44	0.13	0.04	0.00	0.00	0.00
	60	0.99	0.94	0.76	0.43	0.14	0.02	0.00	0.00	0.00
	70	1.00	0.97	0.77	0.45	0.11	0.02	0.00	0.00	0.00
	80	1.00	0.97	0.86	0.42	0.09	0.01	0.00	0.00	0.00
	90	1.00	0.98	0.84	0.49	0.09	0.01	0.00	0.00	0.00
	100	1.00	0.99	0.89	0.43	0.07	0.00	0.00	0.00	0.00
	125	1.00	1.00	0.93	0.42	0.05	0.00	0.00	0.00	0.00
150	1.00	1.00	0.95	0.41	0.02	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

test sample size	n	mean	median	min	max	std
	10	0.65	0.60	0.20	1.00	0.15
	20	0.65	0.65	0.30	0.90	0.11
	30	0.65	0.63	0.40	0.90	0.08
	40	0.65	0.65	0.40	0.90	0.07
	50	0.64	0.64	0.42	0.86	0.06
	60	0.65	0.65	0.43	0.82	0.06
	70	0.64	0.64	0.49	0.80	0.05
	80	0.65	0.65	0.46	0.78	0.05
	90	0.65	0.64	0.51	0.79	0.04
	100	0.65	0.65	0.52	0.76	0.04
	125	0.65	0.65	0.55	0.75	0.03
	150	0.64	0.65	0.55	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.50: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.34	0.34	0.12	0.09	0.01	0.01	0.00	0.00	0.00
	20	0.46	0.17	0.05	0.01	0.00	0.00	0.00	0.00	0.00
	30	0.52	0.26	0.03	0.01	0.00	0.00	0.00	0.00	0.00
	40	0.57	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.59	0.20	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.63	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.66	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.69	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.71	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.70	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.82	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.83	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.52	0.50	0.20	0.80	0.09
	20	0.52	0.50	0.30	0.75	0.06
	30	0.52	0.53	0.37	0.67	0.05
	40	0.52	0.53	0.38	0.68	0.04
	50	0.52	0.52	0.40	0.64	0.04
	60	0.52	0.52	0.42	0.65	0.03
	70	0.52	0.51	0.43	0.63	0.03
	80	0.52	0.53	0.44	0.61	0.03
	90	0.52	0.52	0.44	0.60	0.03
	100	0.52	0.52	0.45	0.59	0.02
	125	0.52	0.52	0.46	0.59	0.02
	150	0.52	0.52	0.47	0.59	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.51: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.11	0.11	0.07	0.03	0.01	0.01	0.00	0.00	0.00
	20	0.06	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	30	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	40	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.36	0.40	0.00	0.90	0.15
	20	0.36	0.35	0.05	0.70	0.10
	30	0.35	0.37	0.07	0.60	0.08
	40	0.36	0.35	0.15	0.60	0.07
	50	0.35	0.36	0.16	0.58	0.06
	60	0.36	0.35	0.18	0.52	0.06
	70	0.36	0.36	0.23	0.56	0.05
	80	0.36	0.36	0.24	0.51	0.04
	90	0.36	0.36	0.22	0.49	0.04
	100	0.36	0.36	0.23	0.48	0.04
	125	0.36	0.35	0.25	0.45	0.03
	150	0.36	0.36	0.25	0.45	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.52: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **10 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.70	0.70	0.58	0.47	0.22	0.22	0.06	0.06	0.01
	20	0.83	0.71	0.57	0.36	0.21	0.10	0.04	0.03	0.00
	30	0.92	0.85	0.59	0.41	0.16	0.08	0.01	0.00	0.00
	40	0.95	0.84	0.67	0.33	0.13	0.03	0.00	0.00	0.00
	50	0.97	0.90	0.68	0.36	0.11	0.03	0.00	0.00	0.00
	60	0.98	0.89	0.65	0.31	0.08	0.01	0.00	0.00	0.00
	70	0.99	0.94	0.66	0.33	0.05	0.00	0.00	0.00	0.00
	80	1.00	0.95	0.73	0.29	0.05	0.00	0.00	0.00	0.00
	90	1.00	0.98	0.72	0.32	0.03	0.00	0.00	0.00	0.00
	100	1.00	0.98	0.79	0.27	0.03	0.00	0.00	0.00	0.00
	125	1.00	0.99	0.81	0.24	0.01	0.00	0.00	0.00	0.00
150	1.00	1.00	0.85	0.22	0.01	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.63	0.60	0.10	1.00	0.15
	20	0.63	0.65	0.30	0.95	0.11
	30	0.63	0.63	0.37	0.87	0.08
	40	0.63	0.62	0.42	0.85	0.07
	50	0.63	0.62	0.44	0.86	0.06
	60	0.63	0.63	0.47	0.82	0.06
	70	0.63	0.63	0.46	0.83	0.05
	80	0.63	0.64	0.49	0.79	0.05
	90	0.63	0.63	0.51	0.74	0.04
	100	0.63	0.63	0.52	0.75	0.04
	125	0.63	0.63	0.54	0.73	0.03
	150	0.63	0.63	0.53	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.53: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.51	0.51	0.20	0.16	0.03	0.03	0.00	0.00	0.00
	20	0.71	0.40	0.16	0.05	0.01	0.00	0.00	0.00	0.00
	30	0.79	0.55	0.13	0.04	0.00	0.00	0.00	0.00	0.00
	40	0.86	0.45	0.12	0.01	0.00	0.00	0.00	0.00	0.00
	50	0.90	0.59	0.10	0.01	0.00	0.00	0.00	0.00	0.00
	60	0.93	0.51	0.08	0.00	0.00	0.00	0.00	0.00	0.00
	70	0.96	0.63	0.06	0.00	0.00	0.00	0.00	0.00	0.00
	80	0.98	0.57	0.06	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.97	0.64	0.04	0.00	0.00	0.00	0.00	0.00	0.00
	100	0.99	0.56	0.04	0.00	0.00	0.00	0.00	0.00	0.00
	125	1.00	0.64	0.02	0.00	0.00	0.00	0.00	0.00	0.00
	150	1.00	0.71	0.01	0.00	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.56	0.60	0.20	0.80	0.10
	20	0.56	0.55	0.35	0.80	0.07
	30	0.56	0.57	0.37	0.73	0.05
	40	0.56	0.55	0.40	0.68	0.04
	50	0.56	0.56	0.44	0.66	0.04
	60	0.56	0.57	0.45	0.67	0.03
	70	0.56	0.56	0.46	0.64	0.03
	80	0.56	0.56	0.47	0.64	0.03
	90	0.56	0.56	0.46	0.64	0.03
	100	0.56	0.56	0.48	0.64	0.03
	125	0.56	0.56	0.48	0.64	0.02
	150	0.56	0.56	0.50	0.61	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.54: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.70	0.70	0.55	0.44	0.20	0.20	0.06	0.06	0.01
	20	0.83	0.67	0.52	0.31	0.17	0.07	0.01	0.01	0.00
	30	0.88	0.81	0.55	0.37	0.13	0.07	0.01	0.00	0.00
	40	0.93	0.78	0.61	0.27	0.10	0.03	0.00	0.00	0.00
	50	0.96	0.87	0.66	0.34	0.08	0.02	0.00	0.00	0.00
	60	0.98	0.88	0.62	0.26	0.05	0.01	0.00	0.00	0.00
	70	0.98	0.92	0.62	0.28	0.04	0.00	0.00	0.00	0.00
	80	1.00	0.94	0.68	0.24	0.04	0.00	0.00	0.00	0.00
	90	0.99	0.95	0.69	0.27	0.02	0.00	0.00	0.00	0.00
	100	1.00	0.96	0.73	0.19	0.02	0.00	0.00	0.00	0.00
	125	1.00	0.98	0.75	0.19	0.01	0.00	0.00	0.00	0.00
	150	1.00	0.99	0.79	0.16	0.01	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.63	0.60	0.20	1.00	0.14
	20	0.62	0.60	0.25	0.90	0.10
	30	0.62	0.63	0.37	0.87	0.09
	40	0.62	0.62	0.35	0.88	0.07
	50	0.62	0.62	0.44	0.82	0.06
	60	0.62	0.63	0.45	0.83	0.05
	70	0.62	0.63	0.41	0.77	0.05
	80	0.62	0.62	0.47	0.76	0.05
	90	0.62	0.62	0.48	0.76	0.04
	100	0.62	0.62	0.50	0.75	0.04
	125	0.62	0.62	0.50	0.72	0.03
	150	0.62	0.62	0.53	0.73	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.55: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **100 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

		\geq accuracy								
	n	50	55	60	65	70	75	80	85	90
test sample size	10	0.57	0.57	0.44	0.31	0.12	0.12	0.04	0.04	0.01
	20	0.69	0.50	0.35	0.17	0.09	0.03	0.01	0.01	0.00
	30	0.77	0.65	0.35	0.21	0.06	0.03	0.00	0.00	0.00
	40	0.82	0.61	0.38	0.12	0.03	0.01	0.00	0.00	0.00
	50	0.87	0.68	0.39	0.13	0.02	0.00	0.00	0.00	0.00
	60	0.89	0.65	0.33	0.08	0.02	0.00	0.00	0.00	0.00
	70	0.92	0.72	0.32	0.09	0.01	0.00	0.00	0.00	0.00
	80	0.94	0.65	0.29	0.04	0.00	0.00	0.00	0.00	0.00
	90	0.95	0.75	0.29	0.06	0.00	0.00	0.00	0.00	0.00
	100	0.96	0.73	0.29	0.03	0.00	0.00	0.00	0.00	0.00
	125	0.99	0.84	0.28	0.01	0.00	0.00	0.00	0.00	0.00
	150	1.00	0.85	0.23	0.01	0.00	0.00	0.00	0.00	0.00

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.58	0.60	0.10	1.00	0.15
	20	0.58	0.57	0.25	0.90	0.11
	30	0.58	0.57	0.27	0.87	0.09
	40	0.58	0.57	0.35	0.80	0.07
	50	0.58	0.58	0.40	0.76	0.06
	60	0.58	0.58	0.43	0.77	0.06
	70	0.58	0.59	0.41	0.76	0.05
	80	0.58	0.57	0.44	0.71	0.05
	90	0.58	0.58	0.42	0.71	0.04
	100	0.58	0.58	0.44	0.70	0.04
	125	0.58	0.58	0.48	0.68	0.03
	150	0.58	0.58	0.48	0.69	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.56: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **Random Forest** was trained with default parameters. ($n_{\text{estimators}} = 100$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.53	0.53	0.33	0.23	0.06	0.06	0.01	0.01	0.00
	20	0.71	0.47	0.28	0.09	0.02	0.01	0.00	0.00	0.00
	30	0.73	0.56	0.23	0.09	0.01	0.00	0.00	0.00	0.00
	40	0.80	0.47	0.22	0.04	0.01	0.00	0.00	0.00	0.00
	50	0.83	0.57	0.20	0.03	0.00	0.00	0.00	0.00	0.00
	60	0.88	0.51	0.16	0.02	0.00	0.00	0.00	0.00	0.00
	70	0.90	0.61	0.13	0.01	0.00	0.00	0.00	0.00	0.00
	80	0.94	0.54	0.13	0.00	0.00	0.00	0.00	0.00	0.00
	90	0.94	0.59	0.09	0.01	0.00	0.00	0.00	0.00	0.00
	100	0.96	0.55	0.09	0.00	0.00	0.00	0.00	0.00	0.00
	125	0.98	0.60	0.07	0.00	0.00	0.00	0.00	0.00	0.00
150	0.99	0.66	0.03	0.00	0.00	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n					
		mean	median	min	max	std
test sample size	10	0.56	0.60	0.20	1.00	0.13
	20	0.57	0.55	0.30	0.85	0.09
	30	0.56	0.57	0.33	0.77	0.07
	40	0.56	0.55	0.40	0.78	0.06
	50	0.56	0.56	0.38	0.72	0.05
	60	0.56	0.57	0.42	0.70	0.05
	70	0.56	0.56	0.43	0.69	0.04
	80	0.56	0.56	0.44	0.68	0.04
	90	0.56	0.56	0.44	0.67	0.03
	100	0.56	0.56	0.45	0.65	0.03
	125	0.56	0.56	0.48	0.65	0.03
	150	0.56	0.56	0.49	0.63	0.02

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.57: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, an **SVM** with an **RBF kernel** was trained with default parameters. ($C = 1.0$; $\gamma = 1/n_{\text{feature}}$)

		\geq accuracy								
test sample size	n	50	55	60	65	70	75	80	85	90
	10	0.77	0.77	0.67	0.54	0.27	0.27	0.10	0.10	0.02
	20	0.91	0.81	0.68	0.44	0.27	0.12	0.04	0.04	0.00
	30	0.93	0.87	0.67	0.50	0.21	0.12	0.03	0.01	0.00
	40	0.97	0.90	0.78	0.47	0.21	0.07	0.01	0.00	0.00
	50	0.99	0.95	0.82	0.53	0.19	0.05	0.00	0.00	0.00
	60	0.99	0.96	0.81	0.49	0.17	0.03	0.00	0.00	0.00
	70	1.00	0.98	0.83	0.56	0.18	0.04	0.00	0.00	0.00
	80	1.00	0.98	0.89	0.49	0.15	0.02	0.00	0.00	0.00
	90	1.00	1.00	0.88	0.56	0.11	0.02	0.00	0.00	0.00
	100	1.00	0.99	0.92	0.55	0.11	0.01	0.00	0.00	0.00
	125	1.00	1.00	0.96	0.55	0.09	0.00	0.00	0.00	0.00
150	1.00	1.00	0.98	0.59	0.05	0.00	0.00	0.00	0.00	

(a) Probabilities to yield an accuracy exceeding a certain threshold related to the test sample size.

	n	mean	median	min	max	std
test sample size	10	0.66	0.70	0.20	1.00	0.15
	20	0.66	0.65	0.35	0.90	0.10
	30	0.65	0.63	0.43	0.97	0.08
	40	0.66	0.65	0.45	0.90	0.07
	50	0.65	0.66	0.46	0.86	0.06
	60	0.66	0.65	0.47	0.82	0.05
	70	0.66	0.66	0.50	0.81	0.05
	80	0.66	0.65	0.49	0.80	0.05
	90	0.65	0.66	0.53	0.81	0.04
	100	0.66	0.66	0.53	0.80	0.04
	125	0.66	0.66	0.56	0.78	0.03
	150	0.66	0.66	0.57	0.74	0.03

(b) Summary of the accuracy value distributions for certain sample sizes.

Table F.58: Results as a function of variable test set sizes with a fixed classifier. To reduce the dimensionality of the feature space a **PCA** was performed and **all components** were retained. For **feature selection** an ANOVA was computed inside the the pipeline and the top **1,000 features** were taken based on the ANOVA F-values. Following, a **linear SVM** was trained with default parameters. ($C = 1.0$)

G Abbreviations

MDD major depressive disorder

HC healthy control

PAC Predictive Analytics Competition

ML machine learning

MRI magnetic resonance imaging

ADHD attention deficit hyperactivity disorder

LOOCV leave-one-out cross-validation

SVM support-vector machine

TIV total intracranial volume

PCA principal-component analysis

RBF radial basis function