

Long-length Legal Document Classification

Lulu Wan
Clifford Chance LLP

lulu.wan@cliffordchance.com george.papageorgiou@cliffordchance.com

George Papageorgiou
Clifford Chance LLP

Michael Seddon
Clifford Chance LLP

michael.seddon@cliffordchance.com mirko.bernardoni@cliffordchance.com

Mirko Bernardoni
Clifford Chance LLP

Abstract

One of the principal tasks of machine learning with major applications is text classification. This paper focuses on the legal domain and, in particular, on the classification of lengthy legal documents. The main challenge that this study addresses is the limitation that current models impose on the length of the input text. In addition, the present paper shows that dividing the text into segments and later combining the resulting embeddings with a BiLSTM architecture to form a single document embedding can improve results. These advancements are achieved by utilising a simpler structure, rather than an increasingly complex one, which is often the case in NLP research. The dataset used in this paper is obtained from an online public database containing lengthy legal documents with highly domain-specific vocabulary and thus, the comparison of our results to the ones produced by models implemented on the commonly used datasets would be unjustified. This work provides the foundation for future work in document classification in the legal field.

Research so far has focused on short text ([Yang et al., 2016](#); [Du and Huang, 2018](#); [Zhang et al., 2019](#); [Adhikari et al., 2019a](#)), whereas the main objective of this paper is to address the classification of lengthy legal documents. In fact, pre-existing models could not be applied on our corpus, which consists of excessively lengthy legal documents. In the legal field, companies manage millions of documents per year, depending on the size of the company. Therefore, automatic categorisation of documents into different groups significantly enhances the efficiency of document management and decreases the time spent by legal experts analysing documents.

Recently, several quite sophisticated frameworks have been proposed to address the document classification task. However, as proven by [Adhikari et al. \(2019a\)](#) regarding the document classification task, complex neural networks such as Bidirectional Encoder Representations from Transformers (BERT; [Devlin et al., 2018](#)) can be distilled and yet achieve similar performance scores. In addition, [Adhikari et al. \(2019b\)](#) shows that complex architectures are more sensitive to hyperparameter fluctuations and are susceptible to domains that consist of data with dissimilar characteristics. In this study, rather than employing an overly complex neural architecture, we focus on a relatively simpler neural structure that, in short, creates text embeddings using Doc2Vec ([Le and Mikolov, 2014](#)) and then passes them through a Bi-directional LSTM (BiLSTM) with attention before making the final prediction.

Furthermore, an important contribution of this paper to automatic document classification is the concept of dividing documents into chunks before processing. It is demonstrated that the segmentation of lengthy documents into smaller chunks of text allows the context of each document to

1 Introduction

Text classification is a problem in library, information and computer science and one of the most classical and prominent tasks in Natural Language Processing (NLP). In particular, document classification is a procedure of assigning one or more labels to a document from a predetermined set of labels. Automatic document classification tasks can be divided into three categories: supervised, unsupervised and semi-supervised. This study focuses on supervised document classification.

Dataset	C	N	W	S
Reuters	90	10,789	144.3	6.6
AAPD	54	55,840	167.3	1.0
IMDB	10	135,669	393.8	14.4
Yelp 2014	5	1,125,386	148.8	9.1

Table 1: Summary of the commonly used datasets for document classification. C denotes the number of classes in the dataset, N the number of samples and W and S the average number of words and sentences per document respectively.

be encapsulated in an improved way, leading to enhanced results. The intuition behind this idea was formed by investigating automatic audio segmentation research. Audio segmentation (also known as audio classification) is an essential pre-processing step in audio analysis that separates different types of sound (e.g. speech, music, silence etc.) and splits audio signals into chunks in order to further improve the comprehension of these signals (Giannakopoulos and Pikrakis, 2014). Analogously, the present paper shows that splitting overly lengthy legal documents into smaller parts before processing them, boosts the final results.

2 Related Work

In several industries that produce or handle colossal amounts of text data such as the legal industry, document categorisation is still often performed manually by human experts. Automatic categorisation of documents is highly beneficial for reducing the human effort spent on time-consuming operations. In particular, deep neural networks have achieved state-of-the-art results in document classification over the last few years, outperforming the human classifiers in numerous cases.

2.1 Document Classification Datasets

The majority of researchers evaluate their document classifying models on the following four datasets: Reuters-21578 (Chidanand et al., 1994), ArXiv Academic Paper Dataset - AAPD (Yang et al., 2018), IMDB reviews (Maas et al., 2011), and Yelp 2014 reviews (Yelp, 2014). However, these commonly used datasets do not contain large documents, which conflicts with one of the main objectives of this study. Note that our definition of ‘document’ in this specific context is a document that has at least 5000 words.

Type	N	W	S
EX-101.INS	5,689	11,730	344
EX-10.1	5,689	28,515	432
10-Q	5,689	20,178	552
EX-99.1	5,689	12,224	276
10-K	5,689	51,071	1,476

Table 2: Summary of EDGAR dataset. N denotes the number of samples and W and S the average number of words and sentences per document respectively.

For that purpose, we use a dataset provided by the U.S Securities and Exchange Commission (SEC), namely EDGAR (EDGAR, 2019 – see Section 4.1). As anticipated, most models that have achieved inspiring results have very poor performance or even fail when they are tested on large documents from the EDGAR corpus. As shown in Table 1 and Table 2, the differences between the commonly used datasets and the EDGAR dataset are evident.

2.2 Document Classification Approaches

The application of deep neural networks in the field of computer vision has achieved great success. Following this success, several well-known DNN models attained remarkable results when applied on the document classification task. One of the most popular models is the Hierarchical Attention Network (HAN) proposed by Yang et al. (2016). HAN used word and sentence-level attention in order to extract meaningful features of the documents and ultimately classify them. However, the fact that this architecture is based on a Gated Recurrent Unit (GRU) framework combined with the excessive size of the documents in our corpus would severely affect the results. Concretely, using overly large documents would result in a vast number of time steps and the vanishing gradient problem would be detrimental to performance.

A different yet powerful framework, namely BERT (Devlin et al., 2018), has achieved state-of-the-art results on a large amount of NLP tasks. BERT architecture employs self-attention instead of general attention, thus making the neural network even more complex. Nevertheless, Adhikari et al. (2019a) have established groundbreaking results and demonstrated that sophisticated architectures such as BERT are not necessary to succeed in the document classification task. Furthermore, it

is worth mentioning that both the aforementioned models were trained on a rather different corpora. The main difference between the datasets used by those researchers and the EDGAR dataset is the size of the documents, which explains why these models could not be utilised in the present study. In particular, BERT was incompatible with our dataset due to the maximum input sequence length that imposes, namely the 512 terms threshold.

3 Methods

The novelty of this work is the application of audio segmentation used for speech recognition (Theodorou et al., 2014) in document classification. The ultimate purpose of audio segmentation is to divide the signal into segments, each of which contains distinct audio information. In our case, the same occurs during the document segmentation, where the split chunks become the inputs of our neural network.

From a human perspective, when reading a rather long document or book, we are constantly storing and updating our memory with the essential parts or information of that record. Once enough information is stored in our memory we can form connections so as to gain a deeper understanding of the context and potentially extract valuable insight. In the same way, instead of passing the whole document to Doc2Vec, we split the document into multiple chunks (Figure 1). Hence, the machine can imitate human behaviour by identifying and determining the relevance of each chunk.

We create different models with respect to the number of chunks that we divide the initial text into, in order to observe how the different number of chunks affect the efficiency of the final model. These chunks are then used to train Doc2Vec. In short, the intuition behind Doc2Vec is analogous to the intuition behind Word2Vec, where the

words are used to make predictions about the target word (central word). The additional part of Doc2Vec is that it also considers the document ID when predicting a word. Ultimately, after the training each chunk has the form of an embedding.

In the next phase, we aggregate the different chunk embeddings of a document into one vector through the use of a BiLSTM (see Figure 2). First, the different chunk embeddings $E_i^1, E_i^2, \dots, E_i^n$ of a document are sequentially fed to the BiLSTM model. Then, the outputs of the forward and the

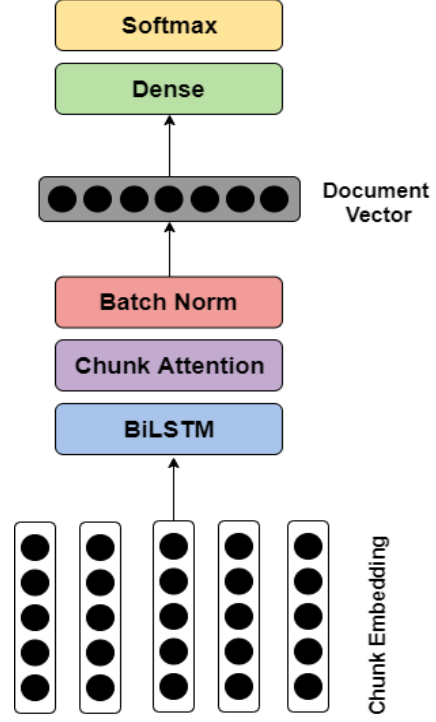


Figure 1: Overall architecture of proposed BiLSTM model.

backward layer are concatenated; $h_{it} = [\vec{h}_{it} \overleftarrow{h}_{it}]$. h_{it} denotes the resulting vectors.

The final classification is subjected to the various features that each chunk contains. Thus, the attention mechanisms are introduced so as to enable the assignment of different weights to each chunk, depending on how strong of a class indicator this chunk is. In particular, the attention scores are assigned to the corresponding hidden state outputs as follows:

$$u_{it} = \tanh(W^a h_{it} + b^a) \quad (1)$$

$$\alpha_{it} = \frac{\exp(u_{it}^T u_w)}{\sum_t \exp(u_{it}^T u_w)} \quad (2)$$

$$d_i = \sum \alpha_{it} h_{it} \quad (3)$$

Here α_{it} is the attention score assigned to hidden state h_{it} of document i at time step t . This score is determined by the similarity between u_{it} and u_w , where u_{it} is a mere non-linear transformation of h_{it} and u_w is the context (category) vector (Du and Huang, 2018). During the following steps, the products of the hidden states and their corresponding attention scores are calculated and the document vector d_i is formed from the summation of those products. Note that u_w is randomly

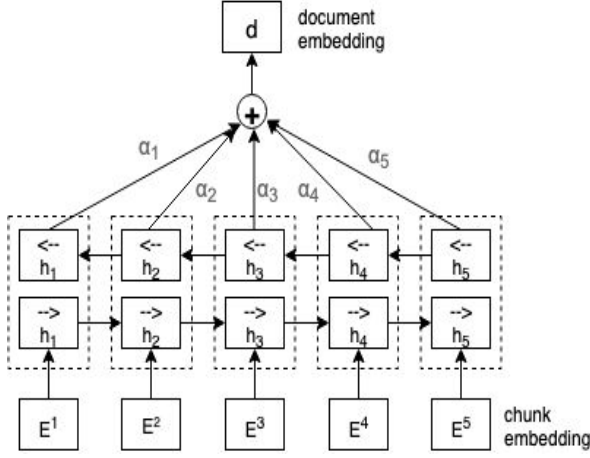


Figure 2: Document embedding process through BiLSTM framework.

initialised and then constantly updated during the training process.

Ultimately, we try different classifiers in order to assess the impact of the segmentation method. As part of the models of the first type, the resulting document vector is output from a batch normalisation layer. A linear transformation is then applied to that and this output is passed through a softmax classifier in order to acquire the multi-class probabilities. This final process is summarised in the following formula:

$$s_i = \text{softmax}(BN(Wd_i + b)) \quad (4)$$

where $W \in R^{c \times d}$ is the weight matrix, c and d are the number of classes and the number of dimensions of the hidden states respectively and $b \in R^d$ is the bias term. Hence, the final vector s_i is a c -dimension vector comprising the probability of that document belonging to each class.

The models of the second type are based on a strong machine learning classifier, namely Support Vector Machine (SVM). SVM also performs document classification by utilising the resulting document embeddings. The main parameters used to train SVM were obtained by optimising each model separately (see Section 4.2).

4 Experimental Setup

We evaluate the proposed model on a document classification dataset; 70% of the data is used for the training and the remaining 30% is equally divided and used for tuning and testing our model.

During the pre-processing stage where the documents are split into chunks, we utilise a cluster

Filing Type	Description under Regulation S-K ¹
10-Q	Quarterly reports
10-K	Annual reports
EX-10.1	Material contracts
EX-99.1	Additional exhibits for investment companies
EX-101.INS	XBRL-related documents

Table 3: Description of different filing type contents.

of Azure Virtual Machines with 32 GB RAM and 16 cores, which are optimised for CPU usage. A similar cluster is used during the hyperparameter optimisation, however, with 112 GB RAM. Reading from the remote disk (Azure Blob Storage) is rather time-consuming, since the corpus comprises lengthy documents. Thus, to accelerate the training, we chose nodes with abundant memory in order to load everything in memory just once (required roughly one hour for that process).

We use Pytorch 1.2.0 as the backend framework, Scikit-learn 0.20.3 for SVM and dataset splits, and gensim 3.8.1 for Doc2Vec model.

4.1 Dataset

The data we use to evaluate our model is a set of documents downloaded from EDGAR, an on-line public database from the U.S. Securities and Exchange Commission (SEC). EDGAR is the primary system for submissions by companies and others who are required by law to file information with the SEC. These documents can be grouped according to filing types, which determines the substantial content to fulfill their filing obligation. To work on as many documents as possible, we choose the following types: “10-Q”, “10-K”, “EX-99.1”, “EX-10.1” and “EX-101.INS”. The total number of documents is 28,445 and there are 5,689 documents for each filing type. We summarise the statistics of this dataset in Table 3.

Almost all documents of type “10-K” begin with lines that contain identical headings. In order to enable the machine to truly comprehend why a document of type “10-K” should be categorised to that filing type, we remove the first six lines where the identical text is located. The model is then able

¹ Regulation S-K is an official regulation under the US Securities Act of 1933 that establishes reporting regulations for a variety SEC filings used by public companies.

Model	W_c	Test.F1	Val.F1
1-chunk	24,744	96.96	97.50
3-chunk	8,248	97.85	98.11
5-chunk	4,949	97.97	97.85
7-chunk	3,535	97.45	97.55
10-chunk	2,474	97.87	97.87
25-chunk	990	97.41	97.64
50-chunk	495	97.34	97.22

Table 4: Performance of models of the first type (simple linear classifier) reported on validation and test set. W_c denotes the average words per chunk and best scores are shown in bold.

to focus on finding common features that exist in documents of the same filing type, rather than focusing on just capturing the few sentences that are the same in almost all of the documents of type “10-K”. A similar procedure is followed with the documents of type “10-Q”.

4.2 Model Configuration

As Table 4 shows, we create seven different models that correspond to the number of chunks that the text is divided into before passing through Doc2Vec. Each model is optimised separately to ensure fair comparison.

For the optimisation of the BiLSTM with attention model, we use Adam optimiser with a learning rate of 0.001, batch size of 1,000 and distinct values for each one of the other hyperparameters. Analogously, the SVM classifier consists of the Radial Basis Function (RBF) as the kernel function and a different value of gamma and the penalty parameter for each different model. The intention of the distinct values used for each model is to optimise each model separately so as to enable them to reach their best performance.

Furthermore, we observe that Doc2Vec requires only a small portion of the corpus to train accurately. Indeed, when training Doc2Vec on more documents we observe a substantial decrease in accuracy. It is well-known that legal documents contain several domain-specific words that are often repeated not only among different documents, but also within the same document. Training Doc2Vec on more documents introduced undesirable noise that results from company names, numbers such as transaction amounts and dates, job titles and addresses. Consequently, Doc2Vec is proven to generate more accurate document em-

Model	W_c	Test.F1	Val.F1
1-chunk	24,744	97.71	97.50
3-chunk	8,248	97.97	98.20
5-chunk	4,949	98.04	98.04
7-chunk	3,535	98.11	97.83
10-chunk	2,474	97.92	97.83
25-chunk	990	97.64	97.92
50-chunk	495	97.24	97.38

Table 5: Performance of models of the second type (SVM classifier) reported on validation and test set. W_c denotes the average words per chunk and best scores are shown in bold.

beddings when trained on just 150 randomly chosen documents (30 for each filing type).

5 Results and Discussion

Recently, reproducibility is becoming a growing concern for the NLP community (Crane, 2018). In fact, the majority of the papers we consider in this study fail to report the validation set results. To address these issues, apart from the F1 scores on the test sets we also report the F1 scores for the validation sets.

Legal documents contain domain-specific vocabulary and each type of document is normally defined in a very unambiguous way. Hence, even simple classifiers can achieve relatively high accuracy when classifying different documents. Nevertheless, even the slightest improvement of 1% or less will result in the correct classification of thousands of additional documents, which is crucial in the legal industry when handling large numbers of documents. This research allows these simple classifiers to achieve even greater results, by combining them with different architectures.

As Table 4 and Table 5 indicate, dividing the document in chunks - up to certain thresholds - results in improved models compared to those where the whole document is input into the classifier. Note that the model with one chunk denotes the model which takes as input the whole document to produce the document embedding and thereby is used as a benchmark in order to be able to identify the effectiveness of the document segmentation method.

More specifically, splitting the document into chunks yields higher test accuracy than having the whole document as input. Our first model with the BiLSTM based framework and the linear classi-

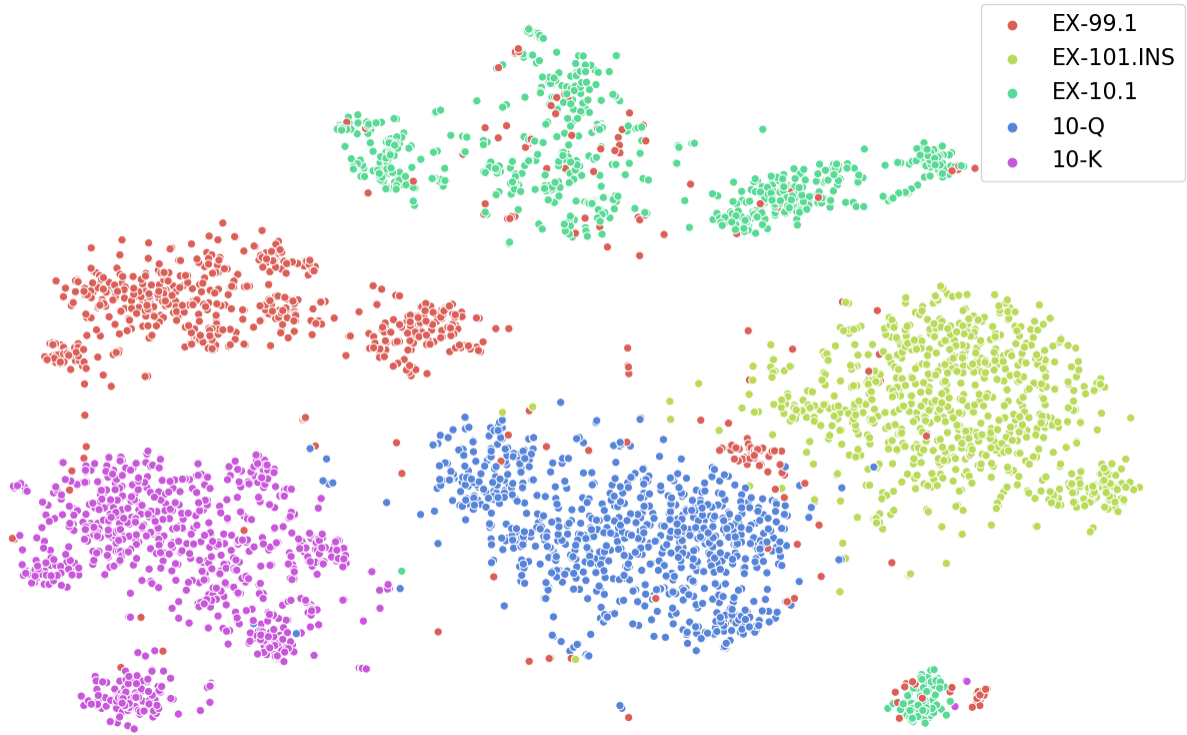


Figure 3: t-SNE plot of projections of document embeddings, using vanilla Doc2Vec.

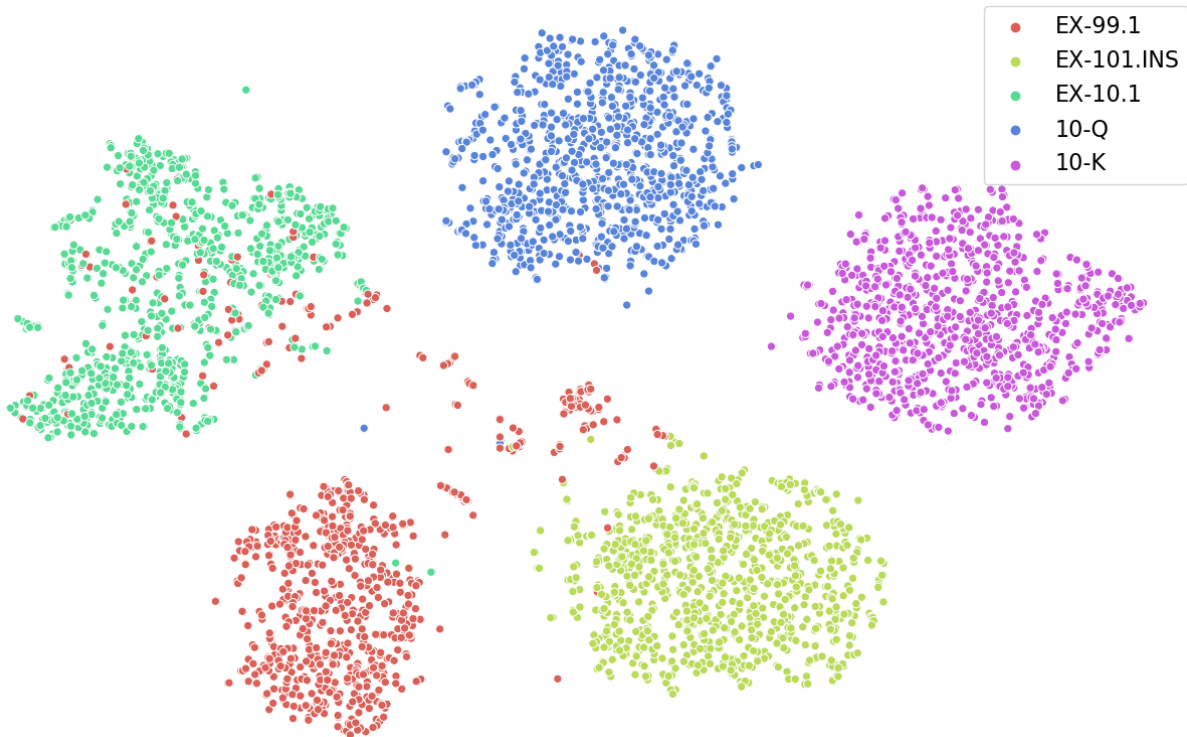


Figure 4: t-SNE plot of projections of document embeddings, using Doc2Vec + BiLSTM.

fier reaches a 97.97% accuracy with a 1.1% improvement upon the benchmark model. Similarly, the second model with the SVM classifier reaches a remarkable 98.11% accuracy with a 0.4% im-

provement upon the benchmark model.

A more thorough investigation of the test accuracy scores indicate that documents of type “EX-99.1” are the ones that get misclassified the most,

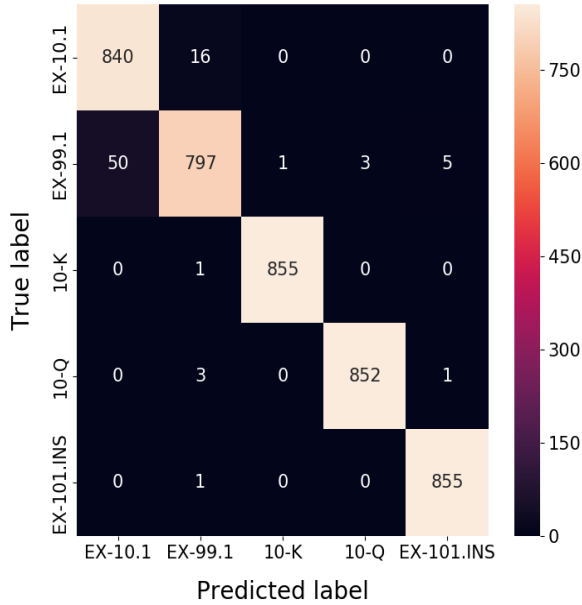


Figure 5: Confusion matrix plot of classification results for 7-chunk model on test set.

whereas the remaining four types of documents are in general classified correctly at a considerably higher rate. As confusion matrix plot in Figure 5 highlights, there are cases that documents of type “EX-10.1” are misclassified as “EX-99.1”, however, the reverse occurs more frequently. Further exploration of documents of type “EX-99.1” reveals that these documents often contain homogeneous agreements or clauses with the ones embodied in documents of type “EX-10.1”.

Ultimately, Figure 3 and Figure 4 demonstrate the increase of the efficiency of the document embeddings after the use of BiLSTM. These vector representations of each cluster have noticeably more robustly defined boundaries after they are passed through the BiLSTM network compared to the ones that are only passed through the mere Doc2Vec.

6 Conclusion

The main contribution of this paper is to overcome the document length limitations that are imposed by most modern architectures. It also shows that dividing documents into chunks before inputting them into Doc2Vec can result in enhanced models. Nonetheless, these advancements are accomplished with a relatively simplified structure, rather than a significantly more sophisticated architecture than its predecessors, which is often the

case in NLP research.

One potential extension of this work would be to apply powerful yet computationally expensive pre-processing techniques to the various documents. Techniques such as Named Entity Recognition (NER) could enable the training of the whole corpus in Doc2Vec by removing the undesired noise. Furthermore, the projections of the document embeddings at the end of our pipeline are shown to have clearly defined boundaries and thus they can be valuable for different NLP tasks, such as estimating document similarities. In the legal industry, this can contribute to identifying usages of legal templates and clauses.

References

- Adhikari, A., Ram, A., Tang, R., and Lin, J. (2019a). [DocBERT: BERT for document classification](#). *arXiv preprint arXiv:1904.08398*.
- Adhikari, A., Ram, A., Tang, R., and Lin, J. (2019b). [Rethinking complex neural network architectures for document classification](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, volume 1, pages 4046–4051.
- Chidanand, A., Fred, D., and M.Weiss, S. (1994). [Reuters-21578 Dataset](#).
- Crane, M. (2018). Questionable answers in question answering research: Reproducibility and variability of published results. In *Transactions of the Association for Computational Linguistics*, volume 6, pages 241–252. MIT Press.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2018). [BERT: Pre-training of deep bidirectional transformers for language understanding](#). *arXiv preprint arXiv:1810.04805*.
- Du, C. and Huang, L. (2018). [Text classification research with attention-based recurrent neural networks](#). *International Journal of Computers Communications & Control*, 13(1):50–61.
- EDGAR (2019). [The electronic data gathering, analysis, and retrieval system](#).
- Giannakopoulos, T. and Pikrakis, A. (2014). Introduction to audio analysis: a matlab® approach. *Academic Press*.
- Le, Q. and Mikolov, T. (2014). [Distributed representations of sentences and documents](#). In *In-*

ternational Conference on Machine Learning, pages 1188–1196.

Maas, A. L., Daly, R. E., Pham, P. T., Huang, D., Ng, A. Y., and Potts, C. (2011). [Learning word vectors for sentiment analysis](#). In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, volume 1, pages 142–150. Association for Computational Linguistics.

Theodorou, T., Mporas, I., and Fakotakis, N. (2014). An overview of automatic audio segmentation. In *International Journal of Information Technology and Computer Science*, volume 6, pages 1–9.

Yang, P., Sun, X., Li, W., Ma, S., Wu, W., and Wang, H. (2018). [SGM: Sequence generation model for multi-label classification](#). *arXiv preprint arXiv:1806.04822*.

Yang, Z., Yang, D., Dyer, C., He, X., Smola, A., and Hovy, E. (2016). [Hierarchical attention networks for document classification](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1480–1489.

Yelp (2014). [Yelp dataset challenge](#).

Zhang, X., Chen, F., Lu, C.-T., and Ramakrishnan, N. (2019). [Mitigating uncertainty in document classification](#). *arXiv preprint arXiv:1907.07590*.