

The *Shmoop* Corpus: A Dataset of Stories with Loosely Aligned Summaries

Atef Chaudhury^{1,2}, Makarand Tapaswi^{1,2,4}, Seung Wook Kim^{1,2,3}, Sanja Fidler^{1,2,3}

¹University of Toronto, ²Vector Institute, ³NVIDIA, ⁴Inria

<http://www.cs.toronto.edu/~makarand/shmoop/>

{atef,makarand,seung,fidler}@cs.toronto.edu

Abstract

Understanding stories is a challenging reading comprehension problem for machines as it requires reading a large volume of text and following long-range dependencies. In this paper, we introduce the *Shmoop* Corpus: a dataset of 231 stories that are paired with detailed multi-paragraph summaries for each individual chapter (7,234 chapters), where the summary is chronologically aligned with respect to the story chapter. From the corpus, we construct a set of common NLP tasks, including Cloze-form question answering and a simplified form of abstractive summarization, as benchmarks for reading comprehension on stories. We then show that the chronological alignment provides a strong supervisory signal that learning-based methods can exploit leading to significant improvements on these tasks. We believe that the unique structure of this corpus provides an important foothold towards making machine story comprehension more approachable.

1 Introduction

Humans have an extraordinary capability to become immersed in long narrative texts such as novels and plays, relive the stories, sympathize with characters, and understand the key messages that authors intend to convey. This set of skills defines the core of reading comprehension, a problem that remains unsolved by machines.

What makes story comprehension challenging is the fact that novels typically feature very long texts written in a variety of styles, and contain long-range dependencies over characters and plot events. Existing datasets such as NarrativeQA (Kočiský et al., 2018) consist of stories with a set of questions and answers as a proxy task for understanding. However, such quizzes provide a very weak form of supervision for an

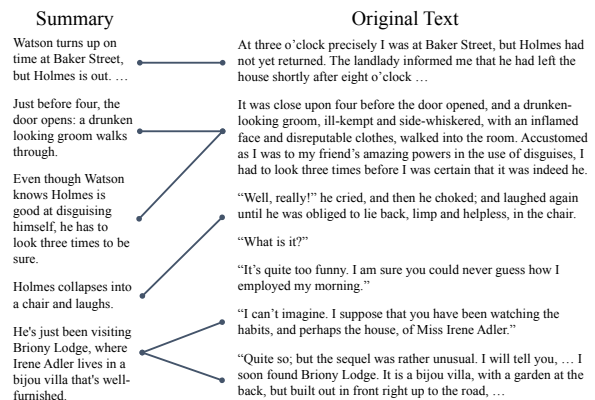


Figure 1: An excerpt from the corpus showing Shmoop summary paragraphs (left) and their chronological alignment to story paragraphs (right).

artificial agent, as it is required to learn to extract relevant semantic information from an extremely large volume of text with only a few QA pairs. This is likely one of the reasons that existing methods on summarization (See et al., 2017; Paulus et al., 2018; Zeng et al., 2016) and question answering (Hermann et al., 2015; Hill et al., 2016; Rajpurkar et al., 2016) are often limited to texts with only a few sentences or paragraphs. Recent forays into analyzing longer texts (Chen et al., 2017; Joshi et al., 2017; Liu et al., 2018) focus on Wikipedia articles or search results which are typically simpler in structure and are fact-based, and thus do not require a high-level of semantic abstraction in order to comprehend.

To address this, we introduce the *Shmoop* Corpus: a dataset of stories (books and plays) with summaries from Shmoop¹, a learning guide resource. Rather than summarizing the entire story in a few paragraphs as in Wikipedia plot synopses, these summaries are written for each chapter (see Fig. 1). Each summary compresses the relevant events in the chapter into a few short paragraphs,

¹<https://www.shmoop.com/>

Corpus	Size	Avg Tokens	
		Summary	Text
CNN/Daily Mail (Hermann et al., 2015)	300k	56	781
Children’s Book Test ² (Hill et al., 2016)	700k	-NA-	465
NarrativeQA (Kočiský et al., 2018)	1,572	659	62,528
MovieQA ³ (Tapaswi et al., 2016)	199	714	23,877
Shmoop Corpus (Ours)	7,234	460	3,579

Table 1: Statistics for summary and narrative datasets.

and is written in a neutral style. Moreover, the paragraphs in the summaries have a loose chronological alignment with paragraphs in the chapter. Just as with human learners for whom these summaries are originally intended, we believe that the alignment also provides a strong supervisory signal for training machine comprehension models.

We showcase this by constructing a benchmark set of NLP tasks from the corpus: Cloze-form question answering and a simplified form of abstractive summarization with multiple choices. We first demonstrate how the chronological structure can help compute alignments. Then, we use this alignment to learn semantic representations of stories that perform well on the tasks, thus demonstrating that this corpus is a key step towards improving reading comprehension for stories.

2 Corpus

We describe the features of the *Shmoop* corpus.

Data collection. We first retrieved paired summaries and narrative texts from the Shmoop website and Project Gutenberg⁴, respectively. The stories were parsed manually, split into chapters (plays into scenes), and then matched to their summaries. To assess the chronological order between the summaries and stories, we manually labeled a small validation set (5% of the corpus) with alignments. To do this, we split summaries into paragraphs based on their bullet-point structure, and stories based on line breaks (up to 250 words). We then manually aligned the summary and story paragraphs to best match their content.

Statistics. The corpus consists of 231 works (145 novels, 62 plays and 24 short stories) with a to-

²Corpus does not contain summaries. Size is based on the number of contexts which are derived from 108 texts.

³Dataset based on movie scripts and plot summaries.

⁴Accessed at <https://www.gutenberg.org/>

tal of 7,234 chapter and summary pairs. Table 1 compares our dataset to other narrative or summarization datasets. Our *Shmoop* corpus strikes a balance between short-form large-scale datasets such as the Children’s Book Test and long-form small-scale corpora like NarrativeQA. At the paragraph level, our dataset has 111k summary paragraphs with 30 words on average, and 436k story paragraphs with an average of 59 words each.

Chronological structure. The manually aligned validation set contains 360 chapters (from 15 stories) with a total of 13.5k aligned summary paragraphs. During alignment, we did not impose any constraints and allowed annotators to skip story paragraphs that did not fit any summary paragraph. Despite this, only 168 (1.2%) of the aligned summary paragraphs deviate from chronological order.

3 Exploiting the Chronological Structure

We take advantage of the chronological structure in a two step process. First, we use it to compute alignments that demonstrate good performance on our validation set. Second, we use these alignments as supervision for our benchmark tasks and show improved performance. Let us define some notation. For any chapter, let $S = \{s_i\}_{i=1}^N$ denote the summary composed of a sequence of paragraphs s_i , and $D = \{d_j\}_{j=1}^M$ denote the paragraphs of the story document. An alignment H denotes a relationship between S and D , where $h_{ij} \in \{0, 1\}$, such that $h_{ij} = 1$ iff d_j is aligned to s_i . Note that by *aligned*, we mean that the summary paragraph s_i partially or wholly encapsulates the content conveyed in the story paragraph d_j .

3.1 Computing Alignments

Let $g(s_i, d_j)$ denote a scoring function indicating similarity between s_i and d_j . We define the optimal alignment for a given g as: $H^* = \arg \max_H \sum_{ij} h_{ij} \cdot g(s_i, d_j)$, subject to a set of constraints. Specifically, we impose chronological ordering with the following constraints: $\forall i > k$ and $j < l$, if $h_{kl} = 1$ then $h_{ij} = 0$. Similar to prior work on aligning subtitles with scripts (Everingham et al., 2006) or plot synopses sentences with video shots (Tapaswi et al., 2015) we can compute alignments efficiently with dynamic programming.

We analyze a variety of alignments with and without imposing the temporal ordering. See Fig. 2 for an illustration of each approach.

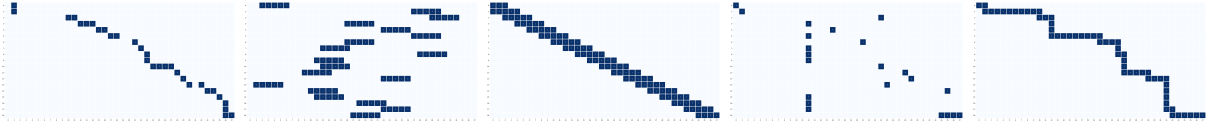


Figure 2: Various alignment methods applied to a chapter from *A Midsummer Night's Dream*. In each plot, y-axis (top to bottom) indicates subsequent summary paragraphs and x-axis (left to right) represents story paragraphs. A darkened square indicates that the summary paragraph is aligned to the story paragraph. **Alignment methods (left-to-right):** Ground-truth, Random-5, Diagonal-5, TFIDF, Chronological-TFIDF.

Random- N . Not considering the similarity score g leads to a random alignment. Here, N randomly selected consecutive d_j are aligned to each s_i .

Diagonal- N . Imposing temporal order without considering similarity scores leads to a diagonal alignment. In particular, N story paragraphs are aligned with each summary paragraph.

Similarity scores. We assign d_{j^*} to a summary paragraph s_i such that $j^* = \arg \max_j g(s_i, d_j)$. We compare three different scoring functions g . (i) BLEU (Papineni et al., 2002), a classic metric used in translation; (ii) BERT (Devlin et al., 2018), we compute cosine similarity between paragraph representations extracted with the pre-trained BERT model; and (iii) TFIDF, compares paragraphs using words weighted by their frequencies.

Chronological similarity scores. Alignment H^* is computed using dynamic programming with different scoring functions from above.

3.2 Benchmark NLP Tasks

We show the benefits of having an alignment by constructing two benchmark NLP tasks from the corpus: Cloze-form question answering and a simplified form of abstractive summarization. The alignment H determines the subset of the story document D used for each task. We choose these tasks to illustrate the benefits of aligned stories and summaries on reading comprehension most effectively. We expect improved performance given better alignments as the model is not required to search through a long text. Note that our key contribution is not a new task but rather a different approach that incorporates alignments to improve story understanding. Additionally, our dataset also serves as a benchmark for unsupervised learning of alignments.

Cloze-Form question answering. We construct this task following Hermann et al. (2015). A question q_i is constructed by masking an entity in a summary paragraph s_i . Given the subset of story paragraphs from D aligned to s_i as determined by H , the task is to select the correct answer a_i from

a set of candidate answers – up to 10 other entities from the same story. We determine entities using an entity tagger from AllenNLP (Gardner et al., 2017) and use entity anonymization Hermann et al. (2015) to ensure that the model does not learn information about specific entities. For a small percentage of s_i that do not have entities, we mask a random token during training. For evaluation, we report accuracy only on questions with masked entities.

Our model is a modified version of the Attentive Reader (AR) from Hermann et al. (2015), adapted for multi-paragraph texts. We treat (potentially multiple) story paragraphs aligned to the sentence s_i as a unique document and compute its question-conditioned representation. This is calculated as an attention-weighted sum of the word vectors, where attention is computed with respect to the question representation. We then combine individual paragraph representations into a single feature using another attention-weighted sum, again, attended by the question representation. This essentially amounts to a hierarchical version of AR. More model details are provided in Appendix B.1.

Multi-choice abstractive summarization. To see the benefits of having alignments, we propose a simplified form of abstractive summarization as another task. Given the story document D and corresponding alignments H , the goal of this task is to complete summary sentences s_i given first $T = 5$ tokens. In particular, we make this a multiple-choice problem by creating a set of 10 candidate sentences, 1 correct, and 9 incorrect ones obtained from tokens from other summary paragraphs of the same chapter.

Our model is an LSTM decoder that uses a modified version of the Attentive Reader to attend to the aligned portion of the document at each time step. In particular, we sequentially predict words using an LSTM decoder (similar to other generative summarizers) and rank possible candidate answers by computing the average log-likelihood for each candidate. The use of multiple-choice an-

Alignment Type	Using Similarity g	Temporal Order	Alignment Performance			Task Accuracy	
			Precision	Recall	F-Score	Cloze	Summarization
No Context (Random Choice)	N/A	N/A	N/A	N/A	N/A	0.109	0.102
No Alignment (All Paragraphs)	X	X	0.127	1.000	0.206	0.149	0.148
Random-1	X	X	0.125	0.048	0.065	0.173	0.118
Random-5	X	X	0.125	0.217	0.145	0.255	0.129
Random-25	X	X	0.121	0.606	0.186	0.127	0.144
Diagonal-1	X	✓	0.210	0.087	0.115	0.157	0.145
Diagonal-5	X	✓	0.234	0.370	0.261	0.319	0.142
Diagonal-25	X	✓	0.176	0.850	0.271	0.356	0.149
BERT	✓	X	0.142	0.056	0.075	0.158	0.149
BLEU1	✓	X	0.196	0.122	0.123	0.317	0.153
BLEU4	✓	X	0.296	0.134	0.163	0.277	0.150
TFIDF	✓	X	0.428	0.173	0.229	0.367	0.152
Chronological-Random	X	✓	0.207	0.387	0.264	0.262	0.148
Chronological-BERT	✓	✓	0.196	0.364	0.250	0.253	0.146
Chronological-BLEU1	✓	✓	0.240	0.455	0.308	0.276	0.150
Chronological-BLEU4	✓	✓	0.262	0.492	0.336	0.366	0.152
Chronological-TFIDF	✓	✓	0.351	0.670	0.452	0.407	0.154

Table 2: Alignment performance and task accuracy for various methods.

swers for summarization removes additional ambiguity introduced by sentence comparison metrics (*e.g.*, BLEU, ROUGE). Nevertheless, please note that our LSTM decoder is able to generate a summary paragraph when no candidates are provided. Additional details are in Appendix B.2.

3.3 Learning Alignments

We also experiment with learning an alignment simultaneously with a task of interest (*e.g.*, Cloze QA). This has the potential to obtain ever-increasing performance improvements for both the alignment as well as the task. As the alignment H is a latent non-differentiable variable, we follow a Concave-Convex Procedure (Yu and Joachims, 2009). The optimization procedure alternates between computing optimal H given model parameters θ using dynamic programming, and learning θ given H with a gradient-based optimizer. More details on the procedure are provided in Appendix C.

4 Results

Table 2 summarizes experimental results on alignment and NLP tasks studied in this work.

Alignment performance is reported as precision, recall, and F1-score, with each ground-truth aligned (s_i, d_j) pair considered as a sample. We see that even with our simple methods, it is possible to produce reasonably accurate alignments. Our best result, using TFIDF pairwise scores with

a chronological constraint, attains 0.452 F-score, whereas random alignments are 0.186 or below. Chronological-TFIDF tends to closely follow the ground-truth and has high recall (see Fig. 2).

Interestingly, while large-scale corpora models like BERT have been successful on many tasks, story-understanding still poses a significant challenge. Using sentence representations from a pre-trained BERT model performs similar to random scoring and far worse than word matching: F-score of 0.25 for Chronological-BERT, 0.264 for Chronological-Random and 0.452 for Chronological-TFIDF. We speculate that this is due to the complexity of stories and summaries (*e.g.*, tracking long-range dependencies, high variance in linguistic style), and the generally limited availability of summary-story pairs in the wild.

Benchmark NLP Tasks. We use accuracy as a metric for both Cloze and summarization tasks. In general, using an alignment helps improve performance, and alignments that take advantage of the chronological structure perform better on both studied tasks. Without using any alignment, accuracy on the tasks is at 0.149 and 0.148.

We categorize methods based on whether they have access to the similarity scoring function g and whether they use temporal order (diagonal or DP). Among methods that do not have access to g , non-temporal methods (Random-N) achieve an accuracy of 0.255 and 0.144. In comparison, methods that use temporal order (Diagonal-N) ob-

tain higher accuracy 0.356 and 0.149, respectively. Among methods with access to g , using temporal order does improve performance, but is less pronounced. For example, Chronological-TFIDF obtains an accuracy of 0.407 and 0.154, while TFIDF achieves 0.367 and 0.152.

This demonstrates that the chronological order present in the corpus is useful for natural language tasks, in particular when no prior information about the text is available. A reason for the small improvements on summarization is the task difficulty. On the other hand, we see that Cloze-form QA is made much more accessible by leveraging alignment information.

Simultaneously learning alignments. Jointly optimizing both H and model parameters for the Cloze task produces alignments with an F-score of 0.355. While this is more accurate than other methods such as Chronological-BERT, it is lower than the Chronological-TFIDF approach. Learning alignments with weak supervision remains an active area of research (Zhu et al., 2015; Raffel et al., 2017; Luo et al., 2017), and is an interesting task that our corpus facilitates.

5 Conclusion

We introduced a corpus of stories and loosely-aligned summaries, as well as a set of benchmark tasks for story-based reading comprehension. We showed that the corpus’s structural properties, in the form of temporal ordering, are key to learning effective representations for these tasks. This is the core value of our corpus, as it makes the challenge of learning on stories much more accessible. Beyond the tasks we showed here, we believe this corpus can be built upon to expand to other challenges such as question answering and learning alignment, pushing the envelope of story understanding in multiple domains. We make the corpus available at <https://github.com/achaudhury/shmoop-corpus>.

Acknowledgments. We thank Shmoop for creating an amazing learning resource and allowing us to use their summary data for research purposes. The project was supported by DARPA Explainable AI (XAI) and NSERC Cohesa. We thank our Upwork annotators for helping us in annotating the alignments between stories and their summaries.

Appendix

We present additional details on the benchmark Cloze-form QA and summarization tasks (Appendix A) and their corresponding models in Appendix B. We also discuss the method we adopt for learning alignments simultaneously with the task in Appendix C and present some examples of aligned summary and story paragraphs from our corpora in Appendix D.

A Task Construction Details

A.1 Cloze-Form Question Answering

20,000 Leagues Under the Sea

Question:

[MASK] obviously wants to find his Giant Narwhal as well. Only Conseil seems uninterested.

Multiple Choice Answers:

- | | |
|-------------|------------------|
| a) Aronnax | f) Giant Narwhal |
| b) Nautilus | g) Higginson |
| c) Conseil | h) Moby Dick |
| d) Ned | i) Vanikoro |
| e) Nemo | j) Kraken |
-

Oedipus the King

Question:

[MASK] reenters and demands that anyone with information about the former king’s murder speak up. He curses the murderer.

Multiple Choice Answers:

- | | |
|--------------|------------|
| a) Creon | f) Polybus |
| b) Jocasta | g) Apollo |
| c) Oedipus | h) Sphinx |
| d) Teiresias | i) Corinth |
| e) Laius | j) Thebes |
-

Table 3: Examples of Cloze-form questions derived from summary paragraphs. Our task employs 10 multiple choice options.

We create Cloze-form questions in the following manner. For each summary paragraph, candidate entities for masking are determined using the pre-trained AllenNLP entity tagger (Gardner et al., 2017), using the PERSON, ORGANIZATION and LOCATION tags. Entities that do not occur in the original text are removed from the candidate set. If multiple entity candidates are found in a single summary paragraph, the entity that appears least frequently in the summary is chosen – thus encouraging diversity of answers. If no entities are present in the summary paragraph, a token is chosen at random to be masked during training, but is not included in reporting the final performance.

A.2 Multi-choice Abstractive Summarization

A Christmas Carol

Question:

Scrooge throws out his famous....

Multiple Choice Answers:

- a) ... come over for Christmas dinner, but Scrooge isn't having any of it.
- b) ... but what about the whole Jesus's birth thing?
- c) ... **catchphrase - Bah! Humbug!**
- d) ... guys show up asking for any donations for the poor.
- e) ... the cellar bursts open and out of it comes Marley's ghost!.

Table 4: Example of Multi-choice Abstractive summarization. Our task employs 10 multiple choice options, but here we show 5 for brevity.

In this task, our goal is to complete the summary bullet point given the first $T = 5$ words of the paragraph, the original story D and an alignment H . Summaries that have less than $T = 5$ tokens are not considered in this task (both as correct or contrastive answers). Instead of generating a new sentence, we wish to complete the sentence by choosing one among 10 possible candidate sentences. The wrong candidates consist of other summary paragraphs from the same chapter (ignoring the first T tokens).

In particular, for a model that consists of a standard RNN decoder (e.g., LSTM), and we teacher force the entire summary paragraph and train the parameters using cross-entropy loss. At test time, we seed (teacher-force) the model with the first T tokens of the desired summary paragraph. Then, we compute the average log-likelihood (probabilities) of all remaining tokens in each candidate to rank them.

B Model Details

B.1 Cloze-Form Question Answering

We first encode the question q_i (summary paragraph s_i with a blank) and story paragraphs d_j with a word embedding and Bi-LSTM to obtain q_i^{enc} and d_j^{enc} (Eq. 1, 2). We then use our modified Attentive Reader f_{AR} to generate a conditional document representation c_i based on the encoded mask token representation $q_{i[mask]}^{enc}$, and alignment H (Eq. 3). Finally an answer vector a_i^* is computed by adding c_i to $q_{i[mask]}^{enc}$ and applying a linear layer W_f (Eq. 4). This answer vector is compared against candidate answers using cosine similarity,

Algorithm 1: CCCP Optimization

Initialize θ and H ;

while not converged **do**

$$H^* = \arg \max_H J_\theta(H);$$

$$\theta = \arg \min_\theta (\max_H J_\theta(H) - J_\theta(H^*));$$

end

followed by selecting the highest scoring answer.

$$q_i^{enc} = BiLSTM_q(W_{emb}(q_i)), \quad (1)$$

$$d_j^{enc} = BiLSTM_d(W_{emb}(d_j)), \quad (2)$$

$$c_i = f_{AR}(q_{i[mask]}^{enc}, H, D^{enc}), \quad (3)$$

$$a_i^* = W_f(q_{i[mask]}^{enc} + c_i). \quad (4)$$

Our modified Attentive Reader f_{AR} first constructs a conditional representation p_j for each d_j^{enc} based on an attention-weighted sum of token representations. Attention is computed as a function of the encoding of the mask token from the question $q_{i[mask]}^{enc}$ and token representation d_{jt}^{enc} (q and d_{jt} respectively for brevity) in Eq. 5 and Eq. 6. We then combine the representations into a single vector with an attention-weighted sum once again to produce the final AR output (Eq. 7 and Eq. 8):

$$\alpha_{jt} = \frac{\exp(q^T W_\alpha d_{jt})}{\sum_t \exp(q^T W_\alpha d_{jt})}, \quad (5)$$

$$p_j = \sum_t \alpha_{jt} d_{jt}. \quad (6)$$

$$\beta_j = \frac{\exp(q^T W_\beta p_j)}{\sum_{j \in h_i} \exp(q^T W_\beta p_j)}, \quad (7)$$

$$f_{AR}(q, H, D) = \sum_{j \in h_i} \beta_j p_j, \quad (8)$$

where $j \in h_i$ corresponds to the set $\{j : h_{ij} = 1\}$ described by the latent alignment H .

Our model parameters θ constitute a word embedding layer W_{emb} , linear layers W_α , W_β , W_f , and the bi-directional LSTMs $BiLSTM_q$ and $BiLSTM_d$. Dimensionality of embeddings and LSTM hidden states is chosen to be 200. The model parameters are trained via the max-margin loss (margin $m = 0.1$) using the Adam optimizer with a learning rate of 10^{-4} .

B.2 Multi-choice Abstractive Summarization

We adapt the Attentive Reader from above to the generation task by computing new context vectors

A Christmas Carol

Summary

s_1 : Scrooge snorts himself awake, and again it's about to be one o'clock. Scrooge is hip to all this now, though, so he doesn't freak out.

Original Text

d_1 : AWAKING in the middle of a prodigiously tough snore, and sitting up in bed to get his thoughts together, Scrooge had no occasion to be told that the bell was again upon the stroke of One. He felt that he was restored to consciousness in the right nick of time, for the especial purpose of holding a conference with the second messenger dispatched to him through Jacob Marley's intervention. But finding that he turned uncomfortably cold when he began to wonder which of his curtains this new spectre would draw back, he put them every one aside with his own hands; and lying down again, established a sharp look-out all round the bed. For he wished to challenge the Spirit on the moment of its appearance, and did not wish to be taken by surprise, and made nervous.

Table 5: Aligned summary and stories paragraphs from *A Christmas Carol*

c_{it} for each generated token rather than a single c_i . These are used to create an answer prediction vector a_{it}^* at each time step.

$$c_{it} = f_{AR}(q_{i,t-1}, h_i, D^{enc}), \quad (9)$$

$$a_{it}^* = W_f LSTMG(q_{it}, c_{it}). \quad (10)$$

Different from the model used for Cloze-form QA, we use the cross-entropy loss at each time step. We use a word embedding and LSTM hidden state dimension of 200, and train our model parameters using the Adam optimizer at a learning rate of 10^{-4} .

C Learning Alignment Details

We provide additional details for our approach towards learning the alignment jointly with the task.

Let $J_\theta(H)$ be the loss function for a given task, for a model with parameters θ , depending on a latent variable H . To jointly optimize both θ and H we follow a modified version of the Concave-Convex Optimization Procedure (CCCP) outlined in Algorithm 1.

Notably, the initial step of solving H^* can be computed efficiently due to the alignment constraints with a dynamic programming algorithm as J_θ can be made to have a linear dependency on H . For the sake of simplicity use contrastive sampling to estimate the max over all possible alignments during training. During validation, our focus is on determining H^* and we do not actually compute $\max_H J_\theta(H)$.

A Midsummer Night's Dream

Summary

s_3 : Quince announces that Bottom is the paramour of a sweet voice, and Flute points out that he means "paragon."

Original Text

d_7 : QUINCE Yea, and the best person too, and he is a very paramour for a sweet voice.

d_8 : FLUTE You must say paragon. A paramour is (God bless us) a thing of naught.

Summary

s_4 : Snug enters the house, announcing that the Duke is coming from the temple with two or three more couples who were just married. Flute laments that, had they been able to perform, they'd no doubt be rich men, earning them at least sixpence a day (a royal pension).

Original Text

d_9 : Enter Snug the joiner.

d_{10} : SNUG Masters, the Duke is coming from the temple, and there is two or three lords and ladies more married. If our sport had gone forward, we had all been made men.

d_{11} : FLUTE O, sweet bully Bottom! Thus hath he lost sixpence a day during his life. He could not have scaped sixpence a day. An the Duke had not given him sixpence a day for playing Pyramus, Ill be hanged. He would have deserved it. Sixpence a day in Pyramus, or nothing!

Table 6: Aligned summary and stories paragraphs from *A Midsummer Night's Dream*

D Additional Dataset Examples

We present several examples of summary paragraphs and their corresponding aligned story paragraphs. We include an example of a perfect one-to-one paragraph alignment from a novel (*A Christmas Carol*) in Table 5; a one-to-many alignment common in the presence of story paragraphs consisting of dialogs in a play (*A Midsummer Night's Dream*) in Table 6; and a many-to-one alignment in a large paragraph from a short story (*The Masque of the Red Death*) in Table 7.

References

- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading wikipedia to answer open-domain questions. In *Annual Meeting of the Association for Computational Linguistics*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Mark Everingham, Josef Sivic, and Andrew Zisserman. 2006. "Hello! My name is ... Buffy" – Automatic

The Masque of Red Death

Summary

s₂: Prince Prospero, the ruler of said kingdom currently being ravaged by the Red Death, is "happy" and "dauntless" and decides he doesn't want to bother with the disease. So he takes a thousand of his knights and maidens and shuts himself up with them in a hidden "castellated abbey" (that would be an abbey made over into a castle, with battlements).

s₃: The doors of the abbey are welded shut, so no one can get in. But no one can get out, either.

s₄: Prince Prospero is quite the party animal, and plans to have a good time while the rest of the world dies.

s₅: The abbey (which Prospero designed himself) is filled to the brim with all the makings of an incredible party: lots of food, jesters, dancers, musicians, and wine.

Original Text

d₂: But the Prince Prospero was happy and dauntless and sagacious. When his dominions were half depopulated, he summoned to his presence a thousand hale and light-hearted friends from among the knights and dames of his court, and with these retired to the deep seclusion of one of his castellated abbeys. This was an extensive and magnificent structure, the creation of the prince's own eccentric yet august taste. A strong and lofty wall girdled it in. This wall had gates of iron. The courtiers, having entered, brought furnaces and massy hammers and welded the bolts. They resolved to leave means neither of ingress nor egress to the sudden impulses of despair or of frenzy from within. The abbey was amply provisioned. With such precautions the courtiers might bid defiance to contagion. The external world could take care of itself. In the meantime it was folly to grieve, or to think. The prince had provided all the appliances of pleasure. There were buffoons, there were improvisatori, there were ballet-dancers, there were musicians, there was Beauty, there was wine. All these and security were within. Without was the "Red Death".

Table 7: Aligned summary and stories paragraphs from *The Masque of Red Death*

Naming of Characters in TV Video. In *British Machine Vision Conference*.

Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke S. Zettlemoyer. 2017. AllenNLP: A Deep Semantic Natural Language Processing Platform. In *arXiv:1803.07640*.

Karl Moritz Hermann, Tomas Kocisky, Edward Grefenstette, Lasse Espeholt, Will Kay, Mustafa Su-leyman, and Phil Blunsom. 2015. Teaching machines to read and comprehend. In *Advances in neural information processing systems*.

Felix Hill, Antoine Bordes, Sumit Chopra, and Jason Weston. 2016. The goldilocks principle: Reading children's books with explicit memory representations. In *International Conference on Learning Representations*.

Mandar Joshi, Eunsol Choi, Daniel S Weld, and Luke Zettlemoyer. 2017. Triviaqa: A large scale distantly

supervised challenge dataset for reading comprehension. In *Annual Meeting of the Association for Computational Linguistics*.

Tomáš Kočiský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. 2018. The narrativeqa reading comprehension challenge. *Transactions of the Association of Computational Linguistics*.

Peter J Liu, Mohammad Saleh, Etienne Pot, Ben Goodrich, Ryan Sepassi, Lukasz Kaiser, and Noam Shazeer. 2018. Generating wikipedia by summarizing long sequences. In *International Conference on Learning Representations*.

Yuping Luo, Chung-Cheng Chiu, Navdeep Jaitly, and Ilya Sutskever. 2017. Learning online alignments with continuous rewards policy gradient. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*.

Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Annual Meeting of the Association for Computational Linguistics*.

Romain Paulus, Caiming Xiong, and Richard Socher. 2018. A deep reinforced model for abstractive summarization. In *International Conference on Learning Representations*.

Colin Raffel, Minh-Thang Luong, Peter J Liu, Ron J Weiss, and Douglas Eck. 2017. Online and linear-time attention by enforcing monotonic alignments. In *International Conference on Machine Learning*.

Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100,000+ questions for machine comprehension of text. In *Empirical Methods in Natural Language Processing*.

Abigail See, Peter J Liu, and Christopher D Manning. 2017. Get to the point: Summarization with pointer-generator networks. In *Annual Meeting of the Association for Computational Linguistics*.

Makarand Tapaswi, Martin Bumli, and Rainer Stiefel-hagen. 2015. Aligning Plot Synopses to Videos for Story-based Retrieval. *International Journal of Multimedia Information Retrieval (IJMIR)*, 4:3–16.

Makarand Tapaswi, Yukun Zhu, Rainer Stiefel-hagen, Antonio Torralba, Raquel Urtasun, and Sanja Fidler. 2016. MovieQA: Understanding Stories in Movies through Question-Answering. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.

Chun-Nam John Yu and Thorsten Joachims. 2009. Learning structural SVMs with latent variables. In *International Conference on Machine Learning*.

Wenyuan Zeng, Wenjie Luo, Sanja Fidler, and Raquel Urtasun. 2016. Efficient summarization with read-again and copy mechanism. In *arXiv:1611.03382*.

Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. 2015. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. In *IEEE international conference on computer vision*.