

Complexity Issues of String to Graph Approximate Matching^{*}

Riccardo Dondi¹, Giancarlo Mauri², and Italo Zoppis²

¹ Università degli Studi di Bergamo, Bergamo, Italy

² Università degli Studi di Milano-Bicocca, Milano - Italy

riccardo.dondi@unibg.it, mauri@disco.unimib.it, zoppis@disco.unimib.it

Abstract. The problem of matching a query string to a directed graph, whose vertices are labeled by strings, has application in different fields, from data mining to computational biology. Several variants of the problem have been considered, depending on the fact that the match is exact or approximate and, in this latter case, which edit operations are considered and where are allowed. In this paper we present results on the complexity of the approximate matching problem, where edit operations are symbol substitutions and are allowed only on the graph labels or both on the graph labels and the query string. We introduce a variant of the problem that asks whether there exists a path in a graph that represents a query string with any number of edit operations and we show that it is NP-complete, even when labels have length one and in the case the alphabet is binary. Moreover, when it is parameterized by the length of the input string and graph labels have length one, we show that the problem is fixed-parameter tractable and it is unlikely to admit a polynomial kernel. The NP-completeness of this problem leads to the inapproximability (within any factor) of the approximate matching when edit operations are allowed only on the graph labels. Moreover, we show that the variants of approximate string matching to graph we consider are not fixed-parameter tractable, when the parameter is the number of edit operations, even for graphs that have distance one from a DAG. The reduction for this latter result allows us to prove the inapproximability of the variant where edit operations can be applied both on the query string and on graph labels.

Keywords: Algorithms on strings, Computational complexity, Graph query, Parameterized complexity, Patterns, String to graph matching.

1 Introduction

Given a query string s and a directed graph G whose vertices are labeled with strings (referred as labeled graph), the matching and the approximate matching of s to G ask for a path (not necessarily simple) in G that represents s , that

^{*} Riccardo Dondi dedicates the paper to the memory of his beloved father, Gilberto, who passed away on November 26, 2019.

is by concatenating the labels of the vertices on the path we obtain s or an approximate occurrence of s .

The matching and the approximate matching of a query string to a labeled graph have applications in different areas, from graph databases and data mining to genome research. The problems have been introduced in the context of pattern matching in hypertext [1,3,16,10], but have found recently new applications. Indeed in computational biology a representation of variants of related sequences is often provided by a labeled graph [18,11] and the query of a string in a labeled graph has found application in computational pan-genomics [14,19].

The exact matching problem is known to be in P [1,3,16]. Furthermore, conditional lower bounds for this problem has been recently given in [7].

The approximate string to graph matching problem, referred to **String to Graph Approximate Matching**, has the goal of minimizing the number of edit operations (of the query string or of the labels of the graph) such that there exists a path p in G whose labels match the query string. **String to Graph Restricted Approximate Matching** denotes the variant where edit operations are allowed only on the graph labels. **String to Graph Approximate Matching** and **String to Graph Restricted Approximate Matching** are known to be NP-hard [12], even for binary alphabet [9]. When the edit operations are allowed only on the query string, then **String to Graph Approximate Matching** is polynomial-time solvable [9]. Moreover, when the input graph is a Directed Acyclic Graph (DAG), **String to Graph Approximate Matching** and **String to Graph Restricted Approximate Matching** are polynomial-time solvable [10].

In this contribution, we consider the **String to Graph Approximate Matching** problem and the **String to Graph Restricted Approximate Matching** problem, with the goal of deepening the understanding of their complexity. Notice that the edit operations we consider are symbol substitutions of the graph labels or of the query string. Other variants with different edit operations have been considered in literature [3,9].

We introduce a variant of **String to Graph Restricted Approximate Matching**, called **String to Graph Compatibility Matching**, that asks whether it is possible to find an occurrence of a query string in a graph with any number of edit operations of the graph labels. This decision problem is helpful to characterize whether a feasible solution of **String to Graph Restricted Approximate Matching** exists or not. We show in Section 3 that **String to Graph Compatibility Matching** is NP-complete, even when the labels of the graph have length one or when the alphabet is binary. The reduction shows also that **String to Graph Compatibility Matching** when parameterized by the length of the query string is unlikely to have a polynomial kernel³ (for details on kernelization we refer to [15,6]). A consequence of the intractability of **String to Graph Compatibility Matching** is that **String to Graph Restricted Approximate Matching** cannot be approximated within any factor in polynomial time. Notice that if we allow edit operations of the query

³ A problem parameterized by parameter t admits a polynomial kernel if there exists a polynomial-time algorithm that reduces the instance of the problem so that it has a size which is a polynomial in t .

string, then the existence of a path that represents an approximate matching of the query string can be decided in polynomial time. Indeed, it is enough to check whether the input graph contains a (non necessarily simple) path p in G that represents a string of length $|s|$.

We consider in Section 4 the parameterized complexity of **String to Graph Restricted Approximate Matching** and of **String to Graph Approximate Matching** and we show that they are $W[2]$ -hard when parameterized by the number of edit operations, even for a labeled graph having distance one from a DAG. This result shows that, while **String to Graph Restricted Approximate Matching** and **String to Graph Approximate Matching** are solvable in polynomial time when the labeled graph is a DAG [10], even for graphs that are very close to DAG they become hard. The reduction designed to prove this latter result allows us to show that **String to Graph Approximate Matching** is not approximable within factor $\Omega(\log(|V|))$ and $\Omega(\log(|s|))$, for a labeled graph $G = (V, E)$ and a query string s .

In Section 5, we provide a fixed-parameter tractable algorithm for **String to Graph Compatibility Matching**, when parameterized by size of the query string and when the graph labels have length one. We conclude the paper in Section 6 with some open problems, while in Section 2 we introduce some definitions and the problems we are interested in. Some of the proofs are not included due to page limit.

2 Definitions

Given an alphabet Σ and a string s over Σ , we denote by $|s|$ the length of s , by $s[i]$, with $1 \leq i \leq |s|$, the i -th symbol of s and by $s[i, j]$, with $1 \leq i \leq j \leq |s|$, the substring of s that starts at position i and ends at position j .

Every graph we consider in this paper is *directed*. Given a graph $G = (V, E)$ and a vertex $v \in V$, we define $N^+(v) = \{u \in V : (v, u) \in E\}$ and $N^-(v) = \{w \in V : (w, v) \in E\}$.

A labeled graph $G = (V, E, \sigma)$ is a graph whose vertices are labeled with strings, formally assigned by a labeled function $\sigma : V \rightarrow \Sigma^*$, where Σ is an alphabet of symbols. Notice that $\sigma(v)$, with $v \in V$, denotes the string associated by σ to vertex v . Let $p = v_1 v_2 \dots v_z$ be a path (non necessarily simple) in G , the set of vertices that induces p is denoted by $V(p)$ and the string associated with p is defined as $\sigma(p) = \sigma(v_1) \sigma(v_2) \dots \sigma(v_z)$, that is $\sigma(p)$ is obtained by concatenating the strings that label the vertices of path p .

Consider a string s on alphabet Σ and a labeled graph $G = (V, E, \sigma)$. We say that a path p in G is an occurrence of s if $\sigma(p) = s$; in this case we call $\sigma(p)$ an exact matching of s and we say that p matches s .

An edit operation of a string s is a substitution of the symbol in a position i , with $1 \leq i \leq |s|$, of s with a different symbol in Σ . An edit operation of $G = (V, E, \sigma)$ is an edit operation of a string $\sigma(v)$, with $v \in V$. A path p in G is an *approximate matching* of s if, after $k_1 \geq 0$ edit operations of labels of G , $\sigma(p) = s'$, where s' is a string obtained with $k_2 \geq 0$ edit operations of s . In this case, we say that the approximate matching requires $k = k_1 + k_2$ edit operations.

We say that p in G is a *restricted approximate matching* of s , if, after $k \geq 0$ edit operations to labels of G , $s = \sigma(p)$ (that is the edit operations are allowed only on the labels of G).

Consider a path p that matches (exactly, approximately or restricted approximately) the query string s . If position i , $1 \leq i \leq |s|$, in s and the j -th position, $1 \leq j \leq |\sigma(u)|$, of the label of vertex u in p match (possibly after an edit operation), we say that position i is mapped in $\sigma(u)[j]$; if $|\sigma(u)| = 1$, by slightly abusing the notation, we say that position i is mapped in u .

Next, we define the first combinatorial problem we are interested in.

Problem 1. String to Graph Approximate Matching

Input: A labeled graph $G = (V, E, \sigma)$ and a query string s , both on alphabet Σ .

Output: An approximate matching p of s that requires the minimum number of edit operations.

We define now the variant of the problem, called **String to Graph Restricted Approximate Matching**, where edit operations are allowed only on the labels of the labeled graph.

Problem 2. String to Graph Restricted Approximate Matching

Input: A labeled graph $G = (V, E, \sigma)$ and a query string s , both on alphabet Σ .

Output: A restricted approximate matching p of s that requires the minimum number of edit operations.

Consider a labeled graph $G = (V, E, \sigma)$ and a query string s over Σ . If there exists a path p in G which is a restricted approximate matching of s , we say that p is *compatible* with s . Notice that the definition of compatibility does not put any bound on the number of edit operations of graph labels and that no edit operation is allowed on the query string. In this paper, we introduce a decision problem, called **String to Graph Compatibility Matching**, related to **String to Graph Restricted Approximate Matching**, that asks whether there exists a path in $G = (V, E, \sigma)$ compatible with s .

Problem 3. String to Graph Compatibility Matching

Input: A labeled graph $G = (V, E, \sigma)$, a query string s , both on alphabet Σ .

Output: Does there exist a path in G that is compatible with s ?

3 Hardness of String to Graph Compatibility Matching

In this section we consider the computational complexity of **String to Graph Compatibility Matching** and we prove that the problem is indeed NP-complete and it is unlikely to admit a polynomial kernel. This result, as discussed in Theorem 3, is not only interesting to characterize the complexity of **String to Graph Compatibility Matching**, but also to give insights into the approximation complexity of **String to Graph Restricted Approximate Matching**.

We start by proving that **String to Graph Compatibility Matching** is NP-complete when the labels of the graph have length one, via a reduction from the h -Path

problem. The reduction is inspired by that in [3] to prove the NP-hardness of **String to Graph Restricted Approximate Matching**. Then we modify the reduction so that it holds also for binary alphabet. We recall the definition of h -Path, which is known to be NP-complete [8].

Problem 4. h -Path

Input: A directed graph $G = (V_L, E_L)$.

Output: Does there exist a simple path in G_L of length h ?

3.1 Graph Labels of Length One

Consider a graph $G_L = (V_L, E_L)$, with $V_L = \{v_1^l, \dots, v_n^l\}$, which is an instance of h -Path, we define an instance of **String to Graph Compatibility Matching** consisting of a labeled graph $G = (V, E, \sigma)$ and a query string s .

First, define the alphabet Σ as follows: $\Sigma = \{x_i : 1 \leq i \leq n\} \cup \{y_i : 1 \leq i \leq h\}$.

The labeled graph $G = (V, E, \sigma)$ is defined as follows:

$$V = \{v_i : v_i^l \in V_L, 1 \leq i \leq n\}, \quad E = \{(v_i, v_j) : (v_i^l, v_j^l) \in E_L\}.$$

The labelling function $\sigma : V \rightarrow \Sigma^*$ of the graph vertices is defined as follows: $\sigma(v_i) = x_i$, for each i with $1 \leq i \leq n$.

Finally, we define the query string $s = y_1 y_2 \dots y_h$.

The following lemma allows us to prove the hardness of **String to Graph Compatibility Matching**.

Lemma 1. *Let $G_L = (V_L, E_L)$ be a graph instance of h -Path and let $(G = (V, E, \sigma), s)$ be the corresponding instance of **String to Graph Compatibility Matching**. There exists a simple path of length h in G_L if and only if there exists a path in G compatible with s .*

Proof. Consider a simple path $v_{i_1}^l v_{i_2}^l \dots v_{i_h}^l$ in G_L . Then consider the corresponding path $v_{i_1} v_{i_2} \dots v_{i_h}$ in G and edit the symbol of each vertex v_{i_j} , with $1 \leq j \leq h$, so that it is associated with symbol y_i . It follows that p matches s . Then $v_{i_1} v_{i_2} \dots v_{i_h}$ is a path of G compatible with s .

Consider a path $p = v_{i_1} v_{i_2} \dots v_{i_h}$ in G_L compatible with s . Notice that p must be a simple path, since s consists of h distinct symbols. As a consequence, the corresponding path $v_{i_1}^l v_{i_2}^l \dots v_{i_h}^l$ in G_L is a simple path of length h . \square

Lemma 1 and the NP-completeness of h -Path [8] allow to prove the following result.

Theorem 1. *String to Graph Compatibility Matching is NP-complete even when the labels of the graph have length one.*

Proof. Consider a graph $G = (V, E, \sigma)$, and a path p in G . It can be checked in polynomial time if p is compatible with s , so **String to Graph Compatibility Matching** is in NP.

The reduction constructs a labeled graph with labels of length one. From Lemma 1 and from the hardness of h -Path [8], it follows that **String to Graph Compatibility Matching** is NP-hard even when the labels of the graph have length one. \square

Notice that the reduction we have described is also a Polynomial Parameter Transformation [5] from h -Path parameterized by h to **String to Graph Compatibility Matching** parameterized by $|s|$, as $|s| = h$. Since h -Path when parameterized by h does not admit a polynomial kernel unless $NP \subseteq coNP/Poly$ [4], the reduction leads to the following result.

Corollary 1. *The String to Graph Compatibility Matching problem parameterized by $|s|$ does not admit a polynomial kernel unless $NP \subseteq coNP/Poly$ even when the labels of the graph have length one.*

3.2 Binary Alphabet

Next, we show that the **String to Graph Compatibility Matching** problem is NP-complete even on binary alphabet. The reduction is similar to the reduction of the Section 3.1, except for the definition of the query string s and the labeling $\sigma : V \rightarrow \Sigma^*$ of the labeled graph.

Consider a graph $G_L = (V_L, E_L)$, with $V_L = \{v_1^l, \dots, v_n^l\}$, that is an instance of h -Path, we define a corresponding instance $(G = (V, E, \sigma), s)$ of **String to Graph Compatibility Matching**. The alphabet is binary, hence $\Sigma = \{0, 1\}$. Next, we define the labeled graph $G = (V, E, \sigma)$. The sets V of vertices and E of edges are defined as in Section 3.1. For each $v_i \in V$, with $1 \leq i \leq h$, $\sigma(v_i) = 0^h$, namely it is a string consisting of h occurrences of symbol 0.

The construction of the query string s requires the introduction of strings s_i , with $1 \leq i \leq h$, having length h and defined as follows:

$$s_i[i] = 1; \quad s_i[j] = 0, \text{ with } 1 \leq j \leq h \text{ and } j \neq i.$$

Finally, s is defined as the concatenation of s_1, s_2, \dots, s_n , that is $s = s_1 s_2 \dots s_n$.

Next, we prove the correctness of the reduction.

Lemma 2. *Let $G_L = (V_L, E_L)$ be a graph instance of h -Path and let $(G = (V, E, \sigma), s)$ be the corresponding instance of **String to Graph Compatibility Matching** on binary alphabet. There exists a simple path of length h in G_L if and only if there exists a path compatible with s in G .*

Proof. Consider a simple path $v_{i_1}^l v_{i_2}^l \dots v_{i_h}^l$ in G_L . Then consider the corresponding path $v_{i_1} v_{i_2} \dots v_{i_h}$ in G and edit the label of each vertex v_{i_j} , with $1 \leq j \leq h$, such that is associated with string s_j . Then the resulting string is an exact match of s , hence $v_{i_1} v_{i_2} \dots v_{i_h}$ is a path compatible with s .

Consider a path $p = v_{i_1} v_{i_2} \dots v_{i_h}$ in G that is compatible with s . Since $\sigma(p)$ must match s after some symbol substitutions and, by construction, $|\sigma(v_j)| = |s_l|$, for each $1 \leq j \leq n$ and $1 \leq l \leq h$, it follows that the positions of s_l , $1 \leq l \leq h$,

are mapped to the positions of $\sigma(v_{i_t})$, for some t with $1 \leq t \leq h$. Moreover, since $s_l \neq s_q$, with $t \neq q$, all the vertices in p are distinct and p is a simple path in G of length h . As a consequence the corresponding path $v_{i_1}^l v_{i_2}^l \dots v_{i_h}^l$ in G_L is a simple path of length h , thus concluding the proof. \square

Thus, based on Lemma 2, we can prove the following result.

Theorem 2. *String to Graph Compatibility Matching is NP-complete even on binary alphabet.*

Proof. As for Theorem 1, given a path p in G , it can be checked in polynomial time if p is compatible with s , so String to Graph Compatibility Matching is in NP. The reduction defines $\Sigma = \{0, 1\}$, hence a binary alphabet. From Lemma 2 and from the hardness of h -Path [8] it follows that String to Graph Compatibility Matching on binary alphabet is NP-hard. \square

The results of Theorem 1 and Theorem 2 have a consequence not only on the complexity of String to Graph Compatibility Matching, but also on the approximation of String to Graph Restricted Approximate Matching.

Theorem 3. *The String to Graph Restricted Approximate Matching problem cannot be approximated within any factor in polynomial time, unless $P = NP$, even when the labels of the graph have length one or when the alphabet is binary.*

Proof. The NP-completeness of String to Graph Compatibility Matching implies that, given an instance $(G = (V, E, \sigma), s)$, even deciding whether there exists a feasible solution of String to Graph Restricted Approximate Matching, with any number of edit operations in G , is NP-complete. Hence if there exists a polynomial-time approximation algorithm \mathcal{A} for String to Graph Restricted Approximate Matching, with some approximation factor α , it follows that \mathcal{A} can be used to decide the String to Graph Compatibility Matching problem: if \mathcal{A} returns an approximated solution for String to Graph Restricted Approximate Matching with input (G, s) , then it follows that there exists a path in G compatible with s , if \mathcal{A} does not return an approximated solution for String to Graph Restricted Approximate Matching with input (G, s) , then there is no path in G compatible with s . Since String to Graph Compatibility Matching is NP-complete, when the labels of the graph have length one (by Theorem 1) and on binary alphabet (by Theorem 2), then there does not exist a polynomial-time approximation algorithm with any approximation factor for String to Graph Restricted Approximate Matching when the graph labels have length one or when the alphabet is binary, unless $P = NP$. \square

4 Hardness of Parameterization

In this section, we consider the parameterized complexity of String to Graph Restricted Approximate Matching and String to Graph Approximate Matching. The reduction we present allows us to prove that String to Graph Restricted Approximate

Matching and String to Graph Approximate Matching, when parameterized by the number of edit operations, are $W[2]$ -hard for a labeled graph having distance one from a DAG. Moreover, the same reduction will allow us to prove that String to Graph Approximate Matching is not approximable within factor $\Omega(\log(|V|))$ and $\Omega(\log(|s|))$.

We prove these results by presenting a reduction, that is parameterized [15,6] and approximate preserving [20], from the Minimum Set Cover problem. We recall here the definition of Minimum Set Cover.

Problem 5. Minimum Set Cover

Input: A collection $C = \{S_1, \dots, S_m\}$ of sets over a universe $U = \{u_1, \dots, u_n\}$.

Output: A subcollection C' of C of minimum cardinality such that for each $u_i \in U$, with $1 \leq i \leq n$, there exists a set in C' containing u_i .

First, we focus on String to Graph Restricted Approximate Matching, then we show that the same reduction can be applied to String to Graph Approximate Matching.

Given an instance (U, C) of Minimum Set Cover, in the following we define an instance $(G = (V, E, \sigma), s)$ of String to Graph Restricted Approximate Matching (see Fig. 1 for an example). We start by defining the alphabet Σ :

$$\Sigma = \{x_i : 0 \leq i \leq m\} \cup \{y_i : 1 \leq i \leq n\} \cup \{z\}.$$

Then, we define the labeled graph $G = (V, E, \sigma)$:

$$\begin{aligned} V &= \{v_i : 0 \leq i \leq m\} \cup \{v_{i,j} : 1 \leq i \leq m, 1 \leq j \leq |S_i|\} \\ E &= \{(v_0, v_i) : 1 \leq i \leq m\} \cup \{(v_i, v_{i,j}) : 1 \leq i \leq m, 1 \leq j \leq |S_i|\} \cup \\ &\quad \{(v_{i,j}, v_0) : 1 \leq i \leq m, 1 \leq j \leq |S_i|\}. \end{aligned}$$

Now, we define the labeling σ of the vertices of G :

- $\sigma(v_i) = x_i, 0 \leq i \leq m$
- $\sigma(v_{i,l}) = y_j, 1 \leq i \leq m, 1 \leq l \leq |S_i|$ and $1 \leq j \leq n$, where the l -th element of S_i is u_j (based on some ordering of the elements in S_i)

The query string s is defined as follows: $s = x_0 z y_1 x_0 z y_2 \dots x_0 z y_n$.

First, we prove that the labeled graph G , has distance one from a DAG, that is by removing a vertex of G (namely, v_0), we obtain a DAG.

Lemma 3. *Let (C, U) be an instance of Minimum Set Cover and let $(G = (V, E, \sigma), s)$ be the corresponding instance of String to Graph Restricted Approximate Matching. Then, G has distance one from a DAG.*

Proof. Consider graph $G = (V, E, \sigma)$. By removing vertex v_0 , we obtain a set of m disconnected DAGs, each one induced by vertices v_i and $v_{i,j}$, with $1 \leq i \leq m$ and $1 \leq j \leq |S_i|$. Hence the graph we obtain from the removal of v_0 is a DAG and the lemma holds. \square

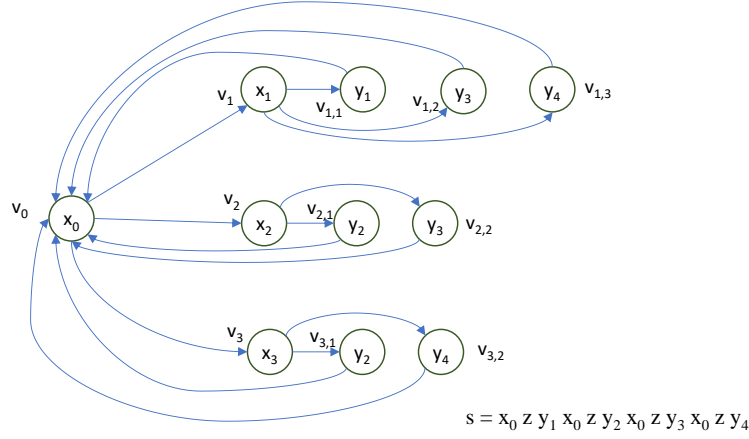


Fig. 1. A labeled graph G and a query string s associated with the following instance of Minimum Set Cover: $U = \{u_1, u_2, u_3, u_4\}$; $S_1 = \{u_1, u_3, u_4\}$, $S_2 = \{u_2, u_3\}$, $S_3 = \{u_2, u_4\}$. Inside each vertex we represent its label.

Next, we present the main result to prove the correctness of the reduction.

Lemma 4. *Let (C, U) be an instance of Minimum Set Cover and let $(G = (V, E, \sigma), s)$ be the corresponding instance of String to Graph Restricted Approximate Matching. There exists a cover C' of U of cardinality $h < n$ if and only if there exists a solution of String to Graph Restricted Approximate Matching that requires h edit operations.*

Proof. Consider $C' = \{S_{i_1}, S_{i_2}, \dots, S_{i_h}\}$, with $C' \subseteq C$, that covers U . Starting from C' , define a set C^* consisting of sets $S_{i_j}^*$, $1 \leq j \leq h$, defined as follows: $S_{i_j}^*$ contains the elements of U covered by S_{i_j} and not covered by a set S_{i_l} , with $l < j$, in C' . Hence, since C' covers U , it follows that by construction each element in U is covered by exactly one set in C^* .

For each element $u_i \in U$, with $1 \leq i \leq n$, we denote by $S^*(u_i)$ the set of C^* that covers u_i , and by $v(S^*(u_i))$ the corresponding vertex in $\{v_1, \dots, v_n\} \subseteq V$. Moreover, given $v_j = S^*(u_i)$, we denote by $y(S^*(u_i))$ the vertex $v_{j,l}$, with $1 \leq l \leq |S_j|$, such that $\sigma(v_{j,l}) = u_i$, with $1 \leq l \leq |S_j|$.

Consider the following path p in G :

$$p = v_0, v(S^*(u_1)), y(S^*(u_1)), v_0, v(S^*(u_2)), v_0, \dots, v(S^*(u_n)), y(S^*(u_n)).$$

Now, the symbol associated with each $v(S^*(u_i))$, with $1 \leq i \leq n$, is edited to symbol y . The string we obtain is exactly s , since $\sigma(v_0) = x_0$, each symbol associated with $v(S^*(u_i))$ is edited to y , $1 \leq i \leq n$, and $\sigma(y(S^*(u_i))) = u_i$, $1 \leq i \leq n$. Moreover, notice that p is obtained by editing h labels of vertices of G .

We present the second direction of the proof. Consider a path p in G such that p is a restricted approximate matching of s requiring at most h edit operations of the labels of vertices in p . First, we prove some properties of G . If v_0 is removed from G , then the resulting graph G' contains paths consisting of at most 2 vertices. Since $|s| = 3n$, there is no path in G' that can be a restricted approximate matching of s . This implies that at least one position of s is mapped in v_0 .

Now, assume that the first vertex of p is not v_0 . Assume that the first position of s is mapped in v_i , for some i with $1 \leq i \leq m$. By construction, $p = v_i v_{i,j} v_0 v_l v_{l,t} v_0 \dots$, since $N^+(v_i) = \{v_{i,j} : 1 \leq j \leq |S_i|\}$, $N^+(v_{i,j}) = \{v_0\}$ and $N^+(v_0) = \{v_i : 1 \leq i \leq m\}$. Then each occurrence of a symbol y_q , $1 \leq q \leq n$, in s is mapped in v_0 , while the symbol associated with v_0 can be at most one of y_1, \dots, y_n , thus there is no path in G that starts with a vertex v_i and that is a restricted approximate matching of s .

Assume that the first vertex of p is some vertex $v_{i,j}$, with $1 \leq i \leq m$ and $1 \leq j \leq |S_i|$. By construction, $p = v_{i,j} v_0 v_l v_{l,t} v_0 \dots$. Hence each position of s containing z is mapped in vertex v_0 , while each position of s containing y_t , $1 \leq t \leq n$, is mapped in a vertex v_q , with $1 \leq q \leq m$. This last mapping requires $n > h$ edit operations of labels of vertices of G , violating the hypothesis that at most $h < n$ edit operations are applied.

We can conclude that if p is a restricted approximate matching of s requiring $h < n$ edit operations, then v_0 must be the first vertex of p . It follows that each label of a vertex v_i , $1 \leq i \leq n$, in path p must be edited to z . Consider the case that position t of s , $1 \leq t \leq |s|$, where $s[t] = y_q$, $1 \leq q \leq n$, is mapped to some vertex $v_{i,j}$, with $1 \leq i \leq m$ and $1 \leq j \leq |S_i|$, such that $\sigma(v_{i,j}) \neq y_q$, and that hence the label of $v_{i,j}$ is edited to y_q . Let v_a , with $1 \leq a \leq m$, be the vertex that precedes $v_{i,j}$ in p . Then, we can modify p , so that the number of edit operations are not increased, by replacing v_a with a vertex v_b , with $1 \leq b \leq m$, and $v_{i,j}$ with $v_{b,l}$, with $1 \leq l \leq |S_b|$, so that $\sigma(v_{b,l}) = y_q$, and by editing the label of v_b (if it is not already edited) to z . This implies that the only vertices of p whose labels are edited are vertices v_i , $1 \leq i \leq m$.

Now, we can define a solution C' of Minimum Set Cover consisting of h sets as follows: $C' = \{S_i : \text{the label of vertex } v_i \text{ in } p \text{ is edited to } z, 1 \leq i \leq m\}$. Since at most h labels of vertices of p are edited (to z), it follows that at most h sets belong to C' . Furthermore, since each vertex with label y_j , $1 \leq j \leq n$, is connected to a vertex v_i in p , $1 \leq i \leq m$, by construction it follows that each element of U belongs to some set in C' . \square

Based on Lemma 3 and on Lemma 4, we can prove the following result.

Theorem 4. *The String to Graph Restricted Approximate Matching problem is $W[2]$ -hard when parameterized by the number of edit operations, even when the input graph has distance one from a DAG.*

Proof. Notice that, by Lemma 3, G has distance one from a DAG. The $W[2]$ -hardness of String to Graph Approximate Matching follows from Lemma 4 and from the $W[2]$ -hardness of Minimum Set Cover [17]. \square

Next, we show that the same reduction allows us to prove the $W[2]$ -hardness and the inapproximability of String to Graph Approximate Matching. Essentially, we will prove that we can avoid edit operations of the query string.

Theorem 5. *The String to Graph Approximate Matching problem is $W[2]$ -hard when parameterized by the number of edit operations, even when the input graph has distance one from a DAG. Moreover, String to Graph Approximate Matching cannot be approximated within factor $\Omega(\log(|V|))$ and $\Omega(\log(|s|))$, unless $P = NP$, even when the input graph has distance one from a DAG.*

Proof. We consider the same construction given in the reduction from Minimum Set Cover to String to Graph Restricted Approximate Matching. Notice that, if there exists a cover C' of U of cardinality $h < n$, we can compute in polynomial time a solution of String to Graph Approximate Matching with at most h edit operations as in Lemma 4. Now, consider a solution of String to Graph Approximate Matching on instance $G = (V, E, \sigma)$ that requires at most $h < n$ edit operations, we show that we can compute in polynomial time a cover C' of U of cardinality h . We prove that, given a solution of String to Graph Approximate Matching on instance $G = (V, E, \sigma)$, we can restrict ourselves to edit operations on graph labels.

Let p be a path in G that approximately matches s . Notice that p must contain vertex v_0 (otherwise p cannot be of length $|s|$, since $|s| = 3n$).

Now, assume that the first vertex of p is v_i , with $1 \leq i \leq m$. Then, by construction, each position of s containing y_i , with $1 \leq i \leq n$, is mapped in vertex v_0 , hence at least $n - 1$ edit operations on these positions of s are required for the approximate matching, plus an edit operation either on s or on the label x_0 of v_0 . But then $n > h$ edit operations are required by an approximate matching of s with p .

Assume that the first vertex of p is $v_{i,j}$, with $1 \leq i \leq m$ and $1 \leq j \leq |S_j|$. Then the positions with symbols y_q in s , with $1 \leq q \leq n$, are mapped to vertices v_l , with $1 \leq l \leq m$, thus requiring at least $n > k$ edit operations to match s with p .

As a consequence, it follows that the first positions of p must be v_0 and hence that the positions of s containing symbol x_0 always match v_0 (no edit operation is required). The positions of s containing symbol z are mapped to vertices v_i , with $1 \leq i \leq m$. Assume that an edit operation is done in one of those positions of s and that its symbol is edited to x_i . Since x_i has only one occurrence in s , each position of s mapped to v_i requires an edit operation. Hence by editing the label of v_i to z , we obtain an approximate matching of s that does not increase the number of edit operations and such that no edit operation is applied in the positions of s mapped to v_i .

Finally, assume that a position t , with $1 \leq t \leq |s|$, of s containing symbol y_i , with $1 \leq i \leq n$, is mapped to a vertex $v_{j,l}$, with $1 \leq j \leq m$ and $1 \leq l \leq |S_j|$, and that either $\sigma(v_{j,l})$ or the symbol $s[t]$ is edited and let v_a , $1 \leq a \leq n$, be the vertex that precedes $v_{j,l}$ in p . Consider a set S_b , with $1 \leq b \leq m$, that contains element u_i , with $1 \leq i \leq n$. We can compute an approximate matching of s and G that does not increase the number of edit operations, by replacing v_a with v_b

and editing the label of v_b to z (if it is not already edited), so that position t of s is mapped in $v_{b,q}$, with $\sigma(v_{b,q}) = y_i$, and hence no edit operation is required neither for symbol $\sigma(v_{b,q})$ nor for position t of s .

It follows that, starting from p , we can compute in polynomial time a path p' in G that is an approximate matching of s , that does not increase the number of edit operations with respect to p and such that the edit operations are applied only to labels of the graph, and, in particular, only to vertices v_i , $1 \leq i \leq m$, in p . Then we can compute a solution of **Minimum Set Cover** as in the proof of Lemma 4:

$$C' = \{S_i : \text{the label of } v_i \text{ is edited to } z, 1 \leq i \leq m\}.$$

As in the proof of Lemma 4, at most h labels of vertices of p are edited (to z), hence at most h sets belong to C' . Furthermore, since each vertex with label y_i , $1 \leq i \leq n$, is connected to a vertex v_j in p , $1 \leq j \leq m$, by construction it follows that each element of U belongs to some set in C' .

The parameterized reduction from **Minimum Set Cover** to **String to Graph Approximate Matching** we have described and the $W[2]$ -hardness of **Minimum Set Cover** [17], imply that **String to Graph Approximate Matching** is $W[2]$ -hard when parameterized by the number of edit operations.

Notice that the reduction is also an approximation preserving reduction [20], since, given a solution of **Minimum Set Cover** consisting of h sets, we can compute in polynomial time a solution of **String to Graph Approximate Matching** that requires h edit operations and, given a solution of **String to Graph Approximate Matching** that requires h edit operations, we can compute in polynomial time a solution of **Minimum Set Cover** consisting of h sets. Since **Minimum Set Cover** is not approximable within factor $\Omega(\log(|U|))$, unless $P=NP$, even when $|U| = n$ and $|C| = m$ are polynomially related [13], and $|V| = m + mn + 1$, while $|s| = 3n$, it follows that **String to Graph Approximate Matching** cannot be approximated within factor $\Omega(\log(|V|))$ and $\Omega(\log(|s|))$, unless $P=NP$. \square

5 String to Graph Compatibility Matching Parameterized by $|s|$

We present a fixed-parameter algorithm for **String to Graph Compatibility Matching** when parameterized by $|s|$. We consider the case where each vertex of G is labeled with exactly one symbol (notice that in this case, by Theorem 1, **String to Graph Compatibility Matching** is NP-complete and, by Corollary 1, **String to Graph Compatibility Matching** parameterized by $|s|$ does not admit a polynomial kernel unless $NP \subseteq coNP/Poly$).

We start by proving an easy property of an instance of **String to Graph Compatibility Matching**.

Lemma 5. $|\Sigma| \leq |s|$.

Proof. The lemma clearly holds for those symbols having an occurrence in s . For those symbols that label vertices of G but that do not have occurrences in s ,

since they cannot exactly match any position of s and they will be edited in a restricted approximate matching of s , it follows that we can substitute all their occurrences with any symbol in Σ . \square

The fixed-parameter algorithm is based on the color-coding technique [2] and on dynamic programming. Consider a path p in G that is compatible with s and the set $V(p)$ of vertices that induces p , where $|V(p)| = k$. It holds $k \leq |s|$, since each position of s is mapped in at least one vertex of p .

We consider a coloring of V with a set of colors $\{c_1, \dots, c_k\}$, where, given a vertex $v \in V$, we denote by $c(v)$ the color assigned to v . Based on color-coding (see Definition 1), we assume that the coloring is *colorful*, that is each vertex of $V(p)$ is assigned a distinct color in $\{c_1, \dots, c_k\}$.

Now, each color c_i , with $1 \leq i \leq k$, is associated by a function $r: \{c_1, \dots, c_k\} \rightarrow \Sigma$, with a symbol in Σ , that represents the fact that the vertices of p that are colored by c_i , with $1 \leq i \leq k$, must match a position of s containing symbol $r(c_i)$. In this case we say that p *satisfies* r . The algorithm iterates over the possible colorings of graph G based on a family of perfect hash functions and over the possible functions r .

Now, given a coloring of G and a function r , define a function $M_r[i, v]$, with $1 \leq i \leq |s|$ and $v \in V$, as follows. $M_r[i, v]$ is equal to 1 if there exists a path p of G that is compatible with $s[1, i]$ and such that (1) position i of s is mapped in v , and (2) p satisfies r ; else $M_r[i, v] = 0$. Notice that, since $s[1, i]$ is mapped in v , it follows that v is the last vertex of p . Next, we describe the recurrence to compute $M_r[i, v]$. For $i \geq 2$, if $r(c(v)) \neq s[i]$, then $M_r[i, v] = 0$; if $r(c(v)) = s[i]$, then:

$$M_r[i, v] = \bigvee_{u \in V: (u, v) \in E} M_r[i-1, u]$$

In the base case, it holds $M_r[1, v] = 1$ if and only if $r(c(v)) = s[1]$, else $M_r[1, v] = 0$. Next, we prove the correctness of the recurrence.

Lemma 6. *$M_r[i, v]$ is equal to 1 if and only if there exists a path p of G that is compatible with $s[1, i]$ and such that (1) position i of s is mapped in v , and (2) p satisfies r .*

Proof. We prove the lemma by induction on $i \geq 1$. First, we consider the base case, when $i = 1$. By definition it holds $M_r[1, v] = 1$ if and only if $r(c(v)) = s[1]$, with $v \in V$, hence if and only if there exists a path consisting only of vertex v that is a compatible matching of $s[1]$ and such that p satisfies r .

Assume that the lemma holds for $i - 1 \geq 1$, we show that it holds for i . Consider the case that $M_r[i, v] = 1$, it follows that there exists a vertex u , such that $M_r[i-1, u] = 1$, $(u, v) \in E$ and $r(c(v)) = s[i]$. By induction hypothesis, there exists a path p in G that is a compatible matching of s such that: (1) the last vertex of p is u (thus position $i-1$ of s is mapped in u), and (2) p satisfies r . Then, consider the path p' obtained by connecting u to v . Since $(u, v) \in E$ and $r(c(v)) = s[i]$, it follows that p' is a compatible matching of s such that (1) position i of s is mapped in v , and (2) p' satisfies r .

Consider a path p in G that is a compatible matching of $s[1, i]$ and such that (1) position i of s is mapped in v , and (2) p satisfies r . Since $i - 1 \geq 1$, it follows that there exists a vertex u in p , with $(u, v) \in E$. Consider the path p' obtained from p by removing v . By induction hypothesis, path p' in G is an approximate matching of $s[1, i - 1]$ such that (1) position $i - 1$ of s is mapped in u (the last vertex of p'), and (2) p satisfies r . By induction hypothesis, $M_r[i - 1, u] = 1$. By the definition of the recurrence, since $(u, v) \in E$ and $r(c(v)) = s[i]$, it follows that $M_r[i, v] = 1$. \square

In order to compute a colorful coloring of G , we consider a perfect family of hash functions for the set of vertices of G .

Definition 1. Let $G = (V, E, \sigma)$ be a labeled graph and let $C = \{c_1, \dots, c_k\}$ be a set of colors. A family F of hash functions from V to C is called perfect if for each subset $V' \subseteq V$, with $|V'| = k$, there exists a function $f \in F$ such that for each $x, y \in V'$, with $x \neq y$, $f(x) = c_i$, $f(y) = c_j$, with $1 \leq i, j \leq k$ and $i \neq j$.

It has been shown in [2] that a perfect family F of hash functions from V to C , having size $2^{O(k)}O(\log |V|)$, can be computed in time $2^{O(k)}O(|V| \log |V|)$. From Lemma 6 and by using a perfect family of hash functions to color the vertices in G , we can prove the main result of this section.

Theorem 6. *The String to Graph Compatibility Matching problem can be decided in time $2^{O(|s|)}O(|s|^{|s|+1}|V|^2 \log |V|)$.*

Proof. First, we consider the correctness of the algorithm. From Lemma 6, given a colorful coloring of G and a function r , there exists a path p in G compatible with s such that the last position of s is mapped in v , with $v \in V$, and p satisfies function r if and only if $M_r[|s|, v] = 1$, for some $v \in V$.

Consider a family F of perfect hash functions for G , by Definition 1, for each path p , induced by $V(p)$, with $|V(p)| = k$, there exists a function f in F that is colorful for $V(p)$, that is it assigns to each vertex in $V(p)$ a distinct color. Consider a path p that is compatible with s , and for a position t , $1 \leq t \leq |s|$, of s mapped to a vertex u in G , define function r so that it assigns symbol $s[t]$ to color $c(u)$. Then r is satisfied by p . The correctness of the algorithm holds since it iterates over the possible functions in a family of perfect hash functions and over the possible definitions of r .

It has been shown in [2] that a perfect family F of hash functions from V to C , where F has size $2^{O(k)}O(\log |V|)$, can be computed in time $2^{O(k)}O(|V| \log |V|)$.

The function r can be computed in time $O(|s|^{|s|})$, since $k \leq |s|$, each color can be associated with at most Σ symbols and, by Lemma 5, $|\Sigma| \leq |s|$. The dynamic programming recurrence requires time $O(|s||V|^2)$, since $M_r[i, v]$ consists of $|s||V|$ entries and each entry is computed in $O(|V|)$ time. Hence the overall time complexity is $2^{O(k)}O(\log |V|)O(|s|^{|s|}(s|V|^2))$, and, since $k \leq |s|$, we can conclude that the time complexity is $2^{O(|s|)}O(|s|^{|s|+1}|V|^2 \log |V|)$. \square

6 Conclusion

In this contribution we have presented results on the tractability of the approximate matching of a query string to a labeled graph. There are several open questions related to variants of this problem. It will be interesting to further investigate the approximability of **String to Graph Approximate Matching**, since it can be trivially approximated within factor $|s|$ in polynomial time, while it cannot be approximated within factor $\Omega(\log(|s|))$, unless $P=NP$. Another interesting open question is to investigate the parameterized complexity of **String to Graph Approximate Matching** when the edit operations are not restricted to symbol substitutions, but include symbol insertions and deletions.

References

1. Akutsu, T.: A linear time pattern matching algorithm between a string and a tree. In: Combinatorial Pattern Matching, 4th Annual Symposium, CPM 93, Padova, Italy, June 2-4, 1993, Proceedings. pp. 1–10 (1993)
2. Alon, N., Yuster, R., Zwick, U.: Color-coding. *Journal of the ACM* **42**(4), 844–856 (1995)
3. Amir, A., Lewenstein, M., Lewenstein, N.: Pattern matching in hypertext. *J. Algorithms* **35**(1), 82–99 (2000)
4. Bodlaender, H.L., Downey, R.G., Fellows, M.R., Hermelin, D.: On problems without polynomial kernels. *J. Comput. Syst. Sci.* **75**(8), 423–434 (2009)
5. Bodlaender, H.L., Jansen, B.M.P., Kratsch, S.: Kernel bounds for path and cycle problems. *Theor. Comput. Sci.* **511**, 117–136 (2013)
6. Downey, R.G., Fellows, M.R.: *Fundamentals of Parameterized Complexity*. Texts in Computer Science, Springer (2013)
7. Equi, M., Grossi, R., Mäkinen, V., Tomescu, A.I.: On the complexity of string matching for graphs. In: Baier, C., Chatzigiannakis, I., Flocchini, P., Leonardi, S. (eds.) 46th International Colloquium on Automata, Languages, and Programming, ICALP 2019, July 9-12, 2019, Patras, Greece. LIPIcs, vol. 132, pp. 55:1–55:15. Schloss Dagstuhl - Leibniz-Zentrum fuer Informatik (2019)
8. Garey, M.R., Johnson, D.S.: *Computers and Intractability: A Guide to the Theory of NP-Completeness*. WH Freeman & Co. (1979)
9. Jain, C., Zhang, H., Gao, Y., Aluru, S.: On the complexity of sequence to graph alignment. In: Cowen, L.J. (ed.) *Research in Computational Molecular Biology - 23rd Annual International Conference, RECOMB 2019, Washington, DC, USA, May 5-8, 2019, Proceedings*. Lecture Notes in Computer Science, vol. 11467, pp. 85–100. Springer (2019)
10. Manber, U., Wu, S.: Approximate string matching with arbitrary cost for text and hypertext. In: *Advances in Structural and Syntactic Pattern Recognition*. pp. 22–33 (1992)
11. Myers, E.W.: The fragment assembly string graph. *Bioinformatics* **21** (suppl_2), ii79–ii85 (2005)
12. Navarro, G.: Improved approximate pattern matching on hypertext. *Theor. Comput. Sci.* **237**(1-2), 455–463 (2000)
13. Nelson, J.: A note on set cover inapproximability independent of universe size. *Electronic Colloquium on Computational Complexity (ECCC)* **14**(105) (2007)

14. Nguyen, N., Hickey, G., Zerbino, D.R., Raney, B.J., Earl, D., Armstrong, J., Kent, W.J., Haussler, D., Paten, B.: Building a pan-genome reference for a population. *Journal of Computational Biology* **22**(5), 387–401 (2015)
15. Niedermeier, R.: *Invitation to Fixed-Parameter Algorithms*. Oxford University Press (2006)
16. Park, K., Kim, D.K.: String matching in hypertext. In: Galil, Z., Ukkonen, E. (eds.) *Combinatorial Pattern Matching*, 6th Annual Symposium, CPM 95, Espoo, Finland, July 5-7, 1995, Proceedings. *Lecture Notes in Computer Science*, vol. 937, pp. 318–329. Springer (1995)
17. Paz, A., Moran, S.: Non deterministic polynomial optimization problems and their approximations. *Theoretical Computer Science* **15**, 251–277 (1981)
18. Pevzner, P., Tang, H., Waterman, M.S.: An eulerian path approach to dna fragment assembly. *Proceedings of the National Academy of Sciences* **98**(17), 9748–97533 (2001)
19. The Computational Pan-Genomics Consortium: Computational pan-genomics: status, promises and challenges. *Briefings in Bioinformatics* **19**(1), 118–135 (2018)
20. Williamson, D.P., Shmoys, D.B.: *The Design of Approximation Algorithms*. Cambridge University Press (2011)